

MeetingPlace SMTP Post-Install Configuration and Click-to-Attend Link Settings

Document ID: 50025

Introduction

Prerequisites

Requirements

Components Used

Conventions

Configuration and Click-to-Attend Link Setting Options

Related Information

Introduction

This document explains Cisco MeetingPlace Simple Mail Transfer Protocol (SMTP) post-install configuration and Click-to-Attend link registry settings and their primary functions.

Prerequisites

Requirements

There are no specific requirements for this document.

Components Used

The information in this document is based on Cisco MeetingPlace SMTP Version 4.2.1.x.


The information in this document was created from the devices in a specific lab environment. All of the devices used in this document started with a cleared (default) configuration. If your network is live, make sure that you understand the potential impact of any command.

Conventions

For more information on document conventions, refer to the Cisco Technical Tips Conventions.

Configuration and Click-to-Attend Link Setting Options

This screenshot shows locations in the Cisco MeetingPlace notification gateway registry key:

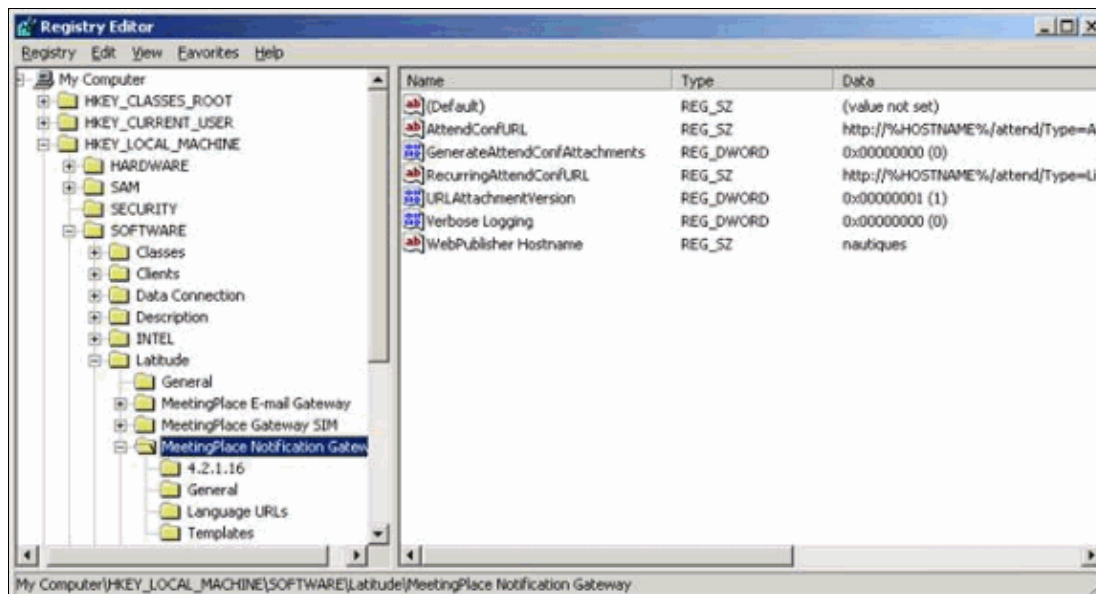

Restart SMTP and notification services for these changes to take effect.

1. **GenerateAttendConfAttachments** If the registry value is set to 1, then the Click-to-Attend link is an icon. (This is the default.) If the registry value is set to 0, then the Click-to-Attend link is an embedded URL. If you want the embedded URL, you must add `<!-- #LATD AttendConference -->` to the **NotifySchedule.tpl** and **NotifyReSchedule.tpl** templates, located at `drive:\latitude\MeetingPlace Notification Gateway`. (No need to edit the others.)
2. **Verbose Logging** If the registry value is set to 0, then regular logging is used. (This is the default.) If the registry value is set to 1, then verbose logging is used. (This setting should be used only for troubleshooting.)
3. **WebPublisher Hostname** If a value is entered in this field, then a Click-toAttend link icon or embedded URL is present in notifications. If the value is blank, then there will not be a Click-to-Attend link or embedded URL in notifications.

Related Information

- [Voice Technology Support](#)
- [Voice and Unified Communications Product Support](#)
- [Recommended Reading: Troubleshooting Cisco IP Telephony](#)
- [Technical Support – Cisco Systems](#)

[Contacts & Feedback](#) | [Help](#) | [Site Map](#)

© 2008 – 2009 Cisco Systems, Inc. All rights reserved. [Terms & Conditions](#) | [Privacy Statement](#) | [Cookie Policy](#) | [Trademarks of Cisco Systems, Inc.](#)

Updated: Jan 31, 2006

Document ID: 50025
