

Why Don't RIPv1 and IGRP Support Variable–Length Subnet Mask?

Document ID: 13722

Introduction

Prerequisites

Requirements

Components Used

Conventions

Example

NetPro Discussion Forums – Featured Conversations

Related Information

Introduction

The ability to specify a different subnet mask for the same network number on different subnets is called Variable–Length Subnet Mask (VLSM). RIPv1 and IGRP are classful protocols and are incapable of carrying subnet mask information in their updates. Before RIPv1 or IGRP sends out an update, it performs a check against the subnet mask of the network that is about to be advertised and, in case of VLSM, the subnet gets dropped.

Prerequisites

Requirements

There are no specific requirements for this document.

Components Used


This document is not restricted to specific software and hardware versions.

Conventions

Refer to Cisco Technical Tips Conventions for more information on document conventions.

Example

This section provides an example. In this figure, Router 1 has three subnets with two different masks (/24 and /30):

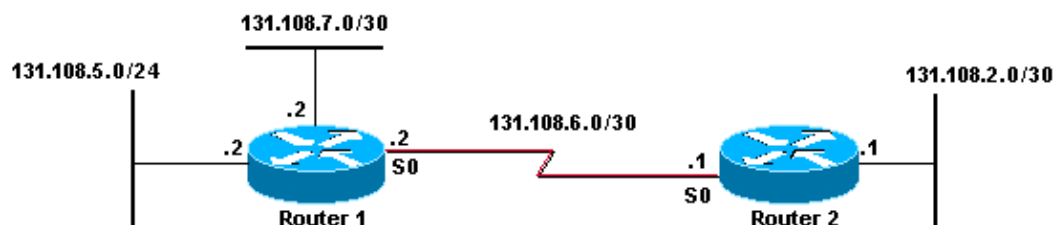

Router 1 goes through these steps before sending an update to Router 2. Refer to Behavior of RIP and IGRP When Sending or Receiving Updates for more information on these steps.

1. Router 1 checks to see whether 131.108.5.0/24 is part of the same major net as 131.108.6.0/30, which is the network assigned to the interface that will be sourcing the update.
2. It is, and now Router 1 checks whether 131.108.5.0 has the same subnet mask as 131.108.6.0/30.
3. Because it does not, Router 1 drops the network, and does not advertise the route.
4. Router 1 now checks whether 131.108.7.0/30 is part of the same major net as 131.108.6.0/30, which is the network assigned to the interface that will be sourcing the update.
5. It is, and now Router 1 checks whether 131.108.7.0/30 has the same subnet mask as 131.108.6.0/30.
6. Because it does, Router 1 advertises the network.

These checks determined that Router 1 only includes 131.108.7.0 in its update that is sent to Router 2. When the **debug ip rip** command is issued, you can actually see the update sent by Router 1. This is how it looks:

```
RIP: sending v1 update to 255.255.255.255 via Serial0 (131.108.6.2)
subnet 131.108.7.0, metric 1
```

Notice that in the previous output only one subnet is included in the update. This results in this entry in Router 2's routing table, which is displayed using the **show ip route** command:

```
131.108.0.0/30 is subnetted, 3 subnets
R      131.108.7.0 [120/1] via 131.108.6.2, 00:00:08, Serial0
C      131.108.6.0 is directly connected, Serial0
C      131.108.2.0 is directly connected, Ethernet0
```

In order to avoid having subnets eliminated from routing updates, either use the same subnet mask over the entire RIPv1 network or use static routes for networks with different subnet masks.

NetPro Discussion Forums – Featured Conversations

Networking Professionals Connection is a forum for networking professionals to share questions, suggestions, and information about networking solutions, products, and technologies. The featured links are some of the most recent conversations available in this technology.

NetPro Discussion Forums – Featured Conversations for RP
Service Providers: MPLS
Virtual Private Networks: Services
Virtual Private Networks: Security

Related Information

- [IP Routing Protocols Support Pages](#)
- [Technical Support & Documentation – Cisco Systems](#)

[Contacts & Feedback](#) | [Help](#) | [Site Map](#)

© 2007 – 2008 Cisco Systems, Inc. All rights reserved. [Terms & Conditions](#) | [Privacy Statement](#) | [Cookie Policy](#) | [Trademarks of Cisco Systems, Inc.](#)