

How to Configure Layer 2 Tunnel Protocol Authentication with TACACS+

Document ID: 13858

Introduction

Prerequisites

- Requirements
- Components Used
- Conventions

Configure

- Network Diagram
- TACACS+ Server Configurations
- Router Configurations

Verify

- Show Command Output From Both Routers
- Show Version Output from Both Routers
- What Can Go Wrong – Bad Debug from LAC
- What Can Go Wrong – Bad Debug from LNS
- LNS Accounting Records

Troubleshoot

- Troubleshooting Commands
- Debug Output

NetPro Discussion Forums – Featured Conversations

Related Information

Introduction

This document describes how to configure Layer 2 Tunnel Protocol (L2TP) with TACACS+. It includes sample configurations for L2TP Access Concentrator (LAC) TACACS+ servers, L2TP Network Server (LNS) TACACS+ servers, and routers.

Prerequisites

Requirements

There are no specific requirements for this document.

Components Used

The information in this document is based on these software and hardware versions:

- Two Cisco 2511 routers
- Cisco IOS® Software Release 12.0(2).T
- Cisco Secure UNIX, Cisco Secure Windows, or TACACS+ Freeware

The information in this document was created from the devices in a specific lab environment. All of the devices used in this document started with a cleared (default) configuration. If your network is live, make sure that you understand the potential impact of any command.

Conventions

For more information on document conventions, refer to Cisco Technical Tips Conventions.


Configure

In this section, you are presented with the information to configure the features described in this document.

Note: To find additional information on the commands used in this document, use the Command Lookup Tool (registered customers only).

Network Diagram

This document uses the network setup shown in this diagram.

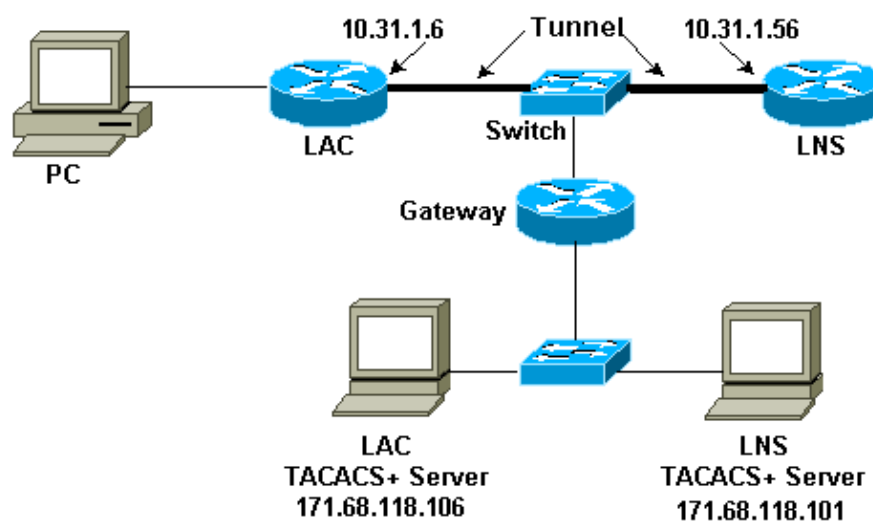

TACACS+ Server Configurations

LAC Configuration – Cisco Secure UNIX

```
# ./ViewProfile -p 9900 -u rtp.cisco.com user = rtp.cisco.com{
service=ppp {
protocol=vpdn {
set tunnel-type=l2tp
set tunnel-id=rtp_tunnel
set ip-addresses="10.31.1.56"
}
}
}

# ./ViewProfile -p 9900 -u rtp_tunnel
user = rtp_tunnel{
password = chap "FGHIJ"
service=ppp {
protocol=lcp {
}
}
protocol=ip {
}
```

```
}
```

```
}
```

LNS Configuration – Cisco Secure UNIX

```
# ./ViewProfile -p 9900 -u janedoe@rtp.cisco.com
user = janedoe@rtp.cisco.com{
password = chap "rtprules"
service=ppp {
protocol=lcp {
}
}
protocol=ip {
}
}

}
# ./ViewProfile -p 9900 -u ABCDE
user = ABCDE{
password = chap "FGHIJ"
service=ppp {
protocol=lcp {
}
}
protocol=ip {
}
}

}
```

LAC Configuration – Cisco Secure Windows

Complete these steps to configure LAC on a Cisco Secure Windows:

1. Set up user `rtp_tunnel` as a normal PPP user (password and/or CHAP password in the User Setup).
2. Put the user in `group_1` and check service **PPP/IP**. Check **PPP/LCP** if that box is displayed.
3. Set up user `rtp.cisco.com`. The password is a "do not care."
4. If some options are not displayed in Group Settings, go to **Interface Configuration** and select the boxes to get them to appear.
5. Put the user in `group_2` and check service **PPP/VPDN**. The `tunnel-id` is **rtp_tunnel**, the ip address list is **10.31.1.56**, and in the rectangular custom-attribute box underneath, type **tunnel-type=l2tp**.

LNS Configuration – Cisco Secure Windows

Complete these steps to configure LNS for Cisco Secure Windows:

1. Set up users 'ABCDE' and 'janedoe@rtp.cisco.com' as normal PPP users (password and/or CHAP password in the user setup).
2. Put the users in `group_3` and check service **PPP/IP**. Check **PPP/LCP** if that box is displayed.

LAC TACACS+ Freeware Configuration

```
user = rtp.cisco.com {
service = ppp protocol = vpdn {
tunnel-type = l2tp
tunnel-id = rtp_tunnel
ip-addresses = "10.31.1.56"
}
}
```

```

user = rtp_tunnel {
  chap = cleartext "FGHIJ"
  service = ppp protocol = ip {
    default attribute = permit
  }
}

```

LNS TACACS+ Freeware Configuration

```

key = "cisco"

user = janedoe@rtp.cisco.com {
  chap = cleartext "rtprules"
  service = ppp protocol = ip {
    default attribute = permit
  }
}

user = ABCDE {
  chap = cleartext "FGHIJ"
  service = ppp protocol = ip {
    default attribute = permit
  }
}

```

Router Configurations

LAC Router Configuration

```

version 12.0
service timestamps debug datetime
service timestamps log uptime
no service password-encryption
!
hostname LAC
!
aaa new-model
aaa authentication ppp default if-needed tacacs+
aaa authorization network default tacacs+
aaa accounting network default start-stop tacacs+
enable secret level 7 5 $1$Dj3K$9jkyuJR6fJV2JO./Qt0lC1
enable password ww
!
username john password 0 doe
ip subnet-zero
no ip domain-lookup
!
vpdn enable
!
vpdn search-order domain
!
interface Loopback0
no ip address
no ip directed-broadcast
!
interface Ethernet0
ip address 10.31.1.144 255.255.255.0
no ip directed-broadcast
!
interface Serial0
no ip address
no ip directed-broadcast

```

```

no ip mroute-cache
shutdown
!
interface Serial1
no ip address
no ip directed-broadcast
shutdown
!
interface Async1
ip unnumbered Ethernet0
no ip directed-broadcast
ip tcp header-compression passive
encapsulation ppp
async mode dedicated
peer default ip address pool default
ppp authentication chap
!
ip local pool default 10.5.5.5 10.5.5.50
ip classless
ip route 0.0.0.0 0.0.0.0 10.31.1.1
!
tacacs-server host 171.68.118.106
tacacs-server key cisco
!
line con 0
transport input none
line 1
exec-timeout 0 0
autoselect during-login
autoselect ppp
modem Dialin
transport preferred none
transport output none
speed 38400
flowcontrol hardware
line 2 16
modem InOut
transport input all
speed 38400
flowcontrol hardware
line aux 0
line vty 0 4
password WW
!
end

```

LNS Router Configuration

```

version 12.0
service timestamps debug datetime
service timestamps log uptime
no service password-encryption
!
hostname LNS
!
aaa new-model
aaa authentication ppp default if-needed tacacs+
aaa authorization network default tacacs+
aaa accounting network default start-stop tacacs+
enable secret 5 $1$wfMI$ixUG9hw7yhmsv.87.krpZl
enable password WW
!
username john password 0 doe

```

```

ip subnet-zero
no ip domain-lookup

!
vpdn enable
!
vpdn-group 1
accept dialin l2tp virtual-template 1 remote rtp_tunnel
local name ABCDE
!
interface Ethernet0
ip address 10.31.1.56 255.255.255.0
no ip directed-broadcast
!
interface Virtual-Template1
ip unnumbered Ethernet0
no ip directed-broadcast
peer default ip address pool default
ppp authentication chap
!
interface Serial0
no ip address
no ip directed-broadcast
no ip mroute-cache
shutdown
!
interface Serial1
no ip address
no ip directed-broadcast
shutdown
!
interface Async1
ip unnumbered Ethernet0
no ip directed-broadcast
ip tcp header-compression passive
encapsulation ppp
async mode dedicated
peer default ip address pool setup_pool
ppp authentication chap pap
!
!
!
ip local pool default 10.6.1.1 10.6.1.2
ip classless
ip route 0.0.0.0 0.0.0.0 10.31.1.1
!
tacacs-server host 171.68.118.101
tacacs-server key cisco
!
line con 0
transport input none
line 1 8
autoselect during-login
autoselect ppp
modem Dialin
speed 115200
flowcontrol hardware
line aux 0
line vty 0 4
password WW
!
end

```

Verify

Show Command Output From Both Routers

This section provides information you can use to confirm your configuration is working properly.

Certain **show** commands are supported by the Output Interpreter Tool (registered customers only) , which allows you to view an analysis of **show** command output.

LAC Router

```
LAC#show vpdn session
L2TP Session Information (Total tunnels=1 sessions=1)

LocID RemID TunID Intf Username State Last Chg
1 1 76 As1 janedoe@rtp.c est 00:00:32

% No active L2F tunnels

LAC#show vpdn tunnel

L2TP Tunnel Information (Total tunnels=1 sessions=1)

LocID RemID Remote Name State Remote Address Port Sessions
76 58 ABCDE est 10.31.1.56 1701 1

% No active L2F tunnels
```

LNS Router

```
LNS#show vpdn session
L2TP Session Information (Total tunnels=1 sessions=1)

LocID RemID TunID Intf Username State Last Chg
1 1 58 Vi1 janedoe@rtp.c est 00:01:55

% No active L2F tunnels

LNS#show vpdn tunnel

L2TP Tunnel Information (Total tunnels=1 sessions=1)

LocID RemID Remote Name State Remote Address Port Sessions
58 76 rtp_tunnel est 10.31.1.144 1701 1

% No active L2F tunnels
```

Show Version Output from Both Routers

```
LAC#show version
Cisco Internetwork Operating System Software
IOS (tm) 2500 Software (C2500-IS-L), Version 12.0(2)T, RELEASE SOFTWARE (fc1)
Copyright (c) 1986-1998 by cisco Systems, Inc.
Compiled Wed 09-Dec-98 02:31 by dschwart
Image text-base: 0x030403B0, data-base: 0x00001000

ROM: System Bootstrap, Version 11.0(10c), SOFTWARE
BOOTFLASH: 3000 Bootstrap Software (IGS-BOOT-R), Version 11.0(10c), RELEASE SOFTWARE (fc1)
```

```
LAC uptime is 20 hours, 22 minutes
System restarted by reload at 16:13:55 UTC Fri Jan 29 1999
System image file is "flash:c2500-is-1.120-2.T"
```

```
cisco 2511 (68030) processor (revision M) with 14336K/2048K bytes of memory.
Processor board ID 07041186, with hardware revision 00000000
Bridging software.
X.25 software, Version 3.0.0.
1 Ethernet/IEEE 802.3 interface(s)
2 Serial network interface(s)
16 terminal line(s)
32K bytes of non-volatile configuration memory.
16384K bytes of processor board System flash (Read ONLY)
Configuration register is 0x2102
```

What Can Go Wrong – Bad Debug from LAC

This debug output includes comments on where the sequence stops when the router is misconfigured.

```
LAC#show debug
General OS:
AAA Authentication debugging is on
AAA Authorization debugging is on
AAA Accounting debugging is on
VPN:
L2X protocol events debugging is on
L2X protocol errors debugging is on
VPDN events debugging is on
VPDN errors debugging is on
VTEMPLATE:
Virtual Template debugging is on
LAC#
Jan 30 12:17:09: As1 AAA/AUTHOR/FSM: (0): LCP succeeds trivially
20:03:18: %LINK-3-UPDOWN: Interface Async1, changed state to up
Jan 30 12:17:09: As1 VPDN: Looking for tunnel -- rtp.cisco.com --
Jan 30 12:17:09: AAA: parse name=Async1 idb type=10 tty=1
Jan 30 12:17:09: AAA: name=Async1 flags=0x11 type=4 shelf=0 slot=0 adapter=0
port=1 channel=0
Jan 30 12:17:09: AAA/AUTHEN: create_user (0x278B90) user='rtp.cisco.com'
ruser='' port='Async1'
rem_addr='' authn_type=NONE service=LOGIN priv=0
Jan 30 12:17:09: AAA/AUTHOR/VPDN (898425447): Port='Async1'
list='default' service=NET
Jan 30 12:17:09: AAA/AUTHOR/VPDN: (898425447) user='rtp.cisco.com'
Jan 30 12:17:09: AAA/AUTHOR/VPDN: (898425447) send AV service=ppp
Jan 30 12:17:09: AAA/AUTHOR/VPDN: (898425447) send AV protocol=vpdn
Jan 30 12:17:09: AAA/AUTHOR/VPDN (898425447) found list "default"
Jan 30 12:17:09: AAA/AUTHOR/VPDN: (898425447) Method=TACACS+
Jan 30 12:17:09: AAA/AUTHOR/TAC+: (898425447): user=rtp.cisco.com
Jan 30 12:17:09: AAA/AUTHOR/TAC+: (898425447): send AV service=ppp
Jan 30 12:17:09: AAA/AUTHOR/TAC+: (898425447): send AV protocol=vpdn
Jan 30 12:17:09: TAC+: (898425447): received author response status = PASS_ADD
Jan 30 12:17:09: AAA/AUTHOR (898425447): Post authorization status = PASS_ADD
Jan 30 12:17:09: AAA/AUTHOR/VPDN: Processing AV service=ppp
Jan 30 12:17:09: AAA/AUTHOR/VPDN: Processing AV protocol=vpdn
Jan 30 12:17:09: AAA/AUTHOR/VPDN: Processing AV tunnel-type=l2tp
Jan 30 12:17:09: AAA/AUTHOR/VPDN: Processing AV tunnel-id=rtp_tunnel

!--- If the wrong tunnel termination IP address
!--- is in the profile:

Jan 30 12:56:30: AAA/AUTHOR/VPDN: Processing AV ip-addresses=1.1.1.1
```

```

Jan 30 12:17:09: AAA/AUTHOR/VPDN: Processing AV ip-addresses=10.31.1.56
Jan 30 12:17:09: As1 VPDN: Get tunnel info for rtp.cisco.com with LAC
rtp_tunnel, IP 10.31.1.56
Jan 30 12:17:09: AAA/AUTHEN: free_user (0x278B90) user='rtp.cisco.com'
ruser='' port='Async1'
rem_addr='' authen_type=NONE service=LOGIN priv=0

!--- If the wrong tunnel termination IP
!--- address is in the profile:

Jan 30 12:56:30: As1 VPDN: Forward to address 1.1.1.1

!--- The connection eventually drops on this end and no
!--- debug is seen on the other end.

Jan 30 12:17:09: As1 VPDN: Forward to address 10.31.1.56
Jan 30 12:17:09: As1 VPDN: Forwarding...
Jan 30 12:17:09: AAA: parse name=Async1 idb type=10 tty=1
Jan 30 12:17:09: AAA: name=Async1 flags=0x11 type=4 shelf=0 slot=0
adapter=0 port=1 channel=0
Jan 30 12:17:09: AAA/AUTHEN: create_user (0x22CDEC)
user='janedoe@rtp.cisco.com' ruser=''
port='Async1' rem_addr='async' authen_type=CHAP service=PPP priv=1
Jan 30 12:17:09: As1 VPDN: Bind interface direction=1
Jan 30 12:17:09: Tnl/Cl 74/1 L2TP: Session FS enabled
Jan 30 12:17:09: Tnl/Cl 74/1 L2TP: Session state change from idle to
wait-for-tunnel
Jan 30 12:17:09: As1 74/1 L2TP: Create session
Jan 30 12:17:09: Tnl 74 L2TP: SM State idle
Jan 30 12:17:09: Tnl 74 L2TP: O SCCRQ
Jan 30 12:17:09: Tnl 74 L2TP: Tunnel state change from idle to wait-ctl-reply
Jan 30 12:17:09: Tnl 74 L2TP: SM State wait-ctl-reply
Jan 30 12:17:09: As1 VPDN: janedoe@rtp.cisco.com is forwarded
Jan 30 12:17:10: Tnl 74 L2TP: I SCCRP from ABCDE
Jan 30 12:17:10: Tnl 74 L2TP: Got a challenge from remote peer, ABCDE
Jan 30 12:17:10: AAA: parse name= idb type=-1 tty=-1
Jan 30 12:17:10: AAA/AUTHEN: create_user (0x23232C) user='rtp_tunnel'
ruser='' port=''
rem_addr='' authen_type=CHAP service=PPP priv=1
Jan 30 12:17:10: AAA/AUTHEN/START (1598999635): port='' list='default'
action=SENDAUTH service=PPP
Jan 30 12:17:10: AAA/AUTHEN/START (1598999635): found list default
Jan 30 12:17:10: AAA/AUTHEN (1598999635): status = UNKNOWN
Jan 30 12:17:10: AAA/AUTHEN/START (1598999635): Method=TACACS+
Jan 30 12:17:10: TAC+: send AUTHEN/START packet ver=193 id=1598999635
Jan 30 12:17:10: TAC+: ver=192 id=1598999635 received AUTHEN status = ERROR
Jan 30 12:17:10: AAA: parse name= idb type=-1 tty=-1
Jan 30 12:17:10: AAA/AUTHEN: create_user (0x232470) user='rtp_tunnel'
ruser='' port=''
rem_addr='' authen_type=CHAP service=PPP priv=1
Jan 30 12:17:10: TAC+: ver=192 id=3400389836 received AUTHEN status = PASS
Jan 30 12:17:10: AAA/AUTHEN: free_user (0x232470) user='rtp_tunnel' ruser=''
port=''
rem_addr='' authen_type=CHAP service=PPP priv=1
Jan 30 12:17:10: AAA/AUTHEN (1598999635): status = PASS
Jan 30 12:17:10: AAA/AUTHEN: free_user (0x23232C) user='rtp_tunnel'
ruser='' port=''
rem_addr='' authen_type=CHAP service=PPP priv=1

!--- Change the CHAP passwords. The password rtp_tunnel
!--- in the LAC TACACS+ users' file does not match the
!--- password for "local name ABCDE" from the router
!--- in the LNS TACACS+ users' file:

```

```

Jan 30 13:24:23: Tnl 88 L2TP: Tunnel Authentication fails for ABCDE
Jan 30 13:24:23: Tnl 88 L2TP: Expected 7C959CA96C1E4AAA68BB3D481249488B
Jan 30 13:24:23: Tnl 88 L2TP: Got E4118FB4C8C4467EA4BF8872276C20B2

Jan 30 12:17:10: Tnl 74 L2TP: Got a response from remote peer, ABCDE
Jan 30 12:17:10: AAA: parse name= idb type=-1 tty=-1
Jan 30 12:17:10: AAA/AUTHEN: create_user (0x22FBA4) user='rtp_tunnel'
ruser='' port=''
rem_addr='' authen_type=CHAP service=PPP priv=1
Jan 30 12:17:10: AAA/AUTHEN/START (2964849625): port='' list='default'
action=SENDAUTH service=PPP
Jan 30 12:17:10: AAA/AUTHEN/START (2964849625): found list default
Jan 30 12:17:10: AAA/AUTHEN (2964849625): status = UNKNOWN
Jan 30 12:17:10: AAA/AUTHEN/START (2964849625): Method=TACACS+
Jan 30 12:17:10: TAC+: send AUTHEN/START packet ver=193 id=2964849625
20:03:20: %LINEPROTO-5-UPDOWN: Line protocol on Interface Async1,
changed state to up
Jan 30 12:17:11: TAC+: ver=192 id=2964849625 received AUTHEN status = ERROR
Jan 30 12:17:11: AAA: parse name= idb type=-1 tty=-1
Jan 30 12:17:11: AAA/AUTHEN: create_user (0x22FC8C) user='rtp_tunnel'
ruser='' port=''
rem_addr='' authen_type=CHAP service=PPP priv=1
Jan 30 12:17:11: As1 74/1 L2TP: Discarding data packet because tunnel is not open
Jan 30 12:17:11: As1 74/1 L2TP: Discarding data packet because tunnel is not open
Jan 30 12:17:11: TAC+: ver=192 id=1474818051 received AUTHEN status = PASS
Jan 30 12:17:11: AAA/AUTHEN: free_user (0x22FC8C) user='rtp_tunnel' ruser=''
port=''
rem_addr='' authen_type=CHAP service=PPP priv=1
Jan 30 12:17:11: AAA/AUTHEN (2964849625): status = PASS
Jan 30 12:17:11: AAA/AUTHEN: free_user (0x22FBA4) user='rtp_tunnel' ruser=''
port=''
rem_addr='' authen_type=CHAP service=PPP priv=1
Jan 30 12:17:11: Tnl 74 L2TP: Tunnel Authentication success
Jan 30 12:17:11: Tnl 74 L2TP: Tunnel state change from wait-ctl-reply to
established
Jan 30 12:17:11: Tnl 74 L2TP: O SCCCN to ABCDE tnlid 56
Jan 30 12:17:11: Tnl 74 L2TP: SM State established
Jan 30 12:17:11: As1 74/1 L2TP: O ICRQ to ABCDE 56/0
Jan 30 12:17:11: As1 74/1 L2TP: Session state change from wait-for-tunnel
to wait-reply
Jan 30 12:17:11: Tnl 74 L2TP: Dropping old CM, Ns 0, expected 1
Jan 30 12:17:11: As1 74/1 L2TP: O ICCN to ABCDE 56/1
Jan 30 12:17:11: As1 74/1 L2TP: Session state change from wait-reply to
established

LAC#

```

What Can Go Wrong – Bad Debug from LNS

This debug output includes comments on where the sequence stops when the router is misconfigured.

```

LNS#show debug
General OS:
AAA Authentication debugging is on
AAA Authorization debugging is on
AAA Accounting debugging is on
VPN:
L2X protocol events debugging is on
L2X protocol errors debugging is on
VPDN events debugging is on
VPDN errors debugging is on
VTEMPLATE:
Virtual Template debugging is on

```

```

LNS#
Jan 30 12:17:09: L2TP: I SCCRQ from rtp_tunnel tnl 74
Jan 30 12:17:09: Tnl 56 L2TP: New tunnel created for remote rtp_tunnel,
address 10.31.1.144

!--- Instead of the LAC sending the "rtp_tunnel"
!--- (see the user profile on the TACACS+ server), it sends "junk".
!--- We are expecting "rtp_tunnel" as in "accept dialin l2tp
!--- virtual-template 1 remote rtp_tunnel" in this configuration:

Jan 30 13:05:16: L2TP: I SCCRQ from junk tnl 81
Jan 30 13:05:16: L2X: Never heard of junk
Jan 30 13:05:16: L2TP: Could not find info block for junk
Jan 30 12:17:09: Tnl 56 L2TP: Got a challenge in SCCRQ, rtp_tunnel
Jan 30 12:17:09: AAA: parse name= idb type=-1 tty=-1
Jan 30 12:17:09: AAA/AUTHEN: create_user (0x21F6D0) user='ABCDE'
ruser='' port=''
rem_addr='' authn_type=CHAP service=PPP priv=1
Jan 30 12:17:09: AAA/AUTHEN/START (3194595626): port='' list='default'
action=SENDAUTH service=PPP
Jan 30 12:17:09: AAA/AUTHEN/START (3194595626): found list default
Jan 30 12:17:09: AAA/AUTHEN (3194595626): status = UNKNOWN
Jan 30 12:17:09: AAA/AUTHEN/START (3194595626): Method=TACACS+
Jan 30 12:17:09: TAC+: send AUTHEN/START packet ver=193 id=3194595626
Jan 30 12:17:09: TAC+: ver=192 id=3194595626 received AUTHEN status = ERROR
Jan 30 12:17:09: AAA: parse name= idb type=-1 tty=-1
Jan 30 12:17:09: AAA/AUTHEN: create_user (0x2281AC) user='ABCDE' ruser='' port=''
rem_addr='' authn_type=CHAP service=PPP priv=1
Jan 30 12:17:09: TAC+: ver=192 id=3639011179 received AUTHEN status = PASS
Jan 30 12:17:09: AAA/AUTHEN: free_user (0x2281AC) user='ABCDE' ruser='' port=''
rem_addr='' authn_type=CHAP service=PPP priv=1
Jan 30 12:17:09: AAA/AUTHEN (3194595626): status = PASS
Jan 30 12:17:09: AAA/AUTHEN: free_user (0x21F6D0) user='ABCDE' ruser='' port=''
rem_addr='' authn_type=CHAP service=PPP priv=1
Jan 30 12:17:09: Tnl 56 L2TP: O SCCRP to rtp_tunnel tnlid 74
Jan 30 12:17:09: Tnl 56 L2TP: Tunnel state change from idle to wait-ctl-reply
Jan 30 12:17:10: Tnl 56 L2TP: O Resend SCCRP, flg TLF, ver 2, len 152,
tnl 74, cl 0, ns 0, nr 1
Jan 30 12:17:10: Tnl 56 L2TP: I SCCCN from rtp_tunnel tnl 74
Jan 30 12:17:10: Tnl 56 L2TP: Got a Challenge Response in SCCCN from rtp_tunnel
Jan 30 12:17:10: AAA: parse name= idb type=-1 tty=-1
Jan 30 12:17:10: AAA/AUTHEN: create_user (0x227F3C) user='ABCDE' ruser='' port=''
rem_addr='' authn_type=CHAP service=PPP priv=1
Jan 30 12:17:10: AAA/AUTHEN/STARTTranslating "rtp.cisco.com"
(4117701992): port='' list='default' action=SENDAUTH service=PPP
Jan 30 12:17:10: AAA/AUTHEN/START (4117701992): found list default
Jan 30 12:17:10: AAA/AUTHEN (4117701992): status = UNKNOWN
Jan 30 12:17:10: AAA/AUTHEN/START (4117701992): Method=TACACS+
Jan 30 12:17:10: TAC+: send AUTHEN/START packet ver=193 id=4117701992
Jan 30 12:17:11: TAC+: ver=192 id=4117701992 received AUTHEN status = ERROR
Jan 30 12:17:11: AAA: parse name= idb type=-1 tty=-1
Jan 30 12:17:11: AAA/AUTHEN: create_user (0x228E68) user='ABCDE' ruser='' port=''
rem_addr='' authn_type=CHAP service=PPP priv=1
Jan 30 12:17:11: TAC+: ver=192 id=2827432721 received AUTHEN status = PASS
Jan 30 12:17:11: AAA/AUTHEN: free_user (0x228E68) user='ABCDE' ruser='' port=''
rem_addr='' authn_type=CHAP service=PPP priv=1
Jan 30 12:17:11: AAA/AUTHEN (4117701992): status = PASS
Jan 30 12:17:11: AAA/AUTHEN: free_user (0x227F3C) user='ABCDE' ruser='' port=''
rem_addr='' authn_type=CHAP service=PPP priv=1
Jan 30 12:17:11: Tnl 56 L2TP: Tunnel Authentication success
Jan 30 12:17:11: Tnl 56 L2TP: Tunnel state change from wait-ctl-reply
to established
Jan 30 12:17:11: Tnl 56 L2TP: SM State established

```

```

Jan 30 12:17:11: Tnl 56 L2TP: I ICRQ from rtp_tunnel tnl 74
Jan 30 12:17:11: Tnl/Cl 56/1 L2TP: Session FS enabled
Jan 30 12:17:11: Tnl/Cl 56/1 L2TP: Session state change from idle to
wait-for-tunnel
Jan 30 12:17:11: Tnl/Cl 56/1 L2TP: New session created
Jan 30 12:17:11: Tnl/Cl 56/1 L2TP: O ICRP to rtp_tunnel 74/1
Jan 30 12:17:11: Tnl/Cl 56/1 L2TP: Session state change from wait-for-tunnel
to wait-connect
Jan 30 12:17:11: Tnl/Cl 56/1 L2TP: I ICCN from rtp_tunnel tnl 74, cl 1
Jan 30 12:17:11: Tnl/Cl 56/1 L2TP: Session state change from wait-connect
to established
Jan 30 12:17:11: Vil VTEMPLATE: Reuse Vil, recycle queue size 0
Jan 30 12:17:11: Vil VTEMPLATE: Hardware address 00e0.1e68.942c
Jan 30 12:17:11: Vil VPDN: Virtual interface created for janedoe@rtp.cisco.com
Jan 30 12:17:11: Vil VPDN: Set to Async interface
Jan 30 12:17:11: Vil VPDN: Clone from Vtemplate 1 filterPPP=0 blocking
Jan 30 12:17:11: Vil VTEMPLATE: Has a new cloneblk vtemplate, now it has
vtemplate
Jan 30 12:17:11: Vil VTEMPLATE: ***** CLONE VACCESS1 *****
Jan 30 12:17:11: Vil VTEMPLATE: Clone from Virtual-Templatel
interface Virtual-Access1
default ip address
no ip address
encap ppp
ip unnumbered Ethernet0
peer default ip address pool default
ppp authentication chap
ip unnum ethernet0
peer def ip address pool default
ppp authen chap
end

Jan 30 12:17:12: janedoe@rtp.cisco.com 56/1 L2TP: Session with no hwidb
20:12:14: %LINK-3-UPDOWN: Interface Virtual-Access1, changed state to up
Jan 30 12:17:13: Vil AAA/AUTHOR/FSM: (0): LCP succeeds trivially
Jan 30 12:17:13: Vil VPDN: Bind interface direction=2
Jan 30 12:17:13: Vil VPDN: PPP LCP accepted rcv CONFACK
Jan 30 12:17:13: Vil VPDN: PPP LCP accepted sent CONFACK
Jan 30 12:17:13: Vil L2X: Discarding packet because of no mid/session
Jan 30 12:17:13: AAA: parse name=Virtual-Access1 idb type=21 tty=-1
Jan 30 12:17:13: AAA: name=Virtual-Access1 flags=0x11 type=5 shelf=0 slot=0
adapter=0 port=1 channel=0
Jan 30 12:17:13: AAA/AUTHEN: create_user (0x1F5100) user='janedoe@rtp.cisco.com'
ruser='' port='Virtual-Access1' rem_addr='' authen_type=CHAP
service=PPP priv=1
Jan 30 12:17:13: AAA/AUTHEN/START (562517969): port='Virtual-Access1' list=''
action=LOGIN service=PPP
Jan 30 12:17:13: AAA/AUTHEN/START (562517969): using "default" list
Jan 30 12:17:13: AAA/AUTHEN (562517969): status = UNKNOWN
Jan 30 12:17:13: AAA/AUTHEN/START (562517969): Method=TACACS+
Jan 30 12:17:13: TAC+: send AUTHEN/START packet ver=193 id=562517969
Jan 30 12:17:14: TAC+: ver=192 id=562517969 received AUTHEN status = GETPASS
Jan 30 12:17:14: AAA: parse name=Virtual-Access1 idb type=-1 tty=-1
Jan 30 12:17:14: AAA: name=Virtual-Access1 flags=0x11 type=6 shelf=0 slot=0
adapter=0 port=1 channel=0
Jan 30 12:17:14: AAA/AUTHEN: create_user (0x1F5270) user='janedoe@rtp.cisco.com'
ruser='' port='Virtual-Access1' rem_addr='' authen_type=CHAP
service=PPP priv=1
Jan 30 12:17:14: TAC+: ver=192 id=2384902384 received AUTHEN status = PASS
Jan 30 12:17:14: AAA/AUTHEN: free_user (0x1F5270) user='janedoe@rtp.cisco.com'
ruser='' port='Virtual-Access1' rem_addr='' authen_type=CHAP
service=PPP priv=1

```

!--- Here, the tunnel is ok, but the user
!--- enters a bad password in dialing:

```
Jan 30 13:39:44: AAA/AUTHEN (1958732267): status = FAIL
21:34:45: %VPDN-6-AUTHENFAIL: L2F HGW 10.31.1.144, AAA authentication
failure for Vi1 user
janedoe@rtp.cisco.com; Authentication failure
Jan 30 12:17:14: AAA/AUTHEN (562517969): status = PASS
Jan 30 12:17:14: Vi1 AAA/AUTHOR/LCP: Authorize LCP
Jan 30 12:17:14: AAA/AUTHOR/LCP Vi1 (413543389): Port='Virtual-Access1'
list='' service=NET
Jan 30 12:17:14: AAA/AUTHOR/LCP: Vi1 (413543389) user='janedoe@rtp.cisco.com'
Jan 30 12:17:14: AAA/AUTHOR/LCP: Vi1 (413543389) send AV service=ppp
Jan 30 12:17:14: AAA/AUTHOR/LCP: Vi1 (413543389) send AV protocol=lcp
Jan 30 12:17:14: AAA/AUTHOR/LCP (413543389) found list "default"
Jan 30 12:17:14: AAA/AUTHOR/LCP: Vi1 (413543389) Method=TACACS+
Jan 30 12:17:14: AAA/AUTHOR/TAC+: (413543389): user=janedoe@rtp.cisco.com
Jan 30 12:17:14: AAA/AUTHOR/TAC+: (413543389): send AV service=ppp
Jan 30 12:17:14: AAA/AUTHOR/TAC+: (413543389): send AV protocol=lcp
Jan 30 12:17:14: TAC+: (413543389): received author response status = PASS_ADD
Jan 30 12:17:14: AAA/AUTHOR (413543389): Post authorization status = PASS_ADD
Jan 30 12:17:14: AAA/ACCT/NET/START User janedoe@rtp.cisco.com, Port
Virtual-Access1, List ""
Jan 30 12:17:14: AAA/ACCT/NET: Found list "default"
Jan 30 12:17:14: Vi1 AAA/AUTHOR/FSM: (0): Can we start IPCP?
Jan 30 12:17:14: AAA/AUTHOR/FSM Vi1 (1358526470): Port='Virtual-Access1'
list='' service=NET
Jan 30 12:17:14: AAA/AUTHOR/FSM: Vi1 (1358526470) user='janedoe@rtp.cisco.com'
Jan 30 12:17:14: AAA/AUTHOR/FSM: Vi1 (1358526470) send AV service=ppp
Jan 30 12:17:14: AAA/AUTHOR/FSM: Vi1 (1358526470) send AV protocol=ip
Jan 30 12:17:14: AAA/AUTHOR/FSM (1358526470) found list "default"
Jan 30 12:17:14: AAA/AUTHOR/FSM: Vi1 (1358526470) Method=TACACS+
Jan 30 12:17:14: AAA/AUTHOR/TAC+: (1358526470): user=janedoe@rtp.cisco.com
Jan 30 12:17:14: AAA/AUTHOR/TAC+: (1358526470): send AV service=ppp
Jan 30 12:17:14: AAA/AUTHOR/TAC+: (1358526470): send AV protocol=ip
Jan 30 12:17:14: TAC+: (1358526470): received author response status = PASS_ADD
Jan 30 12:17:14: AAA/AUTHOR (1358526470): Post authorization status = PASS_ADD
Jan 30 12:17:14: Vi1 AAA/AUTHOR/FSM: We can start IPCP
Jan 30 12:17:14: TAC+: (1442592025): received acct response status = UNKNOWN
20:12:16: %LINEPROTO-5-UPDOWN: Line protocol on Interface Virtual-Access1,
changed state to up
Jan 30 12:17:16: Vi1 AAA/AUTHOR/IPCP: Start. Her address 0.0.0.0, we want 0.0.0.0
Jan 30 12:17:16: Vi1 AAA/AUTHOR/IPCP: Processing AV service=ppp
Jan 30 12:17:16: Vi1 AAA/AUTHOR/IPCP: Processing AV protocol=ip
Jan 30 12:17:16: Vi1 AAA/AUTHOR/IPCP: Authorization succeeded
Jan 30 12:17:16: Vi1 AAA/AUTHOR/IPCP: Done. Her address 0.0.0.0,
we want 0.0.0.0
Jan 30 12:17:16: Vi1 AAA/AUTHOR/IPCP: Start. Her address 0.0.0.0,
we want 10.6.1.1
Jan 30 12:17:16: Vi1 AAA/AUTHOR/IPCP: Processing AV service=ppp
Jan 30 12:17:16: Vi1 AAA/AUTHOR/IPCP: Processing AV protocol=ip
Jan 30 12:17:16: Vi1 AAA/AUTHOR/IPCP: Authorization succeeded
Jan 30 12:17:16: Vi1 AAA/AUTHOR/IPCP: Done. Her address 0.0.0.0,
we want 10.6.1.1
Jan 30 12:17:16: Vi1 AAA/AUTHOR/IPCP: Start. Her address 10.6.1.1,
we want 10.6.1.1
Jan 30 12:17:16: AAA/AUTHOR/IPCP Vi1 (3572380713): Port='Virtual-Access1'
list='' service=NET
Jan 30 12:17:16: AAA/AUTHOR/IPCP: Vi1 (3572380713) user='janedoe@rtp.cisco.com'
Jan 30 12:17:16: AAA/AUTHOR/IPCP: Vi1 (3572380713) send AV service=ppp
Jan 30 12:17:16: AAA/AUTHOR/IPCP: Vi1 (3572380713) send AV protocol=ip
Jan 30 12:17:16: AAA/AUTHOR/IPCP: Vi1 (3572380713) send AV addr*10.6.1.1
Jan 30 12:17:16: AAA/AUTHOR/IPCP (3572380713) found list "default"
Jan 30 12:17:16: AAA/AUTHOR/IPCP: Vi1 (3572380713) Method=TACACS+
```

```

Jan 30 12:17:16: AAA/AUTHOR/TAC+: (3572380713): user=janedoe@rtp.cisco.com
Jan 30 12:17:16: AAA/AUTHOR/TAC+: (3572380713): send AV service=ppp
Jan 30 12:17:16: AAA/AUTHOR/TAC+: (3572380713): send AV protocol=ip
Jan 30 12:17:16: AAA/AUTHOR/TAC+: (3572380713): send AV addr*10.6.1.1
Jan 30 12:17:17: TAC+: (3572380713): received author response status = PASS_ADD
Jan 30 12:17:17: AAA/AUTHOR (3572380713): Post authorization status = PASS_ADD
Jan 30 12:17:17: Vi1 AAA/AUTHOR/IPCP: Processing AV service=ppp
Jan 30 12:17:17: Vi1 AAA/AUTHOR/IPCP: Processing AV protocol=ip
Jan 30 12:17:17: Vi1 AAA/AUTHOR/IPCP: Processing AV addr*10.6.1.1
Jan 30 12:17:17: Vi1 AAA/AUTHOR/IPCP: Authorization succeeded
Jan 30 12:17:17: Vi1 AAA/AUTHOR/IPCP: Done. Her address 10.6.1.1,
we want 10.6.1.1

LNS#

```

LNS Accounting Records

This is on the LNS TACACS+ server.

```

Sat Jan 30 05:27:01 1999 10.31.1.56 janedoe@rtp.cisco.com
Virtual-Access1 unknown
start task_id=4 start_time=917700054 timezone=UTC service=ppp

Sat Jan 30 05:27:27 1999 10.31.1.56 janedoe@rtp.cisco.com
Virtual-Access1 unknown
stop task_id=4 start_time=917700054 timezone=UTC service=ppp
protocol=ip addr=10.6.1.1 disc-cause=2 disc-cause-ext=1011
pre-bytes-in=0 pre-bytes-out=8
pre-paks-in=0 pre-paks-out=2 bytes_in=862 bytes_out=142
paks_in=19 paks_out=8 pre-session-time=1

```

Troubleshoot

This section provides information you can use to troubleshoot your configuration.

Troubleshooting Commands

Note: Before issuing **debug** commands, please see Important Information on Debug Commands.

- **debug aaa authentication** Displays information on AAA/TACACS+ authentication.
- **debug aaa authorization** Displays information on AAA/TACACS+ authorization.
- **debug aaa accounting** Displays information on accountable events as they occur. The information displayed by this command is independent of the accounting protocol used to transfer the accounting information to a server.
- **debug tacacs+** Displays detailed debugging information associated with TACACS+.
- **debug vtemplate** Displays cloning information for a virtual access interface from the time it is cloned from a virtual template to the time the virtual access interface comes down when the call ends.
- **debug vpdn error** Displays errors that prevent a PPP tunnel from being established or errors that cause an established tunnel to be closed.
- **debug vpdn events** Displays messages about events that are part of normal PPP tunnel establishment or shutdown.
- **debug vpdn l2x-errors** Displays Layer 2 protocol errors that prevent Layer 2 establishment or prevent its normal operation.
- **debug vpdn l2x-events** Displays messages about events that are part of normal PPP tunnel establishment or shutdown for Layer 2.

Debug Output

Good Debug from LAC Router

```
LAC#show debug
General OS:
AAA Authentication debugging is on
AAA Authorization debugging is on
AAA Accounting debugging is on
VPN:
L2X protocol events debugging is on
L2X protocol errors debugging is on
VPDN events debugging is on
VPDN errors debugging is on
VTEMPLATE:
Virtual Template debugging is on
LAC#
Jan 30 12:17:09: As1 AAA/AUTHOR/FSM: (0): LCP succeeds trivially
20:03:18: %LINK-3-UPDOWN: Interface Async1, changed state to up
Jan 30 12:17:09: As1 VPDN: Looking for tunnel -- rtp.cisco.com --
Jan 30 12:17:09: AAA: parse name=Async1 idb type=10 tty=1
Jan 30 12:17:09: AAA: name=Async1 flags=0x11 type=4 shelf=0 slot=0 adapter=0
port=1 channel=0
Jan 30 12:17:09: AAA/AUTHEN: create_user (0x278B90) user='rtp.cisco.com'
ruser=''
port='Async1' rem_addr='' authen_type=NONE service=LOGIN priv=0
Jan 30 12:17:09: AAA/AUTHOR/VPDN (898425447): Port='Async1' list='default'
service=NET
Jan 30 12:17:09: AAA/AUTHOR/VPDN: (898425447) user='rtp.cisco.com'
Jan 30 12:17:09: AAA/AUTHOR/VPDN: (898425447) send AV service=ppp
Jan 30 12:17:09: AAA/AUTHOR/VPDN: (898425447) send AV protocol=vpdn
Jan 30 12:17:09: AAA/AUTHOR/VPDN (898425447) found list "default"
Jan 30 12:17:09: AAA/AUTHOR/VPDN: (898425447) Method=TACACS+
Jan 30 12:17:09: AAA/AUTHOR/TAC+: (898425447): user=rtp.cisco.com
Jan 30 12:17:09: AAA/AUTHOR/TAC+: (898425447): send AV service=ppp
Jan 30 12:17:09: AAA/AUTHOR/TAC+: (898425447): send AV protocol=vpdn
Jan 30 12:17:09: TAC+: (898425447): received author response status = PASS_ADD
Jan 30 12:17:09: AAA/AUTHOR (898425447): Post authorization status = PASS_ADD
Jan 30 12:17:09: AAA/AUTHOR/VPDN: Processing AV service=ppp
Jan 30 12:17:09: AAA/AUTHOR/VPDN: Processing AV protocol=vpdn
Jan 30 12:17:09: AAA/AUTHOR/VPDN: Processing AV tunnel-type=l2tp
Jan 30 12:17:09: AAA/AUTHOR/VPDN: Processing AV tunnel-id=rtp_tunnel
Jan 30 12:17:09: AAA/AUTHOR/VPDN: Processing AV ip-addresses=10.31.1.56
Jan 30 12:17:09: As1 VPDN: Get tunnel info for rtp.cisco.com with LAC
rtp_tunnel, IP 10.31.1.56
Jan 30 12:17:09: AAA/AUTHEN: free_user (0x278B90) user='rtp.cisco.com' ruser=''
port='Async1' rem_addr='' authen_type=NONE service=LOGIN priv=0
Jan 30 12:17:09: As1 VPDN: Forward to address 10.31.1.56
Jan 30 12:17:09: As1 VPDN: Forwarding...
Jan 30 12:17:09: AAA: parse name=Async1 idb type=10 tty=1
Jan 30 12:17:09: AAA: name=Async1 flags=0x11 type=4 shelf=0 slot=0 adapter=0
port=1 channel=0
Jan 30 12:17:09: AAA/AUTHEN: create_user (0x22CDEC) user='janedoe@rtp.cisco.com'
ruser='' port='Async1' rem_addr='async' authen_type=CHAP
service=PPP priv=1
Jan 30 12:17:09: As1 VPDN: Bind interface direction=1
Jan 30 12:17:09: Tnl/Cl 74/1 L2TP: Session FS enabled
Jan 30 12:17:09: Tnl/Cl 74/1 L2TP: Session state change from idle to
wait-for-tunnel
Jan 30 12:17:09: As1 74/1 L2TP: Create session
Jan 30 12:17:09: Tnl 74 L2TP: SM State idle
Jan 30 12:17:09: Tnl 74 L2TP: O SCCRQ
Jan 30 12:17:09: Tnl 74 L2TP: Tunnel state change from idle to wait-ctl-reply
```

```

Jan 30 12:17:09: Tnl 74 L2TP: SM State wait-ctl-reply
Jan 30 12:17:09: As1 VPDN: janedoe@rtp.cisco.com is forwarded
Jan 30 12:17:10: Tnl 74 L2TP: I SCCRP from ABCDE
Jan 30 12:17:10: Tnl 74 L2TP: Got a challenge from remote peer, ABCDE
Jan 30 12:17:10: AAA: parse name= idb type=-1 tty=-1
Jan 30 12:17:10: AAA/AUTHEN: create_user (0x23232C) user='rtp_tunnel'
ruser='' port=''
rem_addr='' authen_type=CHAP service=PPP priv=1
Jan 30 12:17:10: AAA/AUTHEN/START (1598999635): port='' list='default'
action=SENDAUTH service=PPP
Jan 30 12:17:10: AAA/AUTHEN/START (1598999635): found list default
Jan 30 12:17:10: AAA/AUTHEN (1598999635): status = UNKNOWN
Jan 30 12:17:10: AAA/AUTHEN/START (1598999635): Method=TACACS+
Jan 30 12:17:10: TAC+: send AUTHEN/START packet ver=193 id=1598999635
Jan 30 12:17:10: TAC+: ver=192 id=1598999635 received AUTHEN status = ERROR
Jan 30 12:17:10: AAA: parse name= idb type=-1 tty=-1
Jan 30 12:17:10: AAA/AUTHEN: create_user (0x232470) user='rtp_tunnel'
ruser='' port=''
rem_addr='' authen_type=CHAP service=PPP priv=1
Jan 30 12:17:10: TAC+: ver=192 id=3400389836 received AUTHEN status = PASS
Jan 30 12:17:10: AAA/AUTHEN: free_user (0x232470) user='rtp_tunnel'
ruser='' port=''
rem_addr='' authen_type=CHAP service=PPP priv=1
Jan 30 12:17:10: AAA/AUTHEN (1598999635): status = PASS
Jan 30 12:17:10: AAA/AUTHEN: free_user (0x23232C) user='rtp_tunnel'
ruser='' port=''
rem_addr='' authen_type=CHAP service=PPP priv=1
Jan 30 12:17:10: Tnl 74 L2TP: Got a response from remote peer, ABCDE
Jan 30 12:17:10: AAA: parse name= idb type=-1 tty=-1
Jan 30 12:17:10: AAA/AUTHEN: create_user (0x22FBA4) user='rtp_tunnel'
ruser='' port=''
rem_addr='' authen_type=CHAP service=PPP priv=1
Jan 30 12:17:10: AAA/AUTHEN/START (2964849625): port='' list='default'
action=SENDAUTH service=PPP
Jan 30 12:17:10: AAA/AUTHEN/START (2964849625): found list default
Jan 30 12:17:10: AAA/AUTHEN (2964849625): status = UNKNOWN
Jan 30 12:17:10: AAA/AUTHEN/START (2964849625): Method=TACACS+
Jan 30 12:17:10: TAC+: send AUTHEN/START packet ver=193 id=2964849625
20:03:20: %LINEPROTO-5-UPDOWN: Line protocol on Interface Async1,
changed state to up
Jan 30 12:17:11: TAC+: ver=192 id=2964849625 received AUTHEN status = ERROR
Jan 30 12:17:11: AAA: parse name= idb type=-1 tty=-1
Jan 30 12:17:11: AAA/AUTHEN: create_user (0x22FC8C) user='rtp_tunnel'
ruser='' port=''
rem_addr='' authen_type=CHAP service=PPP priv=1
Jan 30 12:17:11: As1 74/1 L2TP: Discarding data packet because tunnel
is not open
Jan 30 12:17:11: As1 74/1 L2TP: Discarding data packet because tunnel
is not open
Jan 30 12:17:11: TAC+: ver=192 id=1474818051 received AUTHEN status = PASS
Jan 30 12:17:11: AAA/AUTHEN: free_user (0x22FC8C) user='rtp_tunnel'
ruser='' port=''
rem_addr='' authen_type=CHAP service=PPP priv=1
Jan 30 12:17:11: AAA/AUTHEN (2964849625): status = PASS
Jan 30 12:17:11: AAA/AUTHEN: free_user (0x22FBA4) user='rtp_tunnel'
ruser='' port=''
rem_addr='' authen_type=CHAP service=PPP priv=1
Jan 30 12:17:11: Tnl 74 L2TP: Tunnel Authentication success
Jan 30 12:17:11: Tnl 74 L2TP: Tunnel state change from wait-ctl-reply to
established
Jan 30 12:17:11: Tnl 74 L2TP: O SCCCN to ABCDE tnlid 56
Jan 30 12:17:11: Tnl 74 L2TP: SM State established
Jan 30 12:17:11: As1 74/1 L2TP: O ICRQ to ABCDE 56/0
Jan 30 12:17:11: As1 74/1 L2TP: Session state change from wait-for-tunnel

```

```
to wait-reply
Jan 30 12:17:11: Tnl 74 L2TP: Dropping old CM, Ns 0, expected 1
Jan 30 12:17:11: As1 74/1 L2TP: O ICCN to ABCDE 56/1
Jan 30 12:17:11: As1 74/1 L2TP: Session state change from wait-reply to
established
LAC#
```

Good Debug from LNS Router

```
LNS#show debug
General OS:
AAA Authentication debugging is on
AAA Authorization debugging is on
AAA Accounting debugging is on
VPN:
L2X protocol events debugging is on
L2X protocol errors debugging is on
VPDN events debugging is on
VPDN errors debugging is on
VTEMPLATE:
Virtual Template debugging is on
LNS#
Jan 30 12:17:09: L2TP: I SCCRQ from rtp_tunnel tnl 74
Jan 30 12:17:09: Tnl 56 L2TP: New tunnel created for remote
rtp_tunnel, address 10.31.1.144
Jan 30 12:17:09: Tnl 56 L2TP: Got a challenge in SCCRQ, rtp_tunnel
Jan 30 12:17:09: AAA: parse name= idb type=-1 tty=-1
Jan 30 12:17:09: AAA/AUTHEN: create_user (0x21F6D0) user='ABCDE'
ruser='' port=''
rem_addr='' authn_type=CHAP service=PPP priv=1
Jan 30 12:17:09: AAA/AUTHEN/START (3194595626): port='' list='default'
action=SENDAUTH service=PPP
Jan 30 12:17:09: AAA/AUTHEN/START (3194595626): found list default
Jan 30 12:17:09: AAA/AUTHEN (3194595626): status = UNKNOWN
Jan 30 12:17:09: AAA/AUTHEN/START (3194595626): Method=TACACS+
Jan 30 12:17:09: TAC+: send AUTHEN/START packet ver=193 id=3194595626
Jan 30 12:17:09: TAC+: ver=192 id=3194595626 received AUTHEN status = ERROR
Jan 30 12:17:09: AAA: parse name= idb type=-1 tty=-1
Jan 30 12:17:09: AAA/AUTHEN: create_user (0x2281AC) user='ABCDE'
ruser='' port=''
rem_addr='' authn_type=CHAP service=PPP priv=1
Jan 30 12:17:09: TAC+: ver=192 id=3639011179 received AUTHEN status = PASS
Jan 30 12:17:09: AAA/AUTHEN: free_user (0x2281AC) user='ABCDE' ruser='' port=''
rem_addr='' authn_type=CHAP service=PPP priv=1
Jan 30 12:17:09: AAA/AUTHEN (3194595626): status = PASS
Jan 30 12:17:09: AAA/AUTHEN: free_user (0x21F6D0) user='ABCDE' ruser='' port=''
rem_addr='' authn_type=CHAP service=PPP priv=1
Jan 30 12:17:09: Tnl 56 L2TP: O SCCRP to rtp_tunnel tnlid 74
Jan 30 12:17:09: Tnl 56 L2TP: Tunnel state change from idle to
wait-ctl-reply
Jan 30 12:17:10: Tnl 56 L2TP: O Resend SCCRP, flg TLF, ver 2, len 152,
tnl 74, cl 0, ns 0, nr 1
Jan 30 12:17:10: Tnl 56 L2TP: I SCCCN from rtp_tunnel tnl 74
Jan 30 12:17:10: Tnl 56 L2TP: Got a Challenge Response in SCCCN from rtp_tunnel
Jan 30 12:17:10: AAA: parse name= idb type=-1 tty=-1
Jan 30 12:17:10: AAA/AUTHEN: create_user (0x227F3C) user='ABCDE'
ruser='' port=''
rem_addr='' authn_type=CHAP service=PPP priv=1
Jan 30 12:17:10: AAA/AUTHEN/STARTTranslating "rtp.cisco.com"
(4117701992): port='' list='default' action=SENDAUTH service=PPP
Jan 30 12:17:10: AAA/AUTHEN/START (4117701992): found list default
Jan 30 12:17:10: AAA/AUTHEN (4117701992): status = UNKNOWN
Jan 30 12:17:10: AAA/AUTHEN/START (4117701992): Method=TACACS+
Jan 30 12:17:10: TAC+: send AUTHEN/START packet ver=193 id=4117701992
```

```

Jan 30 12:17:11: TAC+: ver=192 id=4117701992 received AUTHEN status = ERROR
Jan 30 12:17:11: AAA: parse name= idb type=-1 tty=-1
Jan 30 12:17:11: AAA/AUTHEN: create_user (0x228E68) user='ABCDE' ruser='' port=''
rem_addr='' authen_type=CHAP service=PPP priv=1
Jan 30 12:17:11: TAC+: ver=192 id=2827432721 received AUTHEN status = PASS
Jan 30 12:17:11: AAA/AUTHEN: free_user (0x228E68) user='ABCDE' ruser='' port=''
rem_addr='' authen_type=CHAP service=PPP priv=1
Jan 30 12:17:11: AAA/AUTHEN (4117701992): status = PASS
Jan 30 12:17:11: AAA/AUTHEN: free_user (0x227F3C) user='ABCDE' ruser='' port=''
rem_addr='' authen_type=CHAP service=PPP priv=1
Jan 30 12:17:11: Tnl 56 L2TP: Tunnel Authentication success
Jan 30 12:17:11: Tnl 56 L2TP: Tunnel state change from wait-ctl-reply
to established
Jan 30 12:17:11: Tnl 56 L2TP: SM State established
Jan 30 12:17:11: Tnl 56 L2TP: I ICRQ from rtp_tunnel tnl 74
Jan 30 12:17:11: Tnl/Cl 56/1 L2TP: Session FS enabled
Jan 30 12:17:11: Tnl/Cl 56/1 L2TP: Session state change from idle to
wait-for-tunnel
Jan 30 12:17:11: Tnl/Cl 56/1 L2TP: New session created
Jan 30 12:17:11: Tnl/Cl 56/1 L2TP: O ICRP to rtp_tunnel 74/1
Jan 30 12:17:11: Tnl/Cl 56/1 L2TP: Session state change from wait-for-tunnel
to wait-connect
Jan 30 12:17:11: Tnl/Cl 56/1 L2TP: I ICCN from rtp_tunnel tnl 74, cl 1
Jan 30 12:17:11: Tnl/Cl 56/1 L2TP: Session state change from wait-connect
to established
Jan 30 12:17:11: Vil VTEMPLATE: Reuse Vil, recycle queue size 0
Jan 30 12:17:11: Vil VTEMPLATE: Hardware address 00e0.1e68.942c
Jan 30 12:17:11: Vil VPDN: Virtual interface created for janedoe@rtp.cisco.com
Jan 30 12:17:11: Vil VPDN: Set to Async interface
Jan 30 12:17:11: Vil VPDN: Clone from Vtemplate 1 filterPPP=0 blocking
Jan 30 12:17:11: Vil VTEMPLATE: Has a new cloneblk vtemplate, now it has vtemplate
Jan 30 12:17:11: Vil VTEMPLATE: ***** CLONE VACCESS1 *****
Jan 30 12:17:11: Vil VTEMPLATE: Clone from Virtual-Templat1
interface Virtual-Access1
default ip address
no ip address
encap ppp
ip unnumbered Ethernet0
peer default ip address pool default
ppp authentication chap
ip unnum ethernet0
peer def ip address pool default
ppp authen chap
end

Jan 30 12:17:12: janedoe@rtp.cisco.com 56/1 L2TP: Session with no hwidb
20:12:14: %LINK-3-UPDOWN: Interface Virtual-Access1, changed state to up
Jan 30 12:17:13: Vil AAA/AUTHOR/FSM: (0): LCP succeeds trivially
Jan 30 12:17:13: Vil VPDN: Bind interface direction=2
Jan 30 12:17:13: Vil VPDN: PPP LCP accepted rcv CONFACK
Jan 30 12:17:13: Vil VPDN: PPP LCP accepted sent CONFACK
Jan 30 12:17:13: Vil L2X: Discarding packet because of no mid/session
Jan 30 12:17:13: AAA: parse name=Virtual-Access1 idb type=21 tty=-1
Jan 30 12:17:13: AAA: name=Virtual-Access1 flags=0x11 type=5 shelf=0 slot=0
adapter=0 port=1 channel=0
Jan 30 12:17:13: AAA/AUTHEN: create_user (0x1F5100) user='janedoe@rtp.cisco.com'
ruser='' port='Virtual-Access1' rem_addr='' authen_type=CHAP
service=PPP priv=1
Jan 30 12:17:13: AAA/AUTHEN/START (562517969): port='Virtual-Access1' list=''
action=LOGIN service=PPP
Jan 30 12:17:13: AAA/AUTHEN/START (562517969): using "default" list
Jan 30 12:17:13: AAA/AUTHEN (562517969): status = UNKNOWN
Jan 30 12:17:13: AAA/AUTHEN/START (562517969): Method=TACACS+
Jan 30 12:17:13: TAC+: send AUTHEN/START packet ver=193 id=562517969

```

```

Jan 30 12:17:14: TAC+: ver=192 id=562517969 received AUTHEN status = GETPASS
Jan 30 12:17:14: AAA: parse name=Virtual-Access1 idb type=-1 tty=-1
Jan 30 12:17:14: AAA: name=Virtual-Access1 flags=0x11 type=6 shelf=0 slot=0
adapter=0 port=1 channel=0
Jan 30 12:17:14: AAA/AUTHEN: create_user (0x1F5270) user='janedoe@rtp.cisco.com'
ruser='' port='Virtual-Access1' rem_addr='' authen_type=CHAP
service=PPP priv=1
Jan 30 12:17:14: TAC+: ver=192 id=2384902384 received AUTHEN status = PASS
Jan 30 12:17:14: AAA/AUTHEN: free_user (0x1F5270) user='janedoe@rtp.cisco.com'
ruser='' port='Virtual-Access1' rem_addr='' authen_type=CHAP
service=PPP priv=1
Jan 30 12:17:14: AAA/AUTHEN (562517969): status = PASS
Jan 30 12:17:14: Vi1 AAA/AUTHOR/LCP: Authorize LCP
Jan 30 12:17:14: AAA/AUTHOR/LCP Vi1 (413543389): Port='Virtual-Access1'
list='' service=NET
Jan 30 12:17:14: AAA/AUTHOR/LCP: Vi1 (413543389) user='janedoe@rtp.cisco.com'
Jan 30 12:17:14: AAA/AUTHOR/LCP: Vi1 (413543389) send AV service=ppp
Jan 30 12:17:14: AAA/AUTHOR/LCP: Vi1 (413543389) send AV protocol=lcp
Jan 30 12:17:14: AAA/AUTHOR/LCP (413543389) found list "default"
Jan 30 12:17:14: AAA/AUTHOR/LCP: Vi1 (413543389) Method=TACACS+
Jan 30 12:17:14: AAA/AUTHOR/TAC+: (413543389): user=janedoe@rtp.cisco.com
Jan 30 12:17:14: AAA/AUTHOR/TAC+: (413543389): send AV service=ppp
Jan 30 12:17:14: AAA/AUTHOR/TAC+: (413543389): send AV protocol=lcp
Jan 30 12:17:14: TAC+: (413543389): received author response status = PASS_ADD
Jan 30 12:17:14: AAA/AUTHOR (413543389): Post authorization status = PASS_ADD
Jan 30 12:17:14: AAA/ACCT/NET/START User janedoe@rtp.cisco.com,
Port Virtual-Access1, List ""
Jan 30 12:17:14: AAA/ACCT/NET: Found list "default"
Jan 30 12:17:14: Vi1 AAA/AUTHOR/FSM: (0): Can we start IPCP?
Jan 30 12:17:14: AAA/AUTHOR/FSM Vi1 (1358526470): Port='Virtual-Access1'
list='' service=NET
Jan 30 12:17:14: AAA/AUTHOR/FSM: Vi1 (1358526470) user='janedoe@rtp.cisco.com'
Jan 30 12:17:14: AAA/AUTHOR/FSM: Vi1 (1358526470) send AV service=ppp
Jan 30 12:17:14: AAA/AUTHOR/FSM: Vi1 (1358526470) send AV protocol=ip
Jan 30 12:17:14: AAA/AUTHOR/FSM (1358526470) found list "default"
Jan 30 12:17:14: AAA/AUTHOR/FSM: Vi1 (1358526470) Method=TACACS+
Jan 30 12:17:14: AAA/AUTHOR/TAC+: (1358526470): user=janedoe@rtp.cisco.com
Jan 30 12:17:14: AAA/AUTHOR/TAC+: (1358526470): send AV service=ppp
Jan 30 12:17:14: AAA/AUTHOR/TAC+: (1358526470): send AV protocol=ip
Jan 30 12:17:14: TAC+: (1358526470): received author response status = PASS_ADD
Jan 30 12:17:14: AAA/AUTHOR (1358526470): Post authorization status = PASS_ADD
Jan 30 12:17:14: Vi1 AAA/AUTHOR/FSM: We can start IPCP
Jan 30 12:17:14: TAC+: (1442592025): received acct response status = UNKNOWN
20:12:16: %LINEPROTO-5-UPDOWN: Line protocol on Interface Virtual-Access1,
changed state to up
Jan 30 12:17:16: Vi1 AAA/AUTHOR/IPCP: Start. Her address 0.0.0.0, we want 0.0.0.0
Jan 30 12:17:16: Vi1 AAA/AUTHOR/IPCP: Processing AV service=ppp
Jan 30 12:17:16: Vi1 AAA/AUTHOR/IPCP: Processing AV protocol=ip
Jan 30 12:17:16: Vi1 AAA/AUTHOR/IPCP: Authorization succeeded
Jan 30 12:17:16: Vi1 AAA/AUTHOR/IPCP: Done. Her address 0.0.0.0, we want 0.0.0.0
Jan 30 12:17:16: Vi1 AAA/AUTHOR/IPCP: Start. Her address 0.0.0.0, we want 10.6.1.1
Jan 30 12:17:16: Vi1 AAA/AUTHOR/IPCP: Processing AV service=ppp
Jan 30 12:17:16: Vi1 AAA/AUTHOR/IPCP: Processing AV protocol=ip
Jan 30 12:17:16: Vi1 AAA/AUTHOR/IPCP: Authorization succeeded
Jan 30 12:17:16: Vi1 AAA/AUTHOR/IPCP: Done. Her address 0.0.0.0, we want 10.6.1.1
Jan 30 12:17:16: Vi1 AAA/AUTHOR/IPCP: Start. Her address 10.6.1.1, we want 10.6.1.1
Jan 30 12:17:16: AAA/AUTHOR/IPCP Vi1 (3572380713): Port='Virtual-Access1'
list='' service=NET
Jan 30 12:17:16: AAA/AUTHOR/IPCP: Vi1 (3572380713) user='janedoe@rtp.cisco.com'
Jan 30 12:17:16: AAA/AUTHOR/IPCP: Vi1 (3572380713) send AV service=ppp
Jan 30 12:17:16: AAA/AUTHOR/IPCP: Vi1 (3572380713) send AV protocol=ip
Jan 30 12:17:16: AAA/AUTHOR/IPCP: Vi1 (3572380713) send AV addr*10.6.1.1
Jan 30 12:17:16: AAA/AUTHOR/IPCP (3572380713) found list "default"
Jan 30 12:17:16: AAA/AUTHOR/IPCP: Vi1 (3572380713) Method=TACACS+

```

```
Jan 30 12:17:16: AAA/AUTHOR/TAC+: (3572380713): user=janedoe@rtp.cisco.com
Jan 30 12:17:16: AAA/AUTHOR/TAC+: (3572380713): send AV service=ppp
Jan 30 12:17:16: AAA/AUTHOR/TAC+: (3572380713): send AV protocol=ip
Jan 30 12:17:16: AAA/AUTHOR/TAC+: (3572380713): send AV addr*10.6.1.1
Jan 30 12:17:17: TAC+: (3572380713): received author response status = PASS_ADD
Jan 30 12:17:17: AAA/AUTHOR (3572380713): Post authorization status = PASS_ADD
Jan 30 12:17:17: Vi1 AAA/AUTHOR/IPCP: Processing AV service=ppp
Jan 30 12:17:17: Vi1 AAA/AUTHOR/IPCP: Processing AV protocol=ip
Jan 30 12:17:17: Vi1 AAA/AUTHOR/IPCP: Processing AV addr*10.6.1.1
Jan 30 12:17:17: Vi1 AAA/AUTHOR/IPCP: Authorization succeeded
Jan 30 12:17:17: Vi1 AAA/AUTHOR/IPCP: Done. Her address 10.6.1.1, we want 10.6.1.1
LNS#
```

NetPro Discussion Forums – Featured Conversations

Networking Professionals Connection is a forum for networking professionals to share questions, suggestions, and information about networking solutions, products, and technologies. The featured links are some of the most recent conversations available in this technology.

NetPro Discussion Forums – Featured Conversations for Security
Security: Intrusion Detection [Systems]
Security: AAA
Security: General
Security: Firewalling

Related Information

- [Cisco Secure UNIX Support Page](#)
- [Documentation for Cisco Secure ACS for UNIX](#)
- [TACACS/TACACS+ Support Page](#)
- [TACACS+ in Cisco IOS Documentation](#)
- [Documentation for Cisco Secure ACS for Windows](#)
- [Cisco Secure ACS for Windows Support Page](#)
- [Technical Support – Cisco Systems](#)

All contents are Copyright © 2006–2007 Cisco Systems, Inc. All rights reserved. Important Notices and Privacy Statement.

Updated: Jul 20, 2007

Document ID: 13858
