

# 配置Jabber自动更新的CUCM TFTP

## 目录

[简介](#)

[先决条件](#)

[要求](#)

[使用的组件](#)

[配置](#)

[配置示例\(Jabber自动更新配置文件\)](#)

[验证](#)

[故障排除](#)

[相关的思科支持社区讨论](#)

## 简介

本文如何描述到在Cisco Unified通信Manngers (CUCM) TFTP server的主机XML文件闲聊的自动更新功能的。

从CUCM 8.5，所有文件上传对TFTP server在TCP端口6970可能也使可用通过HTTP。

**Note:**在HTTP服务器构件的为仅静态内容设计，动态内容不支持。它可以用于主机文件，以便单独的Web服务器不是需要的部署在集群。文件可能通过含义的OS管理TFTP文件管理页只上传它可能不是主机的照片scalabale (为了用在Jabber统一资源识别符(URI)替换法照片检索上)。

## 先决条件

### 要求

思科建议您有这些主题知识

- OS管理TFTP文件管理页
- Cisco Tftp服务

### 使用的组件

本文档中的信息根据Cisco Unified Communications Manager版本8.5和以上。

本文档中的信息都是基于特定实验室环境中的设备编写的。本文档中使用的所有设备最初均采用原始(默认)配置。如果您使用的是真实网络，请确保您已经了解所有命令的潜在影响。

## 配置

### 配置示例(Jabber自动更新配置文件)

此示例说明使用闲聊的自动更新功能的一个XML文件。

```
<?xml version="1.0" encoding="UTF-8"?>
<JabberUpdate>
<LatestBuildNum>55781</LatestBuildNum>
<LatestVersion>10.6.1</LatestVersion>
<Message>

<![CDATA[<h3 class="topicTitle3">New and Changed Features in Release 10.6(1)</h3>
<p><strong>Certificate Validation for CTI Connections</strong></p>
<p>Cisco Jabber for Windows no longer uses CTI server certificate validation.</p>
<p><strong>Call with Edit</strong></p>
<p>A new<strong>Call with Edit</strong>&nbsp;menu option is available from the hub window
by right-clicking over a contact's name. Users can edit the number they are calling prior to
making the call. When users select a number from this menu option, the call number is copied
into the<strong>Search or Call</strong>&nbsp;field with the cursor automatically placed at
the front of the number. Users can edit the call number prior to making the call.</p>
<p>No configuration is required to enable this feature.</p>
<p><strong>Show Contact Pictures in Hub</strong></p>
<p>The Cisco Jabber client has renamed the<strong>Show Contact
Pictures</strong>&nbsp;option as<strong>Show Contact Pictures in Hub</strong>. This option
is available in the client under
the<strong>Options</strong>&nbsp;>&nbsp;<strong>View</strong>&nbsp;menu.</p>
<p>Only the name of the option has changed, the behavior has not; selecting it displays users'
contact photos in the hub window on
the<strong>Contacts</strong>, &nbsp;<strong>Recents</strong>, and<strong>Voice
Messages</strong>&nbsp;tabs.</p>]]>

</Message>
<DownloadURL>http://ucmpub.domain.com:6970/CiscoJabberSetup.msi</DownloadURL>
</JabberUpdate>
```

正如你看到的DownloadURL指向：<http://ucmpub.domain.com:6970/CiscoJabberSetup.msi>

**Note:**使用端口6970在URL是重要的。

下一步是参考此URL [Jabberconfig.xml](#)文件：


```
<?xml version="1.0" encoding="utf-8"?>
<config version="1.0">
  <Client>
    <UpdateUrl>http://ucmpub.domain.com:6970/jabber-update.xml</UpdateUrl>
  </Client>
</config>
```

此Jabberconfig.xml文件然后获得上传对CUCM OS管理TFTP文件管理作为正常。其次，请上传Jabberupdate.xml文件和Jabber可执行文件。

最后，重新启动从Cisco Unified Servicability的Cisco Tftp服务。

## 验证

要验证文件通过HTTP是可用的，请点您的浏览器[http:// <CUCM IP或FQDN>:6970/jabber-update.xml](http://<CUCM IP或FQDN>:6970/jabber-update.xml)：

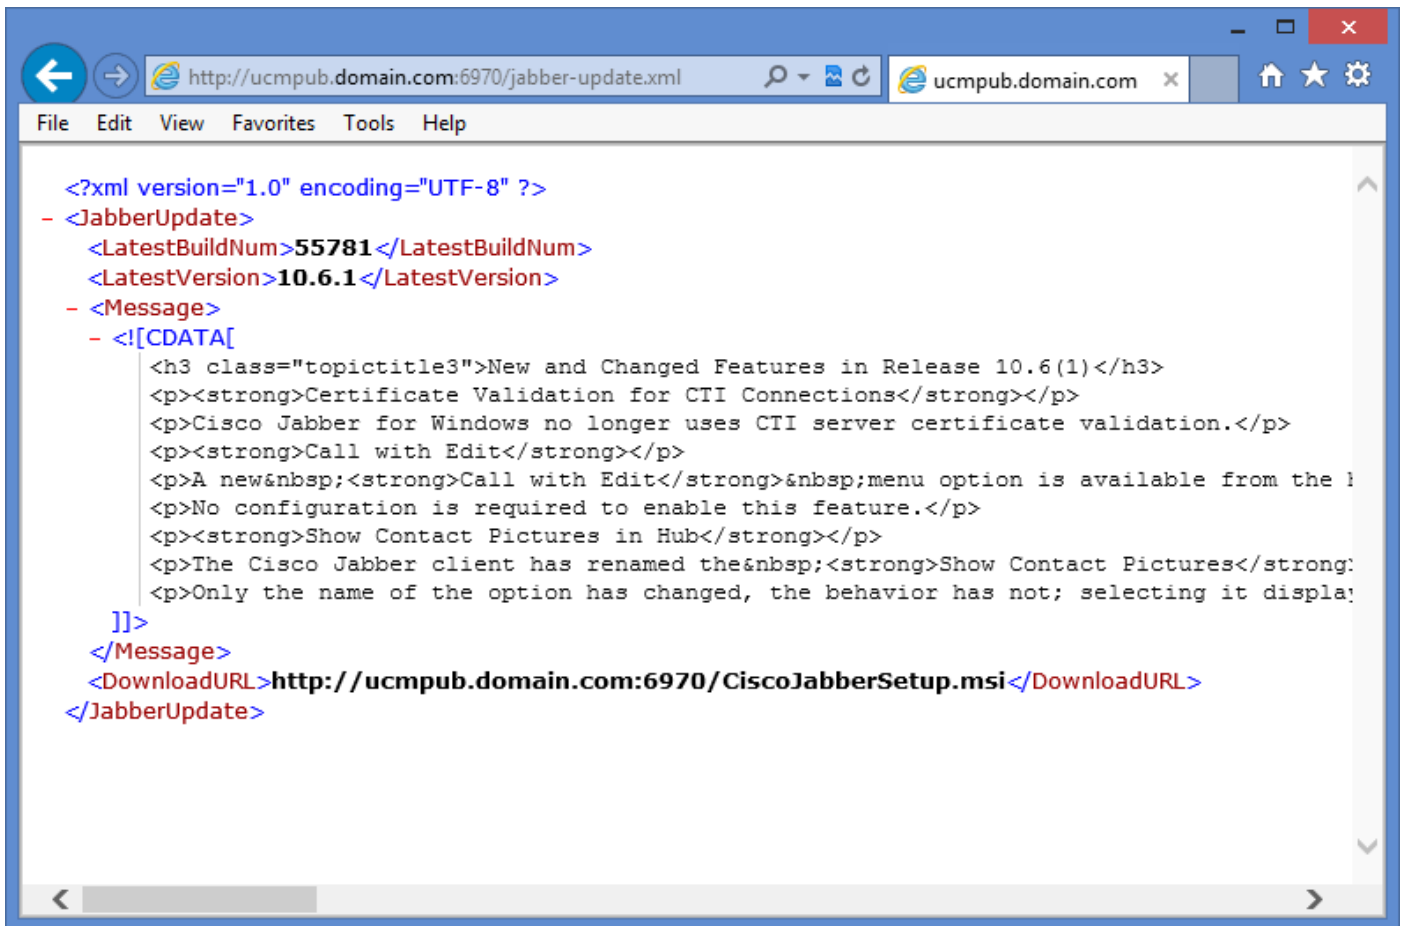

如此镜像所显示，在Wireshark，HTTP协议通过TCP端口6970请求Jabberupdate.xml。

## 故障排除

目前没有针对此配置的故障排除信息。