

Password Recovery Procedure for the Cisco 2700 Series Location Appliance

Document ID: 82161

Introduction

Prerequisites

Requirements

Conventions

Cisco 2700 Series Location Appliance

Connect to the Location Appliance

Step-by-Step Password Recovery Procedure

NetPro Discussion Forums – Featured Conversations

Related Information

Introduction

This document describes how to recover a root password of the Cisco 2700 Series Location Appliance.

Prerequisites

Requirements

There are no specific requirements for this document.

Conventions

Refer to Cisco Technical Tips Conventions for more information on document conventions.

Cisco 2700 Series Location Appliance

The procedure for password recovery explained in this document applies for all versions of Cisco Location Appliance.

Connect to the Location Appliance

Complete the steps in order to connect to the Location Appliance console port:

Note: Use a console cable to connect to the console port. Other cables, such as straight-through, do not work on the console port.

1. Use a straight-through cable with 9-pin male to 9-pin female connectors in order to connect the COM 1 or COM 2 port on your computer to the RS-232 port on the Location Appliance.
2. Open a terminal-emulation program on your computer.

Note: These instructions describe the use of Microsoft HyperTerminal as the terminal-emulation program. Other programs are similar.

3. Enter a name in the Connection Description window.
4. Select an icon for the connection.

5. Click **OK**.
6. In the Connect To window, use the Connect Using pull-down menu in order to choose the port where the cable is connected.
7. Click **OK**.
8. In the Port Settings window, make these selections:
 - ◆ Bits per second (baud): **9600**
 - ◆ Data bits: **8**
 - ◆ Parity: **None**
 - ◆ Stop bits: **1**
 - ◆ Flow Control: **None**
9. Click **OK**.
10. Press **Enter**.


Step-by-Step Password Recovery Procedure

Complete these steps in order to recover the root password of the Location Appliance:


1. You need to reboot the system and wait for this window to appear.

The system does not stay here for long, so you have to be very quick when you see this window.


2. Once this window appears, press **Esc** in order to enter the boot menu.

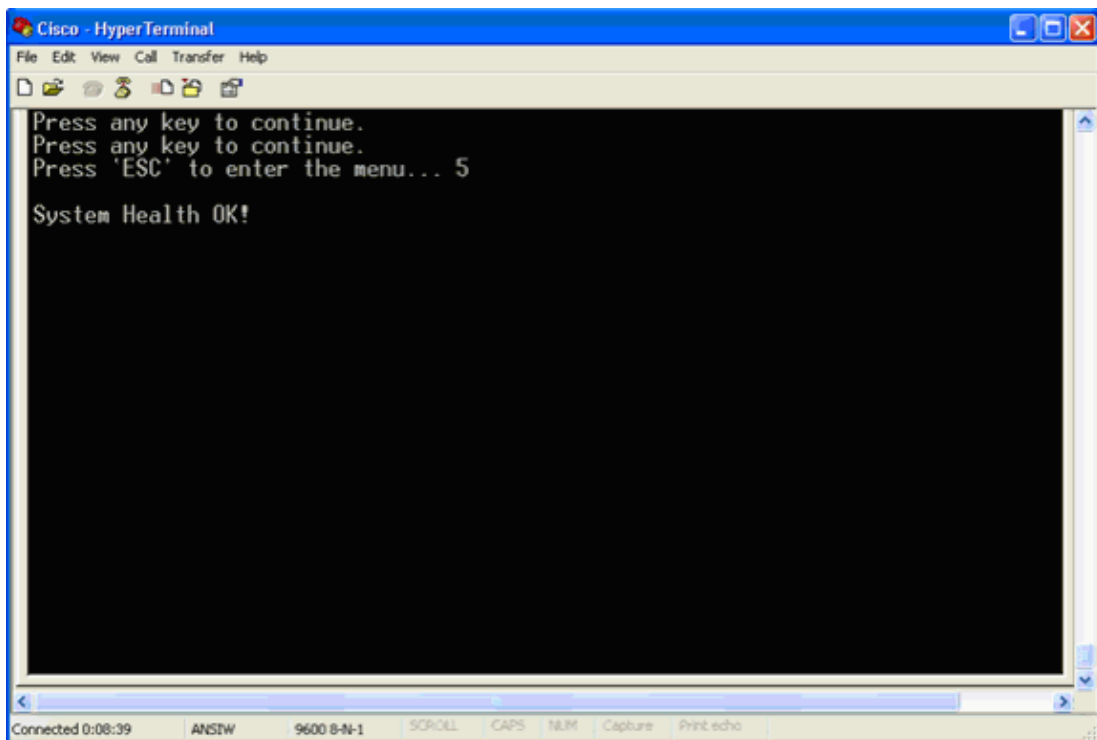


3. Select **Red Hat Enterprise Linux ES (2.4.21-32.ELsmp)**, then press **e** in order to edit.

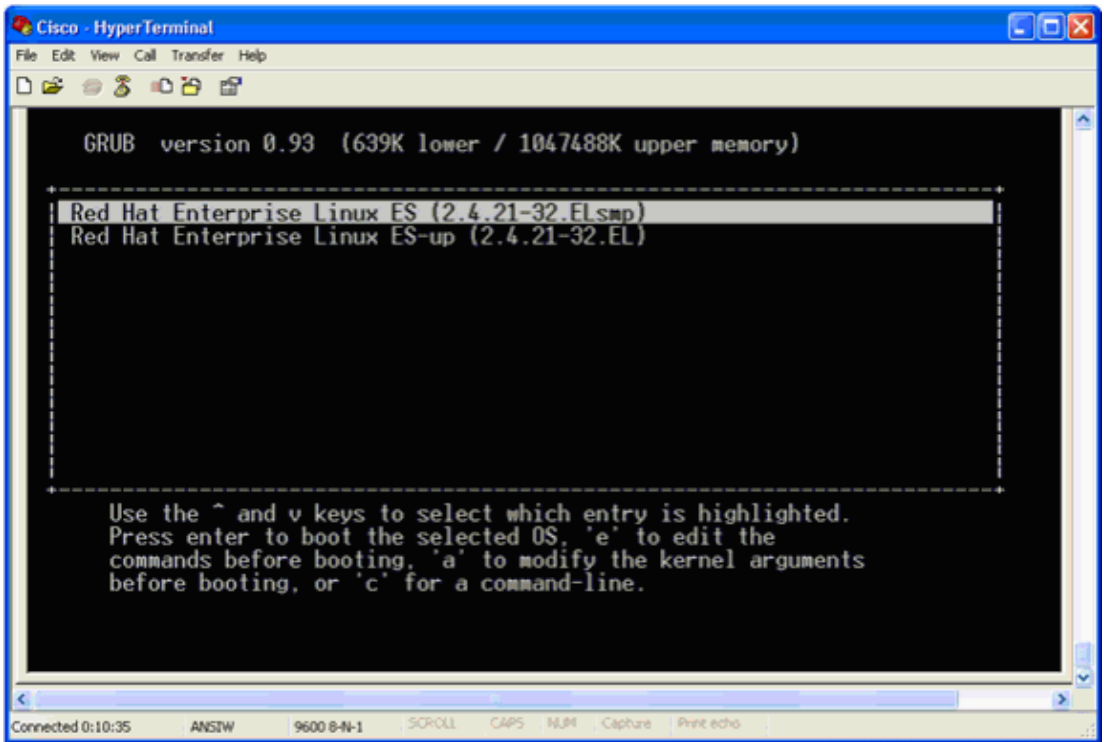


4. Navigate to the line that begins with the word **kernel**, then press **e**.

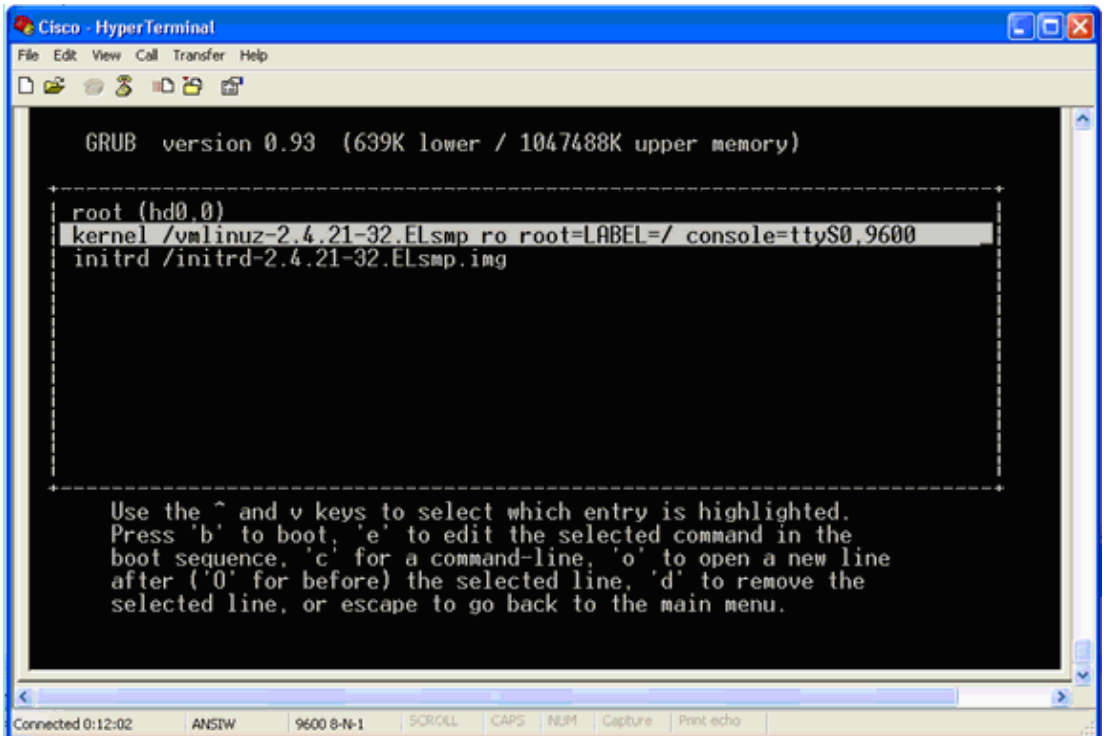


This window appears:

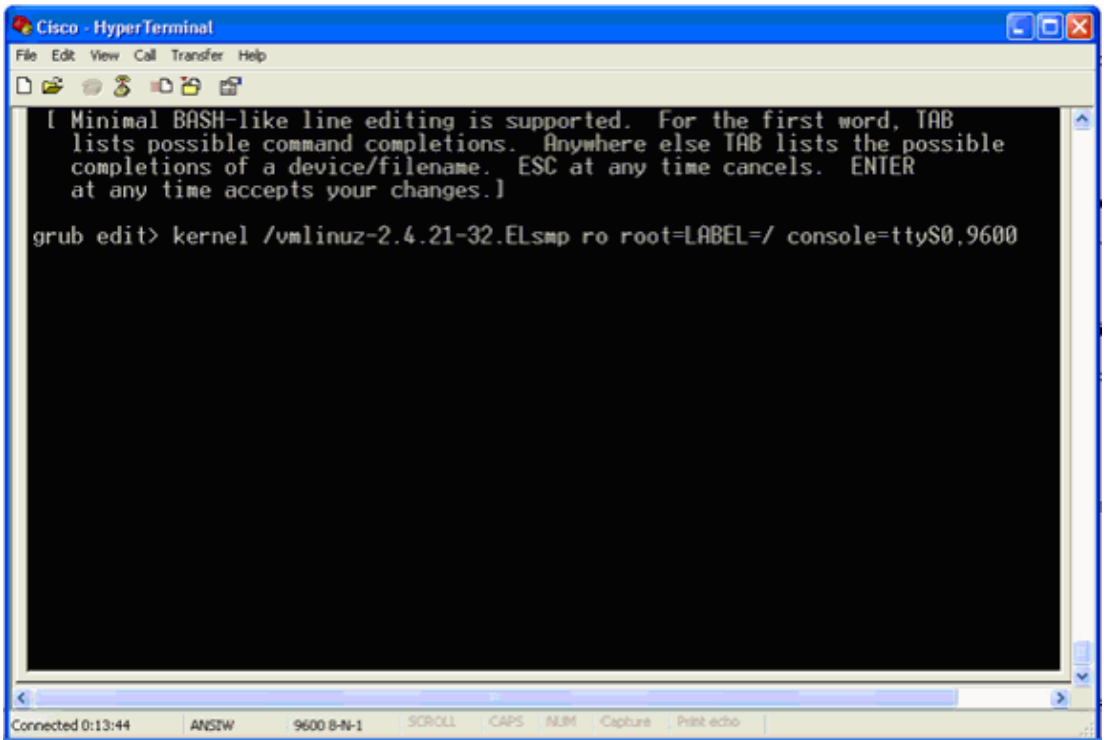

5. Go to the end of the line. Enter one space (to leave one space blank), then enter **1** and press **Enter**.
6. Save the changes, then press **b**.

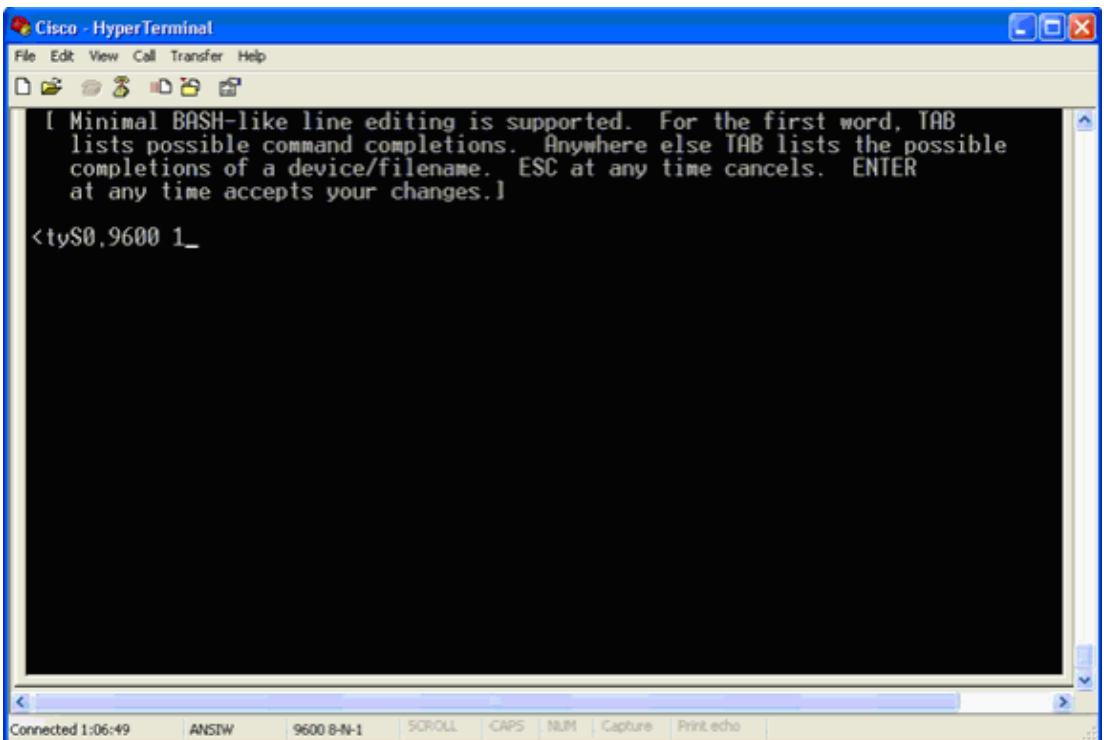

- This window will be returned.
7. Press **b** in order to begin the boot.

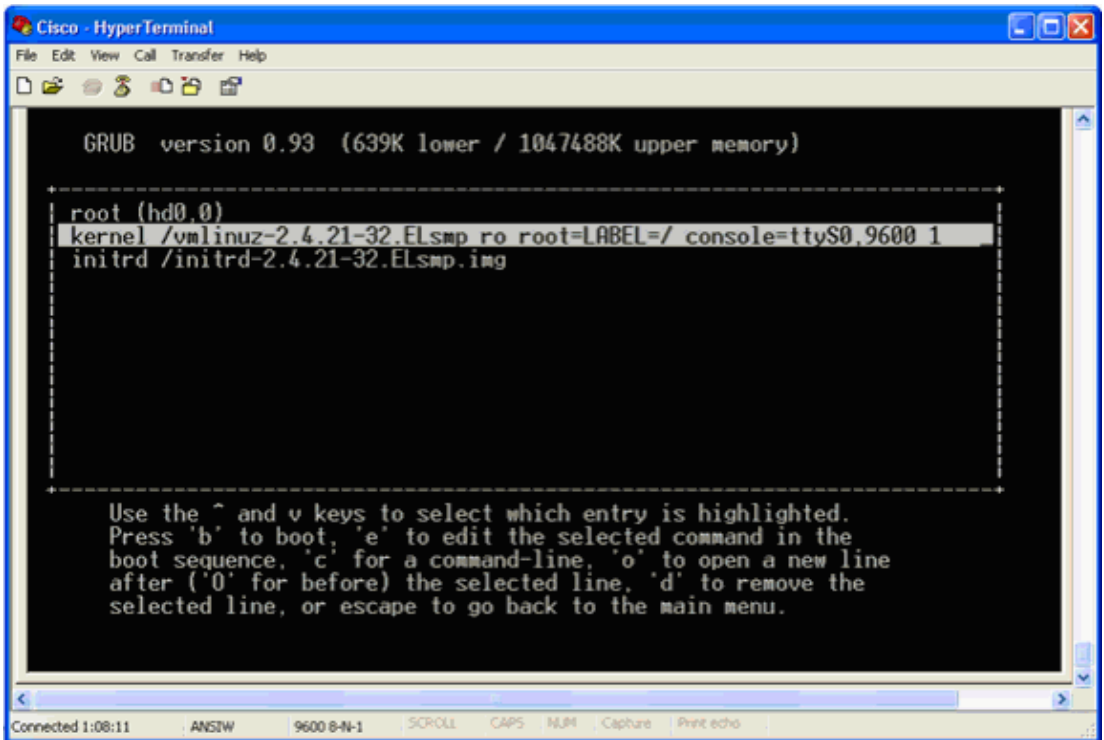


```
GRUB version 0.93 (639K lower / 1047488K upper memory)

root (hd0,0)
kernel /vmlinuz-2.4.21-32.ELsmp ro root=LABEL=/ console=ttyS0,9600 1
initrd /initrd-2.4.21-32.ELsmp.img


Use the ^ and v keys to select which entry is highlighted.
Press 'b' to boot, 'e' to edit the selected command in the
boot sequence, 'c' for a command-line, 'o' to open a new line
after ('O' for before) the selected line, 'd' to remove the
selected line, or escape to go back to the main menu.
```

The boot sequence can commence, and at the end you receive a shell prompt.

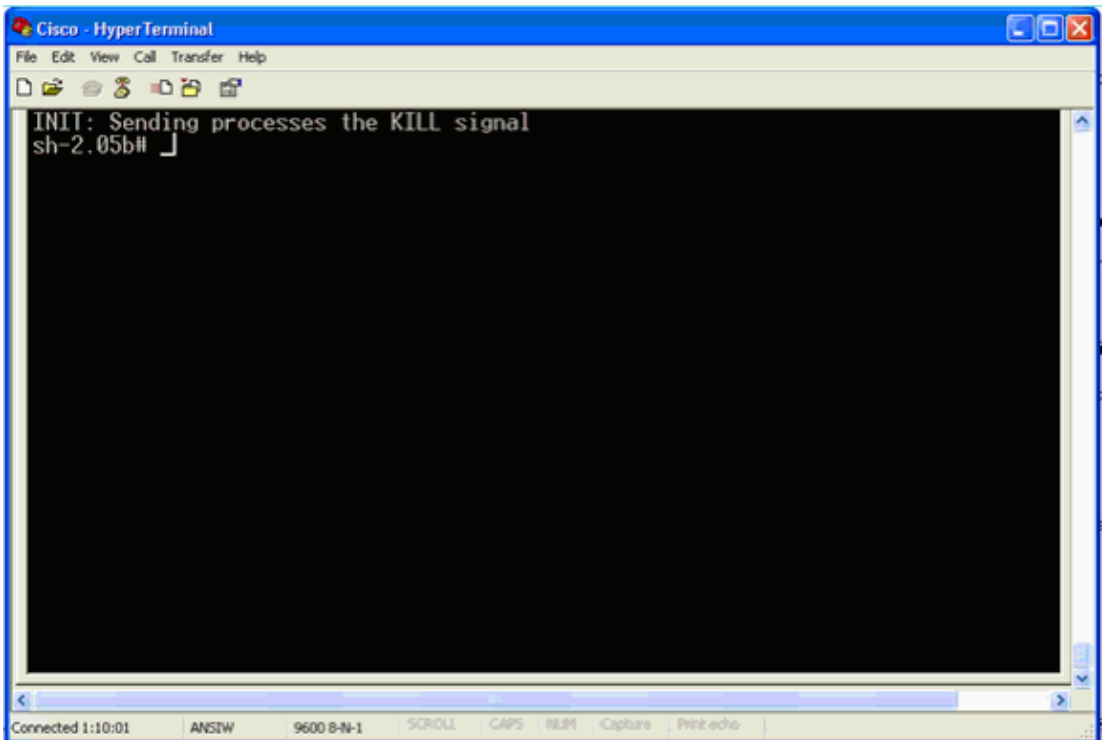


```
INIT: Sending processes the KILL signal
sh-2.05b#
```

8. You can change the root password with the **passwd** command. Then, enter and confirm the new password.

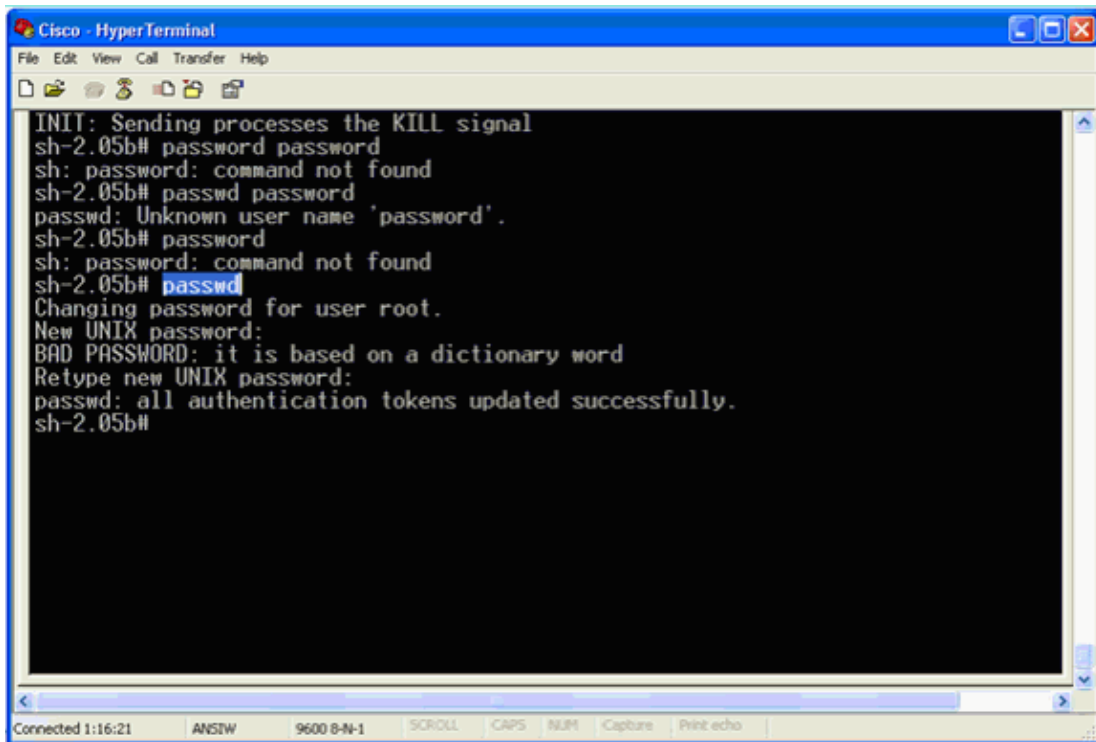

```
Cisco - HyperTerminal
File Edit View Call Transfer Help
INIT: Sending processes the KILL signal
sh-2.05b# password password
sh: password: command not found
sh-2.05b# passwd password
passwd: Unknown user name 'password'.
sh-2.05b# password
sh: password: command not found
sh-2.05b# passwd
Changing password for user root.
New UNIX password:
BAD PASSWORD: it is based on a dictionary word
Retype new UNIX password:
passwd: all authentication tokens updated successfully.
sh-2.05b#
```

9. Enter **reboot** at the shell prompt in order to reboot the system.

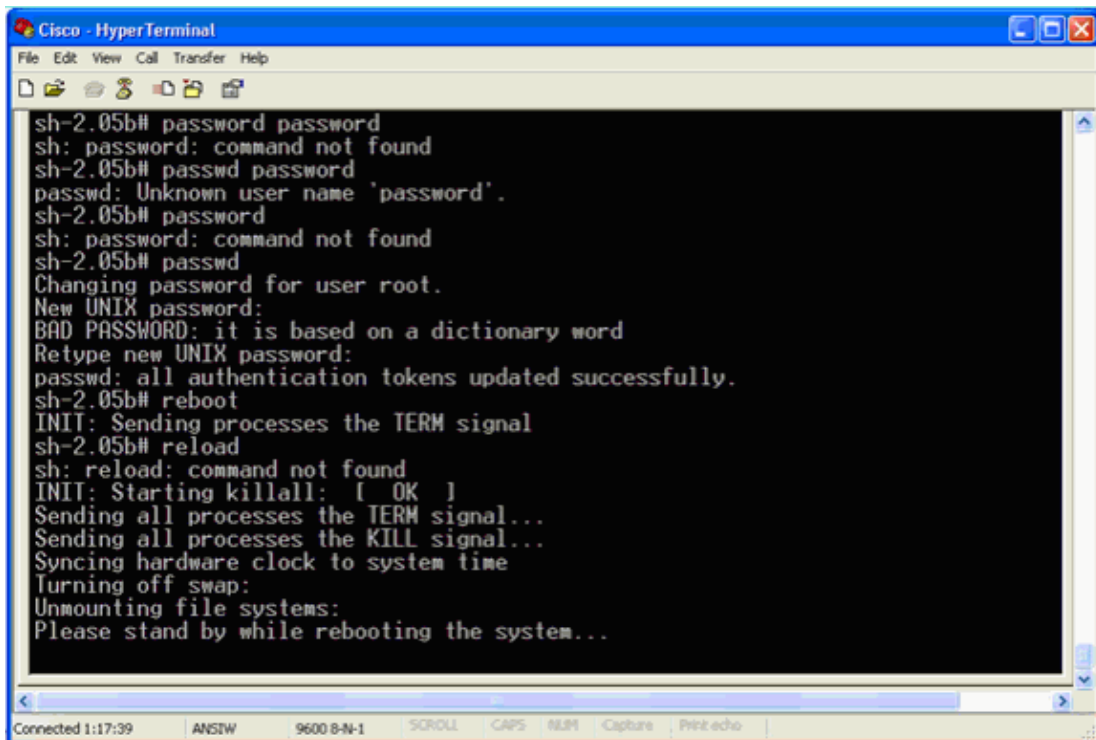

```
Cisco - HyperTerminal
File Edit View Call Transfer Help
sh-2.05b# password password
sh: password: command not found
sh-2.05b# passwd password
passwd: Unknown user name 'password'.
sh-2.05b# password
sh: password: command not found
sh-2.05b# passwd
Changing password for user root.
New UNIX password:
BAD PASSWORD: it is based on a dictionary word
Retype new UNIX password:
passwd: all authentication tokens updated successfully.
sh-2.05b# reboot
INIT: Sending processes the TERM signal
sh-2.05b# reload
sh: reload: command not found
INIT: Starting killall: [ OK ]
Sending all processes the TERM signal...
Sending all processes the KILL signal...
Syncing hardware clock to system time
Turning off swap:
Unmounting file systems:
Please stand by while rebooting the system...
```

NetPro Discussion Forums – Featured Conversations

Networking Professionals Connection is a forum for networking professionals to share questions, suggestions, and information about networking solutions, products, and technologies. The featured links are some of the most recent conversations available in this technology.

NetPro Discussion Forums – Featured Conversations for Wireless

Wireless – Mobility: WLAN Radio Standards

Wireless – Mobility: Security and Network Management
Wireless – Mobility: Getting Started with Wireless
Wireless – Mobility: General

Related Information

- [Wireless Location Appliance FAQ](#)
 - [Cisco Wireless Location Appliance Getting Started Guide \(Release 5.1 and later\)](#)
 - [Cisco Location Appliance Configuration Guide, Release 5.2](#)
 - [Wireless Support Page](#)
 - [Technical Support & Documentation – Cisco Systems](#)
-

[Contacts & Feedback](#) | [Help](#) | [Site Map](#)

© 2008 – 2009 Cisco Systems, Inc. All rights reserved. [Terms & Conditions](#) | [Privacy Statement](#) | [Cookie Policy](#) | [Trademarks of Cisco Systems, Inc.](#)

Updated: Apr 29, 2009

Document ID: 82161
