



Maintaining the Fan Module for Cisco cBR

- [Removing the Fan Module from the Cisco cBR Chassis, on page 1](#)

Removing the Fan Module from the Cisco cBR Chassis

Before you begin

Attach an ESD-preventive wrist strap to your wrist.

Restrictions

- Only one fan module should be removed at a time for servicing or replacement.



Warning Ensure that all Fan Module bays must have functioning Fan Modules. If a Fan Module is removed, replace a functioning Fan Module within one minute of the removal, to avoid possible shutdown of the system due to overheating of individual components.


- Do not operate the chassis with an empty fan bay even if the Supervisor Card allows it.
- Cisco cBR's Supervisor Cards are prevented from powering up if one or more of the Fan Modules have a serious failure such that the error prevents both fans from operating.
- The chassis powers up even if at least one fan in each Fan Module is working.

Required Tools and Equipment

- A flat-blade screwdriver

-
- Step 1** Loosen the captive screws on the left side of the Fan Module, until the screws are disengaged from the chassis.
- Step 2** Pull the fan module from the chassis slightly, grasping the sides of the Fan Module.
- Step 3** Grasp the top and bottom frame of the Fan Module with your hand and pull it gently out of the chassis.

Figure 1: Removing the Fan Module

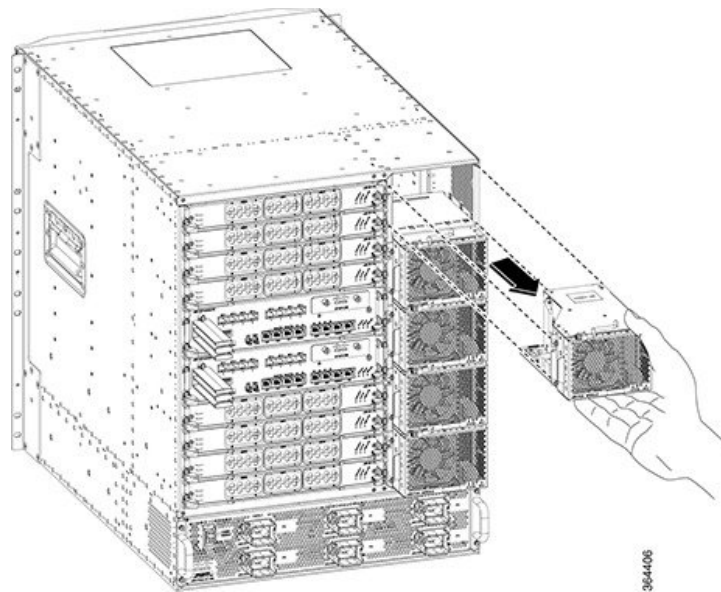

What to do next

Install a working (new or serviced) fan module in the empty bay. See the installation procedure specified in [Installing the Fan Module](#).