




Setting Up the Multi-Fabric Orchestration

- [Example Topology for Multi-Fabric Orchestration, on page 1](#)
- [Set Up the VXLAN Fabrics in First and Second NDFC Instances, on page 2](#)
- [Configure an NDFC External Fabric, on page 6](#)
- [Onboard the NDFC Sites into ND and NDO, on page 7](#)
- [Complete VXLAN Multi-Site Connectivity Between the NDFC Sites, on page 9](#)
- [Configure the Necessary VRF and Network, on page 15](#)

Example Topology for Multi-Fabric Orchestration

The following figure shows one of the supported topologies that could be used for multi-fabric orchestration, and is used in this document to demonstrate the steps required for orchestrating VXLAN Multi-Site connectivity using NDFC and NDO.

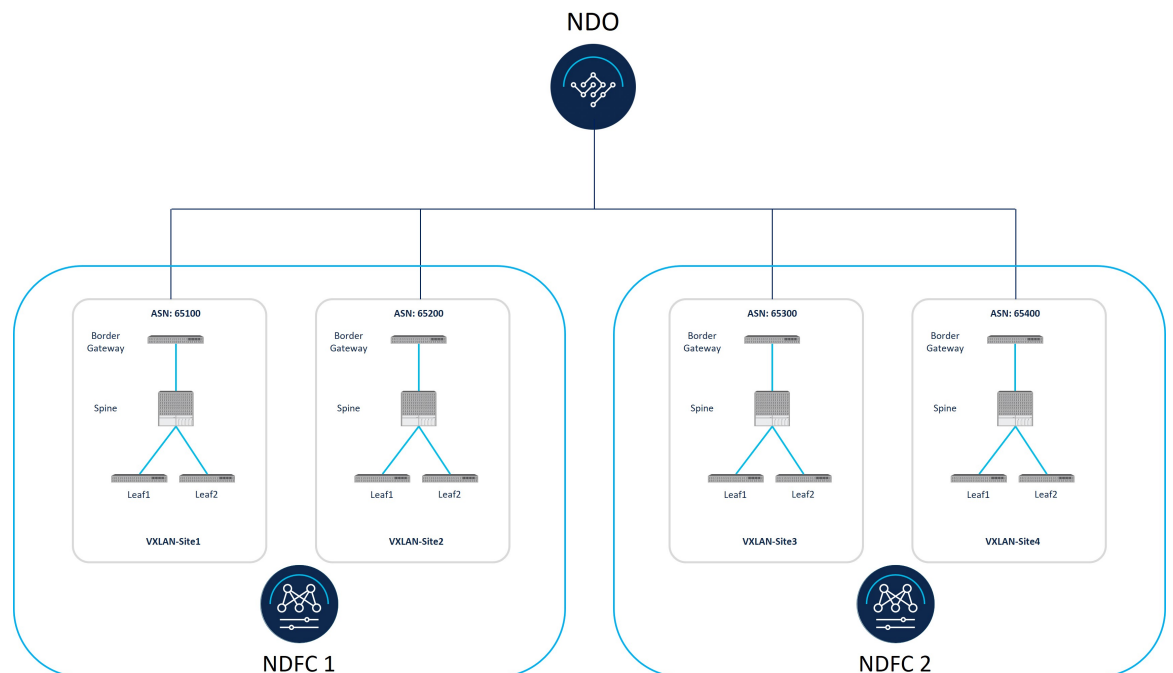

In this deployment procedure, you will configure VXLAN Multi-Site connectivity between the fabrics managed by the same NDFC or by different NDFCs, and the configurations that you will make in each of these connectivity areas. The overall configuration steps are as follows:

- Installing NDFC

For more detailed information, see:

- [Cisco Nexus Dashboard Fabric Controller Installation and Upgrade Guide](#), Release 12.1.2 or later
- [Cisco NDFC-Fabric Controller Configuration Guide](#), Release 12.1.2 or later
- [Cisco Nexus Dashboard Deployment Guide](#), Release 12.1.2 or later

- Installing NDO:

[Cisco Nexus Dashboard Orchestrator Deployment Guide](#)

- Initial setup:

- Building VXLAN EVPN fabrics in NDFC
- Orchestrating VXLAN Multi-Site connectivity using NDO

Set Up the VXLAN Fabrics in First and Second NDFC Instances

In the figure shown in [Example Topology for Multi-Fabric Orchestration, on page 1](#), there are four VXLAN fabrics:

- VXLAN-Site1 and VXLAN-Site2 fabrics, managed by the **first** NDFC instance (NDFC1)
- VXLAN-Site3 and VXLAN-Site4 fabrics, managed by the **second** NDFC instance (NDFC2)

In this section, you will set up the two VXLAN fabrics within each NDFC instance.




Note For more detailed information for these NDFC procedures, see:

- [Cisco Nexus Dashboard Fabric Controller Installation and Upgrade Guide](#), Release 12.1.2 or later
 - [Cisco NDFC-Fabric Controller Configuration Guide](#), Release 12.1.2 or later
 - [Cisco Nexus Dashboard Deployment Guide](#), Release 12.1.2 or later
-

Complete the procedures in the following sections to set up the two VXLAN fabrics in each NDFC.


Create the VXLAN Fabrics in the First NDFC Instance

In this procedure, you will be configuring the part of the example topology highlighted below.

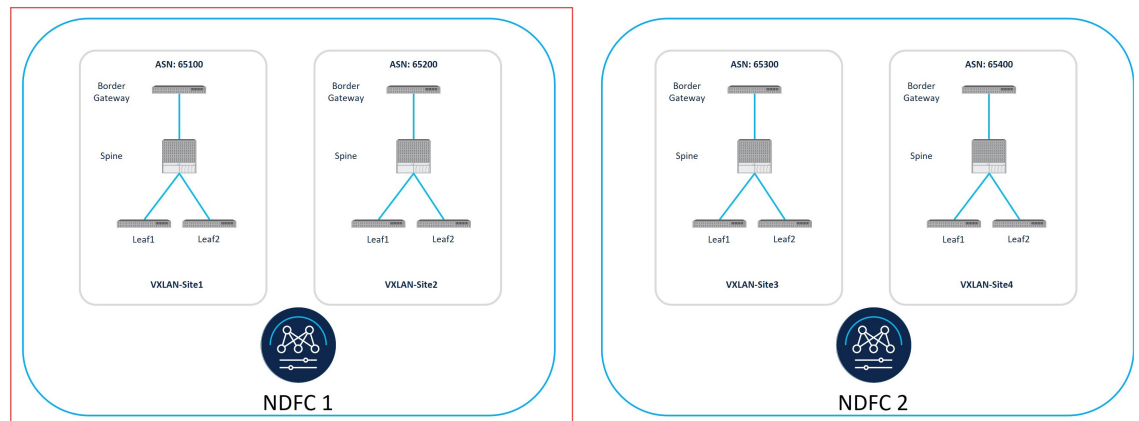

Complete the procedures in the following sections to configure the VXLAN fabrics in the first NDFC instance.

-
- Step 1** Log into the Nexus Dashboard where you have the *first* instance of NDFC installed.
- Step 2** Log into your NDFC account.
- Step 3** Navigate to **LAN > Fabrics**.
The **LAN Fabrics** window appears.
- Step 4** Click **Actions > Create Fabric**.
The **Create Fabric** window appears.
- Step 5** Begin the process of creating the *first* VXLAN fabric in the *first* NDFC instance using the `Data Center VXLAN EVPN` template.
- a) In the **Fabric Name** field, enter a unique name for the first VXLAN fabric.
For example, `VXLAN-Site1`.
 - b) In the **Pick a Template** area, click **Choose Template**.
The **Select Fabric Template** window appears.
 - c) Locate and click the `Data Center VXLAN EVPN` template.
 - d) Click **Select**.

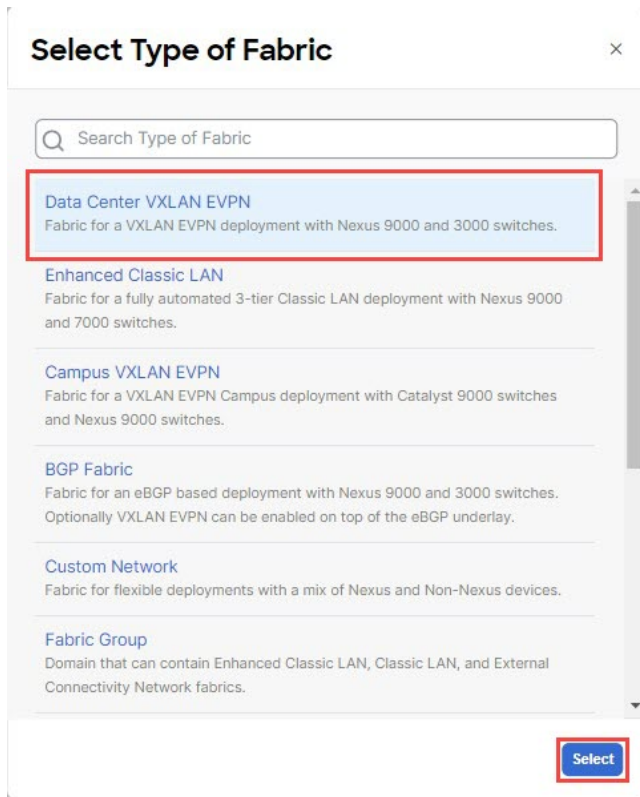

Step 6 Complete the necessary general VXLAN fabric parameter configurations.

The following parameter tabs in the `Data Center VXLAN EVPN` template must be completed:

- **General Parameters**
- **Replication**
- **VPC**
- **Protocols**

Note Only the **BGP ASN** field is mandatory. The rest of the fields in **General Parameters** and the other tabs are pre-populated by NDFC with default values that can be changed, as required.

Complete the VXLAN fabric configurations in those parameter tabs as you normally would. See [Cisco NDFC-Fabric Controller Configuration Guide](#), Release 12.1.2 or later, for more information.

For example, using the information in the example topology, you would enter `65100` in the **BGP ASN** field in the **General Parameters** page.

Create Fabric

Fabric Name
VXLAN-Site1

Pick Fabric
Data Center VXLAN EVPN >

General Parameters | Replication | vPC | Protocols | Advanced | Resources | Manageability | Bootstrap | Configuration Backup | Flow Monitor

BGP ASN*
65100
1-4294967295 | 1-65535|0-65535| It is a good practice to have a unique ASN for each Fabric.

Enable IPv6 Underlay
 If not enabled, IPv4 underlay is used

Enable IPv6 Link-Local Address
 If not enabled, Spine-Leaf interfaces will use global IPv6 addresses

Fabric Interface Numbering*
p2p
Numbered(Point-to-Point) or Unnumbered

Underlay Subnet IP Mask*
30
Mask for Underlay Subnet IP Range

Underlay Subnet IPv6 Mask
Select an Option
Mask for Underlay Subnet IPv6 Range

Underlay Routing Protocol*
ospf
Used for Spine-Leaf Connectivity

Route-Reflectors*
2
Number of spines acting as Route-Reflectors

Anycast Gateway MAC*
2020.0000.00aa
Shared MAC address for all leafs (xxxx.xxxx.xxxx)

Enable Performance Monitoring

Close Save

Step 7 Click **Save** when you have completed the necessary configurations in the **Create Fabric** window for the first VXLAN fabric.

You are returned to the **LAN Fabrics** window, with the first VXLAN fabric that you just created displayed.

Step 8 Repeat [Step 3, on page 3](#) through [Step 7, on page 5](#) to create a *second* VXLAN fabric in the *first* NDFC instance.


- In the **Fabric Name** field in the **Create Fabric** window, enter a unique name for the second VXLAN fabric in the first NDFC instance (for example, `VXLAN-Site2`).
- In the **General Parameters** page in the **Create Fabric** window, enter a unique BGP Autonomous System Number (ASN) in the **BGP ASN** field for this fabric.

For example, using the information in the example topology, you would enter `65200` in the **BGP ASN** field in the **General Parameters** page.

When you have finished creating the second VXLAN fabric, you should now have two VXLAN fabrics (`VXLAN-Site1` and `VXLAN-Site2`) that are being managed by the first NDFC instance.

Create the VXLAN Fabrics in the Second NDFC Instance

In this procedure, you will be configuring the part of the example topology highlighted below.

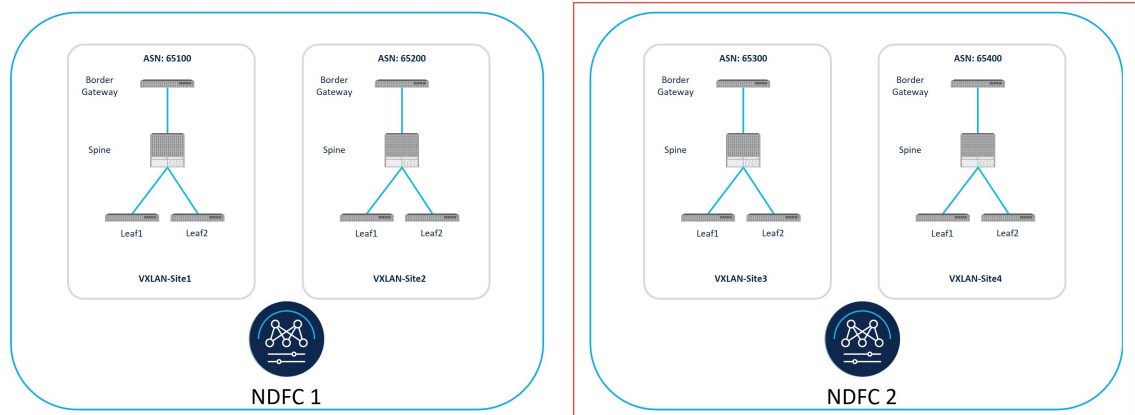

For these procedures, follow the same procedures that you used to create the VXLAN fabrics in the first NDFC instance. Create two VXLAN fabrics in the **second** NDFC instance using the same instructions that were provided in [Create the VXLAN Fabrics in the First NDFC Instance, on page 2](#):

- First VXLAN fabric in second NDFC instance: `VXLAN-Site3`
- Second VXLAN fabric in second NDFC instance: `VXLAN-Site4`

Once you have completed the procedures to fully configure the VXLAN fabrics in the second NDFC instance, onboard the NDFC sites into Nexus Dashboard and Nexus Dashboard Orchestrator using the procedures provided in [Onboard the NDFC Sites into ND and NDO, on page 7](#).

Configure an NDFC External Fabric

Configuring an NDFC external fabric is only required if you are building Route Server-based VXLAN Multi-Site connectivity using NDO. You can create this external fabric on either of the NDFCs, or you can use a separate NDFC instance. Configure an external fabric that contains the Route Server in this case. See [Understanding BGP Peering Type Options](#) for more information on the Route Server option as the BGP peering type.

For instructions on configuring an external fabric, see:

- [Cisco NDFC-Fabric Controller Configuration Guide](#), Release 12.1.2 or earlier
- [External Connectivity Networks](#), Release 12.1.3 or later

When configuring an external fabric that contains the Route Server:

- You should not enable the **Fabric Monitor Mode** option for this use case.
- Onboard the Route Server device to this external fabric and set the role as **Core**.

Onboard the NDFC Sites into ND and NDO

Before you begin

Set up the VXLAN fabrics in the first and second NDFC instances using the procedures provided in [Set Up the VXLAN Fabrics in First and Second NDFC Instances](#), on page 2.

Step 1 Log into Nexus Dashboard (ND) cluster where NDO is installed.

Step 2 In Nexus Dashboard, click **Sites** > **Add Site**.

The **Add Site** page appears.

Step 3 Click the **NDFC** box in the **Site Type** area.

Step 4 Enter the necessary information to add the VXLAN fabrics from the first NDFC instance that were created in the section [Create the VXLAN Fabrics in the First NDFC Instance](#), on page 2.

- In the **Hostname/IP Address** field, enter the data interface IP address for the first NDFC instance.
- In the **Username** and **Password** field, enter the username and password login information for the first NDFC instance.

Step 5 Click **Select Sites**.

The screenshot shows the 'Add Site' configuration page in the Nexus Dashboard. The 'Site Type' is set to 'NDFC'. The 'Hostname/IP Address' field is filled with '172.16.1.191'. The 'Username' field contains 'admin' and the 'Password' field is masked. The 'Select Sites' button is highlighted with a red box. Below the form, there is a table with columns for 'Site Name', 'Fabric Name', and 'Controller URL'.

The two VXLAN fabrics from the first NDFC instance in [Create the VXLAN Fabrics in the First NDFC Instance](#), on page 2 are displayed (`VXLAN-Site1` and `VXLAN-Site2`).

Step 6 Click the boxes next to the two VXLAN fabrics, then click **Select**.

You are returned to the **Add Site** page.

Step 7 (Optional) In the **Sites** area in the **Add Site** page, on the line for each VXLAN fabric that you just added, click the location icon and drop a pin on the map to designate the geolocation on the world map for the each VXLAN fabric.

Step 8 Click **Save**.

You are returned to the **Sites** in Nexus Dashboard.

Step 9 Add the two VXLAN fabrics from the second NDFC instance in Nexus Dashboard.

Repeat [Step 2, on page 7](#) through [Step 8, on page 8](#) to add the second NDFC instance and the two VXLAN fabrics from [Create the VXLAN Fabrics in the Second NDFC Instance, on page 5](#) (VXLAN-Site3 and VXLAN-Site4).

Step 10 If you are using a route server as the BGP peering type, add the external fabric that contains the route server.

See [Understanding BGP Peering Type Options](#) for more information on the route server option as the BGP peering type.

Step 11 In Nexus Dashboard, click **Sites** again.

You should see all four VXLAN fabrics displayed in the **Sites** page:

- The two VXLAN fabrics from the first NDFC instance:
 - VXLAN-Site1
 - VXLAN-Site2
- The two VXLAN fabrics from the second NDFC instance:
 - VXLAN-Site3
 - VXLAN-Site4

If you are using a route server as the BGP peering type, you will also see the external fabric that contains the route server.

Step 12 Access Nexus Dashboard Orchestrator (NDO).

In Nexus Dashboard, click **Services > Installed Services**, then click **Open** on the Nexus Dashboard Orchestrator option.

Step 13 In NDO, click **Sites**.

Step 14 From NDO, start managing all four VXLAN fabrics.

Perform the following steps for each site in NDO:

- a) Under the **State** column, change the state from **Unmanaged** to **Managed**.
- b) Under the **Name** column, for each managed site, provide a site ID that is unique (a site ID that does not conflict with site IDs for any other site being managed through this NDO). You could use the BGP ASN number that you assigned to each fabric as the site ID number, if desired.

For example:

- 65100 for the site ID for VXLAN-Site1
- 65200 for the site ID for VXLAN-Site2
- 65300 for the site ID for VXLAN-Site3
- 65400 for the site ID for VXLAN-Site4

If you are using a route server as the BGP peering type, for the external fabric that contains the route server, also change the state from **Unmanaged** to **Managed** and provide a unique site ID for that site.

What to do next

Complete the site-to-site connectivity between the sites using the procedures provided in [Complete VXLAN Multi-Site Connectivity Between the NDFC Sites, on page 9](#).

Complete VXLAN Multi-Site Connectivity Between the NDFC Sites

Follow the procedures in the following sections to complete the site-to-site connectivity between the NDFC sites.

Complete the Necessary Control Plane Configurations

Before you begin

Onboard the NDFC sites in ND and NDO using the procedures provided in [Onboard the NDFC Sites into ND and NDO, on page 7](#).

Step 1 In NDO, navigate to **Infrastructure > Site Connectivity**.

At this point, you will see the sites on the world map, with a red link connecting those sites, which means that there is no connectivity between the sites at this point.

Step 2 In the upper right area in the **Site Connectivity** window, click **Configure**.
The **General Settings** area of the **Site Connectivity** window appears.

Step 3 In the **General Settings** area, click the **Control Plane Configuration** tab, then make the necessary configurations in this page.

Note These general BGP settings apply to the use of BGP for both underlay and overlay connectivity and normally should not be changed, with the exception of the **BGP Peering Type** option in the next step that only applies to overlay peering.

Step 4 For overlay connectivity between the NDFC sites, make the appropriate selection in the **BGP Peering Type** field in the **BGP** area:

See [Understanding BGP Peering Type Options](#) for more information on the different BGP peering types.

- **full-mesh**: Select this option if you have a small number of sites (for example, two or three sites). Do not use this option if you have a larger number of sites, since you will be creating separate BGP peerings when you create direction connections between BGWs in different sites using this option, which does not scale well.

Go to [Step 5, on page 10](#) if you select the **full-mesh** option.

- **route-server**: This option uses the route server model, where the BGW of one site forms the BGP peering with the route server, and the route server forms the peering with the remaining sites. This option is applicable if you have a larger number of sites (for example, greater than two or three sites).

If you select **route-server** as the BGP peering type, complete the following procedures to configure the route server:

- Click **Add Route Server** to add the route server.
The **Add Route Server** window appears.
- Under **Site**, select the external fabric that you onboarded in [Onboard the NDFC Sites into ND and NDO, on page 7](#).
- In the **Core Router Device** field, select the route server that you configured in the external fabric.
- In the **Interface** field, select the loopback interface that you configured in the external fabric.
- Click **Ok**.
- Go to [Step 5, on page 10](#).

Step 5 Define any remaining parameters in the **Control Plane Configuration** page.

For the remaining tabs in the **General Settings** window:

- You can enable the **CloudSec Control** option, if desired.
CloudSec is a type of encryption that might be used with VXLAN EVPN Multi-site configurations.
- In the **Data Path** area, select **VXLAN** in the **Encapsulation Type** field.
- You can leave the default values in the **NDFC Settings** tab as-is, if they work for your configuration.

Configure Inter-Site Connectivity

The procedures for configuring inter-site connectivity differs, depending on the choice that you made in the **BGP Peering Type** field in [Complete the Necessary Control Plane Configurations, on page 9](#):

- If you selected **full-mesh** in the **BGP Peering Type** field, follow the instructions in [Configure Inter-Site Connectivity for Full-Mesh BGP Peering Type Configurations, on page 10](#).
- If you selected **route-server** in the **BGP Peering Type** field, follow the instructions in [Configure Inter-Site Connectivity for Route Server BGP Peering Type Configurations, on page 13](#).

Configure Inter-Site Connectivity for Full-Mesh BGP Peering Type Configurations

In this section, you will configure inter-site connectivity for **full-mesh** BGP peering type configurations, where you will define the Multi-Site VIP and you will add the port for each BGW device in each VXLAN fabric site.

Step 1 In the left pane under **General Settings: Sites**, click the first VXLAN fabric site (`VXLAN-Site 1`).

Step 2 In the right pane, under **Inter-Site Connectivity**, define the Multi-Site VIP in the **Multi-Site VIP** field for the first VXLAN fabric site.

This Multi-Site VIP will be configured on all the BGW devices in this site. You can click **Auto Allocate** or you can explicitly define the IP address for the Multi-Site VIP.

Step 3 Leaving the first VXLAN fabric site selected in the left pane, in the middle pane, click the first BGW device.

Step 4 In the right pane, click **Add Port**.

Step 5 Enter the necessary information in this page.

Define the port parameters in this page.

- In the **Ethernet Port ID** field, select the interface on the BGW device on the first VXLAN fabric site (VXLAN-Site 1) that connects to the BGW device of the second VXLAN fabric site (VXLAN-Site 2).
- In the **IP Address** field, enter the IP address for this interface. Later in these procedures, Nexus Dashboard Orchestrator will configure this IP address for this interface on the BGW device residing in this VXLAN fabric.
- In the **Remote Address** field, enter the IP address of the gigabit 4 interface of the BGW device on the second VXLAN fabric site (VXLAN-Site 2).
- In the **Remote ASN** field, enter the ASN for the BGW device on the second VXLAN fabric site (VXLAN-Site 2). For example, for this example use case, we would enter 65200 as the ASN for the BGW device on the second VXLAN fabric site.

Step 6 Click **Save**.

You are returned to the **Site Connectivity** page.

Step 7 Repeat [Step 3, on page 11](#) through [Step 6, on page 11](#) to configure additional ports to connect additional BGW devices in the first VXLAN fabric to the BGW devices on the second VXLAN fabric site.

At this point in the process, you have configured the following port:

BGW device on VXLAN-Site 1 → BGW device on VXLAN-Site 2

However, because you have four VXLAN fabrics that need to connect to each other in this use case, you also need to configure additional ports on the BGW device on VXLAN-Site 1:

- a) Leaving the VXLAN-Site 1 site selected under **General Settings: Sites** and the spine device selected in the middle pane, click **Add Port** again, then repeat [Step 4, on page 11](#) through [Step 6, on page 11](#) to connect to the BGW device on the *third* VXLAN fabric site (VXLAN-Site 3).
- b) Leaving the VXLAN-Site 1 site selected under **General Settings: Sites** and the spine device selected in the middle pane, click **Add Port** again, then repeat [Step 4, on page 11](#) through [Step 6, on page 11](#) to connect to the BGW device on the *fourth* VXLAN fabric site (VXLAN-Site 4).

At this point in the process, you have now configured the necessary ports to connect the BGW device on the first VXLAN fabric to the BGW devices on the remaining VXLAN fabric sites:

- BGW device on VXLAN-Site 1 → BGW device on VXLAN-Site 2
- BGW device on VXLAN-Site 1 → BGW device on VXLAN-Site 3
- BGW device on VXLAN-Site 1 → BGW device on VXLAN-Site 4

Note If you have multiple BGWs in the first VXLAN fabric site, repeat [Step 3, on page 11](#) through [Step 7, on page 11](#) to add the necessary ports for each of these additional BGWs.

Step 8 When you have completed the process of configuring the necessary ports to connect the BGW device on the *first* VXLAN fabric to the BGW devices on the remaining VXLAN fabric sites, repeat these steps for the *second* VXLAN fabric.

- a) In the left pane under **General Settings: Sites**, click the second VXLAN fabric site (VXLAN-Site 2).

- b) Define the Multi-Site VIP for the second VXLAN fabric site using [Step 1, on page 10](#) through [Step 2, on page 10](#).
- c) Repeat [Step 3, on page 11](#) through [Step 7, on page 11](#) to configure the necessary ports to connect the BGW device on the *second* VXLAN fabric to the BGW devices on the remaining VXLAN fabric sites:
 - BGW device on `VXLAN-Site 2` → BGW device on `VXLAN-Site 1`
 - BGW device on `VXLAN-Site 2` → BGW device on `VXLAN-Site 3`
 - BGW device on `VXLAN-Site 2` → BGW device on `VXLAN-Site 4`

Step 9

When you have completed the process of configuring the necessary ports to connect the BGW device on the *second* VXLAN fabric to the BGW devices on the remaining VXLAN fabric sites, repeat these steps for the *third* VXLAN fabric.

- a) In the left pane under **General Settings: Sites**, click the third VXLAN fabric site (`VXLAN-Site 3`).
- b) Define the Multi-Site VIP for the third VXLAN fabric site using [Step 1, on page 10](#) through [Step 2, on page 10](#).
- c) Repeat [Step 3, on page 11](#) through [Step 7, on page 11](#) to configure the necessary ports to connect the BGW device on the *third* VXLAN fabric to the BGW devices on the remaining VXLAN fabric sites:
 - BGW device on `VXLAN-Site 3` → BGW device on `VXLAN-Site 1`
 - BGW device on `VXLAN-Site 3` → BGW device on `VXLAN-Site 2`
 - BGW device on `VXLAN-Site 3` → BGW device on `VXLAN-Site 4`

Step 10

When you have completed the process of configuring the necessary ports to connect the BGW device on the *third* VXLAN fabric to the BGW devices on the remaining VXLAN fabric sites, repeat these steps for the *fourth* VXLAN fabric.

- a) In the left pane under **General Settings: Sites**, click the fourth VXLAN fabric site (`VXLAN-Site 4`).
- b) Define the Multi-Site VIP for the fourth VXLAN fabric site using [Step 1, on page 10](#) through [Step 2, on page 10](#).
- c) Repeat [Step 3, on page 11](#) through [Step 7, on page 11](#) to configure the necessary ports to connect the BGW device on the *fourth* VXLAN fabric to the BGW devices on the remaining VXLAN fabric sites:
 - BGW device on `VXLAN-Site 4` → BGW device on `VXLAN-Site 1`
 - BGW device on `VXLAN-Site 4` → BGW device on `VXLAN-Site 2`
 - BGW device on `VXLAN-Site 4` → BGW device on `VXLAN-Site 3`

Step 11

Once you have completed these configurations for all four VXLAN fabric sites, click **Deploy**.

This step will cause NDO to generate all the required configurations to build the VXLAN Multi-Site between the sites, which are then pushed to the respective NDFCs using the REST APIs.

What to do next

Go to [Configure the Necessary VRF and Network, on page 15](#).

Configure Inter-Site Connectivity for Route Server BGP Peering Type Configurations

In this section, you will configure inter-site connectivity for **route-server** BGP peering type configurations, where you will add the ports on the Route Server in the external fabric site connecting to the BGW of each VXLAN fabric.

Step 1 In the left pane under **General Settings: Sites**, click the external fabric site.

Step 2 In the middle pane, click the router device that is used with the Route Server in the external fabric site.

Step 3 In the right pane, click **Add Port**.

Step 4 Enter the necessary information in this page.

Define the port parameters in this page.

- In the **Ethernet Port ID** field, select the interface on the router device that is used with the Route Server in the external fabric site that connects to the BGW device on the first VXLAN fabric site (`VXLAN-Site 1`).
- In the **IP Address** field, enter the IP address for this interface. Later in these procedures, Nexus Dashboard Orchestrator will configure this IP address for this interface on the router device residing in this external fabric.
- In the **Remote Address** field, enter the IP address of the gigabit 4 interface of the BGW device on the first VXLAN fabric site (`VXLAN-Site 1`).
- In the **Remote ASN** field, enter the ASN for the BGW device on the first VXLAN fabric site (`VXLAN-Site 1`). For example, for this example use case, we would enter `65100` as the ASN for the BGW device on the first VXLAN fabric site.

Step 5 Click **Save**.

You are returned to the **Site Connectivity** page.

Step 6 Repeat [Step 3, on page 13](#) through [Step 5, on page 13](#) to configure additional ports to connect additional BGW devices in the external fabric to the BGW devices on the first VXLAN fabric site.

Step 7 Repeat [Step 3, on page 13](#) through [Step 6, on page 13](#) to configure additional ports for each of the remaining VXLAN fabric sites that the Route Server will connect to.

At this point in the process, you have configured the following connections:

Ports on the BGW device that is used to connect to the Route Server in the external fabric site → BGW device on `VXLAN-Site 1`

However, because you have four VXLAN fabrics that need to connect to the Route Server in this use case, you also need to configure additional ports on the router device that is used with the Route Server in the external fabric site:

- Configure ports in the router device that is used with the Route Server in the external fabric site to connect to `VXLAN-Site 2`, with the ASN `65200`
- Configure ports in the router device that is used with the Route Server in the external fabric site to connect to `VXLAN-Site 3`, with the ASN `65300`
- Configure ports in the router device that is used with the Route Server in the external fabric site to connect to `VXLAN-Site 4`, with the ASN `65400`

Step 8 In the left pane under **General Settings: Sites**, click the first VXLAN fabric site (`VXLAN-Site 1`).

- Step 9** In the right pane, under **Inter-Site Connectivity**, define the Multi-Site VIP in the **Multi-Site VIP** field for the first VXLAN fabric site.
- This Multi-Site VIP will be configured on all the BGW devices in this site. You can click **Auto Allocate** or you can explicitly define the IP address for the Multi-Site VIP.
- Step 10** Leaving the first VXLAN fabric site selected in the left pane, in the middle pane, click the first BGW device.
- Step 11** In the right pane, click **Add Port**.
- Step 12** Enter the necessary information in this page.
- Define the port parameters in this page.
- In the **Ethernet Port ID** field, select the interface on the BGW device on the first VXLAN fabric site (VXLAN-Site 1) that connects to the router device that is used with the Route Server in the external fabric site.
 - In the **IP Address** field, enter the IP address for this interface. Later in these procedures, Nexus Dashboard Orchestrator will configure this IP address for this interface on the BGW spine switch residing in this VXLAN fabric.
 - In the **Remote Address** field, enter the IP address of the gigabit 4 interface of the router device that is used with the Route Server in the external fabric site.
 - In the **Remote ASN** field, enter the ASN for the router device that is used with the Route Server in the external fabric site.
- Step 13** Click **Save**.
- You are returned to the **Site Connectivity** page.
- Step 14** Repeat [Step 10, on page 14](#) through [Step 13, on page 14](#) to configure additional ports to connect additional BGW devices in the first VXLAN fabric to the router device that is used with the Route Server in the external fabric site.
- At this point in the process, you have configured the following connections:
- BGW device on VXLAN-Site 1 → router device that is used as the Route Server in the external fabric site
- However, because you have four VXLAN fabrics that need to connect to the Route Server in this use case, you also need to configure the ports on the BGW devices in the remaining VXLAN fabrics to connect to the router device that is used with the Route Server in the external fabric site.
- Step 15** When you have completed the process of configuring the necessary ports to connect the BGW device on the *first* VXLAN fabric to the router device that is used with the Route Server in the external fabric site, repeat these steps for the *second* VXLAN fabric.
- a) In the left pane under **General Settings: Sites**, click the second VXLAN fabric site (VXLAN-Site 2).
 - b) Define the Multi-Site VIP for the second VXLAN fabric site using [Step 8, on page 13](#) through [Step 9, on page 14](#).
 - c) Repeat [Step 10, on page 14](#) through [Step 14, on page 14](#) to configure the necessary ports to connect the BGW device on the *second* VXLAN fabric to the router device that is used with the Route Server in the external fabric site.
- Step 16** When you have completed the process of configuring the necessary ports to connect the BGW device on the *second* VXLAN fabric to the router device that is used with the Route Server in the external fabric site, repeat these steps for the *third* VXLAN fabric.
- a) In the left pane under **General Settings: Sites**, click the third VXLAN fabric site (VXLAN-Site 3).
 - b) Define the Multi-Site VIP for the third VXLAN fabric site using [Step 8, on page 13](#) through [Step 9, on page 14](#).

- c) Repeat [Step 10, on page 14](#) through [Step 14, on page 14](#) to configure the necessary ports to connect the BGW device on the *third* VXLAN fabric to the router device that is used with the Route Server in the external fabric site.

Step 17 When you have completed the process of configuring the necessary ports to connect the BGW device on the *third* VXLAN fabric to the router device that is used with the Route Server in the external fabric site, repeat these steps for the *fourth* VXLAN fabric.

- a) In the left pane under **General Settings: Sites**, click the fourth VXLAN fabric site (`VXLAN-Site 4`).
- b) Define the Multi-Site VIP for the fourth VXLAN fabric site using [Step 8, on page 13](#) through [Step 9, on page 14](#).
- c) Repeat [Step 10, on page 14](#) through [Step 14, on page 14](#) to configure the necessary ports to connect the BGW device on the *fourth* VXLAN fabric to the router device that is used with the Route Server in the external fabric site.

Step 18 Once you have completed these configurations for the router device that is used with the Route Server in the external fabric site and all four VXLAN fabric sites, click **Deploy**.

This step will cause NDO to generate all the required configurations to build the VXLAN Multi-Site between the sites, which are then pushed to the respective NDFCs using the REST APIs.

What to do next

Go to [Configure the Necessary VRF and Network, on page 15](#).

Configure the Necessary VRF and Network

Once the VXLAN Multi-Site connectivity is established, you can then create VRFs and networks using schemas and templates from NDO, which in turn can be deployed to the sites and extended between the sites. Also, if there any VRFs or networks already created for any of the VXLAN fabrics, they can be imported into NDO as brownfield imports and stretched over the VXLAN Multi-Site.

Step 1 In NDO, navigate to **Application Management > Schemas** and click **Add Schema**.

Step 2 Provide the schema name and click **Add**.

For this use case, we will name the new schema `Demo Schema`.

You are returned to the **Overview** page for the new `Demo Schema` schema.

Step 3 Click **Add New Template**.

Step 4 Choose the NDFC template, then click **Add**.

Step 5 Enter a name in the **Display Name** field to create an NDFC-type template (for example, `Template 1`) and select the `dcnm-default-tn` tenant in the **Select a Tenant** field to map the template to that tenant.

Step 6 Under **Template Properties**, click **Create Object** and choose **VRF** to create a VRF.

Step 7 Enter a name in the **Display Name** field for the VRF (for example, `VRF-1`).

Step 8 Create a network under the `VRF-1` VRF on `Template 1`.

- a) Under **Template Properties**, click **Create Object** and choose **Network** to create a network.
- b) Enter a name in the **Display Name** field for the network (for example, `network-10`).
- c) In the **Virtual Routing & Forwarding** field, choose the `VRF-1` VRF to map `network-10` to that VRF.

d) In the **Gateway IP** field, click **Add Subnet**.

The Add Subnet window appears.

e) Click **Add Gateway IP** and provide the gateway IP address, then click the checkmark to accept the value and click **Add**.

The gateway IP address is now displayed in the **Gateway IP** field.

f) Define other optional parameters for this network, if necessary.

Step 9 In the **Template Properties** area, click **Actions > Sites Association**.

Step 10 Associate this template to the four VXLAN fabric sites, then click **Ok**.

You are returned to the `Template 1` window.

Step 11 From the **Template Properties** drop-down, select the `VXLAN-Site1` site.

Note If you have already deployed the VRF and network in any of the VXLAN fabrics, these VRFs/networks can be imported to NDO in order to deploy and extend to other VXLAN fabrics. To import NDFC-created VRFs/networks in NDO, click **Import** under **Template Properties**.

Step 12 Click the `VRF-1` VRF in the middle pane.

Step 13 In the right pane, click **Add Static Leaf**.

The **Add Static Leaf** window appears.

Step 14 In the **Leaf** field, select the BGW where this VRF is to be deployed (for example, the BGW in `VXLAN-Site1`) and click **Ok**.

You are returned to the `Template 1` page.

Step 15 If you want to extend Layer 2/Layer 3 connectivity, where you are stretching this VRF from one fabric to another fabric, click **Add Static Leaf** again to add additional BGWs and leaf switches where this VRF is to be deployed.

For this use case, in the **Leaf** field, you would select the remaining BGWs where this VRF is to be deployed:

- The BGW in `VXLAN-Site2`
- The BGW in `VXLAN-Site3`
- The BGW in `VXLAN-Site4`

When you have added all of the BGWs and leaf switches where this VRF is to be deployed, they will appear in the **Template 1** page.

Step 16 Click the `network-10` network, then click **Add Static Port** to add the ports where you want to deploy this network. The **Add Static Port** window appears.

Step 17 In the **Add Static Port** window, click **Add Path**.

The **Add Static Port** window appears.

Step 18 In the **Leaf** field, select the device where you want to deploy this network.

Step 19 (Optional) Enter the necessary information in the **VLAN** field.

Step 20 In the **Ports** field, select the ports where you want to deploy this network.

Step 21 Click **Save**.

You are returned to the **Add Static Port** window.

Step 22 In the **Add Static Port** window, click **Submit**.

You are returned to the **Template 1** window.

- Step 23** From the **Template Properties** drop-down, select the `VXLAN-Site2` site, then repeat [Step 11, on page 16](#) through [Step 22, on page 16](#) for the `VXLAN-Site2` site.
- Using the **Add Static Leaf** option, add the BGWs for each site, and any additional BGWs or leaf switches, where the `VRF-1` VRF is to be deployed for the `VXLAN-Site2` site.
 - Using the **Add Static Port** option, select the ports where you want to deploy the `network-10` network for the `VXLAN-Site2` site.
- Step 24** From the **Template Properties** drop-down, select the `VXLAN-Site3` site, then repeat [Step 11, on page 16](#) through [Step 22, on page 16](#) for the `VXLAN-Site3` site.
- Using the **Add Static Leaf** option, add the BGWs for each site, and any additional BGWs or leaf switches, where the `VRF-1` VRF is to be deployed for the `VXLAN-Site3` site.
 - Using the **Add Static Port** option, select the ports where you want to deploy the `network-10` network for the `VXLAN-Site3` site.
- Step 25** From the **Template Properties** drop-down, select the `VXLAN-Site4` site, then repeat [Step 11, on page 16](#) through [Step 22, on page 16](#) for the `VXLAN-Site4` site.
- Using the **Add Static Leaf** option, add the BGWs for each site, and any additional BGWs or leaf switches, where the `VRF-1` VRF is to be deployed for the `VXLAN-Site4` site.
 - Using the **Add Static Port** option, select the ports where you want to deploy the `network-10` network for the `VXLAN-Site4` site.
- Step 26** When you have completed these configurations for the all of the necessary sites, click **Save** in the upper right corner of the screen to save the `Demo Schema` schema.
- Step 27** Click the arrow next to the site and from the drop-down menu, select **Template Properties**.
- Step 28** Click **Deploy to Sites**.
- The **Deploy to Sites** window appears, showing the sites where the template will be deployed.
- Step 29** Click **Deployment Plan** for additional verification.
- Click the individual sites in the **Deployment Plan** window to to see the deployment plan for each specific site.
- Step 30** Click **Deploy** to have NDO push the configurations to NDFC.
- Step 31** Verify that the configurations were deployed successfully.
- Note that for each of these verification steps, the exact command that would be used specifically for the configurations in this use case are shown. Replace the appropriate variables in each command based on your configuration.
- In NDO, verify that the configurations were deployed successfully.
 - Verify that the `Template 1` was deployed successfully.
 - Verify that the `dcn-default-tn` tenant was deployed successfully.
 - In NDFC, verify that the following were done successfully:
 - Verify that one vrf and one network has been created.

- Verify that the VRF was deployed successfully.
 - Verify that the network was deployed successfully.
-