



RADIUS Configuration Guide Cisco IOS Release 12.4

Americas Headquarters

Cisco Systems, Inc.
170 West Tasman Drive
San Jose, CA 95134-1706
USA
<http://www.cisco.com>
Tel: 408 526-4000
800 553-NETS (6387)
Fax: 408 527-0883

THE SPECIFICATIONS AND INFORMATION REGARDING THE PRODUCTS IN THIS MANUAL ARE SUBJECT TO CHANGE WITHOUT NOTICE. ALL STATEMENTS, INFORMATION, AND RECOMMENDATIONS IN THIS MANUAL ARE BELIEVED TO BE ACCURATE BUT ARE PRESENTED WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED. USERS MUST TAKE FULL RESPONSIBILITY FOR THEIR APPLICATION OF ANY PRODUCTS.

THE SOFTWARE LICENSE AND LIMITED WARRANTY FOR THE ACCOMPANYING PRODUCT ARE SET FORTH IN THE INFORMATION PACKET THAT SHIPPED WITH THE PRODUCT AND ARE INCORPORATED HEREIN BY THIS REFERENCE. IF YOU ARE UNABLE TO LOCATE THE SOFTWARE LICENSE OR LIMITED WARRANTY, CONTACT YOUR CISCO REPRESENTATIVE FOR A COPY.

The Cisco implementation of TCP header compression is an adaptation of a program developed by the University of California, Berkeley (UCB) as part of UCB's public domain version of the UNIX operating system. All rights reserved. Copyright © 1981, Regents of the University of California.

NOTWITHSTANDING ANY OTHER WARRANTY HEREIN, ALL DOCUMENT FILES AND SOFTWARE OF THESE SUPPLIERS ARE PROVIDED "AS IS" WITH ALL FAULTS. CISCO AND THE ABOVE-NAMED SUPPLIERS DISCLAIM ALL WARRANTIES, EXPRESSED OR IMPLIED, INCLUDING, WITHOUT LIMITATION, THOSE OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT OR ARISING FROM A COURSE OF DEALING, USAGE, OR TRADE PRACTICE.

IN NO EVENT SHALL CISCO OR ITS SUPPLIERS BE LIABLE FOR ANY INDIRECT, SPECIAL, CONSEQUENTIAL, OR INCIDENTAL DAMAGES, INCLUDING, WITHOUT LIMITATION, LOST PROFITS OR LOSS OR DAMAGE TO DATA ARISING OUT OF THE USE OR INABILITY TO USE THIS MANUAL, EVEN IF CISCO OR ITS SUPPLIERS HAVE BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGES.

Cisco and the Cisco logo are trademarks or registered trademarks of Cisco and/or its affiliates in the U.S. and other countries. To view a list of Cisco trademarks, go to this URL: www.cisco.com/go/trademarks. Third-party trademarks mentioned are the property of their respective owners. The use of the word partner does not imply a partnership relationship between Cisco and any other company. (1110R)

Any Internet Protocol (IP) addresses and phone numbers used in this document are not intended to be actual addresses and phone numbers. Any examples, command display output, network topology diagrams, and other figures included in the document are shown for illustrative purposes only. Any use of actual IP addresses or phone numbers in illustrative content is unintentional and coincidental.

© 2012 Cisco Systems, Inc. All rights reserved.



CONTENTS

Configuring RADIUS 1

Finding Feature Information 1

Information About RADIUS 1

RADIUS Operation 2

RADIUS Attributes 3

Vendor-Proprietary RADIUS Attributes 3

RADIUS Tunnel Attributes 3

Preauthentication on a RADIUS Server 4

RADIUS Profile for DNIS or CLID Preauthentication 4

RADIUS Profile for Call Type Preauthentication 4

RADIUS Profile for Preauthentication Enhancements for Callback 5

RADIUS Profile for a Remote Hostname Used for Large-Scale Dial-Out 5

RADIUS Profile for Modem Management 5

RADIUS Profile for Subsequent Authentication 6

RADIUS Profile for Subsequent Authentication Type 6

RADIUS Profile to Include the Username 7

RADIUS Profile for Two-Way Authentication 7

RADIUS Profile to Support Authorization 8

RADIUS Authentication 9

RADIUS Authorization 9

RADIUS Accounting 9

RADIUS Login-IP-Host 9

RADIUS Prompt 9

Vendor-Specific RADIUS Attributes 10

Static Routes and IP Addresses on the RADIUS Server 10

How to Configure RADIUS 11

Configuring Router to RADIUS Server Communication 12

Configuring a Router for Vendor-Proprietary RADIUS Server Communication 15

Configuring a Router to Expand Network Access Server Port Information 16

Replacing NAS-Port Attribute with RADIUS Attribute	18
Configuring AAA Server Groups	19
Configuring AAA Server Groups with Deadtime	21
Configuring AAA DNIS Preauthentication	22
Configuring AAA Server Group Selection Based on DNIS	24
Configuring AAA Preauthentication	26
Configuring DNIS Preauthentication	29
Configuring a Guard Timer	30
Configuring the Suffix and Password in RADIUS Access Requests	31
Monitoring and Maintaining RADIUS	33
Configuration Examples for RADIUS	34
Example RADIUS Authentication and Authorization	35
Example RADIUS Authentication Authorization and Accounting	35
Example Vendor-Proprietary RADIUS Configuration	36
Example RADIUS Server with Server-Specific Values	37
Example Multiple RADIUS Servers with Global and Server-Specific Values	37
Example Multiple RADIUS Server Entries for the Same Server IP Address	37
Example RADIUS Server Group	37
Example Multiple RADIUS Server Entries Using AAA Server Groups	38
Example AAA Server Group Selection Based on DNIS	38
Example AAA Preauthentication	39
Example RADIUS User Profile with RADIUS Tunneling Attributes	40
Example Guard Timer	40
Additional References	41
Feature Information for Configuring RADIUS	42
Framed-Route in RADIUS Accounting	45
Finding Feature Information	45
Prerequisites for Framed-Route in RADIUS Accounting	45
Information About Framed-Route in RADIUS Accounting	45
Framed-Route Attribute 22	46
Framed-Route in RADIUS Accounting Packets	46
How to Monitor Framed-Route in RADIUS Accounting	46
Additional References	47
Feature Information for Framed-Route in RADIUS Accounting	48
RFC-2867 RADIUS Tunnel Accounting	51

Finding Feature Information	51
Restrictions for RFC-2867 RADIUS Tunnel Accounting	51
Information About RFC-2867 RADIUS Tunnel Accounting	51
RADIUS Attributes Support for RADIUS Tunnel Accounting	52
How to Configure RADIUS Tunnel Accounting	56
Enabling Tunnel Type Accounting Records	56
What To Do Next	58
Verifying RADIUS Tunnel Accounting	58
Configuration Examples for RADIUS Tunnel Accounting	59
Configuring RADIUS Tunnel Accounting on LAC Example	59
Configuring RADIUS Tunnel Accounting on LNS Example	60
Additional References	61
Feature Information for RFC-2867 RADIUS Tunnel Accounting	63
RADIUS Centralized Filter Management	65
Finding Feature Information	65
Prerequisites for RADIUS Centralized Filter Management	65
Restrictions for RADIUS Centralized Filter Management	66
Information About RADIUS Centralized Filter Management	66
Cache Management	66
New Vendor-Specific Attribute Support	67
How to Configure Centralized Filter Management for RADIUS	67
Configuring the RADIUS ACL Filter Server	67
Configuring the Filter Cache	68
Verifying the Filter Cache	69
Troubleshooting Tips	70
Monitoring and Maintaining the Filter Cache	70
Configuration Examples for RADIUS Centralized Filter Management	70
NAS Configuration Example	70
RADIUS Server Configuration Example	71
RADIUS Dictionary and Vendors File Example	71
Debug Output Example	71
Additional References	72
Feature Information for RADIUS Centralized Filter Management	73
RADIUS Debug Enhancements	75
Finding Feature Information	75

Prerequisites for RADIUS Debug Enhancements	75
Restrictions for RADIUS Debug Enhancements	75
Information About RADIUS Debug Enhancements	76
RADIUS Overview	76
Benefits of RADIUS Debug Enhancements	76
How to Enable RADIUS Debug Parameters	76
Enabling RADIUS Debug Parameters	76
Verifying RADIUS Debug Parameters	77
Configuration Examples for RADIUS Debug Enhancements	78
Enabling RADIUS Debug Parameters Example	78
Verifying RADIUS Debug Parameters Example	78
Additional References	79
Feature Information for RADIUS Debug Enhancements	81
Glossary	81
RADIUS Logical Line ID	83
Finding Feature Information	83
Prerequisites for RADIUS Logical Line ID	83
Restrictions for RADIUS Logical Line ID	83
Information About RADIUS Logical Line ID	84
How to Configure RADIUS Logical Line ID	84
Configuring Preauthorization	84
Configuring the LLID in a RADIUS User Profile	86
Verifying Logical Line ID	86
Configuration Examples for RADIUS Logical Line ID	87
LAC for Preauthorization Configuration Example	87
RADIUS User Profile for LLID Example	88
Additional References	88
Feature Information for RADIUS Logical Line ID	89
Glossary	90
RADIUS Route Download	93
Finding Feature Information	93
Prerequisites for RADIUS Route Download	93
How to Configure RADIUS Route Download	93
Configuring RADIUS Route Download	94
Verifying RADIUS Route Download	94

Configuration Examples for RADIUS Route Download	94
RADIUS Route Download Configuration Example	94
Additional References	95
Feature Information for RADIUS Route Download	96
RADIUS Support of 56-Bit Acct Session-Id	99
Finding Feature Information	99
Prerequisites for RADIUS Support of 56-Bit Acct Session-Id	99
Information About RADIUS Support of 56-Bit Acct Session-Id	100
Acct-Session-Id Attribute	100
Acct-Session-Id-Count Attribute	100
How to Configure RADIUS Support of 56-Bit Acct Session-Id	100
Configuring RADIUS Support of 56-Bit Acct Session-Id	100
Configuration Examples for RADIUS Support of 56-Bit Acct Session-Id	101
Configuring RADIUS Support of 56-Bit Acct Session-Id Example	101
Additional References	101
Feature Information for RADIUS Support of 56-Bit Acct Session-Id	103
RADIUS Tunnel Preference for Load Balancing and Fail-Over	105
Finding Feature Information	105
Prerequisites	105
Restrictions	106
Information About RADIUS Tunnel Preference for Load Balancing and Fail-Over	106
Industry-Standard Rather Than Proprietary Attributes	106
Load Balancing and Fail-Over in a Multivendor Network	107
Related Features and Technologies	107
How RADIUS Tunnel Preference for Load Balancing and Fail-Over is Configured	108
Configuration Example for RADIUS Tunnel Preference for Load Balancing and Fail-Over	108
Additional References	108
Feature Information for RADIUS Tunnel Preference for Load Balancing and Fail-Over	109
Glossary	110
RADIUS Server Reorder on Failure	113
Finding Feature Information	113
Prerequisites for RADIUS Server Reorder on Failure	113
Restrictions for RADIUS Server Reorder on Failure	114
Information About RADIUS Server Reorder on Failure	114
RADIUS Server Failure	114

How the RADIUS Server Reorder on Failure Feature Works	114
When RADIUS Servers Are Dead	115
How to Configure RADIUS Server Reorder on Failure	115
Configuring a RADIUS Server to Reorder on Failure	115
Monitoring RADIUS Server Reorder on Failure	117
Configuration Examples for RADIUS Server Reorder on Failure	119
Configuring a RADIUS Server to Reorder on Failure Example	119
Determining Transmission Order When RADIUS Servers Are Dead	120
Additional References	121
Related Documents	121
Standards	122
MIBs	122
RFCs	122
Technical Assistance	122
Feature Information for RADIUS Server Reorder on Failure	122
RADIUS EAP Support	125
Finding Feature Information	125
Prerequisites for RADIUS EAP Support	125
Restrictions for RADIUS EAP Support	126
Information About RADIUS EAP Support	126
How EAP Works	126
Newly Supported Attributes	126
How to Configure RADIUS EAP Support	127
Configuring EAP	127
Verifying EAP	129
Configuration Examples	129
EAP Local Configuration on Client Example	129
EAP Proxy Configuration for NAS Example	129
Additional References	130
Feature Information for RADIUS EAP Support	132
Glossary	133



Configuring RADIUS

The RADIUS security system is a distributed client/server system that secures networks against unauthorized access. In the Cisco implementation, RADIUS clients run on Cisco routers and send authentication requests to a central RADIUS server that contains all user authentication and network service access information. RADIUS is a fully open protocol, distributed in source code format, that can be modified to work with any security system currently available.

- [Finding Feature Information, page 1](#)
- [Information About RADIUS, page 1](#)
- [How to Configure RADIUS, page 11](#)
- [Configuration Examples for RADIUS, page 34](#)
- [Additional References, page 41](#)
- [Feature Information for Configuring RADIUS, page 42](#)

Finding Feature Information

Your software release may not support all the features documented in this module. For the latest feature information and caveats, see the release notes for your platform and software release. To find information about the features documented in this module, and to see a list of the releases in which each feature is supported, see the Feature Information Table at the end of this document.

Use Cisco Feature Navigator to find information about platform support and Cisco software image support. To access Cisco Feature Navigator, go to www.cisco.com/go/cfn. An account on Cisco.com is not required.

Information About RADIUS

Cisco supports RADIUS under its authentication, authorization, and accounting (AAA) security paradigm. RADIUS can be used with other AAA security protocols such as TACACS+, Kerberos, and local username lookup. RADIUS is supported on all Cisco platforms, but some RADIUS-supported features run only on specified platforms.

RADIUS has been implemented in a variety of network environments that require high levels of security while maintaining network access for remote users.

Use RADIUS in the following network environments that require access security:

- Networks with multiple-vendor access servers, each supporting RADIUS. For example, access servers from several vendors use a single RADIUS server-based security database. In an IP-based network with multiple vendors' access servers, dial-in users are authenticated through a RADIUS server that has been customized to work with the Kerberos security system.

- Turnkey network security environments in which applications support the RADIUS protocol, such as in an access environment that uses a smart card access control system. In one case, RADIUS has been used with Enigma's security cards to validate users and grant access to network resources.
- Networks already using RADIUS. You can add a Cisco router with RADIUS to the network. This might be the first step when you make a transition to a TACACS+ server.
- Networks in which a user must only access a single service. Using RADIUS, you can control user access to a single host, to a single utility such as Telnet, or to a single protocol such as Point-to-Point Protocol (PPP). For example, when a user logs in, RADIUS identifies this user as having authorization to run PPP using the IP address 10.2.3.4 and the defined access list is started.
- Networks that require resource accounting. You can use RADIUS accounting independent of RADIUS authentication or authorization. The RADIUS accounting functions allow data to be sent at the start and end of services, indicating the amount of resources (such as time, packets, bytes, and so on) used during the session. An ISP might use a freeware-based version of RADIUS access control and accounting software to meet special security and billing needs.
- Networks that support preauthentication. Using the RADIUS server in your network, you can configure AAA preauthentication and set up the preauthentication profiles. Preauthentication enables service providers to better manage ports using their existing RADIUS solutions, and to efficiently manage the use of shared resources to offer differing service-level agreements.

RADIUS is not suitable in the following network security situations:

- Multiprotocol access environments. RADIUS does not support the following protocols:
 - AppleTalk Remote Access (ARA)
 - NetBIOS Frame Control Protocol (NBFCP)
 - NetWare Asynchronous Services Interface (NASI)
 - X.25 Packet Assemblers/Disassemblers (PAD) connections
- Router-to-router situations. RADIUS does not provide two-way authentication. RADIUS can be used to authenticate from one router to a non-Cisco router if the non-Cisco router requires RADIUS authentication.
- Networks using a variety of services. RADIUS generally binds a user to one service model.

The following sections provide more information about RADIUS:

- [RADIUS Operation, page 2](#)
- [RADIUS Attributes, page 3](#)
- [Preauthentication on a RADIUS Server, page 4](#)
- [RADIUS Authentication, page 9](#)
- [RADIUS Authorization, page 9](#)
- [RADIUS Accounting, page 9](#)
- [RADIUS Login-IP-Host, page 9](#)
- [RADIUS Prompt, page 9](#)
- [Vendor-Specific RADIUS Attributes, page 10](#)
- [Static Routes and IP Addresses on the RADIUS Server, page 10](#)

RADIUS Operation

When a user attempts to log in and authenticate to an access server using RADIUS, the following steps occur:

- 1 The user is prompted to enter the username and password.
- 2 The username and encrypted password are sent over the network to the RADIUS server.

- 3 The user receives one of the following responses from the RADIUS server:
 - a ACCEPT--The user is authenticated.
 - b CHALLENGE--A challenge is issued by the RADIUS server. The challenge collects additional data from the user.
 - c CHANGE PASSWORD--A request is issued by the RADIUS server, asking the user to select a new password.
 - d REJECT--The user is not authenticated and is prompted to reenter the username and password, or access is denied.

The ACCEPT or REJECT response is bundled with additional data that is used for EXEC or network authorization. You must first complete RADIUS authentication before using RADIUS authorization. The additional data included with the ACCEPT or REJECT packets consists of the following:

- Services that the user can access, including connections such as Telnet, rlogin, or LAT, and services such as PPP, SLIP, or EXEC services.
- Connection parameters, including the host or client IP address, access list, and user timeouts.

RADIUS Attributes

The network access server monitors the RADIUS authorization and accounting functions defined by RADIUS attributes in each user profile. For more information about RADIUS attributes, see the “RADIUS Attributes Overview and RADIUS IETF Attributes” module.

This section includes the following sections:

- [Vendor-Proprietary RADIUS Attributes, page 3](#)
- [RADIUS Tunnel Attributes, page 3](#)

Vendor-Proprietary RADIUS Attributes

An IETF draft standard for RADIUS specifies a method for communicating vendor-proprietary information between the network access server and the RADIUS server. Some vendors, nevertheless, have extended the RADIUS attribute set in a unique way. Cisco IOS software supports a subset of vendor-proprietary RADIUS attributes.

RADIUS Tunnel Attributes

RADIUS is a security server AAA protocol originally developed by Livingston, Inc. RADIUS uses attribute value (AV) pairs to communicate information between the security server and the network access server. RFC 2138 and RFC 2139 describe the basic functionality of RADIUS and the original set of IETF-standard AV pairs used to send AAA information. Two draft IETF standards, “RADIUS Attributes for Tunnel Protocol Support” and “RADIUS Accounting Modifications for Tunnel Protocol Support,” extend the IETF-defined set of AV pairs to include attributes specific to VPNs; these attributes are used to carry the tunneling information between the RADIUS server and the tunnel initiator. RFC 2865 and RFC 2868 extend the IETF-defined set of AV pairs to include attributes specific to compulsory tunneling in VPNs by allowing the user to specify authentication names for the network access server and the RADIUS server.

Cisco routers and access servers support new RADIUS IETF-standard virtual private dialup network (VPDN) tunnel attributes. For more information, see the *Cisco IOS Dial Technologies Configuration Guide* and *Cisco IOS VPDN Configuration Guide*.

Preauthentication on a RADIUS Server

RADIUS attributes are configured in the RADIUS preauthentication profiles to specify preauthentication behavior. In addition to configuring preauthentication on your Cisco router, you must set up the preauthentication profiles on the RADIUS server.

- [RADIUS Profile for DNIS or CLID Preauthentication, page 4](#)
- [RADIUS Profile for Call Type Preauthentication, page 4](#)
- [RADIUS Profile for Preauthentication Enhancements for Callback, page 5](#)
- [RADIUS Profile for a Remote Hostname Used for Large-Scale Dial-Out, page 5](#)
- [RADIUS Profile for Modem Management, page 5](#)
- [RADIUS Profile for Subsequent Authentication, page 6](#)
- [RADIUS Profile for Subsequent Authentication Type, page 6](#)
- [RADIUS Profile to Include the Username, page 7](#)
- [RADIUS Profile for Two-Way Authentication, page 7](#)
- [RADIUS Profile to Support Authorization, page 8](#)

RADIUS Profile for DNIS or CLID Preauthentication

To configure the RADIUS preauthentication profile, use the DNIS or CLID number as the username, and use the password defined in the **dnis** or **clid** command as the password.



Note

The preauthentication profile must have “outbound” as the service type because the password is predefined on the NAS. Setting up the preauthentication profile in this manner prevents users from trying to log in to the NAS with the username of the DNIS number, CLID number, or call type and an obvious password. The “outbound” service type is also included in the access-request packet sent to the RADIUS server.

RADIUS Profile for Call Type Preauthentication

To set up the RADIUS preauthentication profile, use the call type string as the username, and use the password defined in the **ctype** command as the password. The table below lists the call type strings that may be used in the preauthentication profile.

Table 1 *Call Type Strings Used in Preauthentication*

Call Type String	ISDN Bearer Capabilities
digital	Unrestricted digital, restricted digital.
speech	Speech, 3.1 kHz audio, 7 kHz audio. Note This is the only call type available for CAS.
v.110	Anything with V.110 user information layer.
v.120	Anything with V.120 user information layer.

**Note**

The preauthentication profile must have “outbound” as the service type because the password is predefined on the NAS. Setting up the preauthentication profile in this manner prevents users from trying to log in to the NAS with the username of the DNIS number, CLID number, or call type and an obvious password. The “outbound” service type is also included in the access-request packet sent to the RADIUS server and should be a check-in item if the RADIUS server supports check-in items.

RADIUS Profile for Preauthentication Enhancements for Callback

Callback allows remote network users such as telecommuters to dial in to the NAS without being charged. When callback is required, the NAS hangs up the current call and dials the caller back. When the NAS performs the callback, only information for the outgoing connection is applied. The rest of the attributes from the preauthentication access-accept message are discarded.

**Note**

The destination IP address is not required to be returned from the RADIUS server.

The following example shows a RADIUS profile configuration with a callback number of 555-0101 and the service type set to outbound. The cisco-avpair = “preauth:send-name=<string>” uses the string “user1” and the cisco-avpair = “preauth:send-secret=<string>” uses the password “cisco.”

```
5550101 password = "cisco", Service-Type = Outbound
Service-Type = Callback-Framed
Framed-Protocol = PPP,
Dialback-No = "5550119"
Class = "ISP12"
cisco-avpair = "preauth:send-name=user1"
cisco-avpair = "preauth:send-secret=cisco"
```

RADIUS Profile for a Remote Hostname Used for Large-Scale Dial-Out

The following example protects against accidentally calling a valid telephone number but accessing the wrong router by providing the name of the remote router, for use in large-scale dial-out:

```
5550101 password = "PASSWORD1", Service-Type = Outbound
Service-Type = Callback-Framed
Framed-Protocol = PPP,
Dialback-No = "5550190"
Class = "ISP12"
cisco-avpair = "preauth:send-name=user1"
cisco-avpair = "preauth:send-secret=PASSWORD1"
cisco-avpair = "preauth:remote-name=Router2"
```

RADIUS Profile for Modem Management

When DNIS, CLID, or call type preauthentication is used, the affirmative response from the RADIUS server may include a modem string for modem management in the NAS through VSA 26. The modem management VSA has the following syntax:

```
cisco-avpair = "preauth:modem-service=modem min-speed <
x
> max-speed <
y
>
modulation <
z"
```

```
> error-correction <
a
> compression <
b
>"
```

The table below lists the modem management string elements within the VSA.

Table 2 **Modem Management String**

Command	Argument
min-speed	<300 to 56000>, any
max-speed	<300 to 56000>, any
modulation	K56Flex, v22bis, v32bis, v34, v90, any
error-correction	lapm, mnp4
compression	mnp5, v42bis

When the modem management string is received from the RADIUS server in the form of a VSA, the information is passed to the Cisco IOS software and applied on a per-call basis. Modem ISDN channel aggregation (MICA) modems provide a control channel through which messages can be sent during the call setup time. Hence, this modem management feature is supported only with MICA modems and newer technologies. This feature is not supported with Microcom modems.

RADIUS Profile for Subsequent Authentication

If preauthentication passes, you may use vendor-proprietary RADIUS attribute 201 (Require-Auth) in the preauthentication profile to determine whether subsequent authentication is to be performed. If attribute 201, returned in the access-accept message, has a value of 0, then subsequent authentication will not be performed. If attribute 201 has a value of 1, then subsequent authentication will be performed as usual.

Attribute 201 has the following syntax:

```
cisco-avpair = "preauth:auth-required=<
n
>"
```

where <n> has the same value range as attribute 201 (that is, 0 or 1).

If attribute 201 is missing in the preauthentication profile, then a value of 1 is assumed, and subsequent authentication is performed.



Note

To perform subsequent authentication, you must set up a regular user profile in addition to a preauthentication profile.

RADIUS Profile for Subsequent Authentication Type

If you have specified subsequent authentication in the preauthentication profile, you must also specify the authentication types to be used for subsequent authentication. To specify the authentication types allowed in subsequent authentication, use the following VSA:

```
cisco-avpair = "preauth:auth-type=<
```

```
string
>"
```

The table below lists the allowed values for the `<string>` element.

Table 3 `<string>` Element Values

String	Description
chap	Requires username and password of Challenge-Handshake Authentication Protocol (CHAP) for PPP authentication.
ms-chap	Requires username and password of MS-CHAP for PPP authentication.
pap	Requires username and password of Password Authentication Protocol (PAP) for PPP authentication.

To specify that multiple authentication types are allowed, you can configure more than one instance of this VSA in the preauthentication profile. The sequence of the authentication type VSAs in the preauthentication profile is significant because it specifies the order of authentication types to be used in the PPP negotiation.

This VSA is a per-user attribute and replaces the authentication type list in the **ppp authentication** interface configuration command.



Note

You should use this VSA only if subsequent authentication is required because it specifies the authentication type for subsequent authentication.

RADIUS Profile to Include the Username

If only preauthentication is used to authenticate a call, the NAS could be missing a username when it brings up the call. RADIUS may provide a username for the NAS to use through RADIUS attribute 1 (User-Name) or through a VSA returned in the Access-Accept packet. The VSA for specifying the username has the following syntax:

```
cisco-avpair = "preauth:username=<
string
>"
```

If no username is specified, the DNIS number, CLID number, or call type is used, depending on the last preauthentication command that has been configured (for example, if **clid** was the last preauthentication command configured, the CLID number will be used as the username).

If subsequent authentication is used to authenticate a call, there might be two usernames: one provided by RADIUS and one provided by the user. In this case, the username provided by the user overrides the one contained in the RADIUS preauthentication profile; the username provided by the user is used for both authentication and accounting.

RADIUS Profile for Two-Way Authentication

In the case of two-way authentication, the calling networking device will need to authenticate the NAS. The PAP username and password or CHAP username and password need not be configured locally on the

NAS. Instead, the username and password can be included in the Access-Accept messages for preauthentication.

**Note**

The **ppp authentication** command must be configured with the **radius** command.

To apply for PAP, do not configure the **ppp pap sent-name password** command on the interface. The VSAs “preauth:send-name” and “preauth:send-secret” will be used as the PAP username and PAP password for outbound authentication.

For CHAP, “preauth:send-name” will be used not only for outbound authentication, but also for inbound authentication. For a CHAP inbound case, the NAS will use the name defined in “preauth:send-name” in the challenge packet to the caller networking device. For a CHAP outbound case, both “preauth:send-name” and “preauth:send-secret” will be used in the response packet.

The following example shows a configuration that specifies two-way authentication:

```
5550101 password = "PASSWORD2", Service-Type = Outbound
Service-Type = Framed-User
cisco-avpair = "preauth:auth-required=1"
cisco-avpair = "preauth:auth-type=pap"
cisco-avpair = "preauth:send-name=user1"
cisco-avpair = "preauth:send-secret=PASSWORD2"
class = "<some class>"
```

**Note**

Two-way authentication does not work when resource pooling is enabled.

RADIUS Profile to Support Authorization

If only preauthentication is configured, then subsequent authentication will be bypassed. Note that because the username and password are not available, authorization will also be bypassed. However, you may include authorization attributes in the preauthentication profile to apply per-user attributes and avoid having to return subsequently to RADIUS for authorization. To initiate the authorization process, you must also configure the **aaa authorization network** command on the NAS.

You may configure authorization attributes in the preauthentication profile with one exception: the service-type attribute (attribute 6). The service-type attribute must be converted to a VSA in the preauthentication profile. This VSA has the following syntax:

```
cisco-avpair = "preauth:service-type=<
n
>"
```

where <n> is one of the standard RFC 2865 values for attribute 6.

**Note**

If subsequent authentication is required, the authorization attributes in the preauthentication profile will not be applied.

RADIUS Authentication

After you have identified the RADIUS server and defined the RADIUS authentication key, you must define method lists for RADIUS authentication. Because RADIUS authentication is facilitated through AAA, you must enter the **aaa authentication** command, specifying RADIUS as the authentication method.

RADIUS Authorization

AAA authorization lets you set parameters that restrict a user's access to the network. Authorization using RADIUS provides one method for remote access control, including one-time authorization or authorization for each service, per-user account list and profile, user group support, and support of IP, IPX, AppleTalk Remote Access (ARA), and Telnet. Because RADIUS authorization is facilitated through AAA, you must issue the **aaa authorization** command, specifying RADIUS as the authorization method.

RADIUS Accounting

The AAA accounting feature enables you to track the services users are accessing and the amount of network resources they are consuming. Because RADIUS accounting is facilitated through AAA, you must issue the **aaa accounting** command, specifying RADIUS as the accounting method.

RADIUS Login-IP-Host

To enable the network access server to attempt more than one login host when trying to connect a dial-in user, you can enter as many as three Login-IP-Host entries in the user's profile on the RADIUS server. The following example shows that three Login-IP-Host instances have been configured for the user user1>, and that TCP-Clear will be used for the connection:

```
user1 Password = xyz
  Service-Type = Login,
  Login-Service = TCP-Clear,
  Login-IP-Host = 10.0.0.0,
  Login-IP-Host = 10.2.2.2,
  Login-IP-Host = 10.255.255.255,
  Login-TCP-Port = 23
```

The order in which the hosts are entered is the order in which they are attempted. Use the **ip tcp synwait-time** command to set the number of seconds that the NAS waits before trying to connect to the next host on the list; the default is 30 seconds.

Your RADIUS server might permit more than three Login-IP-Host entries; however, the network access server supports only three hosts in Access-Accept packets.

RADIUS Prompt

To control whether user responses to access-challenge packets are echoed to the screen, you can configure the Prompt attribute in the user profile on the RADIUS server. This attribute is included only in Access-Challenge packets. The following example shows the Prompt attribute set to No-Echo, which prevents the user's responses from echoing:

```
user1 Password = xyz
  Service-Type = Login,
  Login-Service = Telnet,
  Prompt = No-Echo,
  Login-IP-Host = 172.31.255.255
```

To allow user responses to echo, set the attribute to Echo. If the Prompt attribute is not included in the user profile, responses are echoed by default.

This attribute overrides the behavior of the **radius-server challenge-noecho** command configured on the access server. For example, if the access server is configured to suppress echoing, but the individual user profile allows echoing, then the user responses are echoed.

**Note**

If you want to use the Prompt attribute, your RADIUS server must be configured to support Access-Challenge packets.

Vendor-Specific RADIUS Attributes

The IETF draft standard specifies a method for communicating vendor-specific information between the network access server and the RADIUS server by using the vendor-specific attribute (attribute 26). Vendor-specific attributes (VSAs) allow vendors to support their own extended attributes not suitable for general use. The Cisco RADIUS implementation supports one vendor-specific option using the format recommended in the specification. Cisco's vendor ID is 9, and the supported option has vendor-type 1, which is named "cisco-avpair." The value is a string of the following format:

```
protocol : attribute sep value *
```

"Protocol" is a value of the Cisco "protocol" attribute for a particular type of authorization; protocols that can be used include IP, Internetwork Packet Exchange (IPX), VPDN, VoIP, Secure Shell (SSH), Resource Reservation Protocol (RSVP), Serial Interface Processor (SIP), AirNet, and Outbound. "Attribute" and "value" are an appropriate AV pair defined in the Cisco TACACS+ specification, and "sep" is "=" for mandatory attributes and "*" for optional attributes. This allows the full set of features available for TACACS+ authorization to also be used for RADIUS.

For example, the following AV pair causes Cisco's "multiple named ip address pools" feature to be activated during IP authorization (during PPP's Internet Protocol Control Protocol (IPCP) address assignment):

```
cisco-avpair= "ip:addr-pool=first"
```

If you insert an "*", the AV pair "ip:addr-pool=first" becomes optional. Note that any AV pair can be made optional.

```
cisco-avpair= "ip:addr-pool*first"
```

The following example shows how to cause a user logging in from a network access server to have immediate access to EXEC commands:

```
cisco-avpair= "shell:priv-lvl=15"
```

Other vendors have their own unique vendor IDs, options, and associated VSAs.

Static Routes and IP Addresses on the RADIUS Server

Some vendor-proprietary implementations of RADIUS let the user define static routes and IP pool definitions on the RADIUS server instead of on each individual network access server in the network. Each network access server then queries the RADIUS server for static route and IP pool information.

To have the Cisco router or access server query the RADIUS server for static routes and IP pool definitions when the device starts up, use the **radius-server configuration-nas** command.

How to Configure RADIUS

To configure RADIUS on your Cisco router or access server, you must perform the following tasks:

- Use the **aaa new-model** global configuration command to enable AAA. AAA must be configured if you plan to use RADIUS.
- Use the **aaa authentication** global configuration command to define method lists for RADIUS authentication. For more information about using the **aaa authentication** command, see the “Configuring Authentication” module.
- Use **line** and **interface** commands to enable the defined method lists to be used. For more information, see the “Configuring Authentication” module.

The following configuration tasks are optional:

- You may use the **aaa group server** command to group selected RADIUS hosts for specific services. For more information about using the **aaa group server** command, see the Configuring AAA Server Groups.
- You may use the **aaa dnis map** command to select RADIUS server groups based on Dialed Number Identification Service (DNIS) number. Before you use this command, you must define RADIUS server groups using the **aaa group server** command. For more information about using the **aaa dnis map** command, see the Configuring AAA Server Group Selection Based on DNIS.
- You may use the **aaa authorization** global configuration command to authorize specific user functions. For more information about using the **aaa authorization** command, see the “Configuring Authorization” module.
- You may use the **aaa accounting** command to enable accounting for RADIUS connections. For more information about using the **aaa accounting** command, see the “Configuring Accounting” module.
- You may use the **dialer aaa** interface configuration command to create remote site profiles that contain outgoing call attributes on the AAA server. For more information about using the **dialer aaa** command, see the Configuring the Suffix and Password in RADIUS Access Requests.

For RADIUS configuration examples using the commands in this module, refer to the section Configuration Examples for RADIUS.

- [Configuring Router to RADIUS Server Communication, page 12](#)
- [Configuring a Router for Vendor-Proprietary RADIUS Server Communication, page 15](#)
- [Configuring a Router to Expand Network Access Server Port Information, page 16](#)
- [Replacing NAS-Port Attribute with RADIUS Attribute, page 18](#)
- [Configuring AAA Server Groups, page 19](#)
- [Configuring AAA Server Groups with Deadtime, page 21](#)
- [Configuring AAA DNIS Preauthentication, page 22](#)
- [Configuring AAA Server Group Selection Based on DNIS, page 24](#)
- [Configuring AAA Preauthentication, page 26](#)
- [Configuring DNIS Preauthentication, page 29](#)
- [Configuring a Guard Timer, page 30](#)
- [Configuring the Suffix and Password in RADIUS Access Requests, page 31](#)
- [Monitoring and Maintaining RADIUS, page 33](#)

Configuring Router to RADIUS Server Communication

The RADIUS host is normally a multiuser system running RADIUS server software from Cisco (CiscoSecure ACS), Livingston, Merit, Microsoft, or another software provider. Configuring router to RADIUS server communication can have several components:

- Hostname or IP address
- Authentication destination port
- Accounting destination port
- Timeout period
- Retransmission value
- Key string

RADIUS security servers are identified on the basis of their hostname or IP address, hostname and specific UDP port numbers, or IP address and specific UDP port numbers. The combination of the IP address and UDP port number creates a unique identifier, allowing different ports to be individually defined as RADIUS hosts providing a specific AAA service. In other words, this unique identifier enables RADIUS requests to be sent to multiple UDP ports on a server at the same IP address. If two different host entries on the same RADIUS server are configured for the same service--for example, accounting--the second host entry configured acts as failover backup to the first one. If the first host entry fails to provide accounting services, the network access server will try the second host entry configured on the same device for accounting services. (The RADIUS host entries will be tried in the order they are configured.)

A RADIUS server and a Cisco router use a shared secret text string to encrypt passwords and exchange responses. To configure RADIUS to use the AAA security commands, you must specify the host running the RADIUS server daemon and a secret text (key) string that it shares with the router.

The timeout, retransmission, and encryption key values are configurable globally for all RADIUS servers, on a per-server basis or in some combination of global and per-server settings. To apply these settings globally to all RADIUS servers communicating with the router, use the three unique global commands: **radius-server timeout**, **radius-server retransmit**, and **radius-server key**. To apply these values on a specific RADIUS server, use the **radius-server host** command.

**Note**

You can configure both global and per-server timeout, retransmission, and key value commands simultaneously on the same Cisco network access server. If both global and per-server functions are configured on a router, the per-server timer, retransmission, and key value commands override global timer, retransmission, and key value commands.

To configure router to server RADIUS server communication, perform the following task.

SUMMARY STEPS

1. **enable**
2. **configure terminal**
3. **radius-server host** {*hostname | ip-address*} [**auth-port** *port-number*] [**acct-port** *port-number*] [**timeout** *seconds*] [**retransmit** *retries*] [**key** *string*] [**alias** {*hostname | ip-address*}]
4. **radius-server key** {**0** *string* | **7** *string* | *string*}
5. **radius-server retransmit** *retries*
6. **radius-server timeout** *seconds*
7. **radius-server deadtime** *minutes*
8. **exit**

DETAILED STEPS

	Command or Action	Purpose
Step 1	enable Example: Router> enable	Enables privileged EXEC mode. <ul style="list-style-type: none"> • Enter your password if prompted.
Step 2	configure terminal Example: Router# configure terminal	Enters global configuration mode.

Command or Action	Purpose
<p>Step 3 radius-server host {<i>hostname</i> <i>ip-address</i>} [auth-port <i>port-number</i>] [acct-port <i>port-number</i>] [timeout <i>seconds</i>] [retransmit <i>retries</i>] [key <i>string</i>] [alias {<i>hostname</i> <i>ip-address</i>}]</p> <p>Example:</p> <pre>Router(config)# radius-server host 10.45.1.2</pre>	<p>Specifies the IP address or hostname of the remote RADIUS server host and assigns authentication and accounting destination port numbers.</p> <p>Note In this step, the timeout, retransmission, and encryption key values are configure on a per-server basis.</p> <ul style="list-style-type: none"> Use the auth-port <i>port-number</i> keyword-argument pair to configure a specific UDP port on this RADIUS server to be used solely for authentication. Use the acct-port <i>port-number</i> keyword-argument pair to configure a specific UDP port on this RADIUS server to be used solely for accounting. Use the alias keyword to configure up to eight multiple IP addresses for use when referring to RADIUS servers. To configure the network access server to recognize more than one host entry associated with a single IP address, repeat this command as many times as necessary, making sure that each UDP port number is different. Set the timeout, retransmit, and encryption key values to use with the specific RADIUS host. If no timeout is set, the global value is used; otherwise, enter a value in the range from 1 to 1000. If no retransmit value is set, the global value is used; otherwise, enter a value in the range from 1 to 1000. If no key string is specified, the global value is used. <p>Note The key is a text string that must match the encryption key used on the RADIUS server. Always configure the key as the last item in the radius-server host command syntax because the leading spaces are ignored, but spaces within and at the end of the key are used. If you use spaces in your key, do not enclose the key in quotation marks unless the quotation marks themselves are part of the key.</p>
<p>Step 4 radius-server key {0 <i>string</i> 7 <i>string</i> <i>string</i>}</p> <p>Example:</p> <pre>Router(config)# radius-server key myRADIUSpassword</pre>	<p>Specifies the shared secret text string used between the router and a RADIUS server.</p> <p>Note In this step, the encryption key value is configured globally for all RADIUS servers.</p> <ul style="list-style-type: none"> Use the 0 <i>string</i> option to configure an unencrypted shared secret. Use the 7 <i>string</i> option to configure an encrypted shared secret.
<p>Step 5 radius-server retransmit <i>retries</i></p> <p>Example:</p> <pre>Router(config)# radius-server retransmit 25</pre>	<p>Specifies how many times the router transmits each RADIUS request to the server before giving up (the default is 3).</p> <p>Note In this step, the retransmission value is configured globally for all RADIUS servers.</p>

Command or Action	Purpose
<p>Step 6 <code>radius-server timeout seconds</code></p> <p>Example:</p> <pre>Router(config)# radius-server timeout 6</pre>	<p>Specifies for how many seconds a router waits for a reply to a RADIUS request before retransmitting the request.</p> <p>Note In this step, the timeout value is configured globally for all RADIUS servers.</p>
<p>Step 7 <code>radius-server deadtime minutes</code></p> <p>Example:</p> <pre>Router(config)# radius-server deadtime 5</pre>	<p>Specifies for how many minutes a RADIUS server that is not responding to authentication requests is passed over by requests for RADIUS authentication.</p>
<p>Step 8 <code>exit</code></p> <p>Example:</p> <pre>Router(config)# exit</pre>	<p>Returns to privileged EXEC mode.</p>

Configuring a Router for Vendor-Proprietary RADIUS Server Communication

Although an IETF draft standard for RADIUS specifies a method for communicating vendor-proprietary information between the network access server and the RADIUS server, some vendors have extended the RADIUS attribute set in a unique way. Cisco IOS software supports a subset of vendor-proprietary RADIUS attributes.

To configure RADIUS (whether vendor-proprietary or IETF draft-compliant), you must specify the host running the RADIUS server daemon and the secret text string it shares with the Cisco device. You must specify the RADIUS host and secret text string by using the **radius-server** commands. To identify that the RADIUS server is using a vendor-proprietary implementation of RADIUS, use the **radius-server host non-standard** command. Vendor-proprietary attributes will not be supported unless you use the **radius-server host non-standard** command.

To configure a router for vendor-proprietary RADIUS server communication, perform the following task.

SUMMARY STEPS

1. **enable**
2. **configure terminal**
3. **radius-server vsa send [accounting | authentication]**
4. **radius-server host {hostname | ip-address} non-standard**
5. **radius-server key {0 string | 7 string | string}**
6. **exit**

DETAILED STEPS

Command or Action	Purpose
<p>Step 1 <code>enable</code></p> <p>Example:</p> <pre>Router> enable</pre>	<p>Enables privileged EXEC mode.</p> <ul style="list-style-type: none"> Enter your password if prompted.
<p>Step 2 <code>configure terminal</code></p> <p>Example:</p> <pre>Router# configure terminal</pre>	<p>Enters global configuration mode.</p>
<p>Step 3 <code>radius-server vsa send [accounting authentication]</code></p> <p>Example:</p> <pre>Router(config)# radius-server vsa send</pre>	<p>Enables the network access server to recognize and use VSAs as defined by RADIUS IETF attribute 26.</p>
<p>Step 4 <code>radius-server host {hostname ip-address} non-standard</code></p> <p>Example:</p> <pre>Router(config)# radius-server host host1 non-standard</pre>	<p>Specifies the IP address or hostname of the remote RADIUS server host and identifies that it is using a vendor-proprietary implementation of RADIUS.</p>
<p>Step 5 <code>radius-server key {0 string 7 string string}</code></p> <p>Example:</p> <pre>Router(config)# radius-server key myRaDIUSpassword</pre>	<p>Specifies the shared secret text string used between the router and the vendor-proprietary RADIUS server.</p> <ul style="list-style-type: none"> The router and the RADIUS server use this text string to encrypt passwords and exchange responses.
<p>Step 6 <code>exit</code></p> <p>Example:</p> <pre>Router(config)# exit</pre>	<p>Returns to privileged EXEC mode.</p>

Configuring a Router to Expand Network Access Server Port Information

There are some situations when PPP or login authentication occurs on an interface that is different from the interface on which the call itself comes in. For example, in a V.120 ISDN call, login or PPP authentication occurs on a virtual asynchronous interface “`ttt`”, but the call itself occurs on one of the channels of the ISDN interface.

The **radius-server attribute nas-port extended** command configures RADIUS to expand the size of the NAS-Port attribute (RADIUS IETF attribute 5) field to 32 bits. The upper 16 bits of the NAS-Port attribute display the type and number of the controlling interface; the lower 16 bits indicate the interface undergoing authentication.

To configure a router to expand the NAS-Port information, perform the following task.



Note

The **radius-server attribute nas-port format** command replaces the **radius-server extended-portnames** command and the **radius-server attribute nas-port extended** command.

SUMMARY STEPS

1. enable
2. configure terminal
3. radius-server configure-nas
4. radius-server attribute nas-port format
5. exit

DETAILED STEPS

Command or Action	Purpose
<p>Step 1 enable</p> <p>Example:</p> <pre>Router> enable</pre>	<p>Enables privileged EXEC mode.</p> <ul style="list-style-type: none"> • Enter your password if prompted.
<p>Step 2 configure terminal</p> <p>Example:</p> <pre>Router# configure terminal</pre>	<p>Enters global configuration mode.</p>
<p>Step 3 radius-server configure-nas</p> <p>Example:</p> <pre>Router(config)# radius-server configure-nas</pre>	<p>(Optional) Tells the Cisco router or access server to query the RADIUS server for the static routes and IP pool definitions used throughout its domain.</p> <p>Note Because the radius-server configure-nas command is used when the Cisco router starts up, it will not take effect until you issue a copy system:running config nvram:startup-config command.</p>
<p>Step 4 radius-server attribute nas-port format</p> <p>Example:</p> <pre>Router(config)# radius-server attribute nas-port format</pre>	<p>Expands the size of the NAS-Port attribute from 16 to 32 bits to display extended interface information.</p>

Command or Action	Purpose
Step 5 <code>exit</code> Example: <code>Router(config)# exit</code>	Returns to privileged EXEC mode.

Replacing NAS-Port Attribute with RADIUS Attribute

On platforms with multiple interfaces (ports) per slot, the Cisco RADIUS implementation will not provide a unique NAS-Port attribute that permits distinguishing between the interfaces. For example, if a dual PRI is in slot 1, calls on both Serial1/0:1 and Serial1/1:1 will appear as NAS-Port = 20101. This is because of the 16-bit field size limitation associated with RADIUS IETF NAS-Port attribute. In this case, replace the NAS-Port attribute with a VSA (RADIUS IETF attribute 26). Cisco's vendor ID is 9, and the Cisco-NAS-Port attribute is subtype 2. VSAs can be turned on by entering the **radius-server vsa send** command. The port information in this attribute is provided and configured using the **aaa nas port extended** command.

The standard NAS-Port attribute (RADIUS IETF attribute 5) will be sent. If you do not want this information to be sent, you can suppress it by using the **no radius-server attribute nas-port** command. After this command is configured, the standard NAS-Port attribute will no longer be sent.

To replace the NAS-Port attribute with RADIUS IETF attribute 26 and to display extended field information, perform the following task.

SUMMARY STEPS

1. **enable**
2. **configure terminal**
3. **radius-server vsa send [accounting | authentication]**
4. **aaa nas port extended**
5. **exit**

DETAILED STEPS

Command or Action	Purpose
Step 1 <code>enable</code> Example: <code>Router> enable</code>	Enables privileged EXEC mode. <ul style="list-style-type: none"> • Enter your password if prompted.
Step 2 <code>configure terminal</code> Example: <code>Router# configure terminal</code>	Enters global configuration mode.

Command or Action	Purpose
Step 3 <code>radius-server vsa send [accounting authentication]</code> Example: <pre>Router(config)# radius-server vsa send</pre>	Enables the network access server to recognize and use vendor-specific attributes as defined by RADIUS IETF attribute 26.
Step 4 <code>aaa nas port extended</code> Example: <pre>Router(config)# aaa nas port extended</pre>	Expands the size of the VSA NAS-Port field from 16 to 32 bits to display extended interface information.
Step 5 <code>exit</code> Example: <pre>Router(config)# exit</pre>	Returns to privileged EXEC mode.

Configuring AAA Server Groups

Configuring the router to use AAA server groups provides a way to group existing server hosts. This allows you to select a subset of the configured server hosts and use them for a particular service. A server group is used in conjunction with a global server-host list. The server group lists the IP addresses of the selected server hosts.

Server groups can also include multiple host entries for the same server, as long as each entry has a unique identifier. The combination of an IP address and a UDP port number creates a unique identifier, allowing different ports to be individually defined as RADIUS hosts providing a specific AAA service. In other words, this unique identifier enables RADIUS requests to be sent to different UDP ports on a server at the same IP address. If two different host entries on the same RADIUS server are configured for the same service--for example, accounting--the second host entry that is configured acts as failover backup to the first one. If the first host entry fails to provide accounting services, the network access server will try the second host entry configured on the same device for accounting services. (The RADIUS host entries will be tried in the order in which they are configured.)

To define a server host with a server group name, enter the following commands in global configuration mode. The listed server must exist in global configuration mode.

Each server in the group must be defined previously using the **radius-server host** command.

SUMMARY STEPS

1. **enable**
2. **configure terminal**
3. **radius-server host** {*hostname* | *ip-address*} [**auth-port** *port-number*] [**acct-port** *port-number*] [**timeout** *seconds*] [**retransmit** *retries*] [**key** *string*] [**alias** {*hostname* | *ip-address*}]
4. **aaa group server** {**radius** | **tacacs+**} *group-name*
5. **server** *ip-address* [**auth-port** *port-number*] [**acct-port** *port-number*]
6. **end**

DETAILED STEPS

Command or Action	Purpose
Step 1 enable Example: <pre>Router> enable</pre>	Enables privileged EXEC mode. <ul style="list-style-type: none"> • Enter your password if prompted.
Step 2 configure terminal Example: <pre>Router# configure terminal</pre>	Enters global configuration mode.
Step 3 radius-server host { <i>hostname</i> <i>ip-address</i> } [auth-port <i>port-number</i>] [acct-port <i>port-number</i>] [timeout <i>seconds</i>] [retransmit <i>retries</i>] [key <i>string</i>] [alias { <i>hostname</i> <i>ip-address</i> }] Example: <pre>Router(config)# radius-server host 10.45.1.2</pre>	Specifies and defines the IP address of the server host before configuring the AAA server group.
Step 4 aaa group server { radius tacacs+ } <i>group-name</i> Example: <pre>Router(config)# aaa group server radius group1</pre>	Defines the AAA server group with a group name. <ul style="list-style-type: none"> • All members of a group must be the same type, that is, RADIUS or TACACS+. This command puts the router in server group configuration mode.
Step 5 server <i>ip-address</i> [auth-port <i>port-number</i>] [acct-port <i>port-number</i>] Example: <pre>Router(config-sg-radius)# server 172.16.1.1 acct-port 1616</pre>	Associates a particular RADIUS server with the defined server group. <ul style="list-style-type: none"> • Each security server is identified by its IP address and UDP port number. • Repeat this step for each RADIUS server in the AAA server group.

Command or Action	Purpose
Step 6 <code>end</code> Example: <code>Router(config-sg-radius)# end</code>	Exits server group configuration mode and returns to privileged EXEC mode.

Configuring AAA Server Groups with Deadtime

After you have configured a server host with a server name, you can use the **deadtime** command to configure each server per server group. Configuring deadtime within a server group allows you to direct AAA traffic to separate groups of servers that have different operational characteristics.

Configuring deadtime is not limited to a global configuration. A separate timer is attached to each server host in every server group. Therefore, when a server is found to be unresponsive after numerous retransmissions and timeouts, the server is assumed to be dead. The timers attached to each server host in all server groups are triggered. In essence, the timers are checked and subsequent requests to a server (once it is assumed to be dead) are directed to alternate timers, if configured. When the network access server receives a reply from the server, it checks and stops all configured timers (if running) for that server in all server groups.

If the timer has expired, the server to which the timer is attached is assumed to be alive. This becomes the only server that can be tried for later AAA requests using the server groups to which the timer belongs.



Note

Because one server has different timers and may have different deadtime values configured in the server groups, the same server may, in the future, have different states (dead and alive) at the same time.



Note

To change the state of a server, you must start and stop all configured timers in all server groups.

The size of the server group will be slightly increased because of the addition of new timers and the deadtime attribute. The overall impact of the structure depends on the number and size of the server groups and how the servers are shared among server groups in a specific configuration.

To configure deadtime within a AAA server group, perform the following task.

SUMMARY STEPS

1. **enable**
2. **configure terminal**
3. **aaa group server radius *group***
4. **deadtime *minutes***
5. **end**

DETAILED STEPS

Command or Action	Purpose
<p>Step 1 <code>enable</code></p> <p>Example:</p> <pre>Router> enable</pre>	<p>Enables privileged EXEC mode.</p> <ul style="list-style-type: none"> Enter your password if prompted.
<p>Step 2 <code>configure terminal</code></p> <p>Example:</p> <pre>Router# configure terminal</pre>	<p>Enters global configuration mode.</p>
<p>Step 3 <code>aaa group server radius group</code></p> <p>Example:</p> <pre>Router(config)# aaa group server radius group1</pre>	<p>Defines a RADIUS type server group and enters server group configuration mode.</p>
<p>Step 4 <code>deadtime minutes</code></p> <p>Example:</p> <pre>Router(config-sg-radius)# deadtime 1</pre>	<p>Configures and defines deadtime value in minutes.</p> <p>Note Local server group deadtime will override the global configuration. If omitted from the local server group configuration, the deadtime value will be inherited from the master list.</p>
<p>Step 5 <code>end</code></p> <p>Example:</p> <pre>Router(config-sg-radius)# end</pre>	<p>Exits server group configuration mode and returns to privileged EXEC mode.</p>

Configuring AAA DNIS Preauthentication

DNIS preauthentication enables preauthentication at call setup based on the number dialed. The DNIS number is sent directly to the security server when a call is received. If authenticated by AAA, the call is accepted.

To configure DNIS preauthentication, perform the following task.

SUMMARY STEPS

1. **enable**
2. **configure terminal**
3. **aaa preauthorization**
4. **group {radius | tacacs+ | server-group}**
5. **dnis [password string]**
6. **end**

DETAILED STEPS

Command or Action	Purpose
Step 1 enable Example: <pre>Router> enable</pre>	Enables privileged EXEC mode. <ul style="list-style-type: none"> • Enter your password if prompted.
Step 2 configure terminal Example: <pre>Router# configure terminal</pre>	Enters global configuration mode.
Step 3 aaa preauthorization Example: <pre>Router(config)# aaa preauthorization</pre>	Enters AAA preauthentication configuration mode.
Step 4 group {radius tacacs+ server-group} Example: <pre>Router(config-preauth)# group radius</pre>	(Optional) Selects the security server to use for AAA preauthentication requests. <ul style="list-style-type: none"> • The default is RADIUS.
Step 5 dnis [password string] Example: <pre>Router (config-preauth)# dnis password dnispass</pre>	Enables preauthentication using DNIS and optionally specifies a password to use in Access-Request packets.

Command or Action	Purpose
Step 6 end	Exits AAA preauthentication configuration mode and returns to privileged EXEC mode.
Example: Router(config-preauth)# end	

Configuring AAA Server Group Selection Based on DNIS

Cisco IOS software allows you to assign a DNIS number to a particular AAA server group so that the server group can process authentication, authorization, and accounting requests for users dialing in to the network using that particular DNIS. Any phone line (a regular home phone or a commercial T1/PRI line) can be associated with several phone numbers. The DNIS number identifies the number that was called to reach you.

For example, suppose you want to share the same phone number with several customers, but you want to know which customer is calling before you pick up the phone. You can customize how you answer the phone because DNIS allows you to know which customer is calling when you answer.

Cisco routers with either ISDN or internal modems can receive the DNIS number. This functionality allows users to assign different RADIUS server groups for different customers (that is, different RADIUS servers for different DNIS numbers). Additionally, using server groups, you can specify the same server group for AAA services or a separate server group for each AAA service.

Cisco IOS software provides the flexibility to implement authentication and accounting services in several ways:

- Globally--AAA services are defined using global configuration access list commands and applied in general to all interfaces on a specific network access server.
- Per interface--AAA services are defined using interface configuration commands and applied specifically to the interface being configured on a specific network access server.
- DNIS mapping--You can use DNIS to specify an AAA server to supply AAA services.

Because each of these AAA configuration methods can be configured simultaneously, Cisco has established an order of precedence to determine which server or groups of servers provide AAA services. The order of precedence is as follows:

- Per DNIS--If you configure the network access server to use DNIS to identify or determine which server group provides AAA services, then this method takes precedence over any additional AAA selection method.
- Per interface--If you configure the network access server per interface to use access lists to determine how a server provides AAA services, this method takes precedence over any global configuration AAA access lists.
- Globally--If you configure the network access server by using global AAA access lists to determine how the security server provides AAA services, this method has the least precedence.



Note

Prior to configuring the AAA Server Group Selection Based on DNIS feature, you must configure the list of RADIUS server hosts and AAA server groups. See the sections [Configuring Router to RADIUS Server Communication](#), page 12 and [Configuring AAA Server Groups](#), page 19.

To configure the router to select a particular AAA server group based on the DNIS of the server group, configure DNIS mapping. To map a server group with a group name with DNIS number, perform the following task.

SUMMARY STEPS

1. **enable**
2. **configure terminal**
3. **aaa dnis map enable**
4. **aaa dnis map *dnis-number authentication ppp group server-group-name***
5. **aaa dnis map *dnis-number authorization network group server-group-name***
6. **aaa dnis map *dnis-number accounting network [none | start-stop | stop-only] group server-group-name***
7. **exit**

DETAILED STEPS

Command or Action	Purpose
<p>Step 1 enable</p> <p>Example:</p> <pre>Router> enable</pre>	<p>Enables privileged EXEC mode.</p> <ul style="list-style-type: none"> • Enter your password if prompted.
<p>Step 2 configure terminal</p> <p>Example:</p> <pre>Router# configure terminal</pre>	<p>Enters global configuration mode.</p>
<p>Step 3 aaa dnis map enable</p> <p>Example:</p> <pre>Router(config)# aaa dnis map enable</pre>	<p>Enables DNIS mapping.</p>

Command or Action	Purpose
<p>Step 4 <code>aaa dnis map <i>dnis-number</i> authentication ppp group <i>server-group-name</i></code></p> <p>Example:</p> <pre>Router(config)# aaa dnis map 7777 authentication ppp group sgl</pre>	Maps a DNIS number to a defined AAA server group; the servers in this server group are being used for authentication.
<p>Step 5 <code>aaa dnis map <i>dnis-number</i> authorization network group <i>server-group-name</i></code></p> <p>Example:</p> <pre>Router(config)# aaa dnis map 7777 authorization network group sgl</pre>	Maps a DNIS number to a defined AAA server group; the servers in this server group are being used for authorization.
<p>Step 6 <code>aaa dnis map <i>dnis-number</i> accounting network [none start-stop stop-only] group <i>server-group-name</i></code></p> <p>Example:</p> <pre>Router(config)# aaa dnis map 8888 accounting network stop-only group sg2</pre>	Maps a DNIS number to a defined AAA server group; the servers in this server group are being used for accounting.
<p>Step 7 <code>exit</code></p> <p>Example:</p> <pre>Router(config)# exit</pre>	Exits global configuration mode and returns to privileged EXEC mode.

Configuring AAA Preauthentication

Configuring AAA preauthentication with ISDN PRI or channel-associated signaling (CAS) allows service providers to better manage ports using their existing RADIUS solutions and efficiently manage the use of shared resources to offer differing service-level agreements. With ISDN PRI or CAS, information about an incoming call is available to the network access server (NAS) before the call is connected. The available call information includes the following:

- The DNIS number, also referred to as the called number
- The Calling Line Identification (CLID) number, also referred to as the calling number
- The call type, also referred to as the bearer capability

The AAA preauthentication feature allows a Cisco NAS to decide--on the basis of the DNIS number, the CLID number, or the call type--whether to connect an incoming call. (With ISDN PRI, it enables user authentication and authorization before a call is answered. With CAS, the call must be answered; however, the call can be dropped if preauthentication fails.)

When an incoming call arrives from the public network switch, but before it is connected, AAA preauthentication enables the NAS to send the DNIS number, CLID number, and call type to a RADIUS

server for authorization. If the server authorizes the call, then the NAS accepts the call. If the server does not authorize the call, then the NAS sends a disconnect message to the public network switch to reject the call.

In the event that the RADIUS server application becomes unavailable or is slow to respond, a guard timer can be set in the NAS. When the timer expires, the NAS uses a configurable parameter to accept or reject the incoming call that has no authorization.

The AAA preauthentication feature supports the use of attribute 44 by the RADIUS server application and the use of RADIUS attributes that are configured in the RADIUS preauthentication profiles to specify preauthentication behavior. They may also be used, for instance, to specify whether subsequent authentication should occur and, if so, what authentication method should be used.

The following restrictions apply to AAA preauthentication with ISDN PRI and CAS:

- Attribute 44 is available for CAS calls only when preauthentication or resource pooling is enabled.
- Multichassis Multilink PPP (MMP) is not available with ISDN PRI.
- AAA preauthentication is available only on the Cisco AS5300, Cisco AS5400, and Cisco AS5800 platforms.



Note

Prior to configuring AAA preauthentication, you must enable the **aaa new-model** command and make sure that the supporting preauthentication application is running on a RADIUS server in your network.

To configure AAA preauthentication, perform the following task.

SUMMARY STEPS

1. **enable**
2. **configure terminal**
3. **aaa preauthorization**
4. **group** *server-group*
5. **clid** [**if-avail** | **required**] [**accept-stop**] [**password** *string*]
6. **ctype** [**if-avail** | **required**] [**accept-stop**] [**password** *string*]
7. **dnis** [**if-avail** | **required**] [**accept-stop**] [**password** *string*]
8. **dnis bypass** *dnis-group-name*
9. **end**

DETAILED STEPS

Command or Action	Purpose
<p>Step 1 enable</p> <p>Example:</p> <pre>Router> enable</pre>	<p>Enables privileged EXEC mode.</p> <ul style="list-style-type: none"> • Enter your password if prompted.

Command or Action	Purpose
<p>Step 2 <code>configure terminal</code></p> <p>Example:</p> <pre>Router# configure terminal</pre>	Enters global configuration mode.
<p>Step 3 <code>aaa preauthorization</code></p> <p>Example:</p> <pre>Router(config)# aaa preauthorization</pre>	Enters AAA preauthentication configuration mode.
<p>Step 4 <code>group server-group</code></p> <p>Example:</p> <pre>Router(config-preauth)# group sg2</pre>	Specifies the AAA RADIUS server group to use for preauthentication.
<p>Step 5 <code>clid [if-avail required] [accept-stop] [password string]</code></p> <p>Example:</p> <pre>Router(config-preauth)# clid required</pre>	Preauthenticates calls on the basis of the CLID number.
<p>Step 6 <code>ctype [if-avail required] [accept-stop] [password string]</code></p> <p>Example:</p> <pre>Router(config-preauth)# ctype required</pre>	Preauthenticates calls on the basis of the call type.
<p>Step 7 <code>dnis [if-avail required] [accept-stop] [password string]</code></p> <p>Example:</p> <pre>Router(config-preauth)# dnis required</pre>	Preauthenticates calls on the basis of the DNIS number.
<p>Step 8 <code>dnis bypass dnis-group-name</code></p> <p>Example:</p> <pre>Router(config-preauth)# dnis bypass group1</pre>	Specifies a group of DNIS numbers that will be bypassed for preauthentication.

Command or Action	Purpose
Step 9 <code>end</code> Example: <code>Router(config-preauth)# end</code>	Exits preauthentication configuration mode and returns to privileged EXEC mode.

Configuring DNIS Preauthentication

To configure DNIS preauthentication, perform the following task.

SUMMARY STEPS

1. `enable`
2. `configure terminal`
3. `aaa preauthorization`
4. `group {radius | tacacs+ | server-group}`
5. `dnis [password string]`
6. `end`

DETAILED STEPS

Command or Action	Purpose
Step 1 <code>enable</code> Example: <code>Router> enable</code>	Enables privileged EXEC mode. <ul style="list-style-type: none"> • Enter your password if prompted.
Step 2 <code>configure terminal</code> Example: <code>Router# configure terminal</code>	Enters global configuration mode.
Step 3 <code>aaa preauthorization</code> Example: <code>Router(config)# aaa preauthorization</code>	Enters AAA preauthentication mode.

Command or Action	Purpose
<p>Step 4 <code>group {radius tacacs+ server-group}</code></p> <p>Example:</p> <pre>Router (config-preauth)# group radius</pre>	<p>(Optional) Selects the security server to use for AAA preauthentication requests.</p> <ul style="list-style-type: none"> The default is RADIUS.
<p>Step 5 <code>dnis [password string]</code></p> <p>Example:</p> <pre>Router(config-preauth)# dnis password dnisspass</pre>	<p>Enables preauthentication using DNIS and optionally specifies a password to use in Access-Request packets.</p>
<p>Step 6 <code>end</code></p> <p>Example:</p> <pre>Router(config-preauth)# end</pre>	<p>Exits AAA preauthentication configuration mode and returns to privileged EXEC mode.</p>

Configuring a Guard Timer

Because response times for preauthentication and authentication requests can vary, the guard timer allows you to control the handling of calls. The guard timer starts when the DNIS is sent to the RADIUS server. If the NAS does not receive a response from AAA before the guard timer expires, it accepts or rejects the calls on the basis of the configuration of the timer.

To set a guard timer to accept or reject a call in the event that the RADIUS server fails to respond to an authentication or preauthentication request, perform the following task.

SUMMARY STEPS

- enable**
- configure terminal**
- interface** *type number*
- isdn guard-timer** *milliseconds* [**on-expiry** {**accept** | **reject**}]
- call guard-timer** *milliseconds* [**on-expiry** {**accept** | **reject**}]
- end**

DETAILED STEPS

Command or Action	Purpose
<p>Step 1 <code>enable</code></p> <p>Example:</p> <pre>Router> enable</pre>	<p>Enables privileged EXEC mode.</p> <ul style="list-style-type: none"> Enter your password if prompted.
<p>Step 2 <code>configure terminal</code></p> <p>Example:</p> <pre>Router# configure terminal</pre>	<p>Enters global configuration mode.</p>
<p>Step 3 <code>interface type number</code></p> <p>Example:</p> <pre>Router(config)# interface serial 1/0/0:23</pre>	<p>Enters interface configuration mode.</p>
<p>Step 4 <code>isdn guard-timer milliseconds [on-expiry {accept reject}]</code></p> <p>Example:</p> <pre>Router(config-if)# isdn guard-timer 8000 on-expiry reject</pre>	<p>Sets an ISDN guard timer to accept or reject a call in the event that the RADIUS server fails to respond to a preauthentication request.</p>
<p>Step 5 <code>call guard-timer milliseconds [on-expiry {accept reject}]</code></p> <p>Example:</p> <pre>Router(config-if)# call guard-timer 2000 on-expiry accept</pre>	<p>Sets a CAS guard timer to accept or reject a call in the event that the RADIUS server fails to respond to a preauthentication request.</p>
<p>Step 6 <code>end</code></p> <p>Example:</p> <pre>Router(config-if)# end</pre>	<p>Exits interface configuration mode and returns to privileged EXEC mode.</p>

Configuring the Suffix and Password in RADIUS Access Requests

Large-scale dial-out eliminates the need to configure dialer maps on every NAS for every destination. Instead, you can create remote site profiles that contain outgoing call attributes on the AAA server. The profile is downloaded by the NAS when packet traffic requires a call to be placed to a remote site.

You can configure the username in the Access-Request message to RADIUS. The default suffix of the username, “-out,” is appended to the username. The format for composing the username attribute is the IP address plus the configured suffix.

To provide username configuration capability for large-scale dial-out, the **dialer aaa** command is implemented with the new **suffix** and **password** keywords.

To configure the suffix and password in RADIUS access requests, perform the following task.

SUMMARY STEPS

1. **enable**
2. **configure terminal**
3. **aaa new-model**
4. **aaa route download** *time*
5. **aaa authorization configuration default**
6. **interface dialer** *number*
7. **dialer aaa**
8. **dialer aaa suffix** *suffix* **password** *password*
9. **exit**

DETAILED STEPS

	Command or Action	Purpose
Step 1	enable Example: Router> enable	Enables privileged EXEC mode. <ul style="list-style-type: none"> • Enter your password if prompted.
Step 2	configure terminal Example: Router# configure terminal	Enters global configuration mode.
Step 3	aaa new-model Example: Router(config)# aaa new-model	Enables the AAA access control model.
Step 4	aaa route download <i>time</i> Example: Router(config)# aaa route download 450	Enables the download static route feature and sets the amount of time between downloads.

Command or Action	Purpose
<p>Step 5 <code>aaa authorization configuration default</code></p> <p>Example:</p> <pre>Router(config)# aaa authorization configuration default</pre>	Downloads static route configuration information from the AAA server using TACACS+ or RADIUS.
<p>Step 6 <code>interface dialer number</code></p> <p>Example:</p> <pre>Router(config)# interface dialer 1</pre>	Defines a dialer rotary group and enters interface configuration mode.
<p>Step 7 <code>dialer aaa</code></p> <p>Example:</p> <pre>Router(config-if)# dialer aaa</pre>	Allows a dialer to access the AAA server for dialing information.
<p>Step 8 <code>dialer aaa suffix suffix password password</code></p> <p>Example:</p> <pre>Router(config-if)# dialer aaa suffix @samp password password12</pre>	Allows a dialer to access the AAA server for dialing information and specifies a suffix and nondefault password for authentication.
<p>Step 9 <code>exit</code></p> <p>Example:</p> <pre>Router(config-if)# exit</pre>	Exits interface configuration mode and returns to privileged EXEC mode.

Monitoring and Maintaining RADIUS

To monitor and maintain RADIUS, use the following commands.

SUMMARY STEPS

1. `enable`
2. `debug radius`
3. `show radius statistics`
4. `show aaa servers`
5. `exit`

DETAILED STEPS

Command or Action	Purpose
<p>Step 1 <code>enable</code></p> <p>Example:</p> <pre>Router> enable</pre>	<p>Enables privileged EXEC mode.</p> <ul style="list-style-type: none"> • Enter your password if prompted.
<p>Step 2 <code>debug radius</code></p> <p>Example:</p> <pre>Router# debug radius</pre>	<p>Displays information associated with RADIUS.</p>
<p>Step 3 <code>show radius statistics</code></p> <p>Example:</p> <pre>Router# show radius statistics</pre>	<p>Displays the RADIUS statistics for accounting and authentication packets.</p>
<p>Step 4 <code>show aaa servers</code></p> <p>Example:</p> <pre>Router# show aaa servers</pre>	<p>Displays the status and number of packets that are sent to and received from all public and private AAA RADIUS servers as interpreted by the AAA Server MIB.</p>
<p>Step 5 <code>exit</code></p> <p>Example:</p> <pre>Router# exit</pre>	<p>Exits the router session.</p>

Configuration Examples for RADIUS

- [Example RADIUS Authentication and Authorization, page 35](#)
- [Example RADIUS Authentication Authorization and Accounting, page 35](#)
- [Example Vendor-Proprietary RADIUS Configuration, page 36](#)
- [Example RADIUS Server with Server-Specific Values, page 37](#)
- [Example Multiple RADIUS Servers with Global and Server-Specific Values, page 37](#)
- [Example Multiple RADIUS Server Entries for the Same Server IP Address, page 37](#)
- [Example RADIUS Server Group, page 37](#)
- [Example Multiple RADIUS Server Entries Using AAA Server Groups, page 38](#)
- [Example AAA Server Group Selection Based on DNIS, page 38](#)
- [Example AAA Preauthentication, page 39](#)

- [Example RADIUS User Profile with RADIUS Tunneling Attributes](#), page 40
- [Example Guard Timer](#), page 40

Example RADIUS Authentication and Authorization

The following example shows how to configure the router to authenticate and authorize using RADIUS:

```
aaa authentication login use-radius group radius local
aaa authentication ppp user-radius if-needed group radius
aaa authorization exec default group radius
aaa authorization network default group radius
```

The lines in this sample RADIUS authentication and authorization configuration are defined as follows:

- The **aaa authentication login use-radius group radius local** command configures the router to use RADIUS for authentication at the login prompt. If RADIUS returns an error, the user is authenticated using the local database. In this example, **use-radius** is the name of the method list, which specifies RADIUS and then local authentication.
- The **aaa authentication ppp user-radius if-needed group radius** command configures the Cisco IOS software to use RADIUS authentication for lines using PPP with CHAP or PAP if the user has not already been authorized. If the EXEC facility has authenticated the user, RADIUS authentication is not performed. In this example, **user-radius** is the name of the method list defining RADIUS as the if-needed authentication method.
- The **aaa authorization exec default group radius** command sets the RADIUS information that is used for EXEC authorization, autocommands, and access lists.
- The **aaa authorization network default group radius** command sets RADIUS for network authorization, address assignment, and access lists.

Example RADIUS Authentication Authorization and Accounting

The following example shows a general configuration using RADIUS with the AAA command set:

```
radius-server host 10.45.1.2
radius-server key myRaDiUSpassWoRd
username root password ALongPassword
aaa authentication ppp dialins group radius local
aaa authorization network default group radius local
aaa accounting network default start-stop group radius
aaa authentication login admins local
aaa authorization exec default local
line 1 16
  autoselect ppp
  autoselect during-login
  login authentication admins
  modem ri-is-cd
interface group-async 1
  encaps ppp
  ppp authentication pap dialins
```

The lines in this example RADIUS authentication, authorization, and accounting configuration are defined as follows:

- The **radius-server host** command defines the IP address of the RADIUS server host.
- The **radius-server key** command defines the shared secret text string between the network access server and the RADIUS server host.
- The **aaa authentication ppp dialins group radius local** command defines the authentication method list “dialins,” which specifies that RADIUS authentication and then (if the RADIUS server does not respond) local authentication will be used on serial lines using PPP.

- The **aaa authorization network default group radius local** command is used to assign an address and other network parameters to the RADIUS user.
- The **aaa accounting network default start-stop group radius** command tracks PPP usage.
- The **aaa authentication login admins local** command defines another method list, “admins,” for login authentication.
- The **login authentication admins** command applies the “admins” method list for login authentication.
- The **ppp authentication pap dialins** command applies the “dialins” method list to the lines specified.

Example Vendor-Proprietary RADIUS Configuration

The following example shows a general configuration using vendor-proprietary RADIUS with the AAA command set:

```
radius-server host host1 non-standard
radius-server key myRaDiUSpassWoRd
radius-server configure-nas
username root password ALongPassword
aaa authentication ppp dialins group radius local
aaa authorization network default group radius local
aaa accounting network default start-stop group radius
aaa authentication login admins local
aaa authorization exec default local
line 1 16
autoselect ppp
autoselect during-login
login authentication admins
modem ri-is-cd
interface group-async 1
encaps ppp
ppp authentication pap dialins
```

The lines in this RADIUS authentication, authorization, and accounting configuration example are defined as follows:

- The **radius-server host non-standard** command defines the name of the RADIUS server host and identifies that this RADIUS host uses a vendor-proprietary version of RADIUS.
- The **radius-server key** command defines the shared secret text string between the network access server and the RADIUS server host.
- The **radius-server configure-nas** command defines that the Cisco router or access server will query the RADIUS server for static routes and IP pool definitions when the device first starts up.
- The **aaa authentication ppp dialins group radius local** command defines the authentication method list “dialins,” which specifies that RADIUS authentication, and then (if the RADIUS server does not respond) local authentication will be used on serial lines using PPP.
- The **aaa authorization network default group radius local** command is used to assign an address and other network parameters to the RADIUS user.
- The **aaa accounting network default start-stop group radius** command tracks PPP usage.
- The **aaa authentication login admins local** command defines another method list, “admins,” for login authentication.
- The **login authentication admins** command applies the “admins” method list for login authentication.
- The **ppp authentication pap dialins** command applies the “dialins” method list to the lines specified.

Example RADIUS Server with Server-Specific Values

The following example shows how to configure server-specific timeout, retransmit, and key values for the RADIUS server with IP address 172.31.39.46:

```
radius-server host 172.31.39.46 timeout 6 retransmit 5 key rad123
```

Example Multiple RADIUS Servers with Global and Server-Specific Values

The following example shows how to configure two RADIUS servers with specific timeout, retransmit, and key values. In this example, the **aaa new-model** command enables AAA services on the router, and specific AAA commands define the AAA services. The **radius-server retransmit** command changes the global retransmission value to 4 for all RADIUS servers. The **radius-server host** command configures specific timeout, retransmission, and key values for the RADIUS server hosts with IP addresses 172.16.1.1 and 172.29.39.46.

```
! Enable AAA services on the router and define those services.
aaa new-model
aaa authentication login default group radius
aaa authentication login console-login none
aaa authentication ppp default group radius
aaa authorization network default group radius
aaa accounting exec default start-stop group radius
aaa accounting network default start-stop group radius
enable password tryit1
!
! Change the global retransmission value for all RADIUS servers.
radius-server retransmit 4
!
! Configure per-server specific timeout, retransmission, and key values.
! Change the default auth-port and acct-port values.
radius-server host 172.16.1.1 auth-port 1612 acct-port 1616 timeout 3 retransmit 3 key
radkey
!
! Configure per-server specific timeout and key values. This server uses the global
! retransmission value.
radius-server host 172.29.39.46 timeout 6 key rad123
```

Example Multiple RADIUS Server Entries for the Same Server IP Address

The following example shows how to configure the network access server to recognize several RADIUS host entries with the same IP address. Two different host entries on the same RADIUS server are configured for the same services--authentication and accounting. The second host entry configured acts as failover backup to the first one. (The RADIUS host entries will be tried in the order they are configured.)

```
! This command enables AAA.
aaa new-model
! The next command configures default RADIUS parameters.
aaa authentication ppp default group radius
! The next set of commands configures multiple host entries for the same IP address.
radius-server host 172.20.0.1 auth-port 1000 acct-port 1001
radius-server host 172.20.0.1 auth-port 2000 acct-port 2000
```

Example RADIUS Server Group

The following example shows how to create server group radgroup1 with three different RADIUS server members, each using the default authentication port (1645) and accounting port (1646):

```
aaa group server radius radgroup1
```

```
server 172.16.1.11
server 172.17.1.21
server 172.18.1.31
```

The following example shows how to create server group radgroup2 with three RADIUS server members, each with the same IP address but with unique authentication and accounting ports:

```
aaa group server radius radgroup2
server 172.16.1.1 auth-port 1000 acct-port 1001
server 172.16.1.1 auth-port 2000 acct-port 2001
server 172.16.1.1 auth-port 3000 acct-port 3001
```

Example Multiple RADIUS Server Entries Using AAA Server Groups

The following example shows how to configure the network access server to recognize two different RADIUS server groups. One of these groups, group1, has two different host entries on the same RADIUS server configured for the same services. The second host entry configured acts as failover backup to the first one. Each group is individually configured for deadtime; deadtime for group 1 is one minute, and deadtime for group 2 is two minutes.



Note

In cases where both global commands and server commands are used, the server command will take precedence over the global command.

```
! This command enables AAA.
aaa new-model
! The next command configures default RADIUS parameters.
aaa authentication ppp default group group1
! The following commands define the group1 RADIUS server group and associate servers
! with it and configures a deadtime of one minute.
aaa group server radius group1
server 10.1.1.1 auth-port 1645 acct-port 1646
server 10.2.2.2 auth-port 2000 acct-port 2001
deadtime 1
! The following commands define the group2 RADIUS server group and associate servers
! with it and configures a deadtime of two minutes.
aaa group server radius group2
server 10.2.2.2 auth-port 2000 acct-port 2001
server 10.3.3.3 auth-port 1645 acct-port 1646
deadtime 2
! The following set of commands configures the RADIUS attributes for each host entry
! associated with one of the defined server groups.
radius-server host 10.1.1.1 auth-port 1645 acct-port 1646
radius-server host 10.2.2.2 auth-port 2000 acct-port 2001
radius-server host 10.3.3.3 auth-port 1645 acct-port 1646
```

Example AAA Server Group Selection Based on DNIS

The following example shows how to select RADIUS server groups based on DNIS to provide specific AAA services:

```
! This command enables AAA.
aaa new-model
!
! The following set of commands configures the RADIUS attributes for each server
! that will be associated with one of the defined server groups.
radius-server host 172.16.0.1 auth-port 1645 acct-port 1646 key cisco1
radius-server host 172.17.0.1 auth-port 1645 acct-port 1646 key cisco2
radius-server host 172.18.0.1 auth-port 1645 acct-port 1646 key cisco3
radius-server host 172.19.0.1 auth-port 1645 acct-port 1646 key cisco4
radius-server host 172.20.0.1 auth-port 1645 acct-port 1646 key cisco5
! The following commands define the sgl RADIUS server group and associate servers
```

```

! with it.
aaa group server radius sg1
  server 172.16.0.1
  server 172.17.0.1
! The following commands define the sg2 RADIUS server group and associate a server
! with it.
aaa group server radius sg2
  server 172.18.0.1
! The following commands define the sg3 RADIUS server group and associate a server
! with it.
aaa group server radius sg3
  server 172.19.0.1
! The following commands define the default-group RADIUS server group and associate
! a server with it.
aaa group server radius default-group
  server 172.20.0.1
! The next set of commands configures default-group RADIUS server group parameters.
aaa authentication ppp default group default-group
aaa accounting network default start-stop group default-group
!
! The next set of commands enables DNIS mapping and maps DNIS numbers to the defined
! RADIUS server groups. In this configuration, all PPP connection requests using
! DNIS 7777 are sent to the sg1 server group. The accounting records for these
! connections (specifically, start-stop records) are handled by the sg2 server group.
! Calls with a DNIS of 8888 use server group sg3 for authentication and server group
! default-group for accounting. Calls with a DNIS of 9999 use server group
! default-group for authentication and server group sg3 for accounting records
! (stop records only). All other calls with DNIS other than the ones defined use the
! server group default-group for both authentication and stop-start accounting records.
aaa dnis map enable
aaa dnis map 7777 authentication ppp group sg1
aaa dnis map 7777 accounting network start-stop group sg2
aaa dnis map 8888 authentication ppp group sg3
aaa dnis map 9999 accounting network stop-only group sg3

```

Example AAA Preauthentication

The following is a simple configuration that specifies that the DNIS number be used for preauthentication:

```

aaa preauthentication
  group radius
  dnis required

```

The following example shows a configuration that specifies that both the DNIS number and the CLID number be used for preauthentication. DNIS preauthentication will be performed first, followed by CLID preauthentication.

```

aaa preauthentication
  group radius
  dnis required
  clid required

```

The following example specifies that preauthentication be performed on all DNIS numbers except the two DNIS numbers specified in the DNIS group called “dnis-group1”:

```

aaa preauthentication
  group radius
  dnis required
  dnis bypass dnis-group1
dialer dnis group dnis-group1
  number 12345
  number 12346

```

The following is a sample AAA configuration with DNIS preauthentication:

```

aaa new-model
aaa authentication login CONSOLE none
aaa authentication login RADIUS_LIST group radius

```

```

aaa authentication login TAC_PLUS group tacacs+ enable
aaa authentication login V.120 none
aaa authentication enable default enable group tacacs+
aaa authentication ppp RADIUS_LIST if-needed group radius
aaa authorization exec RADIUS_LIST group radius if-authenticated
aaa authorization exec V.120 none
aaa authorization network default group radius if-authenticated
aaa authorization network RADIUS_LIST if-authenticated group radius
aaa authorization network V.120 group radius if-authenticated
aaa accounting suppress null-username
aaa accounting exec default start-stop group radius
aaa accounting commands 0 default start-stop group radius
aaa accounting network default start-stop group radius
aaa accounting connection default start-stop group radius
aaa accounting system default start-stop group radius
aaa preauthentication
  dnis password Cisco-DNIS
aaa nas port extended
!
radius-server configure-nas
radius-server host 10.0.0.0 auth-port 1645 acct-port 1646 non-standard
radius-server host 10.255.255.255 auth-port 1645 acct-port 1646 non-standard
radius-server retransmit 2
radius-server deadtime 1
radius-server attribute nas-port format c
radius-server unique-ident 18
radius-server key MyKey

```

**Note**

To configure preauthentication, you must also set up preauthentication profiles on the RADIUS server.

Example RADIUS User Profile with RADIUS Tunneling Attributes

The following example shows a RADIUS user profile (Merit Daemon format) that includes RADIUS tunneling attributes. This entry supports two tunnels, one for L2F and the other for L2TP. The tag entries with :1 support L2F tunnels, and the tag entries with :2 support L2TP tunnels.

```

cisco.com Password = "PASSWORD3", Service-Type = Outbound
Service-Type = Outbound,
Tunnel-Type = :1:L2F,
Tunnel-Medium-Type = :1:IP,
Tunnel-Client-Endpoint = :1:"10.0.0.2",
Tunnel-Server-Endpoint = :1:"10.0.0.3",
Tunnel-Client-Auth-Id = :1:"l2f-cli-auth-id",
Tunnel-Server-Auth-Id = :1:"l2f-svr-auth-id",
Tunnel-Assignment-Id = :1:"l2f-assignment-id",
Cisco-Avpair = "vpdn:nas-password=l2f-cli-pass",
Cisco-Avpair = "vpdn:gw-password=l2f-svr-pass",
Tunnel-Preference = :1:1,
Tunnel-Type = :2:L2TP,
Tunnel-Medium-Type = :2:IP,
Tunnel-Client-Endpoint = :2:"10.0.0.2",
Tunnel-Server-Endpoint = :2:"10.0.0.3",
Tunnel-Client-Auth-Id = :2:"l2tp-cli-auth-id",
Tunnel-Server-Auth-Id = :2:"l2tp-svr-auth-id",
Tunnel-Assignment-Id = :2:"l2tp-assignment-id",
Cisco-Avpair = "vpdn:l2tp-tunnel-password=l2tp-tnl-pass",
Tunnel-Preference = :2:2

```

Example Guard Timer

The following example shows an ISDN guard timer that is set at 8000 milliseconds. A call will be rejected if the RADIUS server has not responded to a preauthentication request when the timer expires.

```

interface serial 1/0/0:23

```



```

isdn guard-timer 8000 on-expiry reject
aaa preauthentication
group radius
dnis required

```

The following example shows a CAS guard timer that is set at 20,000 milliseconds. A call will be accepted if the RADIUS server has not responded to a preauthentication request when the timer expires.

```

controller T1 0
framing esf
clock source line primary
linecode b8zs
ds0-group 0 timeslots 1-24 type e&m-fgb dtmf dnis
cas-custom 0
call guard-timer 20000 on-expiry accept
aaa preauthentication
group radius
dnis required

```

Additional References

Related Documents

Related Topic	Document Title
Cisco IOS commands	Cisco IOS Master Commands List, All Releases
AAA and RADIUS commands	<i>Cisco IOS Security Command Reference</i>
RADIUS attributes	“RADIUS Attributes Overview and RADIUS IETF Attributes” module
AAA	<ul style="list-style-type: none"> • “Configuring Authentication” module • “Configuring Authorization” module • “Configuring Accounting” module
L2F, L2TP, VPN, or VPDN	<i>Cisco IOS Dial Technologies Configuration Guide</i> and <i>Cisco IOS VPDN Configuration Guide</i>
Modem configuration and management	<i>Cisco IOS Dial Technologies Configuration Guide</i>
RADIUS port identification for PPP	<i>Cisco IOS Wide-Area Networking Configuration Guide</i>

Standards

Standard	Title
None	--

MIBs

MIB	MIBs Link
None	To locate and download MIBs for selected platforms, Cisco IOS releases, and feature sets, use Cisco MIB Locator found at the following URL: http://www.cisco.com/go/mibs

RFCs

RFC	Title
RFC 2139	<i>RADIUS Accounting</i>
RFC 2865	<i>Remote Authentication Dial-In User Service (RADIUS)</i>
RFC 2867	<i>RADIUS Accounting Modifications for Tunnel Protocol Support</i>
RFC 2868	<i>RADIUS Attributes for Tunnel Protocol Support</i>

Technical Assistance

Description	Link
The Cisco Support and Documentation website provides online resources to download documentation, software, and tools. Use these resources to install and configure the software and to troubleshoot and resolve technical issues with Cisco products and technologies. Access to most tools on the Cisco Support and Documentation website requires a Cisco.com user ID and password.	http://www.cisco.com/cisco/web/support/index.html

Feature Information for Configuring RADIUS

The following table provides release information about the feature or features described in this module. This table lists only the software release that introduced support for a given feature in a given software release train. Unless noted otherwise, subsequent releases of that software release train also support that feature.

Use Cisco Feature Navigator to find information about platform support and Cisco software image support. To access Cisco Feature Navigator, go to www.cisco.com/go/cfn. An account on Cisco.com is not required.

Table 4 **Feature Information for Configuring RADIUS**

Feature Name	Releases	Feature Information
Configuring RADIUS	11.1	<p>The RADIUS security system is a distributed client/server system that secures networks against unauthorized access. In the Cisco implementation, RADIUS clients run on Cisco routers and send authentication requests to a central RADIUS server that contains all user authentication and network service access information. RADIUS is a fully open protocol, distributed in source code format, that can be modified to work with any security system currently available.</p> <p>This feature was introduced in Cisco IOS Release 11.1.</p>
Radius Statistics via SNMP	15.1(1)S 15.1(4)M	<p>This feature provides statistics related to RADIUS traffic and private radius servers.</p> <p>The following commands were modified: show aaa servers, show radius statistics.</p>

Cisco and the Cisco logo are trademarks or registered trademarks of Cisco and/or its affiliates in the U.S. and other countries. To view a list of Cisco trademarks, go to this URL: www.cisco.com/go/trademarks. Third-party trademarks mentioned are the property of their respective owners. The use of the word partner does not imply a partnership relationship between Cisco and any other company. (1110R)

Any Internet Protocol (IP) addresses and phone numbers used in this document are not intended to be actual addresses and phone numbers. Any examples, command display output, network topology diagrams, and other figures included in the document are shown for illustrative purposes only. Any use of actual IP addresses or phone numbers in illustrative content is unintentional and coincidental.



Framed-Route in RADIUS Accounting

The Framed-Route in RADIUS Accounting feature provides for the presence of Framed-Route (RADIUS attribute 22) information in RADIUS Accounting-Request accounting records. The Framed-Route information is returned to the RADIUS server in the Accounting-Request packets. The Framed-Route information can be used to verify that a per-user route or routes have been applied for a particular static IP customer on the network access server (NAS).

- [Finding Feature Information, page 45](#)
- [Prerequisites for Framed-Route in RADIUS Accounting, page 45](#)
- [Information About Framed-Route in RADIUS Accounting, page 45](#)
- [How to Monitor Framed-Route in RADIUS Accounting, page 46](#)
- [Additional References, page 47](#)
- [Feature Information for Framed-Route in RADIUS Accounting, page 48](#)

Finding Feature Information

Your software release may not support all the features documented in this module. For the latest feature information and caveats, see the release notes for your platform and software release. To find information about the features documented in this module, and to see a list of the releases in which each feature is supported, see the Feature Information Table at the end of this document.

Use Cisco Feature Navigator to find information about platform support and Cisco software image support. To access Cisco Feature Navigator, go to www.cisco.com/go/cfn. An account on Cisco.com is not required.

Prerequisites for Framed-Route in RADIUS Accounting

Be familiar with configuring authentication, authorization, and accounting (AAA), RADIUS servers, and RADIUS attribute screening.

Information About Framed-Route in RADIUS Accounting

- [Framed-Route Attribute 22, page 46](#)
- [Framed-Route in RADIUS Accounting Packets, page 46](#)

Framed-Route Attribute 22

Framed-Route, attribute 22 as defined in Internet Engineering Task Force (IETF) standard RFC 2865, provides for routing information to be configured for the user on the NAS. The Framed-Route attribute information is usually sent from the RADIUS server to the NAS in Access-Accept packets. The attribute can appear multiple times.

Framed-Route in RADIUS Accounting Packets

The Framed-Route attribute information in RADIUS accounting packets shows per-user routes that have been applied for a particular static IP customer on the NAS. The Framed-Route attribute information is currently sent in Access-Accept packets. Effective with Cisco IOS Release 12.3(4)T, the Framed-Route attribute information is also sent in Accounting-Request packets if it was provided in the Access-Accept packets and was applied successfully. Zero or more instances of the Framed-Route attribute may be present in the Accounting-Request packets.



Note

If there is more than one Framed-Route attribute in an Access-Accept packet, there can also be more than one Framed-Route attribute in the Accounting-Request packet.

The Framed-Route information is returned in Stop and Interim accounting records and in Start accounting records when accounting Delay-Start is configured.

No configuration is required to have the Frame-Route attribute information returned in the RADIUS accounting packets.

How to Monitor Framed-Route in RADIUS Accounting

Use the **debug radius** command to monitor whether Framed-Route (attribute 22) information is being sent in RADIUS Accounting-Request packets.

In the following example, the **debug radius** command is used to verify that Framed-Route (attribute 22) information is being sent in the Accounting-Request packets (see the line 00:06:23: RADIUS: Framed-Route [22] 26 "10.80.0.1 255.255.255.255 10.60.0.1 100").

```
Router# debug radius
00:06:23: RADIUS: Send to unknown id 0 10.1.0.2:1645, Access-Request, len 126
00:06:23: RADIUS: authenticator 40 28 A8 BC 76 D4 AA 88 - 5A E9 C5 55 0E 50 84 37
00:06:23: RADIUS: Framed-Protocol [7] 6 PPP [1]
00:06:23: RADIUS: User-Name [1] 14 "nari@trw1001"
00:06:23: RADIUS: CHAP-Password [3] 19 *
00:06:23: RADIUS: NAS-Port [5] 6 1
00:06:23: RADIUS: Vendor, Cisco [26] 33
00:06:23: RADIUS: Cisco AVpair [1] 27 "interface=Virtual-Access1"
00:06:23: RADIUS: NAS-Port-Type [61] 6 Virtual [5]
00:06:23: RADIUS: Service-Type [6] 6 Framed [2]
00:06:23: RADIUS: NAS-IP-Address [4] 6 12.1.0.1
00:06:23: RADIUS: Acct-Session-Id [44] 10 "00000002"
00:06:23: RADIUS: Received from id 0 10.1.0.2:1645, Access-Accept, len 103
00:06:23: RADIUS: authenticator 5D 2D 9F 25 11 15 45 B2 - 54 BB 7F EB CE 79 20 3B
00:06:23: RADIUS: Vendor, Cisco [26] 33
00:06:23: RADIUS: Cisco AVpair [1] 27 "interface=Virtual-Access1"
00:06:23: RADIUS: Service-Type [6] 6 Framed [2]
00:06:23: RADIUS: Framed-Protocol [7] 6 PPP [1]
00:06:23: RADIUS: Framed-IP-Netmask [9] 6 255.255.255.255
00:06:23: RADIUS: Framed-IP-Address [8] 6 10.60.0.1
00:06:23: RADIUS: Framed-Route [22] 26 "10.80.0.1 255.255.255.255 10.60.0.1
```

```

100"          <=====
00:06:23: RADIUS: Received from id 2
00:06:24: %LINEPROTO-5-UPDOWN: Line protocol on Interface Virtual-Access1, changed state
to up
00:06:25: AAA/AUTHOR: Processing PerUser AV route
00:06:25: V11 AAA/PERUSER/ROUTE: route string: IP route 10.80.0.1 255.255.255.255
10.60.0.1 100
00:06:25: RADIUS/ENCODE(00000002): Unsupported AAA attribute timezone
00:06:25: RADIUS(00000002): sending
00:06:25: RADIUS: Send to unknown id 1 10.1.0.2:1646, Accounting-Request, len 278
00:06:25: RADIUS: authenticator E0 CC 99 EB 49 18 B9 78 - 4A 09 60 0F 4E 92 24 C6
00:06:25: RADIUS: Acct-Session-Id [44] 10 "00000002"
00:06:25: RADIUS: Tunnel-Server-Endpoi[67] 12 00:"10.1.1.1"
00:06:25: RADIUS: Tunnel-Client-Endpoi[66] 12 00:"10.1.1.2"
00:06:25: RADIUS: Tunnel-Assignment-Id[82] 15 00:"from_isdn101"
00:06:25: RADIUS: Tunnel-Type [64] 6 00:L2TP [3]
00:06:25: RADIUS: Acct-Tunnel-Connecti[68] 12 "2056100083"
00:06:25: RADIUS: Tunnel-Client-Auth-I[90] 10 00:"isdn101"
00:06:25: RADIUS: Tunnel-Server-Auth-I[91] 6 00:"lns"
00:06:25: RADIUS: Framed-Protocol [7] 6 PPP [1]
00:06:25: RADIUS: Framed-Route [22] 39 "10.80.0.1 255.255.255.255 10.60.0.1
100"          <=====
00:06:25: RADIUS: Framed-IP-Address [8] 6 10.60.0.1
00:06:25: RADIUS: Vendor, Cisco [26] 35
00:06:25: RADIUS: Cisco AVpair [1] 29 "connect-progress=LAN Ses Up"
00:06:25: RADIUS: Authentic [45] 6 RADIUS [1]
00:06:25: RADIUS: User-Name [1] 14 "username1@example.com"
00:06:25: RADIUS: Acct-Status-Type [40] 6 Start [1]
00:06:25: RADIUS: NAS-Port [5] 6 1
00:06:25: RADIUS: Vendor, Cisco [26] 33
00:06:25: RADIUS: Cisco AVpair [1] 27 "interface=Virtual-Access1"
00:06:25: RADIUS: NAS-Port-Type [61] 6 Virtual [5]
00:06:25: RADIUS: Service-Type [6] 6 Framed [2]
00:06:25: RADIUS: NAS-IP-Address [4] 6 10.1.0.1
00:06:25: RADIUS: Acct-Delay-Time [41] 6 0

```

Additional References

The following sections provide references related to the Framed-Route in RADIUS Accounting feature.

Related Documents

Related Topic	Document Title
RADIUS	“Configuring RADIUS” module.

Standards

Standard	Title
None.	--

MIBs

MIB	MIBs Link
None.	To locate and download MIBs for selected platforms, Cisco IOS releases, and feature sets, use Cisco MIB Locator found at the following URL: http://www.cisco.com/go/mibs

RFCs

RFC	Title
RFC 2865	Remote Authentication Dial In User Service (RADIUS)
RFC 3575	IANA Considerations for RADIUS (Remote Authentication Dial In User Service)

Technical Assistance

Description	Link
<p>The Cisco Support website provides extensive online resources, including documentation and tools for troubleshooting and resolving technical issues with Cisco products and technologies.</p> <p>To receive security and technical information about your products, you can subscribe to various services, such as the Product Alert Tool (accessed from Field Notices), the Cisco Technical Services Newsletter, and Really Simple Syndication (RSS) Feeds.</p> <p>Access to most tools on the Cisco Support website requires a Cisco.com user ID and password.</p>	http://www.cisco.com/techsupport

Feature Information for Framed-Route in RADIUS Accounting

The following table provides release information about the feature or features described in this module. This table lists only the software release that introduced support for a given feature in a given software release train. Unless noted otherwise, subsequent releases of that software release train also support that feature.

Use Cisco Feature Navigator to find information about platform support and Cisco software image support. To access Cisco Feature Navigator, go to www.cisco.com/go/cfn. An account on Cisco.com is not required.

Table 5 **Feature Information for Framed-Route in RADIUS Accounting**

Feature Name	Releases	Feature Information
Framed-Route in RADIUS Accounting	12.3(4)T 12.2(28)SB 12.2(33)SRC	<p>The Framed-Route in RADIUS Accounting feature provides for the presence of Framed-Route (RADIUS attribute 22) information in RADIUS Accounting-Request accounting records.</p> <p>This feature was introduced in Cisco IOS Release 12.3(4)T.</p> <p>This feature was integrated into Cisco IOS Release 12.2(28)SB.</p> <p>This feature was integrated into Cisco IOS Release 12.2(33)SRC.</p>

Cisco and the Cisco logo are trademarks or registered trademarks of Cisco and/or its affiliates in the U.S. and other countries. To view a list of Cisco trademarks, go to this URL: www.cisco.com/go/trademarks. Third-party trademarks mentioned are the property of their respective owners. The use of the word partner does not imply a partnership relationship between Cisco and any other company. (1110R)

Any Internet Protocol (IP) addresses and phone numbers used in this document are not intended to be actual addresses and phone numbers. Any examples, command display output, network topology diagrams, and other figures included in the document are shown for illustrative purposes only. Any use of actual IP addresses or phone numbers in illustrative content is unintentional and coincidental.



RFC-2867 RADIUS Tunnel Accounting

The RFC-2867 RADIUS Tunnel Accounting introduces six new RADIUS accounting types that are used with the RADIUS accounting attribute Acct-Status-Type (attribute 40), which indicates whether an accounting request marks the beginning of user service (start) or the end (stop).

This feature also introduces two virtual private dialup network (VPDN) commands that help users better troubleshoot VPDN session events.

Without RADIUS tunnel accounting support, VPDN with network accounting, which allows users to determine tunnel-link status changes, did not report all possible attributes to the accounting record file. Now that all possible attributes can be displayed, users can better verify accounting records with their Internet Service Providers (ISPs).

- [Finding Feature Information, page 51](#)
- [Restrictions for RFC-2867 RADIUS Tunnel Accounting, page 51](#)
- [Information About RFC-2867 RADIUS Tunnel Accounting, page 51](#)
- [How to Configure RADIUS Tunnel Accounting, page 56](#)
- [Configuration Examples for RADIUS Tunnel Accounting, page 59](#)
- [Additional References, page 61](#)
- [Feature Information for RFC-2867 RADIUS Tunnel Accounting, page 63](#)

Finding Feature Information

Your software release may not support all the features documented in this module. For the latest feature information and caveats, see the release notes for your platform and software release. To find information about the features documented in this module, and to see a list of the releases in which each feature is supported, see the Feature Information Table at the end of this document.

Use Cisco Feature Navigator to find information about platform support and Cisco software image support. To access Cisco Feature Navigator, go to www.cisco.com/go/cfn. An account on Cisco.com is not required.

Restrictions for RFC-2867 RADIUS Tunnel Accounting

RADIUS tunnel accounting works only with L2TP tunnel support.

Information About RFC-2867 RADIUS Tunnel Accounting

- [RADIUS Attributes Support for RADIUS Tunnel Accounting, page 52](#)

RADIUS Attributes Support for RADIUS Tunnel Accounting

The table below outlines the new RADIUS accounting types that are designed to support the provision of compulsory tunneling in dialup networks; that is, these attribute types allow you to better track tunnel status changes.



Note The accounting types are divided into two separate tunnel types so users can decide if they want tunnel type, tunnel-link type, or both types of accounting.

Table 6 RADIUS Accounting Types for the Acct-Status-Type Attribute

Type-Name	Number	Description	Additional Attributes ¹
Tunnel-Start	9	Marks the beginning of a tunnel setup with another node.	<ul style="list-style-type: none"> • User-Name (1)--from client • NAS-IP-Address (4)--from AAA • Acct-Delay-Time (41)--from AAA • Event-Timestamp (55)--from AAA • Tunnel-Type (64)--from client • Tunnel-Medium-Type (65)--from client • Tunnel-Client-Endpoint (66)--from client • Tunnel-Server-Endpoint (67)--from client • Acct-Tunnel-Connection (68)--from client

¹ If the specified tunnel type is used, these attributes should also be included in the accounting request packet.

Type-Name	Number	Description	Additional Attributes ¹
Tunnel-Stop	10	Marks the end of a tunnel connection to or from another node.	<ul style="list-style-type: none"> • User-Name (1)--from client • NAS-IP-Address (4)--from AAA • Acct-Delay-Time (41)--from AAA • Acct-Input-Octets (42)--from AAA • Acct-Output-Octets (43)--from AAA • Acct-Session-Id (44)--from AAA • Acct-Session-Time (46)--from AAA • Acct-Input-Packets (47)--from AAA • Acct-Output-Packets (48)--from AAA • Acct-Terminate-Cause (49)--from AAA • Acct-Multi-Session-Id (51)--from AAA • Event-Timestamp (55)--from AAA • Tunnel-Type (64)--from client • Tunnel-Medium-Type (65)--from client • Tunnel-Client-Endpoint (66)--from client • Tunnel-Server-Endpoint (67)--from client • Acct-Tunnel-Connection (68)--from client • Acct-Tunnel-Packets-Lost (86)--from client

¹ If the specified tunnel type is used, these attributes should also be included in the accounting request packet.

Type-Name	Number	Description	Additional Attributes ¹
Tunnel-Reject	11	Marks the rejection of a tunnel setup with another node.	<ul style="list-style-type: none"> User-Name (1)--from client NAS-IP-Address (4)--from AAA Acct-Delay-Time (41)--from AAA Acct-Terminate-Cause (49)--from client Event-Timestamp (55)--from AAA Tunnel-Type (64)--from client Tunnel-Medium-Type (65)--from client Tunnel-Client-Endpoint (66)--from client Tunnel-Server-Endpoint (67)--from client Acct-Tunnel-Connection (68)--from client
Tunnel-Link-Start	12	Marks the creation of a tunnel link. Only some tunnel types (Layer 2 Transport Protocol [L2TP]) support the multiple links per tunnel; this value should be included only in accounting packets for tunnel types that support multiple links per tunnel.	<ul style="list-style-type: none"> User-Name (1)--from client NAS-IP-Address (4)--from AAA NAS-Port (5)--from AAA Acct-Delay-Time (41)--from AAA Event-Timestamp (55)--from AAA Tunnel-Type (64)--from client Tunnel-Medium-Type (65)--from client Tunnel-Client-Endpoint (66)--from client Tunnel-Server-Endpoint (67)--from client Acct-Tunnel-Connection (68)--from client

¹ If the specified tunnel type is used, these attributes should also be included in the accounting request packet.

Type-Name	Number	Description	Additional Attributes ¹
Tunnel-Link-Stop	13	Marks the end of a tunnel link. Only some tunnel types (L2TP) support the multiple links per tunnel; this value should be included only in accounting packets for tunnel types that support multiple links per tunnel.	<ul style="list-style-type: none"> • User-Name (1)--from client • NAS-IP-Address (4)--from AAA • NAS-Port (5)--from AAA • Acct-Delay-Time (41)--from AAA • Acct-Input-Octets (42)--from AAA • Acct-Output-Octets (43)--from AAA • Acct-Session-Id (44)--from AAA • Acct-Session-Time (46)--from AAA • Acct-Input-Packets (47)--from AAA • Acct-Output-Packets (48)--from AAA • Acct-Terminate-Cause (49)--from AAA • Acct-Multi-Session-Id (51)--from AAA • Event-Timestamp (55)--from AAA • NAS-Port-Type (61)--from AAA • Tunnel-Type (64)--from client • Tunnel-Medium-Type (65)--from client • Tunnel-Client-Endpoint (66)--from client • Tunnel-Server-Endpoint (67)--from client • Acct-Tunnel-Connection (68)--from client • Acct-Tunnel-Packets-Lost (86)--from client

¹ If the specified tunnel type is used, these attributes should also be included in the accounting request packet.

Type-Name	Number	Description	Additional Attributes ¹
Tunnel-Link-Reject	14	Marks the rejection of a tunnel setup for a new link in an existing tunnel. Only some tunnel types (L2TP) support the multiple links per tunnel; this value should be included only in accounting packets for tunnel types that support multiple links per tunnel.	<ul style="list-style-type: none"> • User-Name (1)--from client • NAS-IP-Address (4)--from AAA • Acct-Delay-Time (41)--from AAA • Acct-Terminate-Cause (49)--from AAA • Event-Timestamp (55)--from AAA • Tunnel-Type (64)--from client • Tunnel-Medium-Type (65)--from client • Tunnel-Client-Endpoint (66)--from client • Tunnel-Server-Endpoint (67)--from client • Acct-Tunnel-Connection (68)--from client

How to Configure RADIUS Tunnel Accounting

- [Enabling Tunnel Type Accounting Records, page 56](#)
- [Verifying RADIUS Tunnel Accounting, page 58](#)

Enabling Tunnel Type Accounting Records

Use this task to configure your LAC to send tunnel and tunnel-link accounting records to be sent to the RADIUS server.

Two new command line interfaces (CLIs)--vpdn session accounting network(tunnel-link-type records)and vpdn tunnel accounting network(tunnel-type records)--are supported to help identify the following events:

- A VPDN tunnel is brought up or destroyed
- A request to create a VPDN tunnel is rejected
- A user session within a VPDN tunnel is brought up or brought down
- A user session create request is rejected

¹ If the specified tunnel type is used, these attributes should also be included in the accounting request packet.

**Note**

The first two events are tunnel-type accounting records: authentication, authorization, and accounting (AAA) sends Tunnel-Start, Tunnel-Stop, or Tunnel-Reject accounting records to the RADIUS server. The next two events are tunnel-link-type accounting records: AAA sends Tunnel-Link-Start, Tunnel-Link-Stop, or Tunnel-Link-Reject accounting records to the RADIUS server.

SUMMARY STEPS

1. **enable**
2. **configure terminal**
3. Router(config)# **aaa accounting network default** *list-name* { **start-stop** | **stop-only** | **wait-start** | **none group** *groupname*
4. Router(config)# **vpdn enable**
5. Router(config)# **vpdn tunnel accounting network** *list-name*
6. Router(config)# **vpdn session accounting network** *list-name*

DETAILED STEPS

Command or Action	Purpose
Step 1 enable Example: Router> enable	Enables privileged EXEC mode. <ul style="list-style-type: none"> • Enter your password if prompted.
Step 2 configure terminal Example: Router# configure terminal	Enters global configuration mode.
Step 3 Router(config)# aaa accounting network default <i>list-name</i> { start-stop stop-only wait-start none group <i>groupname</i>	Enables network accounting. <ul style="list-style-type: none"> • default --If the default network accounting method-list is configured and no additional accounting configurations are enabled on the interface, network accounting is enabled by default. If either the vpdn session accounting network command or the vpdn tunnel accounting network command is linked to the default method-list, all tunnel and tunnel-link accounting records are enabled for those sessions. <ul style="list-style-type: none"> • <i>list-name</i> --The <i>list-name</i> defined in the aaa accounting command must be the same as the <i>list-name</i> defined in the VPDN command; otherwise, accounting will not occur.
Step 4 Router(config)# vpdn enable	Enables virtual private dialup networking on the router and informs the router to look for tunnel definitions in a local database and on a remote authorization server (if applicable).

Command or Action	Purpose
Step 5 Router(config)# vpdn tunnel accounting network <i>list-name</i>	Enables Tunnel-Start, Tunnel-Stop, and Tunnel-Reject accounting records. <ul style="list-style-type: none"> <i>list-name</i> --The <i>list-name</i> must match the <i>list-name</i> defined in the aaa accounting command; otherwise, network accounting will not occur.
Step 6 Router(config)# vpdn session accounting network <i>list-name</i>	Enables Tunnel-Link-Start, Tunnel-Link-Stop, and Tunnel-Link-Reject accounting records. <ul style="list-style-type: none"> <i>list-name</i> --The <i>list-name</i> must match the <i>list-name</i> defined in the aaa accounting command; otherwise, network accounting will not occur.

- [What To Do Next, page 58](#)

What To Do Next

After you have enabled RADIUS tunnel accounting, you can verify your configuration via the following optional task “Verifying RADIUS Tunnel Accounting.”

Verifying RADIUS Tunnel Accounting

Use either one or both of the following optional steps to verify your RADIUS tunnel accounting configuration.

SUMMARY STEPS

1. **enable**
2. Router# **show accounting**
3. Router# **show vpdn [session] [tunnel]**

DETAILED STEPS

Command or Action	Purpose
Step 1 enable Example: Router> enable	Enables privileged EXEC mode. <ul style="list-style-type: none"> • Enter your password if prompted.
Step 2 Router# show accounting	Displays the active accountable events on the network and helps collect information in the event of a data loss on the accounting server.
Step 3 Router# show vpdn [session] [tunnel]	Displays information about active L2TP tunnel and message identifiers in a VPDN. <ul style="list-style-type: none"> • session --Displays a summary of the status of all active tunnels. • tunnel --Displays information about all active L2TP tunnels in summary-style format.

Configuration Examples for RADIUS Tunnel Accounting

- [Configuring RADIUS Tunnel Accounting on LAC Example, page 59](#)
- [Configuring RADIUS Tunnel Accounting on LNS Example, page 60](#)

Configuring RADIUS Tunnel Accounting on LAC Example

The following example shows how to configure your L2TP access concentrator (LAC) to send tunnel and tunnel-link accounting records to the RADIUS server:

```
aaa new-model
!
!
aaa authentication ppp default group radius
aaa authorization network default local
aaa accounting network m1 start-stop group radius
aaa accounting network m2 stop-only group radius
aaa session-id common
enable secret 5 $1$IDjH$iL7puCja1RMlyOM.JAeuf/
enable password lab
!
username ISP_LAC password 0 tunnelpass
!
!
resource-pool disable
!
!
ip subnet-zero
ip cef
no ip domain-lookup
ip host dirt 171.69.1.129
!
vpdn enable
vpdn tunnel accounting network m1
vpdn session accounting network m1
vpdn search-order domain dnis
!
vpdn-group 1
 request-dialin
  protocol l2tp
  domain cisco.com
  initiate-to ip 10.1.26.71
  local name ISP_LAC
!
isdn switch-type primary-5ess
!
!
fax interface-type fax-mail
mta receive maximum-recipients 0
!
controller T1 7/4
 framing esf
 linecode b8zs
 pri-group timeslots 1-24
!
!
!
interface FastEthernet0/0
 ip address 10.1.27.74 255.255.255.0
 no ip mroute-cache
 duplex half
 speed auto
 no cdp enable
!
interface FastEthernet0/1
 no ip address
```

```

no ip mroute-cache
shutdown
duplex auto
speed auto
no cdp enable
!
interface Serial7/4:23
ip address 60.0.0.2 255.255.255.0
encapsulation ppp
dialer string 2000
dialer-group 1
isdn switch-type primary-5ess
ppp authentication chap
!
interface Group-Async0
no ip address
shutdown
group-range 1/00 3/107
!
ip default-gateway 10.1.27.254
ip classless
ip route 0.0.0.0 0.0.0.0 10.1.27.254
no ip http server
ip pim bidir-enable
!
!
dialer-list 1 protocol ip permit
no cdp run
!
!
radius-server host 172.19.192.26 auth-port 1645 acct-port 1646 key rad123
radius-server retransmit 3
call rsvp-sync
!

```

Configuring RADIUS Tunnel Accounting on LNS Example

The following example shows how to configure your L2TP network server (LNS) to send tunnel and tunnel-link accounting records to the RADIUS server:

```

aaa new-model
!
!
aaa accounting network m1 start-stop group radius
aaa accounting network m2 stop-only group radius
aaa session-id common
enable secret 5 $l$ftf.$wE6Q5Yv6hmQiwL9pizPCg1
!
username ENT_LNS password 0 tunnelpass
username user1@cisco.com password 0 lab
username user2@cisco.com password 0 lab
spe 1/0 1/7
firmware location system:/ucode/mica_port_firmware
spe 2/0 2/9
firmware location system:/ucode/mica_port_firmware
!
!
resource-pool disable
clock timezone est 2
!
!
ip subnet-zero
no ip domain-lookup
ip host CALLGEN-SECURITY-V2 64.24.80.28 3.47.0.0
ip host dirt 171.69.1.129
!
!
vpdn enable
vpdn tunnel accounting network m1
vpdn session accounting network m1
!
!
vpdn-group 1
accept-dialin

```

```

    protocol l2tp
    virtual-template 1
    terminate-from hostname ISP_LAC
    local name ENT_LNS
    !
    isdn switch-type primary-5ess
    !
    !
    !
    !
    !
    !
    fax interface-type modem
    mta receive maximum-recipients 0
    !
    interface Loopback0
    ip address 70.0.0.101 255.255.255.0
    !
    interface Loopback1
    ip address 80.0.0.101 255.255.255.0
    !
    interface Ethernet0
    ip address 10.1.26.71 255.255.255.0
    no ip mroute-cache
    no cdp enable
    !
    interface Virtual-Template1
    ip unnumbered Loopback0
    peer default ip address pool vpdn-pool1
    ppp authentication chap
    !
    interface Virtual-Template2
    ip unnumbered Loopback1
    peer default ip address pool vpdn-pool2
    ppp authentication chap
    !
    interface FastEthernet0
    no ip address
    no ip mroute-cache
    shutdown
    duplex auto
    speed auto
    no cdp enable
    !
    ip local pool vpdn-pool1 70.0.0.1 70.0.0.100
    ip local pool vpdn-pool2 80.0.0.1 80.0.0.100
    ip default-gateway 10.1.26.254
    ip classless
    ip route 0.0.0.0 0.0.0.0 10.1.26.254
    ip route 90.1.1.2 255.255.255.255 10.1.26.254
    no ip http server
    ip pim bidir-enable
    !
    !
    dialer-list 1 protocol ip permit
    no cdp run
    !
    !
    radius-server host 172.19.192.80 auth-port 1645 acct-port 1646 key rad123
    radius-server retransmit 3
    call rsvp-sync

```

Additional References

The following sections provide references related to RFC-2867 RADIUS Tunnel Accounting.

Related Documents

Related Topic	Document Title
RADIUS attributes	“ RADIUS Attributes ” feature module.
VPDN	<i>Cisco IOS VPDN Configuration Guide , Release 12.4T.</i>
Network accounting	“ Configuring Accounting ” feature module.

Standards

Standards	Title
None	--

MIBs

MIBs	MIBs Link
None	To locate and download MIBs for selected platforms, Cisco IOS releases, and feature sets, use Cisco MIB Locator found at the following URL: http://www.cisco.com/go/mibs

RFCs

RFCs	Title
RFC 2867	<i>RADIUS Accounting Modifications for Tunnel Protocol Support</i>

Technical Assistance

Description	Link
<p>The Cisco Support website provides extensive online resources, including documentation and tools for troubleshooting and resolving technical issues with Cisco products and technologies.</p> <p>To receive security and technical information about your products, you can subscribe to various services, such as the Product Alert Tool (accessed from Field Notices), the Cisco Technical Services Newsletter, and Really Simple Syndication (RSS) Feeds.</p> <p>Access to most tools on the Cisco Support website requires a Cisco.com user ID and password.</p>	http://www.cisco.com/techsupport

Feature Information for RFC-2867 RADIUS Tunnel Accounting

The following table provides release information about the feature or features described in this module. This table lists only the software release that introduced support for a given feature in a given software release train. Unless noted otherwise, subsequent releases of that software release train also support that feature.

Use Cisco Feature Navigator to find information about platform support and Cisco software image support. To access Cisco Feature Navigator, go to www.cisco.com/go/cfn. An account on Cisco.com is not required.

Table 7 Feature Information for RFC-2867 RADIUS Tunnel Accounting

Feature Name	Releases	Feature Information
RFC-2867 RADIUS Tunnel Accounting	12.2(15)B 12.3(4)T	<p>The RFC-2867 RADIUS Tunnel Accounting introduces six new RADIUS accounting types that are used with the RADIUS accounting attribute Acct-Status-Type (attribute 40), which indicates whether an accounting request marks the beginning of user service (start) or the end (stop).</p> <p>This feature also introduces two virtual private virtual private dialup network (VPDN) commands that help users better troubleshoot VPDN session events.</p> <p>In 12.2(15)B, this feature was introduced on the Cisco 6400 series, Cisco 7200 series, and the Cisco 7400 series routers.</p> <p>This feature was integrated into Cisco IOS Release 12.3(4)T.</p> <p>The following commands were introduced or modified: aaa accounting, vpdn session accounting network, vpdn tunnel accounting network.</p>

Cisco and the Cisco logo are trademarks or registered trademarks of Cisco and/or its affiliates in the U.S. and other countries. To view a list of Cisco trademarks, go to this URL: www.cisco.com/go/trademarks. Third-party trademarks mentioned are the property of their respective owners. The use of the word partner does not imply a partnership relationship between Cisco and any other company. (1110R)

Any Internet Protocol (IP) addresses and phone numbers used in this document are not intended to be actual addresses and phone numbers. Any examples, command display output, network topology diagrams, and other figures included in the document are shown for illustrative purposes only. Any use of actual IP addresses or phone numbers in illustrative content is unintentional and coincidental.



RADIUS Centralized Filter Management

The RADIUS Centralized Filter Management feature introduces a filter-server to simplify ACL configuration and management. This filter-server serves as a centralized RADIUS repository and administration point, which users can centrally manage and configure access control list (ACL) filters.

- [Finding Feature Information, page 65](#)
- [Prerequisites for RADIUS Centralized Filter Management, page 65](#)
- [Restrictions for RADIUS Centralized Filter Management, page 66](#)
- [Information About RADIUS Centralized Filter Management, page 66](#)
- [How to Configure Centralized Filter Management for RADIUS, page 67](#)
- [Configuration Examples for RADIUS Centralized Filter Management, page 70](#)
- [Additional References, page 72](#)
- [Feature Information for RADIUS Centralized Filter Management, page 73](#)

Finding Feature Information

Your software release may not support all the features documented in this module. For the latest feature information and caveats, see the release notes for your platform and software release. To find information about the features documented in this module, and to see a list of the releases in which each feature is supported, see the Feature Information Table at the end of this document.

Use Cisco Feature Navigator to find information about platform support and Cisco software image support. To access Cisco Feature Navigator, go to www.cisco.com/go/cfn. An account on Cisco.com is not required.

Prerequisites for RADIUS Centralized Filter Management

- You may need to add a dictionary file to your server if it does not support the new RADIUS VSAs. For a sample dictionary and vendors file, see the section “RADIUS Dictionary and Vendors File Example” later in this document.

If you need to add a dictionary file, ensure that your RADIUS server is nonstandard and that it can send the newly introduced VSAs.

- You want to set up RADIUS network authentication so a remote user can dial in and get IP connectivity.

Restrictions for RADIUS Centralized Filter Management

Multiple method lists are not supported in this feature; only a single global filter method list can be configured.

Information About RADIUS Centralized Filter Management

Before the RADIUS Centralized Filter Management feature, wholesale providers (who provide premium charges for customer services such as access control lists [ACLs]) were unable to prevent customers from applying exhaustive ACLs, which could impact router performance and other customers. This feature introduces a centralized administration point--a filter server--for ACL management. The filter server acts as a centralized RADIUS repository for ACL configuration.

Whether or not the RADIUS server that is used as the filter server is the same server that is used for access authentication, the network access server (NAS) will initiate a second access request to the filter server. If configured, the NAS will use the filter-ID name as the authentication username and the filter server password for the second access request. The RADIUS server will attempt to authenticate the filter-ID name, returning any required filtering configuration in the access-accept response.

Because downloading ACLs is time consuming, a local cache is maintained on the NAS. If an ACL name exists on the local cache, that configuration will be used without consulting the filter server.



Note

An appropriately configured cache should minimize delays; however, the first dialin user to require a filter will always experience a longer delay because the ACL configuration is retrieved for the first time.

- [Cache Management, page 66](#)
- [New Vendor-Specific Attribute Support, page 67](#)

Cache Management

A global filter cache is maintained on the NAS of recently downloaded ACLs; thus, users no longer have to repeatedly request the same ACL configuration information from a potentially overloaded RADIUS server. Users are required to flush the cache when the following criteria have been met:

- After an entry becomes associated with a newly active call, the idle timer that is associated with that entry will be reset, if configured to do so.
- After the idle-time stamp of an entry expires, the entry will be removed.
- After the global cache of entries reaches a specified maximum number, the entry whose idle-timer is closest to the idle time limit will be removed.

A single timer is responsible for managing all cache entries. The timer is started after the first cache entry is created, and it runs periodically until reboot. The period of the timer will correspond to the minimum granularity offered when configuring cache idle timers, which is one expiration per minute. A single timer prevents users from having to manage individual timers per cache entry.

**Note**

The single timer introduces a lack of precision in timer expiration. There is an average error of approximately 50 percent of the timer granularity. Although decreasing the timer granularity will decrease the average error, the decreased timer granularity will negatively impact performance. Because precise timing is not required for cache management, the error delay should be acceptable.

New Vendor-Specific Attribute Support

This feature introduces support for three new vendor-specific attributes (VSAs), which can be divided into the following two categories:

- User profile extensions
 - Filter-Required (50)--Specifies whether the call should be permitted if the specified filter is not found. If present, this attribute will be applied after any authentication, authorization, and accounting (AAA) filter method-list.
- Pseudo-user profile extensions
 - Cache-Refresh (56)--Specifies whether cache entries should be refreshed each time an entry is referenced by a new session. This attribute corresponds to the **cache refresh** command.
 - Cache-Time (57)--Specifies the idle time out, in minutes, for cache entries. This attribute corresponds to the **cache clear age** command.

**Note**

All RADIUS attributes will override any command-line interface (CLI) configurations.

How to Configure Centralized Filter Management for RADIUS

- [Configuring the RADIUS ACL Filter Server, page 67](#)
- [Configuring the Filter Cache, page 68](#)
- [Verifying the Filter Cache, page 69](#)
- [Troubleshooting Tips, page 70](#)
- [Monitoring and Maintaining the Filter Cache, page 70](#)

Configuring the RADIUS ACL Filter Server

To enable the RADIUS ACL filter server, use the following command in global configuration mode:

Command	Purpose
<pre>Router(config)# aaa authorization cache filterserver default <i>methodlist[methodlist2...]</i></pre>	<p>Enables AAA authorization caches and the downloading of an ACL configuration from a RADIUS filter server.</p> <ul style="list-style-type: none"> • default --The default authorization list. • <i>methodlist [methodlist2...]</i>--One of the keywords listed on the password command page.

Configuring the Filter Cache

Follow the steps in this section to configure the AAA filter cache.

SUMMARY STEPS

1. **enable**
2. **configure terminal**
3. Router(config)# **aaa cache filter**
4. Router(config-aaa-filter)# **password 0 7** } *password*
5. Router(config-aaa-filter)# **cache disable**
6. Router(config-aaa-filter)# **cache clear age** *minutes*
7. Router(config-aaa-filter)# **cache refresh**
8. Router(config-aaa-filter)# **cache max** *number*

DETAILED STEPS

Command or Action	Purpose
<p>Step 1 enable</p> <p>Example:</p> <pre>Router> enable</pre>	<p>Enables privileged EXEC mode.</p> <ul style="list-style-type: none"> • Enter your password if prompted.
<p>Step 2 configure terminal</p> <p>Example:</p> <pre>Router# configure terminal</pre>	<p>Enters global configuration mode.</p>
<p>Step 3 Router(config)# aaa cache filter</p>	<p>Enables filter cache configuration and enters AAA filter configuration mode.</p>

Command or Action	Purpose
Step 4 Router(config-aaa-filter)# password 0 7 } <i>password</i>	(Optional) Specifies the optional password that is to be used for filter server authentication requests. 0 --Specifies that an unencrypted password will follow. 7 --Specifies that a hidden password will follow. <i>password</i> --The unencrypted (clear text) password. Note If a password is not specified, the default password (“cisco”) is enabled.
Step 5 Router(config-aaa-filter)# cache disable	(Optional) Disables the cache.
Step 6 Router(config-aaa-filter)# cache clear age minutes	(Optional) Specifies, in minutes, when cache entries expire and the cache is cleared. <i>minutes</i> --Any value between 0 to 4294967295. Note If a time is not specified, the default (1400 minutes [1 day]) is enabled.
Step 7 Router(config-aaa-filter)# cache refresh	(Optional) Refreshes a cache entry when a new session begins. This command is enabled by default. To disable this functionality, use the no cache refresh command.
Step 8 Router(config-aaa-filter)# cache max number	(Optional) Limits the absolute number of entries the cache can maintain for a particular server. <i>number</i> --The maximum number of entries the cache can contain. Any value between 0 to 4294967295. Note If a number is not specified, the default (100 entries) is enabled.

Verifying the Filter Cache

To display the cache status, use the **show aaa cache filterserver** EXEC command. The following is sample output for the **show aaa cache filterserver** command:

```
Router# show aaa cache filterserver
Filter      Server      Age Expires Refresh Access-Control-Lists
-----
aol         10.2.3.4    0      1440    100 ip in icmp drop
           ip out icmp drop
           ip out forward tcp dstip 1.2.3...
msn         10.3.3.4    N/A    Never   2 ip in tcp drop
msn2        10.4.3.4    N/A    Never   2 ip in tcp drop
vone        10.5.3.4    N/A    Never   0 ip in tcp drop
```



Note

The **show aaa cache filterserver** command shows how many times a particular filter has been referenced or refreshed. This function may be used in administration to determine which filters are actually being used.

Troubleshooting Tips

To help troubleshoot your filter cache configurations, use the privileged EXEC **debug aaa cache filterserver** command. To view sample output for the **debug aaa cache filterserver** command, refer to the section “Debug Output Example” later in this document.

Monitoring and Maintaining the Filter Cache

To monitor and maintain filter caches, use at least one of the following EXEC commands:

Command	Purpose
Router# clear aaa cache filterserver acl [<i>filter-name</i>]	Clears the cache status for a particular filter or all filters.
Router# show aaa cache filterserver	Displays the cache status.

Configuration Examples for RADIUS Centralized Filter Management

- [NAS Configuration Example, page 70](#)
- [RADIUS Server Configuration Example, page 71](#)
- [RADIUS Dictionary and Vendors File Example, page 71](#)
- [Debug Output Example, page 71](#)

NAS Configuration Example

The following example shows how to configure the NAS for cache filtering. In this example, the server group “mygroup” is contacted first. If there is no response, the default RADIUS server will then be contacted. If there still is no response, the local filters are contacted. Finally, the call is accepted if the filter cannot be resolved.

```
aaa authorization cache filterserver group mygroup group radius local none
!
aaa group server radius mygroup
  server 10.2.3.4
  server 10.2.3.5
!
radius-server host 10.1.3.4
!
aaa cache filter
  password mycisco
  no cache refresh
  cache max 100
!
```

RADIUS Server Configuration Example

The following example is a sample RADIUS configuration that is for a remote user "user1" dialing into the NAS:

```
myfilter Password = "cisco"
Service-Type = Outbound,
Ascend:Ascend-Call-Filter = "ip in drop srcip 10.0.0.1/32 dstip 10.0.0.10/32 icmp",
Ascend:Ascend-Call-Filter = "ip in drop srcip 10.0.0.1/32 dstip 10.0.0.10/32 tcp dstport
= telnet",
Ascend:Ascend-Cache-Refresh = Refresh-No,
Ascend:Ascend-Cache-Time = 15
user1 Password = "cisco"
Service-Type = Framed,
Filter-Id = "myfilter",
Ascend:Ascend-Filter-Required = Filter-Required-Yes,
```

RADIUS Dictionary and Vendors File Example

The following example is a sample RADIUS dictionary file for the new VSAs. In this example, the dictionary file is for a Merit server.

```
dictionary file:
Ascend.attr Ascend-Filter-Required 50 integer (*, 0, NOENCAPS)
Ascend.attr Ascend-Cache-Refresh 56 integer (*, 0, NOENCAPS)
Ascend.attr Ascend-Cache-Time 57 integer (*, 0, NOENCAPS)
Ascend.value Ascend-Cache-Refresh Refresh-No 0
Ascend.value Ascend-Cache-Refresh Refresh-Yes 1
Ascend.value Ascend-Filter-Required Filter-Required-No 0
Ascend.value Ascend-Filter-Required Filter-Required-Yes 1
vendors file:
50 50
56 56
57 57
```

Debug Output Example

The following is sample output from the **debug aaa cache filterserver** command:

```
Router# debug aaa cache filterserver

AAA/FLTSV: need "myfilter" (fetch), call 0x612DAC64
AAA/FLTSV: send req, call 0x612DAC50
AAA/FLTSV: method SERVER_GROUP myradius
AAA/FLTSV: rcv reply, call 0x612DAC50 (PASS)
AAA/FLTSV: create cache
AAA/FLTSV: add attr "call-inacl"
AAA/FLTSV: add attr "call-inacl"
AAA/FLTSV: add attr "call-inacl"
AAA/FLTSV: skip attr "filter-cache-refresh"
AAA/FLTSV: skip attr "filter-cache-time"
AAA/CACHE: set "AAA filtserv cache" entry "myfilter" refresh? no
AAA/FLTSV: add attr to list "call-inacl" call 0x612DAC64
AAA/FLTSV: add attr to list "call-inacl" call 0x612DAC64
AAA/FLTSV: add attr to list "call-inacl" call 0x612DAC64
AAA/FLTSV: PASS call 0x612DAC64
AAA/CACHE: timer "AAA filtserv cache", next in 10 secs (0 entries)
AAA/CACHE: timer "AAA filtserv cache", next in 10 secs (1 entry)
AAA/CACHE: destroy "AAA filtserv cache" entry "myfilter"
AAA/CACHE: timer "AAA filtserv cache", next in 10 secs (0 entries)
```

Additional References

The following sections provide references related to RADIUS Centralized Filter Management.

Related Documents

Related Topic	Document Title
Configuring Authorization	“ Configuring Authorization ” feature module.
Configuring RADIUS	“ Configuring RADIUS ” feature module
Authorization Commands	<i>Cisco IOS Security Command Reference</i>

Standards

Standard	Title
None	--

MIBs

MIB	MIBs Link
None	To locate and download MIBs for selected platforms, Cisco IOS releases, and feature sets, use Cisco MIB Locator found at the following URL: http://www.cisco.com/go/mibs

RFCs

RFC	Title
None	--

Technical Assistance

Description	Link
<p>The Cisco Support website provides extensive online resources, including documentation and tools for troubleshooting and resolving technical issues with Cisco products and technologies.</p> <p>To receive security and technical information about your products, you can subscribe to various services, such as the Product Alert Tool (accessed from Field Notices), the Cisco Technical Services Newsletter, and Really Simple Syndication (RSS) Feeds.</p> <p>Access to most tools on the Cisco Support website requires a Cisco.com user ID and password.</p>	<p>http://www.cisco.com/techsupport</p>

Feature Information for RADIUS Centralized Filter Management

The following table provides release information about the feature or features described in this module. This table lists only the software release that introduced support for a given feature in a given software release train. Unless noted otherwise, subsequent releases of that software release train also support that feature.

Use Cisco Feature Navigator to find information about platform support and Cisco software image support. To access Cisco Feature Navigator, go to www.cisco.com/go/cfn. An account on Cisco.com is not required.

Table 8 **Feature Information for RADIUS Centralized Filter Management**

Feature Name	Releases	Feature Information
RADIUS Centralized Filter Management	12.2(13)T 12.2(28)SB 12.2(33)SRC 1	<p>The RADIUS Centralized Filter Management feature introduces a filter-server to simplify ACL configuration and management. This filter-server serves as a centralized RADIUS repository and administration point, which users can centrally manage and configure access control list (ACL) filters.</p> <p>This feature was introduced in Cisco IOS Release 12.2(13)T.</p> <p>This feature was integrated into Cisco IOS Release 12.2(28)SB.</p> <p>This feature was integrated into Cisco IOS Release 12.2(33)SRC.</p> <p>The following commands were introduced or modified by this feature: aaa authorization cache filterserver, aaa cache filter, cache clear age, cache disable, cache refresh, clear aaa cache filterserver acl, debug aaa cache filterserver, password, show aaa cache filterserver.</p>

Cisco and the Cisco logo are trademarks or registered trademarks of Cisco and/or its affiliates in the U.S. and other countries. To view a list of Cisco trademarks, go to this URL: www.cisco.com/go/trademarks. Third-party trademarks mentioned are the property of their respective owners. The use of the word partner does not imply a partnership relationship between Cisco and any other company. (1110R)

Any Internet Protocol (IP) addresses and phone numbers used in this document are not intended to be actual addresses and phone numbers. Any examples, command display output, network topology diagrams, and other figures included in the document are shown for illustrative purposes only. Any use of actual IP addresses or phone numbers in illustrative content is unintentional and coincidental.



RADIUS Debug Enhancements

This document describes the Remote Authentication Dial-In User Services (RADIUS) Debug Enhancements feature.

- [Finding Feature Information, page 75](#)
- [Prerequisites for RADIUS Debug Enhancements, page 75](#)
- [Restrictions for RADIUS Debug Enhancements, page 75](#)
- [Information About RADIUS Debug Enhancements, page 76](#)
- [How to Enable RADIUS Debug Parameters, page 76](#)
- [Configuration Examples for RADIUS Debug Enhancements, page 78](#)
- [Additional References, page 79](#)
- [Feature Information for RADIUS Debug Enhancements, page 81](#)
- [Glossary, page 81](#)

Finding Feature Information

Your software release may not support all the features documented in this module. For the latest feature information and caveats, see the release notes for your platform and software release. To find information about the features documented in this module, and to see a list of the releases in which each feature is supported, see the Feature Information Table at the end of this document.

Use Cisco Feature Navigator to find information about platform support and Cisco software image support. To access Cisco Feature Navigator, go to www.cisco.com/go/cfn. An account on Cisco.com is not required.

Prerequisites for RADIUS Debug Enhancements

- Establish a working IP network. For more information about configuring IP refer to the Configuring IPv4 Addresses module.
- Configure the gateway as a RADIUS client. Refer to the section “Configuring the Voice Gateway as a RADIUS Client” section in the CDR Accounting for Cisco IOS Voice Gateways document.
- Be familiar with IETF RFC 2138.

Restrictions for RADIUS Debug Enhancements

Only Internet Engineering Task Force (IETF) attributes and Cisco vendor-specific attributes (VSAs) used in voice applications are supported. For unsupported attributes, “undebuggable” is displayed.

Information About RADIUS Debug Enhancements

- [RADIUS Overview, page 76](#)
- [Benefits of RADIUS Debug Enhancements, page 76](#)

RADIUS Overview

RADIUS is a distributed client/server system that provides the following functionality:

- Secures networks against unauthorized access.
- Enables authorization of specific service limits.
- Provides accounting information so that services can be billed.

In the Cisco implementation, RADIUS clients run on Cisco routers and send authentication requests to a central RADIUS server that contains all user authentication and network service access information.

Benefits of RADIUS Debug Enhancements

The **debug radius** command displays information associated with RADIUS. Prior to the RADIUS Debug Enhancements feature, **debug radius** output was available only in an expanded, hexadecimal string format, resulting in displays that were difficult to interpret and analyze. Moreover, attribute value displays were truncated, particularly for VSAs.

This feature provides enhanced RADIUS display including the following:

- Packet dump in a more readable, user-friendly ASCII format than before.
- Complete display of attribute values without truncation.
- Ability to select a brief RADIUS debug output display.
- Allows a compact debugging output option that is useful for high-traffic, operational environments.

How to Enable RADIUS Debug Parameters

- [Enabling RADIUS Debug Parameters, page 76](#)
- [Verifying RADIUS Debug Parameters, page 77](#)

Enabling RADIUS Debug Parameters

Perform this task to enable RADIUS debug parameters. By default, event logging is enabled.



Note

Prior to Cisco IOS Release 12.2(11)T, the **debug radius** command enabled truncated debugging output in hexadecimal notation, rather than ASCII.

SUMMARY STEPS

1. enable
2. debug radius [accounting | authentication | brief | elog | failover | retransmit | verbose]

DETAILED STEPS

	Command or Action	Purpose
Step 1	enable Example: Router> enable	Enables privileged EXEC mode. <ul style="list-style-type: none"> • Enter your password if prompted.
Step 2	debug radius [accounting authentication brief elog failover retransmit verbose] Example: Router# debug radius accounting	Enables debugging for the specified parameters associated with RADIUS configuration.

Verifying RADIUS Debug Parameters

Perform this task to verify RADIUS debug parameters.

SUMMARY STEPS

1. enable
2. show debug

DETAILED STEPS

	Command or Action	Purpose
Step 1	enable Example: Router> enable	Enables privileged EXEC mode. <ul style="list-style-type: none"> • Enter your password if prompted.
Step 2	show debug Example: Router# show debug	Displays debug information.

Configuration Examples for RADIUS Debug Enhancements

- [Enabling RADIUS Debug Parameters Example, page 78](#)
- [Verifying RADIUS Debug Parameters Example, page 78](#)

Enabling RADIUS Debug Parameters Example

The following example shows how to enable debugging of RADIUS accounting collection.

```
Router> enable
Router# debug radius accounting
Radius protocol debugging is on
Radius protocol brief debugging is off
Radius protocol verbose debugging is off
Radius packet hex dump debugging is off
Radius packet protocol (authentication) debugging is off
Radius packet protocol (accounting) debugging is on
Radius packet retransmission debugging is off
Radius server fail-over debugging is off
Radius elog debugging is off
```



Note

The sample output above displays information that is found inside a RADIUS protocol message. For more information about RADIUS protocol messages, see IETF RFC 2138.

Verifying RADIUS Debug Parameters Example

The following example shows how to verify RADIUS debug parameters.

```
Router> enable
Router# show debug
00:02:50: RADIUS: ustruct sharecount=3
00:02:50: Radius: radius_port_info() success=0 radius_nas_port=1
00:02:50: RADIUS: Initial Transmit ISDN 0:D:23 id 0 10.0.0.0:1824, Accounting-Request,
len 358
00:02:50: RADIUS: NAS-IP-Address [4] 6 10.0.0.1
00:02:50: RADIUS: Vendor, Cisco [26] 19 VT=02 TL=13 ISDN 0:D:23
00:02:50: RADIUS: NAS-Port-Type [61] 6 Async
00:02:50: RADIUS: User-Name [1] 12 "4085274206"
00:02:50: RADIUS: Called-Station-Id [30] 7 "52981"
00:02:50: RADIUS: Calling-Station-Id [31] 12 "4085554206"
00:02:50: RADIUS: Acct-Status-Type [40] 6 Start
00:02:50: RADIUS: Service-Type [6] 6 Login
00:02:50: RADIUS: Vendor, Cisco [26] 27 VT=33 TL=21 h323-gw-id=5300_43.
00:02:50: RADIUS: Vendor, Cisco [26] 55 VT=01 TL=49 h323-incoming-conf-id=8F3A3163
B4980003 0 29BD0
00:02:50: RADIUS: Vendor, Cisco [26] 31 VT=26 TL=25 h323-call-origin=answer
00:02:50: RADIUS: Vendor, Cisco [26] 32 VT=27 TL=26 h323-call-type=Telephony
00:02:50: RADIUS: Vendor, Cisco [26] 57 VT=25 TL=51 h323-setup-time=*16:02:48.681 PST Fri
Dec 31 1999
00:02:50: RADIUS: Vendor, Cisco [26] 46 VT=24 TL=40 h323-conf-id=8F3A3163 B4980003 029BD0
00:02:50: RADIUS: Acct-Session-Id [44] 10 "00000002"
00:02:50: RADIUS: Delay-Time [41] 6 0
00:02:51: RADIUS: Received from id 0 10.0.0.0:1824, Accounting-response, len 20
00:02:51: %ISDN-6-CONNECT: Interface Serial0:22 is now connected to 4085554206
00:03:01: RADIUS: ustruct sharecount=3
00:03:01: Radius: radius_port_info() success=0 radius_nas_port=1
00:03:01: RADIUS: Initial Transmit ISDN 0:D:23 id 1 1.7.157.1:1823, Access-Request, len
171
00:03:01: RADIUS: NAS-IP-Address [4] 6 10.0.0.1
```

```

00:03:01: RADIUS: Vendor, Cisco [26] 19 VT=02 TL=13 ISDN 0:D:23
00:03:01: RADIUS: NAS-Port-Type [61] 6 Async
00:03:01: RADIUS: User-Name [1] 8 "123456"
00:03:01: RADIUS: Vendor, Cisco [26] 46 VT=24 TL=40 h323-conf-id=8F3A3163 B4980003 0
29BD0
00:03:01: RADIUS: Calling-Station-Id [31] 12 "4085274206"
00:03:01: RADIUS: User-Password [2] 18 *
00:03:01: RADIUS: Vendor, Cisco [26] 36 VT=01 TL=30 h323-ivr-out=transactionID:0
00:03:01: RADIUS: Received from id 1 1.7.157.1:1823, Access-Accept, len 115
00:03:01: RADIUS: Service-Type [6] 6 Login
00:03:01: RADIUS: Vendor, Cisco [26] 29 VT=101 TL=23 h323-credit-amount=45
00:03:01: RADIUS: Vendor, Cisco [26] 27 VT=102 TL=21 h323-credit-time=33
00:03:01: RADIUS: Vendor, Cisco [26] 26 VT=103 TL=20 h323-return-code=0
00:03:01: RADIUS: Class [25] 7 6C6F63616C
00:03:01: RADIUS: saved authorization data for user 62321E14 at 6233D258
00:03:13: %ISDN-6-DISCONNECT: Interface Serial0:22 disconnected from 4085274206, call
lasted 22 seconds
00:03:13: RADIUS: ustruct sharecount=2
00:03:13: Radius: radius_port_info() success=0 radius_nas_port=1
00:03:13: RADIUS: Sent class "local" at 6233D2C4 from user 62321E14
00:03:13: RADIUS: Initial Transmit ISDN 0:D:23 id 2 10.0.0.0:1824, Accounting-Request,
len 775
00:03:13: RADIUS: NAS-IP-Address [4] 6 10.0.0.1
00:03:13: RADIUS: Vendor, Cisco [26] 19 VT=02 TL=13 ISDN 0:D:23
00:03:13: RADIUS: NAS-Port-Type [61] 6 Async
00:03:13: RADIUS: User-Name [1] 8 "123456"
00:03:13: RADIUS: Called-Station-Id [30] 7 "52981"
00:03:13: RADIUS: Calling-Station-Id [31] 12 "4085554206"
00:03:13: RADIUS: Acct-Status-Type [40] 6 Stop
00:03:13: RADIUS: Class [25] 7 6C6F63616C
00:03:13: RADIUS: Undebuggable [45] 6 00000001
00:03:13: RADIUS: Service-Type [6] 6 Login
00:03:13: RADIUS: Vendor, Cisco [26] 27 VT=33 TL=21 h323-gw-id=5300_43.
00:03:13: RADIUS: Vendor, Cisco [26] 55 VT=01 TL=49 h323-incoming-conf-id=8F3A3163
B4980003 0 29BD0
00:03:13: RADIUS: Vendor, Cisco [26] 31 VT=26 TL=25 h323-call-origin=answer
00:03:13: RADIUS: Vendor, Cisco [26] 32 VT=27 TL=26 h323-call-type=Telephony
00:03:13: RADIUS: Vendor, Cisco [26] 57 VT=25 TL=51 h323-setup-time=*16:02:48.681 PST Fri
Dec 31 1999
00:03:13: RADIUS: Vendor, Cisco [26] 59 VT=28 TL=53 h323-connect-time=*16:02:48.946
PST Fri Dec 31 1999
00:03:13: RADIUS: Vendor, Cisco [26] 62 VT=29 TL=56 h323-disconnect-time=*16:03:11.306
PST Fri Dec 31 1999
00:03:13: RADIUS: Vendor, Cisco [26] 32 VT=30 TL=26 h323-disconnect-cause=10
00:03:13: RADIUS: Vendor, Cisco [26] 28 VT=31 TL=22 h323-voice-quality=0
00:03:13: RADIUS: Vendor, Cisco [26] 46 VT=24 TL=40 h323-conf-id=8F3A3163 B4980003 0 29BD0
00:03:13: RADIUS: Acct-Session-Id [44] 10 "00000002"
00:03:13: RADIUS: Acct-Input-Octets [42] 6 0
00:03:13: RADIUS: Acct-Output-Octets [43] 6 88000
00:03:13: RADIUS: Acct-Input-Packets [47] 6 0
00:03:13: RADIUS: Acct-Output-Packets [48] 6 550
00:03:13: RADIUS: Acct-Session-Time [46] 6 22
00:03:13: RADIUS: Vendor, Cisco [26] 30 VT=01 TL=24 subscriber=RegularLine
00:03:13: RADIUS: Vendor, Cisco [26] 35 VT=01 TL=29 h323-ivr-out=Tariff:Unknown
00:03:13: RADIUS: Vendor, Cisco [26] 22 VT=01 TL=16 pre-bytes-in=0
00:03:13: RADIUS: Vendor, Cisco [26] 23 VT=01 TL=17 pre-bytes-out=0
00:03:13: RADIUS: Vendor, Cisco [26] 21 VT=01 TL=15 pre-paks-in=0
00:03:13: RADIUS: Vendor, Cisco [26] 22 VT=01 TL=16 pre-paks-out=0
00:03:13: RADIUS: Vendor, Cisco [26] 22 VT=01 TL=16 nas-rx-speed=0
00:03:13: RADIUS: Vendor, Cisco [26] 22 VT=01 TL=16 nas-tx-speed=0
00:03:13: RADIUS: Delay-Time [41] 6 0
00:03:13: RADIUS: Received from id 2 10.0.0.0:1824, Accounting-response, len 20

```

Additional References

The following sections provide references related to the RADIUS Debug Enhancements feature.

Related Documents

Related Topic	Document Title
Configuring RADIUS	“Configuring RADIUS” module.
Debug commands: complete command syntax, defaults, command mode, command history, usage guidelines, and examples	<i>Cisco IOS Debug Command Reference</i>

Standards

Standard	Title
None	--

MIBs

MIB	MIBs Link
None	To locate and download MIBs for selected platforms, Cisco IOS releases, and feature sets, use Cisco MIB Locator found at the following URL: http://www.cisco.com/go/mibs

RFCs

RFC	Title
RFC 2138	Remote Authentication Dial In User Service (RADIUS)

Technical Assistance

Description	Link
<p>The Cisco Support website provides extensive online resources, including documentation and tools for troubleshooting and resolving technical issues with Cisco products and technologies.</p> <p>To receive security and technical information about your products, you can subscribe to various services, such as the Product Alert Tool (accessed from Field Notices), the Cisco Technical Services Newsletter, and Really Simple Syndication (RSS) Feeds.</p> <p>Access to most tools on the Cisco Support website requires a Cisco.com user ID and password.</p>	http://www.cisco.com/techsupport

Feature Information for RADIUS Debug Enhancements

The following table provides release information about the feature or features described in this module. This table lists only the software release that introduced support for a given feature in a given software release train. Unless noted otherwise, subsequent releases of that software release train also support that feature.

Use Cisco Feature Navigator to find information about platform support and Cisco software image support. To access Cisco Feature Navigator, go to www.cisco.com/go/cfn. An account on Cisco.com is not required.

Table 9 Feature Information for RADIUS Debug Enhancements

Feature Name	Releases	Feature Information
RADIUS Debug Enhancements	12.2(11)T	<p>This feature provides enhancements to the existing functionality of RADIUS debug parameters.</p> <p>The following commands were introduced or modified: debug radius and show debug.</p>

Glossary

AAA--authentication, authorization, and accounting. Pronounced “triple A.”

ASCII --American Standard Code for Information Interchange. 8-bit code for character representation (7 bits plus parity).

attribute --Form of information items provided by the X.500 Directory Service. The directory information base consists of entries, each containing one or more attributes. Each attribute consists of a type identifier together with one or more values.

IETF--Internet Engineering Task Force. Task force consisting of over 80 working groups responsible for developing Internet standards. The IETF operates under the auspices of ISOC.

RADIUS --Remote Authentication Dial-In User Service. Database for authenticating modem and ISDN connections and for tracking connection time.

VoIP --Voice over IP. The capability to carry normal telephony-style voice over an IP-based internet with POTS-like functionality, reliability, and voice quality. VoIP enables a router to carry voice traffic (for example, telephone calls and faxes) over an IP network. In VoIP, the DSP segments the voice signal into frames, which then are coupled in groups of two and stored in voice packets. These voice packets are transported using IP in compliance with ITU-T specification H.323.

VSA --vendor-specific attribute. An attribute that has been implemented by a particular vendor. It uses the attribute Vendor-Specific to encapsulate the resulting AV pair: essentially, Vendor-Specific = protocol:attribute = value.

Cisco and the Cisco logo are trademarks or registered trademarks of Cisco and/or its affiliates in the U.S. and other countries. To view a list of Cisco trademarks, go to this URL: www.cisco.com/go/trademarks. Third-party trademarks mentioned are the property of their respective owners. The use of the word partner does not imply a partnership relationship between Cisco and any other company. (1110R)

Any Internet Protocol (IP) addresses and phone numbers used in this document are not intended to be actual addresses and phone numbers. Any examples, command display output, network topology diagrams, and other figures included in the document are shown for illustrative purposes only. Any use of actual IP addresses or phone numbers in illustrative content is unintentional and coincidental.



RADIUS Logical Line ID

The RADIUS Logical Line ID feature, also known as the Logical Line Identification (LLID) Blocking feature enables administrators to track their customers on the basis of the physical lines on which customer calls originate. Administrators use a virtual port that does not change as customers move from one physical line to another. This virtual port facilitates the maintenance of the administrator's customer profile database and allows the administrator to do additional security checks on customers.

- [Finding Feature Information, page 83](#)
- [Prerequisites for RADIUS Logical Line ID, page 83](#)
- [Restrictions for RADIUS Logical Line ID, page 83](#)
- [Information About RADIUS Logical Line ID, page 84](#)
- [How to Configure RADIUS Logical Line ID, page 84](#)
- [Configuration Examples for RADIUS Logical Line ID, page 87](#)
- [Additional References, page 88](#)
- [Feature Information for RADIUS Logical Line ID, page 89](#)
- [Glossary, page 90](#)

Finding Feature Information

Your software release may not support all the features documented in this module. For the latest feature information and caveats, see the release notes for your platform and software release. To find information about the features documented in this module, and to see a list of the releases in which each feature is supported, see the Feature Information Table at the end of this document.

Use Cisco Feature Navigator to find information about platform support and Cisco software image support. To access Cisco Feature Navigator, go to www.cisco.com/go/cfn. An account on Cisco.com is not required.

Prerequisites for RADIUS Logical Line ID

Although this feature can be used with any RADIUS server, some RADIUS servers may require modifications to their dictionary files to allow the Calling-Station-ID attribute to be returned in Access-Accept messages. For example, the Merit RADIUS server does not support LLID downloading unless you modify its dictionary as follows: “ATTRIBUTE Calling-Station-Id 31 string (*, *)”

Restrictions for RADIUS Logical Line ID

The RADIUS Logical Line ID feature supports RADIUS only. TACACS+ is not supported.

This feature can be applied only toward PPP over Ethernet over ATM (PPPoEoATM) and PPP over Ethernet over VLAN (PPPoEoVLAN) (Dot1Q) calls; no other calls, such as ISDN, can be used.

Information About RADIUS Logical Line ID

LLID is an alphanumeric string (which must be a minimum of one character and a maximum of 253 characters) that is a logical identification of a subscriber line. LLID is maintained in a customer profile database on a RADIUS server. When the customer profile database receives a preauthorization request from the access router, the RADIUS server sends the LLID to the router as the Calling-Station-ID attribute (attribute 31).

The Layer 2 Tunneling Protocol (L2TP) access concentrator (LAC) sends a preauthorization request to the customer profile database when the LAC is configured for preauthorization. Configure the LAC for preauthorization using the **subscriber access** command.



Note

Downloading the LLID is referred to as “preauthorization” because it occurs before either service (domain) authorization or user authentication and authorization occur.

The customer profile database on the RADIUS server consists of user profiles for each physical network access server (NAS) port that is connected to the router. Each user profile contains a profile matched to a username (attribute 1) representing the physical port on the router. When the router is configured for preauthorization, it queries the customer profile database using a username representative of the physical NAS port making the connection to the router. When a match is found in the customer profile database, the customer profile database returns an Access-Accept message containing the LLID in the user profile. The LLID is defined in the Access-Accept record as the Calling-Station-ID attribute.

The preauthorization process can also provide the real username being used for authentication to the RADIUS server. Because the physical NAS port information is being used as the username (attribute 1), RADIUS attribute 77 (Connect-Info) can be configured to contain the authentication username. This configuration allows the RADIUS server to provide additional validation on the authorization request if it chooses, such as analyzing the username for privacy rules, before returning an LLID back to the router.

How to Configure RADIUS Logical Line ID

- [Configuring Preauthorization, page 84](#)
- [Configuring the LLID in a RADIUS User Profile, page 86](#)
- [Verifying Logical Line ID, page 86](#)

Configuring Preauthorization

To download the LLID and configure the LAC for preauthorization, perform the following steps.

SUMMARY STEPS

1. **enable**
2. **configure terminal**
3. **ip radius source-interface** *interface-name*
4. **subscriber access {pppoe | pppoa} pre-authorize nas-port-id [default | *list-name*][send username]**

DETAILED STEPS

Command or Action	Purpose
<p>Step 1 enable</p> <p>Example:</p> <pre>Router> enable</pre>	<p>Enables privileged EXEC mode.</p> <ul style="list-style-type: none"> • Enter your password if prompted.
<p>Step 2 configure terminal</p> <p>Example:</p> <pre>Router# configure terminal</pre>	<p>Enters global configuration mode.</p>
<p>Step 3 ip radius source-interface <i>interface-name</i></p> <p>Example:</p> <p>Example:</p> <pre>Router (config)# ip radius source-interface Loopback1</pre>	<p>Specifies the IP address portion of the username for the preauthorization request.</p>
<p>Step 4 subscriber access {pppoe pppoa} pre-authorize nas-port-id [default <i>list-name</i>][send username]</p> <p>Example:</p> <p>Example:</p> <pre>Router (config)# subscriber access pppoe pre- authorize nas-port-id mlist_llid send username</pre>	<p>Enables the LLID to be downloaded so the router can be configured for preauthorization.</p> <p>The send username option specifies that you include the authentication username of the session inside the Connect-Info (attribute 77) in the Access-Request message.</p>

Configuring the LLID in a RADIUS User Profile

To configure the user profile for preauthorization, add a NAS port user to the customer profile database and add RADIUS Internet Engineering Task Force (IETF) attribute 31 (Calling-Station-ID) to the user profile.

SUMMARY STEPS

1. `UserName=nas_port: ip-address:slot/module/port/vpi.vci`
2. `User-Name=nas-port: ip-address:slot/module/port/vlan-id`
3. `Calling-Station-Id = "string (*,*)"`

DETAILED STEPS

Command or Action	Purpose
Step 1 <code>UserName=nas_port: ip-address:slot/module/port/vpi.vci</code>	(Optional) Adds a PPPoE over ATM NAS port user.
Step 2 <code>User-Name=nas-port: ip-address:slot/module/port/vlan-id</code>	(Optional) Adds a PPPoE over VLAN NAS port user.
Step 3 <code>Calling-Station-Id = "string (*,*)"</code>	Adds attribute 31 to the user profile. <ul style="list-style-type: none"> • String--One or more octets, containing the phone number from which the user placed the call.

Verifying Logical Line ID

To verify feature functionality, perform the following steps.

SUMMARY STEPS

1. `enable`
2. `debug radius`

DETAILED STEPS

Command or Action	Purpose
Step 1 <code>enable</code> Example: <code>Router> enable</code>	Enables privileged EXEC mode. <ul style="list-style-type: none"> • Enter your password if prompted.
Step 2 <code>debug radius</code> Example: <code>Router# debug radius</code>	Checks to see that RADIUS attribute 31 is the LLID in the Accounting-Request on LAC and in the Access-Request and Accounting-Request on the LNS.

Configuration Examples for RADIUS Logical Line ID

- [LAC for Preauthorization Configuration Example, page 87](#)
- [RADIUS User Profile for LLID Example, page 88](#)

LAC for Preauthorization Configuration Example

The following example shows how to configure your LAC for preauthorization by downloading the LLID:

```

aaa new-model
aaa group server radius sg_llid
  server 172.31.164.106 auth-port 1645 acct-port 1646
aaa group server radius sg_water
  server 172.31.164.106 auth-port 1645 acct-port 1646
aaa authentication ppp default group radius
aaa authorization config-commands
aaa authorization network default group sg_water
aaa authorization network mlist_llid group sg_llid
aaa session-id common
!
username s7200_2 password 0 lab
username s5300 password 0 lab
username sg_water password 0 lab
vpdn enable
!
vpdn-group 2
  request-dialin
  protocol l2tp
  domain water.com
  domain water.com#184
  initiate-to ip 10.1.1.1
  local name s7200_2
  l2tp attribute clid mask-method right * 255 match #184
!
vpdn-group 3
  accept dialin
  protocol pppoe
  virtual-template 1
!
!
Enable the LLID to be downloaded.
subscriber access pppoe pre-authorize nas-port-id mlist_llid send username
!
interface Loopback0
  ip address 10.1.1.2 255.255.255.0
!
interface Loopback1
  ip address 10.1.1.1 255.255.255.0
!
interface Ethernet1/0
  ip address 10.1.1.8 255.255.255.0 secondary
  ip address 10.0.58.111 255.255.255.0
  no cdp enable
!
interface ATM4/0
  no ip address
  no atm ilmi-keepalive
!
interface ATM4/0.1 point-to-point
  pvc 1/100
  encapsulation aal5snap
  protocol pppoe
!
interface virtual-templatel
  no ip unnumbered Loopback0
  no peer default ip address

```

```

ppp authentication chap
!
radius-server host 172.31.164.120 auth-port 1645 acct-port 1646 key rad123
radius-server host 172.31.164.106 auth-port 1645 acct-port 1646 key rad123
ip radius source-interface Loopback1

```

RADIUS User Profile for LLID Example

The following example shows how to configure the user profile for LLID querying for PPPoEoVLAN and PPPoEoATM and how to add attribute 31:

```

pppoeovlan
-----
nas-port:10.1.0.3:6/0/0/0 Password = "cisco",
  Service-Type = Outbound,
  Calling-Station-ID = "cat-example"
pppoeoa
-----
nas-port:10.1.0.3:6/0/0/1.100 Password = "cisco",
  Service-Type = Outbound,
  Calling-Station-ID = "cat-example"

```

Additional References

The following sections provide references related to RADIUS Logical Line ID.

Related Documents

Related Topic	Document Title
AAA authentication	“Configuring AAA Preauthentication” section in the “Configuring RADIUS” module.
Attribute screening for access requests	“RADIUS Attribute Screening” section in the in the “Configuring RADIUS” module .
Broadband access: PPP and routed bridge encapsulation	<i>Cisco IOS Broadband Access Aggregation and DSL Configuration Guide</i> , Release 12.4T
Dial technologies	<i>Cisco IOS Dial Technologies Configuration Guide</i> , Release 12.4T

Standards

Standard	Title
None	--

MIBs

MIB	MIBs Link
None	To locate and download MIBs for selected platforms, Cisco IOS releases, and feature sets, use Cisco MIB Locator found at the following URL: http://www.cisco.com/go/mibs

RFCs

RFC	Title
None	--

Technical Assistance

Description	Link
<p>The Cisco Support website provides extensive online resources, including documentation and tools for troubleshooting and resolving technical issues with Cisco products and technologies.</p> <p>To receive security and technical information about your products, you can subscribe to various services, such as the Product Alert Tool (accessed from Field Notices), the Cisco Technical Services Newsletter, and Really Simple Syndication (RSS) Feeds.</p> <p>Access to most tools on the Cisco Support website requires a Cisco.com user ID and password.</p>	http://www.cisco.com/techsupport

Feature Information for RADIUS Logical Line ID

The following table provides release information about the feature or features described in this module. This table lists only the software release that introduced support for a given feature in a given software release train. Unless noted otherwise, subsequent releases of that software release train also support that feature.

Use Cisco Feature Navigator to find information about platform support and Cisco software image support. To access Cisco Feature Navigator, go to www.cisco.com/go/cfn. An account on Cisco.com is not required.

Table 10 **Feature Information for RADIUS Logical Line ID**

Feature Name	Releases	Feature Information
RADIUS Logical Line ID	12.2(13)T 12.2(15)B 12.3(14)YM1 12.4(2)T 12.3(14)YM2 12.2(28)SB 12.2(31)SB2 12.2(33)SRC	<p>The RADIUS Logical Line ID feature, also known as the Logical Line Identification (LLID) Blocking feature enables administrators to track their customers on the basis of the physical lines on which customer calls originate.</p> <p>This feature was introduced in Cisco IOS Release 12.2(13)T.</p> <p>This feature was integrated into Cisco IOS Release 12.2(15)B.</p> <p>This feature was integrated into Cisco IOS Release 12.3(14)YM1, and the send username keyword was added to the subscriber access command.</p> <p>This feature was integrated into Cisco IOS Release 12.4(2)T.</p> <p>This feature was integrated into Cisco IOS Release 12.3(14)YM2.</p> <p>This feature was integrated into Cisco IOS Release 12.2(28)SB.</p> <p>This feature was integrated into Cisco IOS Release 12.2(31)SB2.</p> <p>This feature was integrated into Cisco IOS Release 12.2(33)SRC.</p> <p>The subscriber access command was introduced by this feature.</p>

Glossary

LLID Blocking --A feature that enables administrators to track their customers on the basis of the physical lines on which the calls of the customers originate. Also known as RADIUS Logical Line ID.

RADIUS Logical Line ID --A feature that enables administrators to track their customers on the basis of the physical lines on which the calls of the customers originate. Also known as LLID Blocking.

Any Internet Protocol (IP) addresses and phone numbers used in this document are not intended to be actual addresses and phone numbers. Any examples, command display output, network topology diagrams, and other figures included in the document are shown for illustrative purposes only. Any use of actual IP addresses or phone numbers in illustrative content is unintentional and coincidental. © 2002, 2003, 2005-2009 Cisco Systems, Inc. All rights reserved.

Cisco and the Cisco logo are trademarks or registered trademarks of Cisco and/or its affiliates in the U.S. and other countries. To view a list of Cisco trademarks, go to this URL: www.cisco.com/go/trademarks. Third-party trademarks mentioned are the property of their respective owners. The use of the word partner does not imply a partnership relationship between Cisco and any other company. (1110R)

Any Internet Protocol (IP) addresses and phone numbers used in this document are not intended to be actual addresses and phone numbers. Any examples, command display output, network topology diagrams, and other figures included in the document are shown for illustrative purposes only. Any use of actual IP addresses or phone numbers in illustrative content is unintentional and coincidental.



RADIUS Route Download

The RADIUS Route Download feature allows users to configure their network access server (NAS) to direct RADIUS authorization. Users configure a separate named method list (in addition to the default method list) for static route download requests sent by their NAS to authorization, authentication, and accounting (AAA) servers.

Before this feature, RADIUS authorization for static route download requests was sent only to AAA servers specified by the default method list.

This feature extends the functionality of the **aaa route download** command to allow users to specify the name of the method list that will be used to direct static route download requests to the AAA servers. The **aaa route download** command may be used to specify a separate method list for downloading static routes. This method list can be added by using the **aaa authorization configuration** command.

- [Finding Feature Information, page 93](#)
- [Prerequisites for RADIUS Route Download, page 93](#)
- [How to Configure RADIUS Route Download, page 93](#)
- [Configuration Examples for RADIUS Route Download, page 94](#)
- [Additional References, page 95](#)
- [Feature Information for RADIUS Route Download, page 96](#)

Finding Feature Information

Your software release may not support all the features documented in this module. For the latest feature information and caveats, see the release notes for your platform and software release. To find information about the features documented in this module, and to see a list of the releases in which each feature is supported, see the Feature Information Table at the end of this document.

Use Cisco Feature Navigator to find information about platform support and Cisco software image support. To access Cisco Feature Navigator, go to www.cisco.com/go/cfn. An account on Cisco.com is not required.

Prerequisites for RADIUS Route Download

AAA network security must be enabled before you perform the tasks in this feature.

How to Configure RADIUS Route Download

- [Configuring RADIUS Route Download, page 94](#)

- [Verifying RADIUS Route Download, page 94](#)

Configuring RADIUS Route Download

To configure the NAS to send static route download requests to the servers specified by a named method list, use the following commands in global configuration mode:

SUMMARY STEPS

1. Router(config)# **aaa authorization configuration** *method-name* [**radius** | **tacacs+** | **group** *group-name*]
2. Router(config)# **aaa route download** [*time*] [**authorization** *method-list*]

DETAILED STEPS

	Command or Action	Purpose
Step 1	Router(config)# aaa authorization configuration <i>method-name</i> [radius tacacs+ group <i>group-name</i>]	Downloads static route configuration information from the AAA server using RADIUS.
Step 2	Router(config)# aaa route download [<i>time</i>] [authorization <i>method-list</i>]	Enables the static route download feature. Use the authorization <i>method-list</i> attributes to specify a named method list to which RADIUS authorization requests for static route downloads are sent.

Verifying RADIUS Route Download

To verify the routes that are installed, use the **show ip route** command in EXEC mode.

To display information that is associated with RADIUS, use the **debug radius** command in privileged EXEC mode.

Configuration Examples for RADIUS Route Download

- [RADIUS Route Download Configuration Example, page 94](#)

RADIUS Route Download Configuration Example

The following example shows how to configure the NAS to send static route download requests to the servers specified by the method list named “list1”:

```
aaa new-model
aaa group server radius rad1
server 10.2.2.2 auth-port 1645 acct-port 1646
!
aaa group server tacacs+ tac1
server 172.17.3.3
!
aaa authorization configuration default group radius
aaa authorization configuration list1 group rad1 group tac1
aaa route download 1 authorization list1
```

```

tacacs-server host 172.17.3.3
tacacs-server key cisco
tacacs-server administration
!
radius-server host 10.2.2.2 auth-port 1645 acct-port 1646
radius-server key cisco

```

Additional References

The following sections provide references related to RADIUS Route Download.

Related Documents

Related Topic	Document Title
Configuring Large-Scale Dial-Out	<i>Cisco IOS Dial Technologies Command Reference</i>
Cisco IOS Dial Technologies	

Standards

Standard	Title
None	--

MIBs

MIB	MIBs Link
None	To locate and download MIBs for selected platforms, Cisco IOS releases, and feature sets, use Cisco MIB Locator found at the following URL: http://www.cisco.com/go/mibs

RFCs

RFC	Title
None	--

Technical Assistance

Description	Link
<p>The Cisco Support website provides extensive online resources, including documentation and tools for troubleshooting and resolving technical issues with Cisco products and technologies.</p> <p>To receive security and technical information about your products, you can subscribe to various services, such as the Product Alert Tool (accessed from Field Notices), the Cisco Technical Services Newsletter, and Really Simple Syndication (RSS) Feeds.</p> <p>Access to most tools on the Cisco Support website requires a Cisco.com user ID and password.</p>	<p>http://www.cisco.com/techsupport</p>

Feature Information for RADIUS Route Download

The following table provides release information about the feature or features described in this module. This table lists only the software release that introduced support for a given feature in a given software release train. Unless noted otherwise, subsequent releases of that software release train also support that feature.

Use Cisco Feature Navigator to find information about platform support and Cisco software image support. To access Cisco Feature Navigator, go to www.cisco.com/go/cfn. An account on Cisco.com is not required.

Table 11 Feature Information for RADIUS Route Download

Feature Name	Releases	Feature Information
RADIUS Route Download	12.2(8)T 12.2(28)SB 12.2(33)SRC	<p>The RADIUS Route Download feature allows users to configure their network access server (NAS) to direct RADIUS authorization. Users configure a separate named method list (in addition to the default method list) for static route download requests sent by their NAS to authorization, authentication, and accounting (AAA) servers.</p> <p>The aaa route download command was introduced by this feature.</p>

Cisco and the Cisco logo are trademarks or registered trademarks of Cisco and/or its affiliates in the U.S. and other countries. To view a list of Cisco trademarks, go to this URL: www.cisco.com/go/trademarks. Third-party trademarks mentioned are the property of their respective owners. The use of the word partner does not imply a partnership relationship between Cisco and any other company. (1110R)

Any Internet Protocol (IP) addresses and phone numbers used in this document are not intended to be actual addresses and phone numbers. Any examples, command display output, network topology diagrams, and other figures included in the document are shown for illustrative purposes only. Any use of actual IP addresses or phone numbers in illustrative content is unintentional and coincidental.



RADIUS Support of 56-Bit Acct Session-Id

The RADIUS Support of 56-Bit Acct Session-Id feature introduces a new 32-bit authentication, authorization, and accounting (AAA) variable, `acct-session-id-count`. The first eight bits of the `acct-session-id-count` variable are reserved for the unique identifier variable, a unique number assigned to the accounting session which is preserved between reloads. The `acct-session-id-count` variable is used in addition to the existing 32-bit `acct-session-id` variable, RADIUS attribute 44, providing a total of 56 bits of to represent the actual Accounting Session Identifier (ID). Benefits of this feature include the following:

- The 8-bit unique identifier variable allows accounting session IDs to be identified if a reload occurs.
- The additional space provided by the `acct-session-id-count` variable can keep track of `acct-session-id` wrapping when there is a high volume of traffic, such as voice calls. By incrementing each time the `acct-session-id` variable wraps, the `acct-session-id-count` variable preserves accounting information.
- [Finding Feature Information, page 99](#)
- [Prerequisites for RADIUS Support of 56-Bit Acct Session-Id, page 99](#)
- [Information About RADIUS Support of 56-Bit Acct Session-Id, page 100](#)
- [How to Configure RADIUS Support of 56-Bit Acct Session-Id, page 100](#)
- [Configuration Examples for RADIUS Support of 56-Bit Acct Session-Id, page 101](#)
- [Additional References, page 101](#)
- [Feature Information for RADIUS Support of 56-Bit Acct Session-Id, page 103](#)

Finding Feature Information

Your software release may not support all the features documented in this module. For the latest feature information and caveats, see the release notes for your platform and software release. To find information about the features documented in this module, and to see a list of the releases in which each feature is supported, see the Feature Information Table at the end of this document.

Use Cisco Feature Navigator to find information about platform support and Cisco software image support. To access Cisco Feature Navigator, go to www.cisco.com/go/cfn. An account on Cisco.com is not required.

Prerequisites for RADIUS Support of 56-Bit Acct Session-Id

AAA accounting must be configured. For more information about configuring AAA accounting, refer to the “Configuring Accounting” chapter in the *Cisco IOS Security Configuration Guide* .

Information About RADIUS Support of 56-Bit Acct Session-Id

- [Acct-Session-Id Attribute, page 100](#)
- [Acct-Session-Id-Count Attribute, page 100](#)

Acct-Session-Id Attribute

RADIUS attribute 44, Accounting Session ID, is a unique accounting identifier that makes it easy to match start and stop records in a log file. Accounting session ID numbers restart at 1 each time the router is power-cycled or the software is reloaded. RADIUS attribute 44 is automatically enabled when AAA accounting is configured.

The acct-session-id variable is a 32-bit variable that can take on values from 00000000-FFFFFFFF.

Acct-Session-Id-Count Attribute

The new acct-session-id-count variable is a 32-bit variable. The first eight bits of the variable are reserved for the unique identifier variable, an identifier that allows the RADIUS server to identify an accounting session if a reload occurs. The remaining 24 bits of the acct-session-id-count variable acts as a counter variable. When the first acct-session-id variable is assigned, this counter variable is set to 1. The variable increments by 1 every time the acct-session-id variable wraps, preventing the loss of accounting information.

The acct-session-id-count variable can take on values from ##000000- ##FFFFFF, where ## represents the eight bits that are reserved for the unique identifier variable.

The acct-session-id-count and acct-session-id variables are concatenated before being sent to the RADIUS server, resulting in the acct-session variable being represented as the following:

```
##000000 00000000- ##FFFFFF FFFFFFFF
```

This allows a total of 56 bits to be used for acct-session-id space.

How to Configure RADIUS Support of 56-Bit Acct Session-Id

- [Configuring RADIUS Support of 56-Bit Acct Session-Id, page 100](#)

Configuring RADIUS Support of 56-Bit Acct Session-Id

This task enables the acct-session-id-count variable containing the unique identifier variable.

SUMMARY STEPS

1. **enable**
2. **radius-server unique-ident *id***

DETAILED STEPS

Command or Action	Purpose
Step 1 <code>enable</code> Example: <pre>Router> enable</pre>	Enables privileged EXEC mode. <ul style="list-style-type: none"> Enter your password if prompted.
Step 2 <code>radius-server unique-ident id</code> Example: <pre>Router(config)# radius-server unique-ident 5</pre>	Enables the acct-session-id-count variable containing the unique identifier variable. <ul style="list-style-type: none"> The <i>id</i> argument specifies the unique identifier represented by the first eight bits of the acct-session-id-count variable. Valid values range from 0 to 255.

Configuration Examples for RADIUS Support of 56-Bit Acct Session-Id

- [Configuring RADIUS Support of 56-Bit Acct Session-Id Example, page 101](#)

Configuring RADIUS Support of 56-Bit Acct Session-Id Example

The following example configures AAA authentication, enables RADIUS attribute 44 in access request packets, and enables the acct-session-id-count variable and sets the unique identifier variable to 5:

```
aaa new-model
aaa authentication ppp default group radius
radius-server host 10.100.1.34
radius-server unique-ident 5
```

Additional References

The following sections provide references related to the RADIUS Support of 56-Bit Acct Session-ID feature.

Related Documents

Related Topic	Document Title
Configuring RADIUS	See the “Configuring RADIUS” feature module.
Configuring accounting	See the “Configuring Accounting” feature module.

Related Topic	Document Title
AAA RADIUS attributes	See the “ RADIUS Attributes Overview and RADIUS IETF Attributes ” feature module.
RADIUS commands	<i>Cisco IOS Security Command Reference</i>

Standards

Standard	Title
None	--

MIBs

MIB	MIBs Link
None	To locate and download MIBs for selected platforms, Cisco IOS releases, and feature sets, use Cisco MIB Locator found at the following URL: http://www.cisco.com/go/mibs

RFCs

RFC	Title
RFC 2139	RADIUS Accounting

Technical Assistance

Description	Link
<p>The Cisco Support website provides extensive online resources, including documentation and tools for troubleshooting and resolving technical issues with Cisco products and technologies.</p> <p>To receive security and technical information about your products, you can subscribe to various services, such as the Product Alert Tool (accessed from Field Notices), the Cisco Technical Services Newsletter, and Really Simple Syndication (RSS) Feeds.</p> <p>Access to most tools on the Cisco Support website requires a Cisco.com user ID and password.</p>	http://www.cisco.com/techsupport

Feature Information for RADIUS Support of 56-Bit Acct Session-Id

The following table provides release information about the feature or features described in this module. This table lists only the software release that introduced support for a given feature in a given software release train. Unless noted otherwise, subsequent releases of that software release train also support that feature.

Use Cisco Feature Navigator to find information about platform support and Cisco software image support. To access Cisco Feature Navigator, go to www.cisco.com/go/cfn. An account on Cisco.com is not required.

Table 12 Feature Information for RADIUS Support of 56-Bit Acct Session-Id

Feature Name	Releases	Feature Information
RADIUS Support of 56-Bit Acct Session-ID	12.3(2)T	<p>The RADIUS Support of 56-Bit Acct Session-Id feature introduces a new 32-bit authentication, authorization, and accounting (AAA) variable, acct-session-id-count.</p> <p>This feature was introduced in Cisco IOS Release 12.3(2)T.</p> <p>The following commands were introduced or modified: radius-server unique-iden.</p>

Cisco and the Cisco logo are trademarks or registered trademarks of Cisco and/or its affiliates in the U.S. and other countries. To view a list of Cisco trademarks, go to this URL: www.cisco.com/go/trademarks. Third-party trademarks mentioned are the property of their respective owners. The use of the word partner does not imply a partnership relationship between Cisco and any other company. (1110R)

Any Internet Protocol (IP) addresses and phone numbers used in this document are not intended to be actual addresses and phone numbers. Any examples, command display output, network topology diagrams, and other figures included in the document are shown for illustrative purposes only. Any use of actual IP addresses or phone numbers in illustrative content is unintentional and coincidental.



RADIUS Tunnel Preference for Load Balancing and Fail-Over

The RADIUS Tunnel Preference for Load Balancing and Fail-Over feature provides industry-standard load balancing and fail-over functionality for an Layer 2 Tunnel Protocol network server (LNS), rather than requiring the use of a Cisco proprietary Vendor Specific Attribute (VSA). The feature conforms to the tunnel attributes that are to be used in a multivendor network environment as defined in RFC 2868, thereby eliminating interoperability issues among network access servers (NASs) manufactured by different vendors.

- [Finding Feature Information, page 105](#)
- [Prerequisites, page 105](#)
- [Restrictions, page 106](#)
- [Information About RADIUS Tunnel Preference for Load Balancing and Fail-Over, page 106](#)
- [How RADIUS Tunnel Preference for Load Balancing and Fail-Over is Configured, page 108](#)
- [Configuration Example for RADIUS Tunnel Preference for Load Balancing and Fail-Over, page 108](#)
- [Additional References, page 108](#)
- [Feature Information for RADIUS Tunnel Preference for Load Balancing and Fail-Over, page 109](#)
- [Glossary, page 110](#)

Finding Feature Information

Your software release may not support all the features documented in this module. For the latest feature information and caveats, see the release notes for your platform and software release. To find information about the features documented in this module, and to see a list of the releases in which each feature is supported, see the Feature Information Table at the end of this document.

Use Cisco Feature Navigator to find information about platform support and Cisco software image support. To access Cisco Feature Navigator, go to www.cisco.com/go/cfn. An account on Cisco.com is not required.

Prerequisites

Configuring VPDNs and HGW groups is beyond the scope of this document. See the Related Document section for more information.

Restrictions

The following restrictions and limitations apply to the RADIUS Tunnel Preference for Load Balancing and Fail-Over feature:

- This feature does not support VPDN dial-out networks; it is designed only for dial-in applications.
- The maximum number of LNSs allowed in the network is 1550, which is 50 per tag attribute group and a limit of 31 tags.
- This feature requires a RADIUS server implementation to support RFC 2868.

Information About RADIUS Tunnel Preference for Load Balancing and Fail-Over

The RADIUS Tunnel Preference for Load Balancing and Fail-Over feature provides load balancing and fail-over virtual private dialup network (VPDN) home gateway (HGW) groups in a standardized fashion. This feature introduces new software functionality; no new command is associated with this feature.

- [Industry-Standard Rather Than Proprietary Attributes, page 106](#)
- [Load Balancing and Fail-Over in a Multivendor Network, page 107](#)
- [Related Features and Technologies, page 107](#)

Industry-Standard Rather Than Proprietary Attributes

Until Cisco IOS Release 12.2(4)T, load balancing and fail-over functionality for a LNS was provided by the Cisco proprietary VSA. In a multivendor network environment, using VSA on a RADIUS server can cause interoperability issues among NASs manufactured by different vendors. Even though some RADIUS server implementations can send VSAs that the requesting NAS can understand, the user still must maintain different VSAs for the same purpose in a single-service profile.

A consensus regarding the tunnel attributes that are to be used in a multivendor network environment is defined in RFC 2868. In RFC 2868, Tunnel-Server-Endpoint, in conjunction with the Tunnel-Medium-Type, specifies the address to which the NAS should initiate a new session. If multiple Tunnel-Server-Endpoint attributes are defined in one tagged attribute group, they are interpreted as equal-cost load-balancing HGWs.

The Tunnel-Preference attribute defined in RFC 2868 can be used as a measure to form load balancing and fail-over HGW groups. When the Tunnel-Preference values of different tagged attribute groups are the same, the Tunnel-Server-Endpoint of those attribute groups is considered to have the same priority unless otherwise specified. When the Tunnel-Preference values of some attribute groups are higher (they have a lower preference) than other attribute groups, their Tunnel-Server-Endpoint attributes will have higher priority values. When an attribute group has a higher priority value, that attribute group will be used for fail-over in case the attribute groups with lower priority values are unavailable for the connections.


Until Cisco IOS Release 12.2(4)T, a specially formatted string would be transported within a Cisco VSA “vpdn:ip-addresses” string to a NAS for the purpose of HGW load balancing and fail-over. For example, 10.0.0.1 10.0.0.2 10.0.0.3/2.0.0.1 2.0.0.2 would be interpreted as IP addresses 10.0.0.1, 10.0.0.2, and 10.0.0.3 for the first group for load balancing. New sessions are projected to these three addresses based on the least-load-first algorithm. This algorithm uses its local knowledge to select an HGW that has the least load to initiate the new session. In this example, the addresses 2.0.0.1 and 2.0.0.2 in the second group have a lower priority and are applicable only when all HGWs specified in the first group fail to respond to the

new connection request, thereby making 2.0.0.1 and 2.0.0.2 the fail-over addresses. See the section [Configuration Example for RADIUS Tunnel Preference for Load Balancing and Fail-Over](#), page 108 for an example of how to configure these fail-over addresses in a RADIUS tunnel profile.

Load Balancing and Fail-Over in a Multivendor Network

The RADIUS Tunnel Preference for Load Balancing and Fail-Over feature was designed for large multivendor networks that use VPDN Layer 2 tunnels over WAN links such as ATM and Ethernet, such as the configuration shown in the figure below.

Figure 1 Typical Load Balancing and Fail-Over in a Multivendor Network

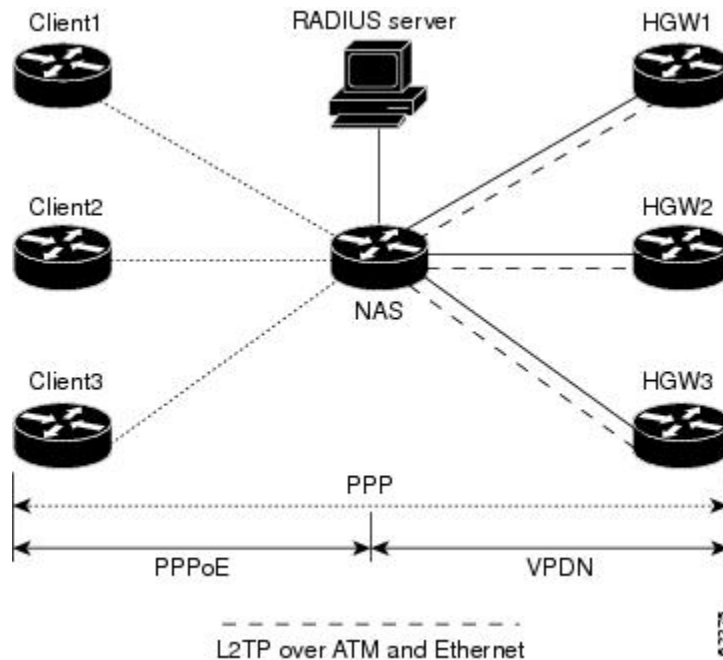

In the configuration shown in the figure above, the NAS uses tunnel profiles downloaded from the RADIUS server to establish VPDN Layer 2 tunnels for load balancing and fail-over. The Point-to-Point over Ethernet (PPPoE) protocol is used as the client to generate PPP sessions.

Related Features and Technologies

The RADIUS Tunnel Preference for Load Balancing and Fail-Over feature is used in VPDNs. Additionally, familiarity with the following technologies and protocols is recommended:

- ATM
- Ethernet
- L2TP and L2F
- PPP and PPPoE
- RADIUS servers

How RADIUS Tunnel Preference for Load Balancing and Fail-Over is Configured

This feature has no new configuration commands; however, see the next section for an example of how to implement the RADIUS Tunnel Preference for Load Balancing and Fail-Over feature in a RADIUS tunnel profile.

Configuration Example for RADIUS Tunnel Preference for Load Balancing and Fail-Over

The following example shows how to create RADIUS tunnel profiles:

```
net3 Password = "cisco" Service-Type = Outbound
  Tunnel-Type = :0:L2TP,
  Tunnel-Medium-Type = :0:IP,
  Tunnel-Server-Endpoint = :0:"1.1.3.1",
  Tunnel-Assignment-Id = :0:"1",
  Tunnel-Preference = :0:1,
  Tunnel-Password = :0:"welcome"
  Tunnel-Type = :1:L2TP,
  Tunnel-Medium-Type = :1:IP,
  Tunnel-Server-Endpoint = :1:"1.1.5.1",
  Tunnel-Assignment-Id = :1:"1",
  Tunnel-Preference = :1:1,
  Tunnel-Password = :1:"welcome"
  Tunnel-Type = :2:L2TP,
  Tunnel-Medium-Type = :2:IP,
  Tunnel-Server-Endpoint = :2:"1.1.4.1",
  Tunnel-Assignment-Id = :2:"1",
  Tunnel-Preference = :2:1,
  Tunnel-Password = :2:"welcome"
  Tunnel-Type = :3:L2TP,
  Tunnel-Medium-Type = :3:IP,
  Tunnel-Server-Endpoint = :3:"1.1.6.1",
  Tunnel-Assignment-Id = :3:"1",
  Tunnel-Preference = :3:1,
  Tunnel-Password = :3:"welcome"
```

See [Information About RADIUS Tunnel Preference for Load Balancing and Fail-Over, page 106](#) for more information on how fail-over addresses are selected in these profiles. See the [Configuration Example for RADIUS Tunnel Preference for Load Balancing and Fail-Over, page 108](#) for documents used create RADIUS tunnel profiles.

Additional References

The following sections provide references related to RADIUS Tunnel Preference for Load Balancing and Fail-Over feature.

Related Documents

Related Topic	Document Title
RADIUS	“Configuring RADIUS” module.

Related Topic	Document Title
RADIUS Attributes	“ RADIUS Attributes Overview and RADIUS IETF Attributes ” module.
Virtual private dialup networks (VPDN) roadmap	<i>Cisco IOS VPDN Configuration Guide</i> , Release 15.0.
Dial Technologies	<i>Cisco IOS Dial Technologies Configuration Guide</i> , Release 12.4T
Broadband Access: PPP and Routed Bridge Encapsulation	<i>Cisco IOS Broadband Access Aggregation and DSL Configuration Guide</i> , Release 12.4T
Standards	
Standard	Title
None.	--
MIBs	
MIB	MIBs Link
None.	To locate and download MIBs for selected platforms, Cisco IOS releases, and feature sets, use Cisco MIB Locator found at the following URL: http://www.cisco.com/go/mibs
RFCs	
RFC	Title
RFC 2868	RADIUS Attributes for Tunnel Protocol Support

Feature Information for RADIUS Tunnel Preference for Load Balancing and Fail-Over

The following table provides release information about the feature or features described in this module. This table lists only the software release that introduced support for a given feature in a given software release train. Unless noted otherwise, subsequent releases of that software release train also support that feature.

Use Cisco Feature Navigator to find information about platform support and Cisco software image support. To access Cisco Feature Navigator, go to www.cisco.com/go/cfn. An account on Cisco.com is not required.

Table 13 *Feature Information for RADIUS Tunnel Preference for Load Balancing and Fail-Over*

Feature Name	Releases	Feature Information
RADIUS Tunnel Preference for Load Balancing and Fail-Over	12.2(4)T	<p>The RADIUS Tunnel Preference for Load Balancing and Fail-Over feature provides industry-standard load balancing and fail-over functionality for an Layer 2 Tunnel Protocol network server (LNS), rather than requiring the use of a Cisco proprietary Vendor Specific Attribute (VSA). The feature conforms to the tunnel attributes that are to be used in a multivendor network environment as defined in RFC 2868, thereby eliminating interoperability issues among network access servers (NASs) manufactured by different vendors.</p> <p>This feature was introduced in Cisco IOS Release 12.2(4)T.</p>

Glossary

HGW --home gateway. A gateway that terminates Layer 2 tunneling protocols such as L2TP.

home gateway --See HGW.

L2TP --Layer 2 Tunnel Protocol. An Internet Engineering Task Force (IETF) standards track protocol defined in RFC 2661 that provides tunneling of PPP. Based upon the best features of L2F and PPTP, L2TP provides an industry-wide interoperable method of implementing VPDN.

L2TP network server--See LNS.

Layer 2 Tunnel Protocol --See L2TP.

LNS --L2TP network server. A node that acts as one side of an L2TP tunnel endpoint and is a peer to the NAS or L2TP access concentrator (LAC). The LNS is the logical termination point of a PPP session that is being tunneled from the remote system by the access server. Analogous to the Layer 2 Forwarding (L2F) HGW.

NAS --network access server. Cisco platform or collection of platforms that interfaces between the packet world (the Internet, for example) and the circuit world (the public switched telephone network, for example).

network access server --See NAS.

Request for Comments --See RFCs.

RFCs --Request for Comments. A series of notes about the Internet collected by the Internet Engineering Task Force (IETF). Started in 1969, the IETF is a large open international community of network designers, operators, vendors, and researchers concerned with the evolution of the Internet architecture.

RFCs define many aspects of computer communication, focusing on networking protocols, procedures, programs, and concepts.

virtual private dialup network --See VPDN.

VPDN --virtual private dialup network. Enables IP traffic to travel securely over a public TCP/IP network by encrypting all traffic from one network to another.

Any Internet Protocol (IP) addresses and phone numbers used in this document are not intended to be actual addresses and phone numbers. Any examples, command display output, network topology diagrams, and other figures included in the document are shown for illustrative purposes only. Any use of actual IP addresses or phone numbers in illustrative content is unintentional and coincidental. © 2001-2009 Cisco Systems, Inc. All rights reserved.

Cisco and the Cisco logo are trademarks or registered trademarks of Cisco and/or its affiliates in the U.S. and other countries. To view a list of Cisco trademarks, go to this URL: www.cisco.com/go/trademarks. Third-party trademarks mentioned are the property of their respective owners. The use of the word partner does not imply a partnership relationship between Cisco and any other company. (1110R)

Any Internet Protocol (IP) addresses and phone numbers used in this document are not intended to be actual addresses and phone numbers. Any examples, command display output, network topology diagrams, and other figures included in the document are shown for illustrative purposes only. Any use of actual IP addresses or phone numbers in illustrative content is unintentional and coincidental.



RADIUS Server Reorder on Failure

The RADIUS Server Reorder on Failure feature provides for failover to another server in the server group during periods of high load or when server failure occurs. Subsequent to the failure, all RADIUS traffic is directed to the new server. Traffic is switched from the new server to another server in the server group only if the new server also fails. Traffic is not automatically switched back to the first server.

By spreading the RADIUS transactions across multiple servers, authentication and accounting requests are serviced more quickly.

- [Finding Feature Information, page 113](#)
- [Prerequisites for RADIUS Server Reorder on Failure, page 113](#)
- [Restrictions for RADIUS Server Reorder on Failure, page 114](#)
- [Information About RADIUS Server Reorder on Failure, page 114](#)
- [How to Configure RADIUS Server Reorder on Failure, page 115](#)
- [Configuration Examples for RADIUS Server Reorder on Failure, page 119](#)
- [Additional References, page 121](#)
- [Feature Information for RADIUS Server Reorder on Failure, page 122](#)

Finding Feature Information

Your software release may not support all the features documented in this module. For the latest feature information and caveats, see the release notes for your platform and software release. To find information about the features documented in this module, and to see a list of the releases in which each feature is supported, see the Feature Information Table at the end of this document.

Use Cisco Feature Navigator to find information about platform support and Cisco software image support. To access Cisco Feature Navigator, go to www.cisco.com/go/cfn. An account on Cisco.com is not required.

Prerequisites for RADIUS Server Reorder on Failure

- Before you can configure your RADIUS server to perform reorder on failure, you must enable authentication, authorization, and accounting (AAA) by using the **aaa new-model** command.
- You must also have RADIUS configured, for functions such as authentication, accounting, or static route download.

Restrictions for RADIUS Server Reorder on Failure

- An additional 4 bytes of memory is required per server group. However, because most server configurations have only a small number of server groups configured, the additional 4 bytes should have a minimal impact on performance.
- Some RADIUS features within the Cisco IOS software set may not be capable of using this feature. If a RADIUS feature cannot use the RADIUS Server Reorder on Failure feature, your server behaves as though the reorder feature is not configured.

Information About RADIUS Server Reorder on Failure

- [RADIUS Server Failure, page 114](#)
- [How the RADIUS Server Reorder on Failure Feature Works, page 114](#)

RADIUS Server Failure

If the RADIUS Server Reorder on Failure feature is not configured and server failure occurs:

- 1 A new RADIUS transaction has to be performed.
- 2 A RADIUS packet for the transaction is sent to the first server in the group that is not marked dead (as per the configured deadtime) and is retransmitted for the configured number of retransmissions.
- 3 If all of those retransmits time out (as per the configured timeout), the router transmits the packet to the next nondead server in the list for the configured number of retransmissions.
- 4 Step 3 is repeated until the specified maximum number of transmissions per transaction have been made. If the end of the list is reached before the maximum number of transmissions has been reached, the router goes back to the beginning of the list and continue from there.

If at any time during this process, a server meets the dead-server detection criteria (not configurable; it varies depending on the version of Cisco IOS software being used), the server is marked as dead for the configured deadtime.

How the RADIUS Server Reorder on Failure Feature Works

If you have configured the RADIUS Server Reorder on Failure feature, the decision about which RADIUS server to use as the initial server is as follows:

- The network access server (NAS) maintains the status of “flagged” server, which is the first server to which a transmission is sent.
- After the transmission is sent to the flagged server, the transmission is sent to the flagged server again for the configured number of retransmissions.
- The NAS then sequentially sends the transmission through the list of nondead servers in the server group, starting with the one listed after the flagged server, until the configured transaction maximum tries is reached or until a response is received.
- At boot time, the flagged server is the first server in the server group list as was established using the **radius-server host** command.
- If the flagged server is marked as dead (even if the dead time is zero), the first nondead server listed after the flagged server becomes the flagged server.

- If the flagged server is the last server in the list, and it is marked as dead, the flagged server becomes the first server in the list that is not marked as dead.
- If all servers are marked as dead, the transaction fails, and no change is made to the flagged server.
- If the flagged server is marked as dead, and the dead timer expires, nothing happens.

**Note**

Some types of transmissions (for example, Challenge Handshake Authentication Protocol [CHAP], Microsoft CHAP [MS-CHAP], and Extensible Authentication Protocol [EAP]) require multiple roundtrips to a single server. For these special transactions, the entire sequence of roundtrips to the server are treated as though they were one transmission.

- [When RADIUS Servers Are Dead, page 115](#)

When RADIUS Servers Are Dead

A server can be marked as dead if the criteria in 1 and 2 are met:

- 1 The server has not responded to at least the configured number of retransmissions as specified by the **radius-server transaction max-tries** command.
- 2 The server has not responded to any request for at least the configured timeout. The server is marked dead only if both criteria (this and the one listed above) are met. The marking of a server as dead, even if the dead time is zero, is significant for the RADIUS server retry method reorder system.

How to Configure RADIUS Server Reorder on Failure

- [Configuring a RADIUS Server to Reorder on Failure, page 115](#)
- [Monitoring RADIUS Server Reorder on Failure, page 117](#)

Configuring a RADIUS Server to Reorder on Failure

Perform this task to configure a server in a server group to direct traffic to another server in the server group when the first server fails.

SUMMARY STEPS

1. **enable**
2. **configure terminal**
3. **aaa new-model**
4. **radius-server retry method reorder**
5. **radius-server retransmit** { *retries* }
6. **radius-server transaction max-tries** { *number* }
7. **radius-server host** { *hostname* | *ip-address* } [**key string**]
8. **radius-server host** { *hostname* | *ip-address* } [**key string**]

DETAILED STEPS

Command or Action	Purpose
<p>Step 1 <code>enable</code></p> <p>Example:</p> <pre>Router> enable</pre>	<p>Enables privileged EXEC mode.</p> <ul style="list-style-type: none"> Enter your password if prompted.
<p>Step 2 <code>configure terminal</code></p> <p>Example:</p> <pre>Router# configure terminal</pre>	<p>Enters global configuration mode.</p>
<p>Step 3 <code>aaa new-model</code></p> <p>Example:</p> <pre>Router (config)# aaa new-model</pre>	<p>Enables the AAA access control model.</p>
<p>Step 4 <code>radius-server retry method reorder</code></p> <p>Example:</p> <p>Example:</p> <pre>Router (config)# radius-server retry method reorder</pre>	<p>Specifies the reordering of RADIUS traffic retries among a server group.</p>
<p>Step 5 <code>radius-server retransmit {retries}</code></p> <p>Example:</p> <pre>Router (config)# radius-server retransmit 1</pre>	<p>Specifies the number of times the Cisco IOS software searches the list of RADIUS server hosts before giving up.</p> <p>The <i>retries</i> argument is the maximum number of retransmission attempts. The default is 3 attempts.</p>
<p>Step 6 <code>radius-server transaction max-tries { number }</code></p> <p>Example:</p> <pre>Router (config)# radius-server transaction max-tries 3</pre>	<p>Specifies the maximum number of transmissions per transaction that may be retried on a RADIUS server.</p> <p>The <i>number</i> argument is the total number of transmissions per transaction. If this command is not configured, the default is eight transmissions.</p> <p>Note This command is global across all RADIUS servers for a given transaction.</p>

Command or Action	Purpose
<p>Step 7 <code>radius-server host {hostname ip-address} [key string]</code></p> <p>Example:</p> <pre>Router (config)# radius-server host 10.2.3.4 key radi23</pre>	<p>Specifies a RADIUS server host.</p> <p>Note You can also configure a global key for all RADIUS servers that do not have a per-server key configured by issuing the <code>radius-server key</code> command.</p>
<p>Step 8 <code>radius-server host {hostname ip-address} [key string]</code></p> <p>Example:</p> <pre>Router (config)# radius-server host 10.5.6.7 key rad234</pre>	<p>Specifies a RADIUS server host.</p> <p>Note At least two servers must be configured.</p>

Monitoring RADIUS Server Reorder on Failure

To monitor the server-reorder-on-failure process on your router, use the following commands:

SUMMARY STEPS

1. `enable`
2. `debug aaa sg-server selection`
3. `debug radius`

DETAILED STEPS

Command or Action	Purpose
<p>Step 1 <code>enable</code></p> <p>Example:</p> <pre>Router> enable</pre>	<p>Enables privileged EXEC mode.</p> <ul style="list-style-type: none"> • Enter your password if prompted.
<p>Step 2 <code>debug aaa sg-server selection</code></p> <p>Example:</p> <pre>Router# debug aaa sg-server selection</pre>	<p>Displays information about why the RADIUS and TACAC+ server group system in the router is choosing a particular server.</p>

Command or Action	Purpose
Step 3 debug radius Example: Router# debug radius	Displays information about why the router is choosing a particular RADIUS server.

Example

Debug 1

Debug 2

The following two debug outputs display the behavior of the RADIUS Server Reorder on Failure feature:

In the following sample output, the RADIUS Server Reorder on Failure feature is configured. The server retransmits are set to 0 (so each server is tried just one time before failover to the next configured server), and the transmissions per transaction are set to 4 (the transmissions stop on the third failover). The third server in the server group (10.107.164.118) has accepted the transaction on the third transmission (second failover).

```
00:38:35: %SYS-5-CONFIG-I: Configured from console by console
00:38:53: RADIUS/ENCODE(0000000F) : ask "Username: "
00:38:53: RADIUS/ENCODE(0000000F) : send packet; GET-USER
00:38:58: RADIUS/ENCODE(0000000F) : ask "Password: "
00:38:58: RADIUS/ENCODE(0000000F) : send packet; GET-PASSWORD
00:38:59: RADIUS: AAA Unsupported [152] 4
00:38:59: RADIUS: 7474 [tt]
00:38:59: RADIUS(0000000F) : Storing nasport 2 in rad-db
00:38:59: RADIUS/ENCODE(0000000F) : dropping service type, "radius-server attribute 6 on-
for-login-auth" is off
00:38:59: RADIUS(0000000F) : Config NAS IP: 0.0.0.0
00:38:59: RADIUS/ENCODE(0000000F) : acct-session-id: 15
00:38:59: RADIUS(0000000F) : sending
00:38:59: RADIUS/ENCODE: Best Local IP-Address 10.0.1.130 for Radius-Server 192.1.1.1
00:38:59: RADIUS(0000000F) : Send Access-Request to 10.10.10.10:1645 id 21645/11, len 78
00:38:59: RADIUS: authenticator 4481 E6 65 2D 5F 6F OA -1E F5 81 8F 4E 1478 9C
00:38:59: RADIUS: User-Name [1] 7 "username1"
00:38:59: RADIUS: User-Password [2] 18 *
00:38:59: RADIUS: NAS-Port fsl 6 2
00:~8:59: RADIUS: NAS-Port-Type [61] 6 Virtual [5]
00:38:59: RADIUS: Calling-Station-Id [31] 15 "10.19.192.23"
00:39:00: RADIUS: NAS-IP-Address [4] 6 10.0.1.130
00:39:02: RADIUS: Fail-over to (10.2.2.2:1645,1646) for id 21645/11
00:39:02: RADIUS/ENCODE: Best Local IP-Address 10.0.1.130 for Radius-Server 192.2.2.2
00:39:04: RADIUS: Fail-over to (10.107.164.118:1645,1646) for id 21645/11
00:39:04: RADIUS/ENCODE: Best Local IP-Address 10.0.1.130 for Radius-Server
128.107.164.118
00:39:05: RADIUS: Received from id 21645/11 10.107.164.118:1645, Access-Accept, len 26
00:39:05: RADIUS: authenticator 5609 56 F9 64 4E DF 19- F3 A2 DD 73 EE 3F 9826
00:39:05: RADIUS: Service-Type [6] 6 Login [1]
```

In the following sample output, the RADIUS Server Reorder on Failure feature is configured. The server retransmits are set to 0, and the transmissions per transaction are set to 8. In this transaction, the transmission to server 10.10.10.0 has failed on the eighth transmission.

```
00:42:30: RADIUS(00000011): Received from id 21645/13
00:43:34: RADIUS/ENCODE(00000012) : ask "Username: "
00:43:34: RADIUS/ENCODE(00000012) : send packet; GET-USER
00:43:39: RADIUS/ENCODE(00000012) : ask "Password: "
```

```

00:43:39: RADIUS/ENCODE(00000012) : send packet; GET-PASSWORD
00:43:40: RADIUS: AAA Unsupported [152] 4
00:43:40: RADIUS: 7474 [tt]
00:43:40: RADIUS(00000012) : Storing nasport 2 in rad-db
00:43:40: RADIUS/ENCODE(00000012): dropping service type, "radius-server attribute 6 on-
for-login-auth" is off
00:43:40: RADIUS(00000012) : Co-fig NAS IP: 0.0.0.0
00:43:40: RADIUS/ENCODE(00000012) : acct-session-id: 18
00:43:40: RADIUS(00000012) : sending
00:43:40: RADIUS/ENCODE: Best Local IP-Address 10.0.1.130 for Radius-Server
10.107.164.118 00:43:40: RADIUS(00000012) : Send Access-Request to 10.107.164.118:1645 id
21645/14, len 78 00:43:40: RADIUS: authenticator B8 OA 51 3A AF A6 0018 -B3 2E 94 5E 07
OB 2A IF 00:43:40: RADIUS: User-Name [1] 7 "username1" 00:43:40: RADIUS: User-Password
[2] 18 * 00:43:40: RADIUS: NAS-Port [5] 6 2
00:43:40: RADIUS: NAS-Port-Type [61] 6 Virtual [5] 00:43:40: RADIUS: Calling-Station-Id
[31] 15 "172.19.192.23" 00:43:40: RADIUS: NAS-IP-Address [4] 6 10.0.1.130
00:43:42: RADIUS: Fail-over to (10.10.10.10:1645,1646) for id 21645/14
00:43:42: RADIUS/ENCODE: Best Local IP-Address 10.0.1.130 for Radius-Server 10.1.1.1
00:43:44: RADIUS: Fail-over to (10.2.2.2:1645,1646) for id 21645/14
00:43:44: RADIUS/ENCODE: Best Local IP-Address 10.0.1.130 for Radius-Server 10.2.2.2
00:43:46: RADIUS: Fail-over to (10.107.164.118:1645,1646) for id 21645/14
00:43:46: RADIUS/ENCODE: Best Local IP-Address 10.0.1.130 for Radius-Server
10.107.164.118 00:43:48: RADIUS: Fail-over to (10.10.10.10:1645,1646) for id 21645/14
00:43:48: RADIUS/ENCODE: Best Local IP-Address 10.0.1.130 for Radius-Server 10.1.1.1
00:43:50: RADIUS: Fail-over to (10.2.2.2:1645,1646) for id 21645/14
00:43:50: RADIUS/ENCODE: Best Local IP-Address 10.0.1.130 for Radius-Server 10.2.2.2
00:43:52: RADIUS: Fail-over to (10.107.164.118:1645,1646) for id 21645/14
00:43:52: RADIUS/ENCODE: Best Local IP-Address 10.0.1.130 for Radius-Server
10.107.164.118 00:43:54: RADIUS: Fail-over to (10.10.10.10:1645,1646) for id 21645/14
00:43:54: RADIUS/ENCODE: Best Local IP-Address 10.0.1.130 for Radius-Server 10.1.1.1
00:43:56: RADIUS: No response from (10.10.10.10:1645,1646) for id 21645/14 00:43:56:
RADIUS/DECODE: parse response no app start; FAIL 00:43:56: RADIUS/DECODE: parse response;
FAIL

```

Configuration Examples for RADIUS Server Reorder on Failure

- [Configuring a RADIUS Server to Reorder on Failure Example, page 119](#)
- [Determining Transmission Order When RADIUS Servers Are Dead, page 120](#)

Configuring a RADIUS Server to Reorder on Failure Example

The following configuration example shows that a RADIUS server is configured to reorder on failure. The maximum number of transmissions per transaction that may be retried on the RADIUS server is six.

```

aaa new-model

radius-server retry method reorder

radius-server retransmit 0

radius-server transaction max-tries 6

radius-server host 10.2.3.4 key rad123

radius-server host 10.5.6.7 key rad123

```

Determining Transmission Order When RADIUS Servers Are Dead

If at boot time you have configured the following:

```
aaa new-model
radius-server retry method reorder
radius-server retransmit 0
radius-server transaction max-tries 6
radius-server host 10.2.3.4
radius-server host 10.5.6.7
```

and both servers are down, but not yet marked dead, for the first transaction you would see the transmissions as follows:

```
10.2.3.4
10.5.6.7
10.2.3.4
10.5.6.7
10.2.3.4
10.5.6.7
```

If you configure the reorder as follows:

```
aaa new-model
radius-server retry method reorder
radius-server retransmit 1
radius-server transaction max-tries 3
radius-server host 10.2.3.4
radius-server host 10.4.5.6
```

and both RADIUS servers are not responding to RADIUS packets but are not yet marked dead (as after the NAS boots), the transmissions for the first transaction are as follows:

```
10.2.3.4
10.2.3.4
10.4.5.6
```

Subsequent transactions may be transmitted according to a different pattern. The transmissions depend on whether the criteria for marking one (or both) servers as dead have been met, and as per the server flagging pattern already described.

If you configure the reorder as follows:

```
aaa new-model
radius-server retry method reorder
radius-server retransmit 1
radius-server max-tries-per-transaction 8
radius-server host 10.1.1.1
radius-server host 10.2.2.2
radius-server host 10.3.3.3
radius-server timeout 3
```

And the RADIUS server 10.1.1.1 is not responding to RADIUS packets but is not yet marked as dead, and the remaining two RADIUS servers are live, you see the following:

For the first transaction:

```
10.1.1.1
10.1.1.1
10.2.2.2
```

For any additional transaction initiated for any transmissions before the server is marked as dead:

```
10.1.1.1
```


10.1.1.1
10.2.2.2

For transactions initiated thereafter:

10.2.2.2

If servers 10.2.2.2 and 10.3.3.3 then go down as well, you see the following transmissions until servers 10.2.2.2 and 10.3.3.3 meet the criteria for being marked as dead:

10.2.2.2
10.2.2.2
10.3.3.3
10.3.3.3
10.1.1.1
10.1.1.1
10.2.2.2
10.2.2.2

The above is followed by the failure of the transmission and by the next method in the method list being used (if any).

If servers 10.2.2.2 and 10.3.3.3 go down but server 10.1.1.1 comes up at the same time, you see the following:

10.2.2.2
10.2.2.2
10.3.3.3
10.3.3.3
10.1.1.1

When servers 10.2.2.2 and 10.3.3.3 are then marked as dead, you see the following:

10.1.1.1

Additional References

- [Related Documents, page 121](#)
- [Standards, page 122](#)
- [MIBs, page 122](#)
- [RFCs, page 122](#)
- [Technical Assistance, page 122](#)

Related Documents

Related Topic	Document Title
RADIUS	The chapter “ Configuring RADIUS ” in the <i>Cisco IOS Security Configuration Guide: Securing User Services</i>
AAA and RADIUS commands	<i>Cisco IOS Security Command Reference</i>

Standards

Standards	Title
None	--

MIBs

MIB	MIBs Link
None	To locate and download MIBs for selected platforms, Cisco IOS releases, and feature sets, use Cisco MIB Locator found at the following URL: http://www.cisco.com/go/mibs

RFCs

RFCs	Title
None	--

Technical Assistance

Description	Link
<p>The Cisco Support website provides extensive online resources, including documentation and tools for troubleshooting and resolving technical issues with Cisco products and technologies.</p> <p>To receive security and technical information about your products, you can subscribe to various services, such as the Product Alert Tool (accessed from Field Notices), the Cisco Technical Services Newsletter, and Really Simple Syndication (RSS) Feeds.</p> <p>Access to most tools on the Cisco Support website requires a Cisco.com user ID and password.</p>	http://www.cisco.com/techsupport

Feature Information for RADIUS Server Reorder on Failure

The following table provides release information about the feature or features described in this module. This table lists only the software release that introduced support for a given feature in a given software release train. Unless noted otherwise, subsequent releases of that software release train also support that feature.

Use Cisco Feature Navigator to find information about platform support and Cisco software image support. To access Cisco Feature Navigator, go to www.cisco.com/go/cfn. An account on Cisco.com is not required.

Table 14 Feature Information for RADIUS Server Reorder on Failure

Feature Name	Releases	Feature Information
RADIUS Server Reorder on Failure	12.3(1) 12.2(28)SB 12.2(33)SRC	<p>The RADIUS Server Reorder on Failure feature provides for failover to another server in the server group during periods of high load or when server failure occurs.</p> <p>This feature was introduced in 12.3(1).</p> <p>This feature was integrated into Cisco IOS Release 12.2(28)SB.</p> <p>This feature was integrated into Cisco IOS Release 12.2(33)SRC.</p> <p>The following commands were introduced or modified by this feature: debug aaa sg-server selection, radius-server retry method reorder, radius-server transaction max-tries.</p>

Cisco and the Cisco logo are trademarks or registered trademarks of Cisco and/or its affiliates in the U.S. and other countries. To view a list of Cisco trademarks, go to this URL: www.cisco.com/go/trademarks. Third-party trademarks mentioned are the property of their respective owners. The use of the word partner does not imply a partnership relationship between Cisco and any other company. (1110R)

Any Internet Protocol (IP) addresses and phone numbers used in this document are not intended to be actual addresses and phone numbers. Any examples, command display output, network topology diagrams, and other figures included in the document are shown for illustrative purposes only. Any use of actual IP addresses or phone numbers in illustrative content is unintentional and coincidental.



RADIUS EAP Support

The RADIUS EAP Support feature makes it possible for users to apply the client authentication methods within PPP (including proprietary authentication), which may not be supported by the network access server (NAS); to be accomplished through the Extensible Authentication Protocol (EAP). Before this feature was introduced, support for various authentication methods for PPP connections required custom vendor-specific configuration and changes to the client and NAS. RADIUS EAP support allows authentication schemes, such as token cards and public key, to strengthen end-user and device authenticated access to their networks.

- [Finding Feature Information, page 125](#)
- [Prerequisites for RADIUS EAP Support, page 125](#)
- [Restrictions for RADIUS EAP Support, page 126](#)
- [Information About RADIUS EAP Support, page 126](#)
- [How to Configure RADIUS EAP Support, page 127](#)
- [Configuration Examples, page 129](#)
- [Additional References, page 130](#)
- [Feature Information for RADIUS EAP Support, page 132](#)
- [Glossary, page 133](#)

Finding Feature Information

Your software release may not support all the features documented in this module. For the latest feature information and caveats, see the release notes for your platform and software release. To find information about the features documented in this module, and to see a list of the releases in which each feature is supported, see the Feature Information Table at the end of this document.

Use Cisco Feature Navigator to find information about platform support and Cisco software image support. To access Cisco Feature Navigator, go to www.cisco.com/go/cfn. An account on Cisco.com is not required.

Prerequisites for RADIUS EAP Support

Before enabling EAP RADIUS on the client, you must perform the following tasks:

- Configure an interface type and enter interface configuration mode by using the **interface** command.
- Configure the interface for PPP encapsulation by using the **encapsulation** command.

For more information on completing these tasks, refer to the “Configuring Asynchronous SLIP and PPP” module.

Restrictions for RADIUS EAP Support

When EAP is running in proxy mode, there may be a significant increase in the authentication time because every packet from the peer must be sent to the RADIUS server and every EAP packet from the RADIUS server must be sent back to the client. Although this extra processing causes delays, you can increase the default authentication timeout value by using the **ppp timeout authentication** command.

Information About RADIUS EAP Support

EAP is an authentication protocol for PPP that supports multiple authentication mechanisms that are negotiated during the authentication phase (instead of the link control protocol [LCP] phase). EAP allows a third-party authentication server to interact with a PPP implementation through a generic interface.

- [How EAP Works, page 126](#)
- [Newly Supported Attributes, page 126](#)

How EAP Works

By default, EAP runs in proxy mode. This means that EAP allows the entire authentication process to be negotiated by the NAS to a back-end server that may reside on or be accessed through a RADIUS server. After EAP is negotiated between the client and the NAS during LCP exchange, all further authentication messages are transparently transmitted between the client and the back-end server. The NAS is no longer directly involved in the authentication process; that is, the NAS works as a proxy, sending EAP messages between the remote peers.



Note

EAP can also run in a local mode; the session is authenticated using the Message Digest 5 (MD5) algorithm and obeys the same authentication rules as Challenge Handshake Authentication Protocol (CHAP). To disable proxy mode and authenticate locally, you must use the **ppp eap local** command.

Newly Supported Attributes

The RADIUS EAP Support feature introduces support for the following RADIUS attributes:

Number	IETF Attribute	Description
79	EAP-Message	Encapsulates one fragment of an EAP message, which includes the PPP type, request-id, length, and EAP-type fields.

Number	IETF Attribute	Description
80	Message Authenticator	Ensures source integrity of the message; all messages that are received with invalid checksums are silently discarded by either end. This attribute contains an HMAC-MD5 checksum of the entire RADIUS request or response message and uses the RADIUS server secret as the key.

How to Configure RADIUS EAP Support

- [Configuring EAP, page 127](#)
- [Verifying EAP, page 129](#)

Configuring EAP

Perform this task to configure EAP on an interface configured for PPP encapsulation.

SUMMARY STEPS

1. **enable**
2. **configure terminal**
3. **ppp authentication eap**
4. **ppp eap identity *string***
5. **ppp eap password [*number*] *string***
6. **ppp eap local**
7. **ppp eap wait**
8. **ppp eap refuse [*callin*]**

DETAILED STEPS

Command or Action	Purpose
Step 1 enable Example: Router> enable	Enables privileged EXEC mode. <ul style="list-style-type: none"> • Enter your password if prompted.

Command or Action	Purpose
<p>Step 2 <code>configure terminal</code></p> <p>Example:</p> <pre>Router# configure terminal</pre>	<p>Enters global configuration mode.</p>
<p>Step 3 <code>ppp authentication eap</code></p> <p>Example:</p> <pre>Router(config-if)# ppp authentication eap</pre>	<p>Enables EAP as the authentication protocol.</p>
<p>Step 4 <code>ppp eap identity string</code></p> <p>Example:</p> <pre>Router(config-if)# ppp eap identity user</pre>	<p>(Optional) Specifies the EAP identity when requested by the peer.</p>
<p>Step 5 <code>ppp eap password [number] string</code></p> <p>Example:</p> <pre>Router(config-if)# ppp eap password 7 141B1309</pre>	<p>(Optional) Sets the EAP password for peer authentication. This command should only be configured on the client.</p>
<p>Step 6 <code>ppp eap local</code></p> <p>Example:</p> <pre>Router(config-if)# ppp eap local</pre>	<p>(Optional) Authenticates locally instead of using a RADIUS back-end server, which is the default.</p> <p>Note This command should only be configured on the NAS.</p>
<p>Step 7 <code>ppp eap wait</code></p> <p>Example:</p> <pre>Router(config-if)# ppp eap wait</pre>	<p>(Optional) Waits for the caller to authenticate itself first. By default, the client always authenticates itself before the caller does.</p> <p>Note This command should only be configured on the NAS.</p>
<p>Step 8 <code>ppp eap refuse [callin]</code></p> <p>Example:</p> <pre>Router(config-if)# ppp eap refuse</pre>	<p>(Optional) Refuses to authenticate using EAP. If the callin keyword is enabled, only incoming calls are not authenticated.</p> <p>Note This command should only be configured on the NAS.</p>

Verifying EAP

To verify EAP configurations on your client or NAS, use at least one of the following commands in privileged EXEC configuration mode:

Command	Purpose
Router# show users	Displays information about the active lines on the router.
Router# show interfaces	Displays statistics for all interfaces configured on the router or access server.
Router# show running-config	Ensures that your configurations appear as part of the running configuration.

Configuration Examples

- [EAP Local Configuration on Client Example, page 129](#)
- [EAP Proxy Configuration for NAS Example, page 129](#)

EAP Local Configuration on Client Example

The following example is a sample configuration for a client configured for EAP:

```
interface Ethernet0/0
 ip address 10.1.1.202 255.255.255.0
 no ip mroute-cache
 half-duplex
 !
interface BRI0/0
 ip address 192.168.101.100 255.255.255.0
 encapsulation ppp
 no ip mroute-cache
 dialer map ip 192.168.101.101 56167
 dialer-group 1
 isdn switch-type basic-5ess
 ppp eap identity user
 ppp eap password 7 141B1309
 !
 !
 ip default-gateway 10.1.1.1
 ip classless
 ip route 192.168.101.101 255.255.255.255 BRI0/0
 no ip http server
 !
 dialer-list 1 protocol ip permit
```

EAP Proxy Configuration for NAS Example

The following example is a sample configuration for a NAS configured to use EAP proxy:

```
aaa authentication login default group radius
aaa authentication login NOAUTH none
aaa authentication ppp default if-needed group radius
aaa session-id common
```

```

enable secret 5 $1$x5D0$cfTL/D8Be.34PgTbdGdgl/
!
username dtw5 password 0 lab
username user password 0 lab
ip subnet-zero
no ip domain-lookup
ip host lab24-boot 172.19.192.254
ip host lb 172.19.192.254
!
isdn switch-type primary-5ess
!
controller T1 3
 framing esf
 linecode b8zs
 pri-group timeslots 1-24
!
interface Ethernet0
 ip address 10.1.1.108 255.255.255.0
 no ip route-cache
 no ip mroute-cache
!
interface Serial3:23
 ip address 192.168.101.101 255.255.255.0
 encapsulation ppp
 dialer map ip 192.168.101.100 60213
 dialer-group 1
 isdn switch-type primary-5ess
 isdn T321 0
 ppp authentication eap
 ppp eap password 7 011F0706
!
!
ip default-gateway 10.0.190.1
ip classless
ip route 192.168.101.0 255.255.255.0 Serial3:23
no ip http server
!
dialer-list 1 protocol ip permit
!
radius-server host 10.1.1.201 auth-port 1645 acct-port 1646 key lab
radius-server retransmit 3
call rsvp-sync
!
mgcp profile default
!
!
line con 0
 exec-timeout 0 0
 logging synchronous
 login authentication NOAUTH
line 1 48
line aux 0
ine vty 0 4
lpassword lab

```

Additional References

The following sections provide references related to RADIUS EAP Support feature.

Related Documents

Related Topic	Document Title
Configuring PPP Authentication Using AAA	“ Configuring Authentication ” module.
Configuring RADIUS	“ Configuring RADIUS ” module.

Related Topic	Document Title
PPP Configuration	“ Configuring Asynchronous SLIP and PPP ” module.
Dial Technologies commands	<i>Cisco IOS Dial Technologies Command Reference</i>
Security Commands	<i>Cisco IOS Security Command Reference</i>

Standards

Standard	Title
None	--

MIBs

MIB	MIBs Link
None	To locate and download MIBs for selected platforms, Cisco IOS releases, and feature sets, use Cisco MIB Locator found at the following URL: http://www.cisco.com/go/mibs

RFCs

RFC	Title
RFC 2284	<i>PPP Extensible Authentication Protocol (EAP)</i>
RFC 1938	<i>A One-Time Password System</i>
RFC 2869	<i>RADIUS Extensions</i>

Technical Assistance

Description	Link
<p>The Cisco Support website provides extensive online resources, including documentation and tools for troubleshooting and resolving technical issues with Cisco products and technologies.</p> <p>To receive security and technical information about your products, you can subscribe to various services, such as the Product Alert Tool (accessed from Field Notices), the Cisco Technical Services Newsletter, and Really Simple Syndication (RSS) Feeds.</p> <p>Access to most tools on the Cisco Support website requires a Cisco.com user ID and password.</p>	http://www.cisco.com/techsupport

Feature Information for RADIUS EAP Support

The following table provides release information about the feature or features described in this module. This table lists only the software release that introduced support for a given feature in a given software release train. Unless noted otherwise, subsequent releases of that software release train also support that feature.

Use Cisco Feature Navigator to find information about platform support and Cisco software image support. To access Cisco Feature Navigator, go to www.cisco.com/go/cfn. An account on Cisco.com is not required.

Table 15 **Feature Information for RADIUS EAP Support**

Feature Name	Releases	Feature Information
RADIUS EAP Support	12.2(2)XB5 12.2(13)T 12.2(28)SB	<p>The RADIUS EAP Support feature makes it possible for users to apply the client authentication methods within PPP (including proprietary authentication), which may not be supported by the network access server (NAS); to be accomplished through the Extensible Authentication Protocol (EAP). Before this feature was introduced, support for various authentication methods for PPP connections required custom vendor-specific configuration and changes to the client and NAS. RADIUS EAP support allows authentication schemes, such as token cards and public key, to strengthen end-user and device authenticated access to their networks.</p> <p>This feature was introduced on the Cisco 2650, Cisco 3640, Cisco 3660, Cisco AS5300, and Cisco AS400 platforms. in 12.2(2)XB5.</p> <p>This feature was integrated into Cisco IOS Release 12.2(13)T.</p> <p>This feature was integrated into Cisco IOS Release 12.2(28)SB.</p> <p>The following commands were introduced or modified: ppp authentication, ppp eap identity, ppp eap local, ppp eap password, ppp eap refuse, ppp eap wait.</p>

Glossary

attribute --A RADIUS Internet Engineering Task Force (IETF) attribute is one of the original set of 255 standard attributes that are used to communicate authentication, authorization, and accounting (AAA) information between a client and a server. Because IETF attributes are standard, the attribute data is predefined and well known; thus all clients and servers that exchange AAA information through IETF attributes must agree on attribute data such as the exact meaning of the attributes and the general bounds of the values for each attribute.

CHAP --Challenge Handshake Authentication Protocol. Security feature that is supported on lines using PPP encapsulation and prevents unauthorized access. CHAP does not itself prevent unauthorized access; it merely identifies the remote end. The router or access server then determines whether that user is allowed access.

EAP --Extensible Authentication Protocol. A PPP authentication protocol that supports multiple authentication mechanisms that are negotiated during the authentication phase (instead of the Link Control Protocol [LCP] phase). EAP allows a third-party authentication server to interact with the PPP implementation through a generic interface.

LCP --link control protocol. Protocol that establishes, configures, and tests data-link connections for use by PPP.

MD5 (HMAC variant) --Message Digest 5. A hash algorithm used to authenticate packet data. HMAC is a key hashing for message authentication.

NAS --network access server. A device providing local network access to users across a remote access network such as the public switched telephone network (PSTN).

PAP --Password Authentication Protocol. Authentication protocol that allows PPP peers to authenticate one another. The remote router attempting to connect to the local router is required to send an authentication request. Unlike CHAP, PAP passes the password and host name or username in the clear (unencrypted). PAP does not itself prevent unauthorized access; it merely identifies the remote end. The router or access server then determines if that user is allowed access. PAP is supported only on PPP lines.

PPP --Point-to-Point Protocol. A protocol that encapsulates network layer protocol information over point-to-point links. PPP is defined in RFC 1661.

RADIUS --Remote Authentication Dial-In User Service. Database for authenticating modem and ISDN connections and for tracking connection time.

Any Internet Protocol (IP) addresses and phone numbers used in this document are not intended to be actual addresses and phone numbers. Any examples, command display output, network topology diagrams, and other figures included in the document are shown for illustrative purposes only. Any use of actual IP addresses or phone numbers in illustrative content is unintentional and coincidental. © 2001-2009 Cisco Systems, Inc. All rights reserved.

Cisco and the Cisco logo are trademarks or registered trademarks of Cisco and/or its affiliates in the U.S. and other countries. To view a list of Cisco trademarks, go to this URL: www.cisco.com/go/trademarks. Third-party trademarks mentioned are the property of their respective owners. The use of the word partner does not imply a partnership relationship between Cisco and any other company. (1110R)

Any Internet Protocol (IP) addresses and phone numbers used in this document are not intended to be actual addresses and phone numbers. Any examples, command display output, network topology diagrams, and other figures included in the document are shown for illustrative purposes only. Any use of actual IP addresses or phone numbers in illustrative content is unintentional and coincidental.