



# CHAPTER 5

## Modeled Network Examples

---

This chapter provides examples of typical optical networks you can model using Cisco Transport Planner.

This chapter contains the following sections:

- [5.1 Supported Cisco Transport Planner Topologies, page 5-1](#)
- [5.2 Bus Topologies, page 5-1](#)
- [5.3 Hubbed Ring Topology, page 5-2](#)
- [5.4 Meshed Topology, page 5-3](#)

### 5.1 Supported Cisco Transport Planner Topologies

Cisco Transport Planner supports the following topologies:

- Bus (single span, point-to-point, and linear)
- Open (or hubbed) ring
- Closed (or meshed) ring

An example of each topology is given in this chapter.


### 5.2 Bus Topologies

Bus topologies comprise three types of topologies: single span, point-to-point, and linear.

#### 5.2.1 Single-Span Topology

[Figure 5-1](#) shows an example of a single-span topology. Single-span topologies are characterized by a single span link. The single-span configuration only supports two terminal sites (full terminal or flexible channel-count terminal) without any intermediate line amplifier or optical add/drop multiplexing (OADM) sites.

Figure 5-1 Single-Span Topology Example



## 5.2.2 Point-to-Point Topology

Figure 5-2 shows an example of a point-to-point topology. In a point-to-point topology, all the wavelengths are terminated at the same point in the chain. In the point-to-point configuration, no channels are added or dropped in intermediate sites.

Figure 5-2 Point-to-Point Topology Example



## 5.2.3 Linear Topology

Figure 5-3 shows an example of a linear topology. Linear configurations are characterized by the presence of two terminal sites (full terminal or flexible channel-count terminal). Between the two terminal sites, OADM or line amplifiers nodes can be inserted. In a linear configuration, specific wavelengths are terminated at different points in the chain and only unprotected traffic can be provisioned.


Figure 5-3 Linear Topology Example



## 5.3 Hubbed Ring Topology

Figure 5-4 shows an example of a hubbed ring topology. In this configuration, at least one of the sites must be a hub site, where all channels are terminated.

**Figure 5-4 Hubbed Ring Topology Example**

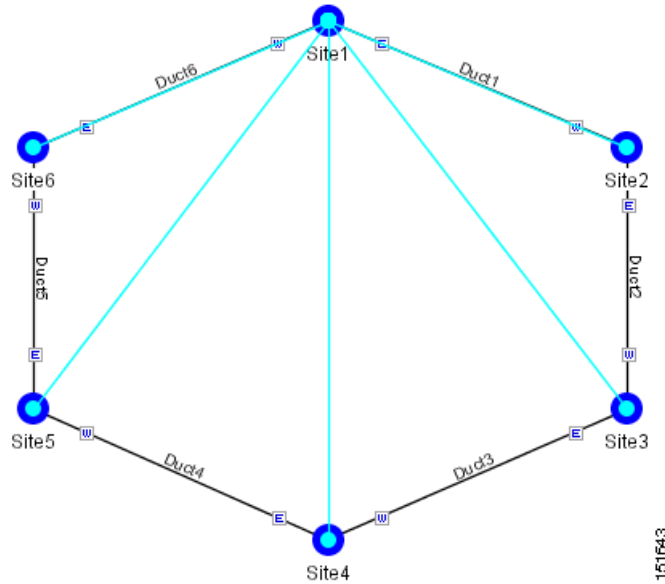

## 5.4 Meshed Topology

Figure 5-5 provides an example of a meshed ring topology. A meshed ring is characterized by the absence of a hub node.

**Figure 5-5 Meshed Ring Topology Example**

