



Cisco Catalyst IW9167E Heavy Duty Access Point Configuration Guide, Release 26.2.x

Cisco Catalyst IW9167E Heavy Duty Access Point
Updated September 28, 2026

Topics included

1 Introduction.....	6
Overview of the Access Point.....	7
Determine Image on IW9167EH.....	7
Configure AP to boot with different image options.....	8
Upgrade the IW9167EH to support WGB/uWGB.....	9
Related Documentation.....	11
2 AP Mode Configuration.....	12
Indoor deployment for -E domain.....	13
Configure indoor deployment for -E domain using CLI.....	13
Configure indoor deployment for -E domain using GUI.....	13
802.11ax 1600ns and 3200ns guard interval support.....	14
Configure 802.11ax long guard interval.....	14
Example: Configure and apply custom Guard Interval settings to an AP using RF profiles and RF tags.....	15
RAP Ethernet Daisy Chain.....	16
Wireless LAN Spanning Tree Protocol.....	17
Comparison with previous releases.....	17
RAP Ethernet Daisy Chain configuration.....	18
GNSS.....	28
Disable GNSS.....	28
Enable GNSS.....	29
Check the status of the GNSS module.....	29
GNSS status and diagnostics.....	30
3 Workgroup Bridges.....	32
Introduction and basics.....	33
Workgroup Bridge.....	33
WGB mode recommendations.....	34
uWGB mode recommendations.....	35
Guidelines to reset the login credentials.....	36
Know your AP status using LED indicators.....	37
Initial setup and core configuration.....	37
Configure the WLAN profile.....	38
Configure wireless policy profile.....	38
Configure IP address.....	39
Configuring WGB on the Radio Interface.....	40
Create an SSID profile.....	41
Configure radio interface for WGB.....	43

Configure security parameters.....	44
Configure WGB or uWGB timer.....	58
Deauthenticate WGB wired client.....	60
Configure uWGB on the radio interface.....	60
Conversion between WGB and uWGB modes.....	61
Import and export WGB configuration.....	61
Upgrade the uWGB image.....	62
Configure WGB/uWGB Radio Parameters.....	63
Configure the WGB Radio Antenna.....	63
Configure the 802.11ax guard interval.....	64
Set the transmit power for a radio.....	64
Assign the Country Code to a WGB or uWGB with -ROW PID.....	65
Enable or disable indoor deployment for -E Domain and United Kingdom.....	65
Configure WGB roaming parameters.....	66
Advanced features and optimizations.....	67
Configure transmission rate with high throughput.....	67
802.11v features.....	68
Auxiliary scanning.....	72
Optimized roaming with dual-radio WGBs.....	77
Layer 2 NAT.....	77
Native VLAN on Ethernet Ports.....	82
Low latency profile.....	83
SNMP features.....	89
QoS ACL classification and marking.....	97
Packet Capture: TCP dump utilities.....	104
Port address translation.....	110
802.1X authentication for wired clients.....	120
AAA user authentications.....	122
Configure AAA Server.....	123
Enable or disable RADIUS authentication for login user.....	124
Enable or disable TACACS+ authentication for login user.....	125
AAA authentication configuration example.....	125
Verification and monitoring.....	126
Verify the WGB and uWGB configuration.....	126
Syslog.....	128
Radio Statistics Commands.....	129
Configure event logging.....	132
Configure remote server.....	133
10 Mbps Speed Port Support on Cisco IW9167EH WGB.....	134
10 Mbps speed negotiation on Ethernet port.....	134
Enable a 10 Mbps speed port on Cisco IW9167EH WGB.....	135
Disable the 10 Mbps Speed Port on Cisco IW9167EH WGB.....	136
WPA3-Enterprise and SCEP for WGB.....	136
Overview of WPA3-Enterprise and SCEP for WGB.....	136
Guidelines and limitations.....	137

Configure WPA3-Enterprise security for your WGB device.....	137
Configure WPA3-Enterprise on a Workgroup Bridge Using the GUI	137

4 Manage the Workgroup Bridges through Web UI.....140

Workgroup Bridge.....	141
Access the Cisco Workgroup Bridge Web UI.....	141
Monitor the client details and configurations.....	142
Configure and authenticate wireless profiles.....	142
Create a WLAN.....	143
Create 802.1X profile.....	144
EAP profiles and SSID maps.....	144
Map the SSID to the uplink radio.....	145
Configure a static route for NAT wired client access to the WebUI in uWGB mode.....	146
Configure WGB and uWGB radio modes.....	147
Configure the radio in WGB mode.....	147
Configure uWGB mode on the radio.....	147
Set IP address.....	148
Switch from static IP to dynamic IP.....	148
Switch from dynamic IP to static IP.....	149
Modify the RSSI threshold.....	149
Create NAT rules.....	151
Manage firmware images.....	152
Reload the firmware image.....	152
Load a backup image.....	152
Perform a factory reset.....	152
Upgrade the firmware image.....	153
Import or export a configuration file.....	153

5 Automated Frequency Coordination.....156

AFC support for 6 GHz standard power mode.....	157
Verify AFC status on an AP.....	158

1 Introduction

Topics:

- [Overview of the Access Point](#)
- [Determine Image on IW9167EH](#)
- [Configure AP to boot with different image options](#)
- [Upgrade the IW9167EH to support WGB/uWGB](#)
- [Related Documentation](#)

Introduction

Overview of the Access Point

This topic explains the Cisco Catalyst IW9167E Heavy Duty Access Point, its supported operating modes, and the configuration options available for CAPWAP and WGB/uWGB modes.

The Cisco Catalyst IW9167E Heavy Duty Access Point is a robust wireless device designed for mission-critical applications, offering flexible operation modes and reliable connectivity.

- Supports both Cisco Catalyst Wi-Fi (CAPWAP) mode and Cisco Ultra-Reliable Wireless Backhaul (Cisco URWB) mode starting from IOS XE Cupertino 17.9.3.
- Allows switching between Wi-Fi and Cisco URWB modes as needed.
- Workgroup Bridge (WGB) and Universal WGB (uWGB) are supported from Cisco IOS XE Dublin 17.11.1.

Supported Operating Modes and Configuration Overview

The Cisco Catalyst IW9167E Heavy Duty Access Point can be configured to operate in various modes, depending on deployment requirements and software version.

The following operating modes are available for CAPWAP mode:

- Local
- Flexconnect
- Bridge
- Flexconnect + Bridge
- Sniffer
- Monitor
- Site survey

Determine Image on IW9167EH

This topic explains how to determine which software image is running on the IW9167EH access point, and describes the relationship between image files and operating modes such as CAPWAP, Cisco URWB, and WGB/uWGB.

The IW9167EH access point stores multiple software images under different folders on the same partition, and the image selected determines the device's operating mode.

The following image shows the folder structure where software images are stored on the IW9167EH:

Figure 1: IW9167EH Software Image Folder Structure



- CAPWAP mode uses the `ap1g6a-k9w8-xxx.tar` image file.
- Cisco URWB mode uses the `ap1g6j-k9c1-xxx.tar` image file.

- WGB/uWGB mode also uses the **ap1g6j-k9c1-xxx.tar** image file.

Software Images and Operating Modes for IW9167EH

The software image that the IW9167EH access point uses depends on the selected operating mode. The following table lists the available modes and their corresponding image files.

Table 1: IW9167EH Software Images

IW9167EH Mode	Software Image
CAPWAP	ap1g6a-k9w8-xxx.tar
Cisco URWB	Unified Industrial Wireless image ap1g6j-k9c1-xxx.tar
WGB/uWGB	ap1g6j-k9c1-xxx.tar

To determine which image your IW9167EH is running, use the **show version** command and review the output for the software type.

- If the **show version** output displays **Cisco AP Software, (ap1g6a)** , the AP is running the CAPWAP image **ap1g6a-k9w8-xxx.tar** , which supports CAPWAP mode.

```
Cisco AP Software, (ap1g6a), C9167, RELEASE SOFTWARE
Technical Support: http://www.cisco.com/techsupport
Copyright (c) 1986-2022 by Cisco Systems, Inc.
Compiled Fri Jul 29 01:56:00 PDT 2022
ROM: Bootstrap program is U-Boot boot loader
BOOTLDR: U-Boot boot loader Version 2022010100
APFC58.9A16.E648 uptime is 0 days, 1 hours, 03 minutes
Last reload time   : Mon Sep 19 02:23:13 UTC 2022
Last reload reason : Image Upgrade
cisco IW9167EH-B ARMv8 Processor rev 4 (v8l) with 1757076/1006864K bytes of
memory.
```

- If the **show version** output displays **Cisco AP Software (ap1g6j)** , the AP is running **ap1g6j-k9c1-xxx.tar** , which supports Cisco URWB mode or Cisco WGB/uWGB.

```
Cisco AP Software, (ap1g6j), C9167, RELEASE SOFTWARE
Technical Support: http://www.cisco.com/techsupport
Copyright (c) 1986-2022 by Cisco Systems, Inc.
Compiled Thu Aug 18 01:01:29 PDT 2022

ROM: Bootstrap program is U-Boot boot loader
BOOTLDR: U-Boot boot loader Version 2022010100

APFC58.9A16.E464 uptime is 1 days, 3 hours, 58 minutes
Last reload time   : Wed Sep 7 11:17:00 UTC 2022
Last reload reason : reload command
```

Configure AP to boot with different image options

Configures an AP to boot up in CAPWAP, URWB, or WGB/uWGB mode.

This procedure describes how to configure the access point to boot up with CAPWAP, URWB, or WGB/uWGB mode.

**Note**

Switching between different modes causes a full factory reset. All configurations and data are removed.

Procedure

1. Use the **enable** command to enter the privileged EXEC mode.

Example

```
Device# enable
```

Enter your password if prompted.

2. Use the **configure boot mode { capwap | urwb | wgb }** command to configure AP to CAPWAP, URWB, or WGB/uWGB mode.

Example

```
Device# configure boot mode wgb
```

The AP reboots with the specified mode.

Upgrade the IW9167EH to support WGB/uWGB

Upgrades the IW9167EH from Cisco IOS XE Cupertino 17.9.x to Dublin 17.11.1 to enable WGB/uWGB mode support.

This procedure describes how to upgrade the IW9167EH from Cisco IOS XE Cupertino 17.9.x to Cisco IOS XE Dublin 17.11.1 to enable WGB/uWGB mode support.

The IW9167EH is shipped with Cisco IOS XE Cupertino 17.9.3 software and operates in CAPWAP mode. To support WGB/uWGB mode, you must upgrade your AP to Cisco IOS XE Dublin 17.11.1. First, switch your AP to Cisco URWB mode. Then, you can upgrade to 17.11.1.

To determine whether your IW9167EH is running CAPWAP mode or Cisco URWB mode, use the **show version** command.

- If the **show version** output displays **Cisco AP Software (ap1g6a)** , your AP is running as CAPWAP mode.
- If the **show version** output displays **Cisco AP Software (ap1g6j)** , your AP is running as Cisco URWB mode.

Cisco WGB/uWGB mode shares the same image with Cisco URWB. You cannot upgrade the **ap1g6j** image to 17.11.1 in CAPWAP mode (**ap1g6a**). If the **archive download** command detects a mismatch between image types, the upgrade is aborted.

Procedure

1. Use the **configure boot mode urwb** command to convert CAPWAP mode to Cisco URWB mode.

Example

```
Device# configure boot mode urwb
Before image swapping device need factory reset. Are you sure to proceed?
(Y/N):y
    Converting to Cisco URWB Mode...
    <rebooting...>
```

2. Log in with default credentials (Cisco/Cisco).
3. Use the **configure iotod-iw offline** command to configure Cisco URWB, to make it work in **Offline** mode.

Example

```
Device# configure iotod-iw offline
Switching to IOTOD IW Offline mode...
Will switch from Provisioning Mode to IOTOD IW offline Mode, device need to
reboot: Y/N? Y
<rebooting...>
```

4. Configure networking in Cisco URWB by setting the IP address, netmask, gateway, and passphrase.

Example

```
Device# configure wireless passphrase unit1
Device# configure ap address ipv4 static 192.168.1.200 255.255.255.0
192.168.1.1
Device# write
Device# reload
<rebooting...>
```

**Note**

The passphrase is optional. However, it is recommended to assign different passphrases when upgrading multiple units simultaneously on the same Layer 2 network.

If all nodes share the same passphrase, Cisco URWB automatically forms an MPLS network without additional MPLS configuration. As a result, your IP service might not function as expected.

5. Use the **archive download-sw /reload tftp://tftp-server/ image-name** command to upgrade to 17.11.1.

Example

```
Device# archive download-sw /reload
tftp://10.10.10.5/ap1g6a-k9w8-tar.17_11_1_160.tar
<rebooting...>
```

6. Use the **configure boot mode wgb** command to convert the AP from Cisco URWB mode to Cisco WGB/uWGB mode.

Example

```
Device# configure boot mode wgb  
<rebooting...>
```

Related Documentation

This topic explains where to find related documentation for the Cisco Catalyst IW9167E Heavy Duty Access Point, including hardware, features, configuration, and software guides.

This topic provides links to related documentation for the Cisco Catalyst IW9167E Heavy Duty Access Point, including hardware installation, data sheets, configuration, and software information.

To view all support information for the Cisco Catalyst IW9167E Heavy Duty Access Point, see <https://www.cisco.com/c/en/us/support/wireless/catalyst-iw9167-series/series.html>.

In addition to the documentation available on the support page, you will need to refer to the following guides:

- For information about IW9167EH hardware, see [Cisco Catalyst IW9167E Heavy Duty Access Point Hardware Installation Guide](#).
- A full listing of the AP's features and specifications is provided in [Cisco Catalyst IW9167E Heavy Duty Access Point Data Sheet](#).
- For more information about the configuration on Cisco Catalyst 9800 Series Wireless Controllers, see <https://www.cisco.com/c/en/us/support/wireless/catalyst-9800-series-wireless-controllers/products-installation-and-configuration-guides-list.html>.
- For information about Cisco URWB mode configuration, see the relevant documents at: <https://www.cisco.com/c/en/us/support/wireless/catalyst-iw9167-series/series.html>.
- For more information about Cisco IOS XE, see the relevant documents at: <http://www.cisco.com/c/en/us/products/ios-nx-os-software/ios-xe/index.html>

2 AP Mode Configuration

Topics:

- Indoor deployment for -E domain
- Configure indoor deployment for -E domain using CLI
- Configure indoor deployment for -E domain using GUI
- 802.11ax 1600ns and 3200ns guard interval support
- RAP Ethernet Daisy Chain
- GNSS
- Disable GNSS
- Enable GNSS
- Check the status of the GNSS module
- GNSS status and diagnostics

Indoor deployment for -E domain

Indoor deployment for -E domain

Indoor Deployment is a configurable operating mode supported on the IW9167EH for the -E regulatory domain. When Indoor Deployment is disabled (the default setting), the 5-GHz radio operates on channels 100, 104, 108, 112, 116, 120, 124, 128, 132, 136, and 140. After a factory reset, the Indoor Deployment setting returns to the disabled state.

The Indoor Deployment status can be verified using the **show ap name *ap-name* config general | section indoor** command. In the command output, "Enabled" indicates that the access point is operating in indoor mode, and "Disabled" indicates that it is operating in outdoor mode.

Configure indoor deployment for -E domain using CLI

Configures the AP for indoor deployment mode using the wireless controller.

This procedure describes how to configure the access point for indoor deployment mode using the wireless LAN controller.

Procedure

1. Use the **ap name *ap-name* indoor** command from the wireless controller to configure the access point for indoor mode.

Example

```
Device# ap name APFC58.9A15.C9A4 indoor
```

This command triggers an access point reboot.

After the access point reboots and re-registers with the wireless LAN controller, assign the appropriate country code to the access point. The 5-GHz radio supports these channels: 36, 40, 44, 48, 52, 56, 60, 64, 100, 104, 108, 112, 116, 120, 124, 128, 132, 136, and 140.



Note

The channel list includes U-NII-2c, U-NII-1, and U-NII-2a frequency bands (except channel 144).

2. Use the **ap name *ap-name* no indoor** command from the wireless controller to disable indoor deployment.

Example

```
Device# ap name APFC58.9A15.C9A4 no indoor
```

Configure indoor deployment for -E domain using GUI

Configures the AP for indoor deployment mode using the wireless controller.

This procedure describes how to configure the antenna type for the 5-GHz radio on an access point using the controller GUI.

Procedure

1. Go to **Configuration > Wireless > Access Points**.
2. Select 5 GHz Radios.
3. Click the AP Name to open the edit page.
4. Use the Antenna Type drop-down to change the type to Internal.
5. Click **Update & Apply to Device**.

802.11ax 1600ns and 3200ns guard interval support

802.11ax 1600ns and 3200ns Guard Interval Support

802.11ac has two Guard Interval (GI) options: long GI (800ns) and short GI (400ns). 802.11ax introduces new guard interval options, specifically 800ns, 1600ns, and 3200ns. Longer guard intervals provide improved performance in environments with multi-path and delay spread. These intervals improve link reliability for longer-range outdoor deployments and help prevent inter-symbol interference, which improves coverage and performance in outdoor environments.

Table 2: 802.11ax guard interval comparing with previous standards

Capabilities	802.11n	802.11ac	802.11ax
Physical Layer (PHY)	High Throughput (HT)	Very High Throughput (VHT)	High-Efficiency (HE)
Guard Interval	800/400 ns	800/400 ns	800/1600/3200 ns

Configure 802.11ax long guard interval

Configuring 802.11ax Long Guard Interval

This procedure describes how to configure the guard interval (GI) for an RF profile.

Procedure

1. Use the **configure terminal** command to enter global configuration mode.

```
Device# configure terminal
```

2. Use the **ap dot11 { 24ghz | 5ghz }** command to configure an RF profile and enter RF profile configuration mode.

Example

```
Device(config)# ap dot11 24ghz rf-profile 24G-RF-profile
```

3. Use the **guard-interval guard-interval** command to set the guard interval for the RF profile.

Example

```
Device(config-rf-profile)# guard-interval GUARD_INTERVAL_1600NS
```

- GUARD_INTERVAL_1600NS: set 1600 ns guard interval (only in HE mode)
- GUARD_INTERVAL_3200NS: set 3200 ns guard interval (only in HE mode)
- GUARD_INTERVAL_400NS: set 400 ns guard interval (HT VHT mode)
- GUARD_INTERVAL_800NS: set 800 ns guard interval

**Note**

Valid guard interval values are 800, 1600, and 3200 ns for HE mode. By default, GI is 800 ns.

4. Use the **end** command to return to privileged EXEC mode.

Example

```
Device(config-rf-profile)# end
```

5. (Optional) Use the **show ap rf-profile name Demo-24G-RF-profile detail | inc Guard** command to verify the configuration on the wireless controller.

Example

```
Device# show ap rf-profile name Demo-24G-RF-profile detail | inc Guard
Guard Interval      : 1600ns
```

```
Device# show ap rf-profile name Demo-5G-RF-profile detail | inc Guard
Guard Interval      : 3200ns
```

Example: Configure and apply custom Guard Interval settings to an AP using RF profiles and RF tags

This example shows how to configure and apply custom Guard Interval (GI) settings to an access point using RF profiles and RF tags.

1. Define GI in RF profile

```
ap dot11 24ghz rf-profile Demo-24G-RF-profile
shutdown
guard-interval GUARD_INTERVAL_1600NS
no shutdown
ap dot11 5ghz rf-profile Demo-5G-RF-profile
shutdown
guard-interval GUARD_INTERVAL_3200NS
no shutdown
```

2. Associate RF profile to RF tag

```
wireless tag rf Demo-Guard-Interval-RF-tag
24ghz-rf-policy Demo-24G-RF-profile
5ghz-rf-policy Demo-5G-RF-profile
```

3. Associate RF tag to AP

```
ap fc58.9a15.c83c
rf-tag Demo-Guard-Interval-RF-tag
```

RAP Ethernet Daisy Chain

Enhances the existing Ethernet bridging functionality by forcing the bridge access point to use the Ethernet link as the uplink backhaul.

This feature enhances the existing Ethernet bridging functionality by forcing the bridge access point to use the Ethernet link for uplink backhaul instead of using a wireless link. If the Ethernet link fails, the access point continues to avoid selecting a parent over wireless backhaul.

This figure shows an example of RAP Ethernet Daisy Chain topology. Each RAP receives a standalone DC power source

Figure 2: RAP Ethernet Daisy Chain topology

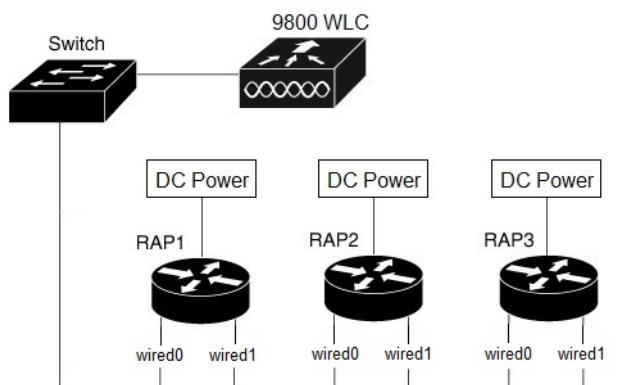


Table 3: Port mapping

Panel Label	SW Interface
mGig POE-IN port	wired 0
SFP	wired 1

- All APs in the daisy chain operate in mesh bridge mode or Flex+Bridge mode with the Root AP role. The PoE-IN (wired0) and SFP (wired1) ports can serve as uplink ports, and the PoE-IN (wired0) port has higher priority than the SFP (wired1) port.
- Disable VLAN transparency on all daisy-chained RAPs.

- To enable VLAN support on each root AP:
 - For bridge mode APs, use the `ap name name-of-rap mesh vlan-trunking [native] vlan-id` command to configure a trunk VLAN on the corresponding RAP.
 - For Flex+Bridge APs, you must configure the native VLAN ID under the corresponding flex profile.

Limitations in Cisco IOS XE Cupertino 17.9.3

The feature has these limitations in Cisco IOS XE Cupertino 17.9.3:


- You must use the primary Ethernet port (mGig port) as the uplink. SFP port-to-SFP port connections are not supported. This limitation impacts network throughput, since 2.5Gbps or 5Gbps copper SFP modules are unavailable for SFP port to mGig port connections.
- Do not use the existing `persistent-ssid` command to enable the RAP Ethernet Daisy Chain feature.

Updates in Cisco IOS XE Dublin 17.11.1

This feature is enhanced to support the following functions in Cisco IOS XE Dublin 17.11.1:

- When Wireless Spanning Tree Protocol (WSTP) hello is enabled, the system supports automatic root port detection. This feature allows the RAP to use any port as its uplink. The subsequent topology diagram illustrates this feature.

Figure 3: RAP Ethernet Daisy Chain With WSTP Topology

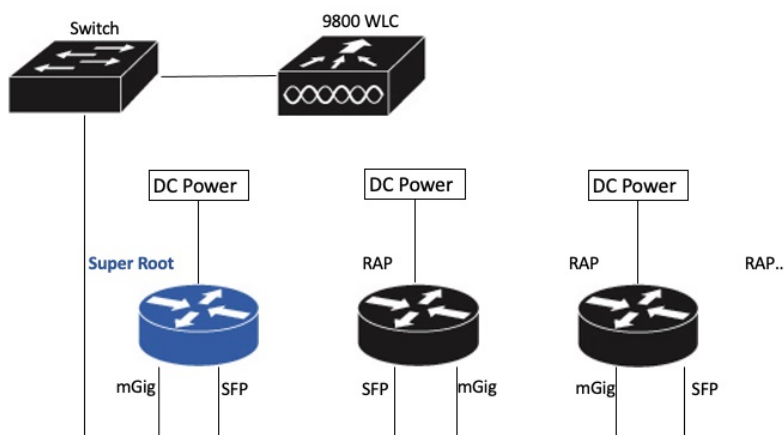

- A new command named `rap-eth-daisychain` is introduced to enable the feature.

Wireless LAN Spanning Tree Protocol

WSTP Overview

Wireless LAN spanning tree protocol (WSTP) organizes a Cisco mesh network into a loop-free spanning tree topology. It quickly configures a mesh network into a stable, loop-free, optimal spanning tree topology. An optimal topology provides least-cost paths to the primary Ethernet LAN. WSTP Hello messages are used to build the WSTP topology.

The WSTP super root is a single RAP that is elected as the highest level “super” root for the entire WSTP spanning tree. The super root is directly attached to the primary LAN and transmits zero-cost WSTP SR Hello messages on its Ethernet root port to advertise the primary LAN to RAPs.

Comparison with previous releases

Comparison of daisy chain features in releases prior to 17.11

The following table compares the daisy chain features in current release and prior to 17.11:

	Prior to Release 17.11.1	Release 17.11.1
Topology	Fixed topology RAP must use its mGig port as uplink in daisy chain topology	Flexible topology RAP can use either the mGig port or the SFP port as an uplink in the daisy chain topology. To enable this, use WSTP on the AP.
Feature enablement	Persistent-ssid in AP profile ¹	rap-eth-daisychain in Mesh profile
Ring Topology	Not supported ²	Not supported

RAP Ethernet Daisy Chain configuration

RAP Ethernet Daisy Chain with WSTP Configuration

This section provides procedures for the RAP Ethernet daisy chain configuration.

Preconfigure RAP Ethernet Daisy Chain before field deployment

Preconfiguring RAP Ethernet Daisy Chain before field deployment.


This procedure describes how to complete the preconfiguration steps in the lab before setting up for field deployment.

Procedure

1. Unpack, connect, and power on the AP.
2. Join each AP to controller with mGig port. Refer to the figure for details.

¹ **Persistent-ssid** is still supported in 17.11. This ensures the daisy chain function is not impacted after upgrading from a previous release to 17.11 with the old configuration. However, **persistent-ssid** is not recommended in 17.11. The new **rap-eth-daisychain** command is recommended.

² Supported only on IW6300 access point, by enabling **daisychain-stp-redundancy**. For more information, see the [RAP Ethernet Daisy Chain Redundancy for STP Ring Topology](#) section in [Cisco Catalyst IW6300 Heavy Duty Series and 6300 Series Embedded Services Access Point Software Configuration Guide](#).

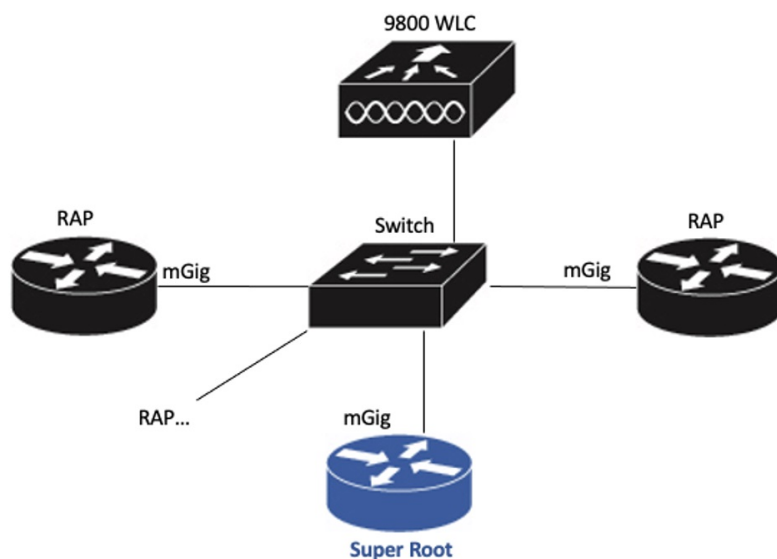

3. Configure the AP to bridge mode. Then, set the AP role to Root AP.

For detailed configuration procedures, see https://www.cisco.com/c/en/us/td/docs/wireless/controller/9800/17-11/config-guide/b_wl_17_eleven_cg/m_mesh_ewlc.html#task_pnb_bwy_mlb.

4. Configure the RAP Ethernet Daisy Chain.

- a) Create a mesh profile and enable the RAP Ethernet Daisy Chain feature.

See [Enabling RAP Ethernet Daisy Chain](#).

- b) Attach the profile to all RAPs.

- c) Configure one AP as the Super Root. This AP should be the first hop to the wireless controller.

See [Configure Super Root](#).

- d) Configure the primary Ethernet port on the Super Root AP if you use the SFP port as the uplink.

See [Configure primary Ethernet port](#).

5. Enable Ethernet Bridging and Configure Ethernet port.


See [Configuring Ethernet Bridging and Ethernet Port](#) on page 24.

- a) Enable Ethernet Bridging.

- b) Configure the Ethernet port on both Port 0 and Port 1, including port mode and VLAN. Configuring the port as trunk mode is recommended.

6. Verify the behavior in daisy chain topology.

- a) Connect the RAPs using the wired port, one at a time.

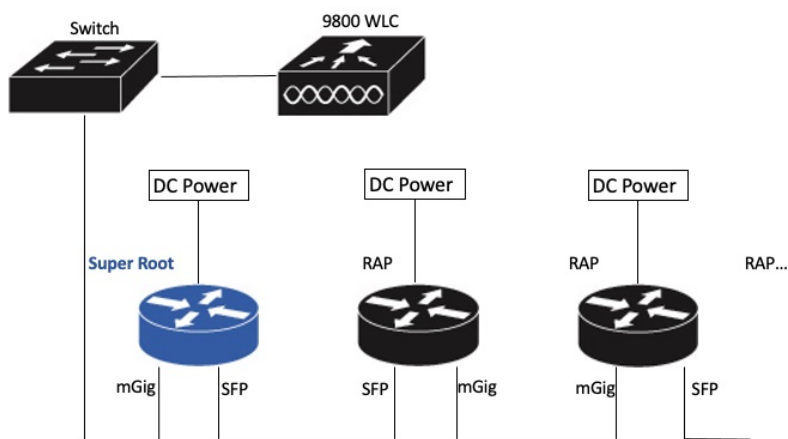

Note

The RAP which is the first hop from wireless controller should be configured as Super Root, as shown in the figure.

- b) Ensure that each RAP at every hop can join the controller.

Note

In field deployment, just repeat Step 6 of this procedure. Make sure you configure the first hop as Super Root.

Enable RAP Ethernet Daisy Chain from CLI

This procedure describes how to enable RAP Ethernet Daisy Chain feature.

Procedure

1. Use the **configure terminal** command to enter into configuration mode.

Example

```
Device# configure terminal
```

2. Use the **wireless profile mesh profile** command to configure a mesh profile and enter mesh profile configuration mode.

Example

```
Device(config)# wireless profile mesh default-mesh-profile
```

3. Use the **ethernet-bridging** command to connect remote wired networks to each other.

Example

```
Device(config-wireless-mesh-profile)# ethernet-bridging
```

4. Use the **rap-ethernet-daisychain** command to enable the RAP Ethernet Daisy Chain feature on a Remote Access Point (RAP).

Example

```
Device(config-wireless-mesh-profile)# rap-ethernet-daisychain
```

5. (Optional) Use the **show wireless profile mesh detailed** command or **show wireless mesh ethernet daisy-chain summary** command to verify the configuration on the wireless controller.

Example

```
Device# show wireless profile mesh detailed <profile name>
```

```
...
RAP ethernet daisychain      : ENABLED
```

```
Device# show wireless mesh ethernet daisy-chain summary
```

AP Name	BVI MAC	BGN	Backhaul	Ethernet	STP
Red	Super Root				
APxxxxxxx	xxxxxxx Enabled	xxxxx	Ethernet0	Up Up	NA

Or use the **show mesh config** command on AP, as shown in the following example:

```
Device#show mesh config
...
RAP Ethernet Daisy Chain: Enabled
Daisy Chain Root: Disabled
```

Enable RAP Ethernet Daisy Chain from GUI

This procedure describes how to Enable RAP Ethernet Daisy Chain from GUI.

Before you begin**Procedure**

1. Choose **Configuration > Wireless > Mesh > Profiles**.
2. Click the mesh profile.
The **Edit Mesh Profile** page is displayed.
3. Check the **RAP Ethernet Daisy Chain** check box.

Edit Mesh Profile

General

Advanced

Name*	mesh_profile	Backhaul amsdu	☒
Description	Enter Description	Backhaul Client Access	☒
Range (Root AP to Mesh AP)	12000	Battery State for an AP	☒
Multicast Mode	In-Out ▼	Full sector DFS status	☒
IDS (Rogue/Signature Detection)	☐	Daisychain STP Redundancy	☐
Convergence Method	Very Fast ▼	MAP Fast Ancestor Find	☐
Background Scanning	☒	RAP Ethernet Daisy Chain	☒
Channel Change Notification	☐		
LSC	☐		

4. Click **Update & Apply to Device**.

Configure Super Root

This procedure ensures that the first RAP connected to the upstream switch is configured as the super root.

The super root device acts as the originator of all WSTP hello messages. Other RAPs initiate hello messages only after they receive messages from the super root. This approach establishes proper topology formation and prevents loops.

You can configure the super root from either the wireless controller or the AP.

Procedure

1. Use the **ap nameap-name mesh rap-eth-daisychain super-root** command to configure a super root from the controller.

Example

```
Device# ap name ap-1 mesh rap-eth-daisychain super-root
```

2. Use the **capwap ap mesh wstp super-root** command to configure a super root from the AP.

Example

```
Device# capwap ap mesh wstp super-root
```

3. (Optional) Use the **show ap name mesh config general** command from the controller to display the general mesh configuration parameters for a specific access point (AP).

Example

```
Device# show ap name ap-1 mesh config general
...
```

```
RAP ethernet daisychain      : Enabled
Super Root                  : Enabled
```

4. (Optional) Use the **show mesh config** command from the AP to display the general mesh configuration parameters.

Example

```
Device# show mesh config
...
RAP Ethernet Daisy Chain: Enabled
Daisy Chain Root: Enabled
```

Configure primary Ethernet port

This procedure ensures that the super root access point establishes its uplink to the upstream switch through the designated primary Ethernet port.

For the IW9167EH, Ethernet port 0 is the default primary port and must be used to maintain proper topology formation and WSTP operation.

Procedure

1. Use the **ap name *ap-name* mesh backhaul ethernet *ethernet-num*** command to configure the primary Ethernet port from the controller.

Example

```
Device# ap name ap-1 mesh backhaul ethernet 1
```

2. (Optional) Use the **show ap name mesh config general** command from the controller to display the general mesh configuration parameters for a specific access point (AP).

Example

```
Device# show ap name ap-1 config general
...
AP Primary Ethernet port      : 1
RAP ethernet daisychain      : Enabled
Super Root                   : Disabled
```

3. (Optional) Use the **show mesh config** command from the AP to display the general mesh configuration parameters.

Example

```
Device# show mesh config
...
RAP Ethernet Daisy Chain: Enabled
  Daisy Chain Root: Enabled
AP Primary ethernet backhaul interface: 1
```

4. (Optional) Use the **show mesh adjacency parent** command from the AP to verify the parent-child relationship in a mesh topology.

Example

```
Device# show mesh adjacency parent
AdjInfo: Wired Backhaul: 1 [xx:xx:xx:xx:xx:xx]
```

Configuring Ethernet Bridging and Ethernet Port

Configuring Ethernet Bridging and Ethernet Port

Configure Ethernet bridging from CLI

Configure Ethernet Bridging

This procedure ensures that Ethernet connectivity is enabled on Mesh Access Points (MAPs) by configuring Ethernet bridging on the Root AP and the corresponding MAPs. Enabling Ethernet bridging activates the MAP Ethernet ports, allowing wired devices to connect and communicate through the mesh network.

To enable Ethernet bridging on the AP, complete these steps:

Procedure

1. Use the **configure terminal** command to enter global configuration mode.

Example

```
Device# configure terminal
```

2. Use the **wireless profile meshprofile-name** command to create a mesh profile and enter the mesh configuration mode.

Example

```
Device(config)# wireless profile mesh rap-eth-daisy
```

3. Use the **ethernet-bridging** command to connect remote wired networks to each other.

Example

```
Device(config-wireless-mesh-profile)# wireless profile mesh rap-eth-daisy
```

4. Use the **no ethernet-vlan-transparent** command to disable VLAN transparency to ensure that the bridge is VLAN aware.

Example

```
Device(config-wireless-mesh-profile)# no ethernet-vlan-transparent
```

5. Use the **end** command to return to privileged EXEC mode.

Example

```
Device(config-wireless-mesh-profile)# end
```

6. (Optional) Use the **show wireless profile mesh detailed rap-eth-daisy** command to verify the configuration.

Example

```
Device# show wireless profile mesh detailed rap-eth-daisy
```

```
Mesh Profile Name      : rap-eth-daisy
-----
Description            :
Bridge Group Name      : unconfigured
Strict match BGN       : DISABLED
Amsdu                  : ENABLED
Background Scan        : DISABLED
Channel Change Notification : DISABLED
Backhaul client access : DISABLED
Ethernet Bridging      : ENABLED
Ethernet Vlan Transparent : DISABLED
Daisy Chain SP Redundancy : DISABLED
Full Sector DFS        : ENABLED
```

Configure Ethernet bridging from GUI


Enables Ethernet bridging on the Root AP and associated MAPs.

This procedure enables Ethernet bridging on the Root AP and associated MAPs, allowing Ethernet traffic to be forwarded across the mesh network.

Follow these steps to configure Ethernet Bridging from wireless controller GUI:

Procedure

1. Choose **Configuration > Wireless > Mesh > Profiles**.
2. Click **Add**.
3. In **General** tab, enter the **Name** of the mesh profile.
4. In **Advanced** tab, uncheck the **VLAN Transparent** check box to disable VLAN transparency.
5. In **Advanced** tab, check the **Ethernet Bridging** check box.

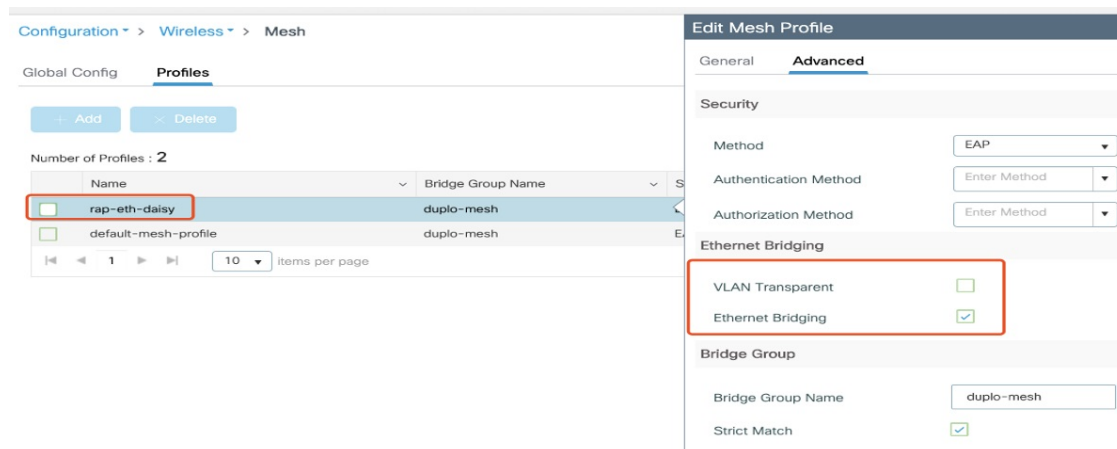

6. Click **Apply to Device** .

Configure the Ethernet port from the CLI

Configures the Ethernet port on a RAP using CLI commands in either Access or Trunk mode.

This procedure describes how to configure the Ethernet port on a RAP.

The secondary Ethernet port on the RAP supports Access mode and Trunk mode..

Procedure

1. Use the **ap name***ap-name* **mesh ethernet ethernet mode access** *vlan-ID* command to configure the Ethernet port in Access mode.

Example

```
Device# ap name ap-1 mesh ethernet 1 mode access 4
```

2. Configure the Ethernet port in Trunk mode.

VLAN support must be enabled, and VLAN transparency must be disabled in your mesh profile.

- a) Use the **ap name***ap-name* **mesh vlan-trunking native** *vlan-ID* command to configure the Ethernet port in Trunk mode.

Example

```
Device# ap name ap-1 mesh vlan-trunking native 4
```

- b) Use the **ap name***ap-name* **mesh ethernet ethernet mode trunk vlan native** *vlan-ID* command to configure the Ethernet port in Trunk mode.

Example

```
Device# ap name ap-1 mesh ethernet 1 mode trunk vlan native 4
```

- c) Use the **ap name***ap-name* **mesh ethernet ethernet mode trunk allowed** *vlan-ID* command to configure the allowed VLANs for the trunk port.

Example

```
Device# ap name ap-1 mesh ethernet 1 mode trunk allowed 4
```

VLAN filtering is permitted on an Ethernet port of any Mesh or Root Access Point. This setting is active only when VLAN transparency is disabled in the mesh profile.

Configure Ethernet port from GUI

Configures Ethernet port from wireless controller GUI.

This procedure describes how to configure Ethernet port from wireless controller GUI:

Procedure

1. Choose **Configuration > Wireless > Access Points**.

The **All Access Points** section, which lists all the configured APs in the network, is displayed with their corresponding details.

2. Click the configured mesh AP.

The **Edit AP** window is displayed.

3. Choose the **Mesh** tab.

4. In the **Ethernet Port Configuration** section, from the **Port** drop-down list, choose the port to configure.

5. From the **Mode** drop-down list, choose access mode or trunk mode.

6. In the **Native VLAN ID** field, enter the native VLAN for the trunk port.

Edit AP

General Interfaces High Availability Inventory **Mesh** Advanced Support Bundle

General Ethernet Port Configuration

Block Child ☐

Daisy Chaining ☐

Daisy Chaining strict-RAP ☐

Preferred Parent MAC

Role

Remove PSK

Ethernet Bridging on the associated Mesh Profile should be enabled to configure this section successfully

Port

Mode

Native VLAN ID*

Allowed VLAN IDs

7. Click **Update and Apply to Device**.

Debug and verify WSTP

Learn how to use CLI commands to debug the Wireless Termination Point (WTP) and display Wireless Spanning Tree Protocol (WSTP) statistics for monitoring and troubleshooting mesh topology or loop prevention issues.

This procedure describes how to use CLI commands to debug the Wireless Termination Point (WTP) and to display Wireless Spanning Tree Protocol (WSTP) statistics.

Procedure

1. Use the **debug mesh wstp** command to debug WTP.

Example

```
AP# debug mesh wstp
```

```
error      Mesh wstp error debugs
events     Mesh wstp events debugs
packets    Mesh wstp packet debugs
```

```
03:05:24.5918] chatter: wstp_ctl :: WstpControl: RX Hello(00) - BID:FC:58:9A:15:C8:04 SR:FC:58:9A:15:C8:04/0 Flags:02 Port:wired0
03:05:24.5918] chatter: wstp_ctl :: WstpControl - wired_hello_only, hello received, update parent record
03:05:24.5946] chatter: wstp_ctl :: WstpControl: TX Hello(00) - BID:FC:58:9A:17:58:EC SR:FC:58:9A:15:C8:04/0 Flags:02 Port:wired1
03:05:26.5918] chatter: wstp_ctl :: WstpControl: RX Hello(00) - BID:FC:58:9A:15:C8:04 SR:FC:58:9A:15:C8:04/0 Flags:02 Port:wired0
03:05:26.5918] chatter: wstp_ctl :: WstpControl - wired_hello_only, hello received, update parent record
03:05:26.5946] chatter: wstp_ctl :: WstpControl: TX Hello(00) - BID:FC:58:9A:17:58:EC SR:FC:58:9A:15:C8:04/0 Flags:02 Port:wired1
```

2. Use the `show mesh stats` command to display the WSTP statistics.

Example

```
AP# show mesh stats
```

```
WSTP stats:
Attach-Cnt Hello-TX Hello-Rx TCN-TX TCN-RX SR-Chg-Cnt ST-Roam-Cnt
0          58          58      0      0          0          0
```

GNSS

Introduces GNSS enhancements in Release 26.1.1, including controller-based enable or disable support and improved runtime status and diagnostic output.

Global Navigation Satellite System (GNSS) is a general term for satellite-based systems that provide positioning, navigation, and timing (PNT) services.

- GNSS provides positioning and navigation services anywhere on Earth.
- GNSS delivers position accuracy ranging from a few meters (standard) down to centimeters or millimeters.
- GNSS enables receivers to synchronize time to within billionths of a second, an essential requirement for telecom, power grids, and financial networks.

From Cisco IOS XE Dublin 17.11.1, GNSS is supported on IW9167EH. The AP tracks GPS information for devices deployed in the outdoor environment and sends the GNSS information to the wireless controller.

Use the following command to display the GNSS information on the AP:

```
ap# show gnss info
```

Use the following commands to display the GPS location of the AP:

```
controller# show ap geolocation summary
```

```
controller# show ap name Cisco AP geolocation detail
```

With Release 26.1.1, two GNSS enhancements are available: an option to enable or disable GNSS from the controller, and improved output for the `show gnss info` command, offering more detailed runtime status and diagnostics.

Disable GNSS

Explains how to dynamically disable GNSS on a specific access point to prevent inaccurate location reporting when satellite signals are weak.

From release 26.1.1, you can dynamically disable the GNSS service on a specific access point. This capability is especially useful when weak satellite signals could cause an AP to report inaccurate coordinates. By disabling GNSS in such cases, you can prevent incorrect location data from affecting the system and ensure the AP uses an alternative location source.

Use this procedure on the controller to disable the GNSS service.

Procedure

Use the **ap name** *ap-name* **geolocation gnss shutdown** command to specify the AP and disable the GNSS service on that AP.

Example

```
Device# ap name AP-BLR-01 geolocation gnss shutdown
```

The configuration persists across AP reboots.

Enable GNSS

Guides how to re-enable GNSS service on a specific access point from the controller using the appropriate geolocation command.

Use this procedure on the controller to enable the GNSS service.

Procedure

Use the **ap name** *ap-name* **no geolocation gnss shutdown** command to specify the AP and enable the GNSS service on that AP.

Example

```
Device# ap name AP-BLR-01 no geolocation gnss shutdown
```

Check the status of the GNSS module

Describes how to verify the administrative state of the GNSS module on an access point using the **show gnss info** command.

Starting with release 26.1.1, you can set the state of the GNSS module to administratively down. Use this procedure on the AP to check the status of the GNSS module.

Procedure

Use the **show gnss info** command to view the status of the GNSS module.

Example

```
Device# show gnss info

GNSS State Down
```

GNSS status and diagnostics

Explains the enhanced GNSS diagnostic output, including satellite details, signal quality, location data, fix status, accuracy, and uncertainty information.

The updated **show gnss info** command now includes more detailed runtime GNSS status and diagnostics including satellite distribution, signal quality, number of satellites, location, uncertainty ellipse and more.

A sample output is provided.

```
AP# show gnss info

GnssState: Started
ExternalAntenna: true
Fix: 3D-Fix ValidFix: true Time: 2022-01-01 00:01:01
Latitude: 37.4080 Longitude: -121.9530
HorAcc: 0 hDOP: 0.84
Uncertainty Ellipse:
  Major axis: 0 Minor axis: 0 Orientation: 0
Altitude MSL: 176.4 HAE: 0 VertAcc: 0
NumSat: 10
pDOP: 1.75 hDOP: 0.84 vDOP: 1.54 nDOP: 99.99 eDOP: 99.99 gDOP: 99.99 tDOP:
99.99
LastFixTime: 2022-01-01 00:01:00
SatelliteCount: 4

Const.      SatId CNO    Elev. Azim.
GPS         1      47     28    110
GPS         7      44     55    127
GPS         8      45     19     44
GPS         9      42      3    175

GNSS_PostProcessor:
Latitude: 37.4080 Longitude: -121.9530
HorAcc: 32.413618 hDOP: 18.628516
Uncertainty Ellipse:
  Major axis: 44.269861 Minor axis: 10.924539 Orientation: 141.70748
Altitude MSL: 360.78333 HAE: 0 VertAcc: 0

CiscoGNSS: N/A

Last Location Acquired:
Latitude: 37.4080 Longitude: -121.9530
HorAcc: 3.6618832 hDOP: 2.1045306
Uncertainty Ellipse:
  Major axis: 5.151356 Minor axis: 0.00035979961 Orientation: 146.63993
Altitude MSL: 310.9 HAE: 0 VertAcc: 0
Derivation Type: GNSS_PostProcessor
Time: 2025-10-05 01:28:46
```


3 Workgroup Bridges

Topics:

- Introduction and basics
- Initial setup and core configuration
- Upgrade the uWGB image
- Configure WGB/uWGB Radio Parameters
- Assign the Country Code to a WGB or uWGB with -ROW PID
- Enable or disable indoor deployment for -E Domain and United Kingdom
- Configure WGB roaming parameters
- Advanced features and optimizations
- AAA user authentications
- Verification and monitoring
- 10 Mbps Speed Port Support on Cisco IW9167EH WGB
- WPA3-Enterprise and SCEP for WGB

Workgroup Bridges

Introduction and basics

Learn how to configure and operate Workgroup Bridge (WGB) deployments on the access point.

Workgroup Bridge

Learn how a wired device or a group of wired devices can connect to a wireless network.

A Workgroup Bridge (WGB) is a feature in wireless networking that allows a wired device or a group of wired devices to connect to a wireless network.

Both Workgroup Bridge (WGB) and Universal Workgroup Bridge (uWGB) modes are part of WGB and that enable seamless connectivity between wired and wireless networks.

From Unified Industrial Wireless (UIW) Release 17.13.1, both of these modes are supported on the Cisco Catalyst IW9165E Rugged Access Point (AP) and wireless client.

WGB mode

Provides wireless connectivity to wired clients connected to the Ethernet port of the WGB

WGB mode provides wireless connectivity to wired clients connected to the Ethernet port of the WGB.


- Bridges the wired network to a wireless segment.
- Learns the MAC addresses of connected Ethernet-wired clients and shares these identifiers with the Controller. This is done through an AP infrastructure using Internet Access Point Protocol (IAPP) messaging.
- Establishes a single wireless connection to the root AP, which treats the WGB as a wireless client.

This mode is ideal for environments requiring wireless connectivity for wired devices that lack native wireless capabilities.

Use case of WGB mode

A factory floor uses wired devices such as sensors and PLCs, which lack built-in wireless connectivity. These devices connect to the WGB using Ethernet, and it bridges them to the wireless infrastructure through a single connection to the root AP.

Figure 4: WGB mode implementation

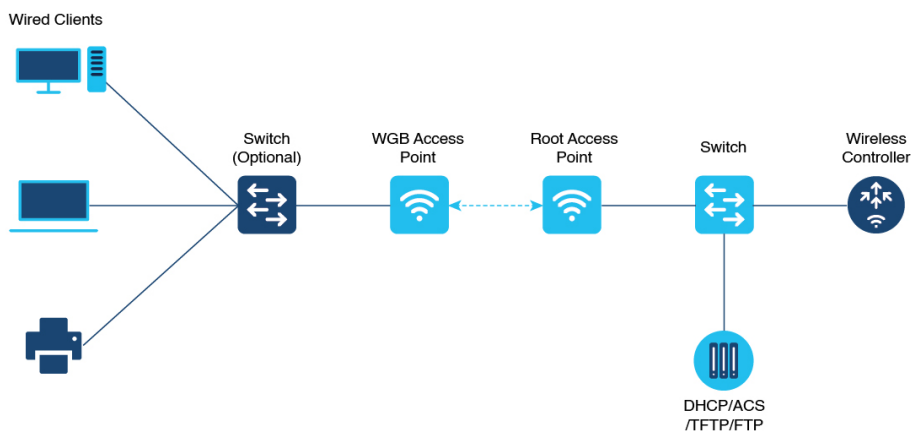

uWGB mode

Complementary category to the WGB mode, designed to act as a wireless bridge between wired clients and wireless infrastructure.

uWGB mode is a complementary category to the WGB mode, designed to act as a wireless bridge between wired clients and wireless infrastructure.

- Supports both Cisco and non-Cisco wireless networks.
- Uses a wireless interface to connect with the AP, employing the radio MAC address for association.
- Ensures that wired clients connected to the uWGB can access wireless networks seamlessly.

Use case of uWGB mode

A retail store employs a point-of-sale (POS) system with wired devices that require connectivity to a wireless network. uWGB connects these devices to the store's wireless infrastructure, supporting both Cisco and non-Cisco wireless networks. The uWGB uses its wireless interface to associate with the AP, enabling seamless communication between the wired POS devices and the wireless network.

Use both of these modes to efficiently extend wireless capabilities to wired devices to enhance both network scalability and flexibility.

Comparison of key features of WGB and uWGB modes

This table outlines the differences between these two modes.

Feature	WGB mode	uWGB mode
Connectivity	Cisco wireless networks only	Cisco and non-Cisco wireless networks
Interface usage	Learns MAC addresses using Ethernet ports	Uses radio MAC address for association

WGB mode recommendations

Limitations and restrictions of both WGB and uWGB modes.

Understand the limitations and restrictions of both WGB and uWGB modes to ensure optimal performance and avoid potential network issues.

- The WGB can associate only with Cisco lightweight access points.
- Speed and duplex settings are negotiated automatically based on the capabilities of the connected endpoint. Manual configuration is not supported on the wired-0 and wired-1 interfaces of the AP.
- When the WGB roams to a foreign controller, a wired client can connect to the WGB network. In this case, the anchor controller shows the IP address of the wired client, but the foreign controller does not.
- Deauthenticating a WGB record from a controller clears all entries of wired clients connected to that WGB.
- Wired clients connected to a WGB do not support:
 - MAC filtering
 - link tests
 - idle timeout
 - web authentication
- A WGB cannot associate with a WLAN configured either with an adaptive 802.11r or WPA3-DOT1X.

 Note

The WGB drops Bridge Protocol Data Unit (BPDU) frames, which may lead to Layer 2 network loops.

IPv6 and IPv4 support

- The WGB supports IPv6 traffic exclusively for wired clients, even though IPv4 is enabled.
- IPv6 management does not function properly on the WGB, even if the device associates successfully with an uplink. In this scenario, IPv6 pings and SSH access to the WGB management IPv6 address fail.

 Note

Re-enable IPv6 on the WGB, even if it is already enabled and an IPv6 address has been assigned.

Channel bandwidth issue

If the infrastructure AP operates on a non-dynamic frequency selection (non-DFS) channel and changes its channel bandwidth, the WGB continues to use the original channel bandwidth.

 Note

Confirm that the WGB connects to the AP using the correct channel bandwidth.

uWGB mode recommendations

uWGB mode recommendations.

- TFTP and SFTP are not supported in uWGB mode. Perform software upgrades in WGB mode only. For more information, see uWGB Image Upgrade.
- uWGB mode supports wired clients connected to the wired0 interface. However, it doesn't support wired clients connected to the wired1 interface.
- You should configure an arbitrary non-routable IP address for uWGB. Using a static or dynamic IP address in the same range as the end device can result in unexpected behavior.
- From UIW Release 17.13.1, an AP in uWGB mode is managed using SSH. Image upgrade can be performed when no wired clients are connected to the AP.
 - When a wired client is detected, the AP in uWGB mode remains in the same uWGB mode. You cannot upgrade the image of the AP.
 - When a wired client is not detected, the AP in uWGB mode switches to WGB mode. You can manage as well as upgrade the image of the AP.

Guidelines to reset the login credentials

Configure new login credentials after the first login.

Credential requirements

Reset your login credentials in day 0 to ensure the security of your network device. Follow these guidelines to configure new login credentials after the first login.

Table 4: Username and password recommendations

Rule type	Details
Username length	must be between 1 and 32 characters
Password length	must be between 8 and 120 characters
Password must include	• at least one uppercase character • one lowercase character • one digit, and • one punctuation mark.
Password can include	• alphanumeric characters, and • special characters (ASCII decimal code from 33 to 126).
Password must exclude	• " (double quote), • ' (single quote), and • ? (question mark).
Password cannot	• contain three consecutive characters in sequence (ABC/CBA), • contain three consecutive identical characters (AAA), and • be the same as or the reverse of the username.
Password must contain	A new password that must have at least four characters different from the current password.

Default credentials example:

```
Username: Cisco
Password: Cisco
Enable Password: Cisco
```

User credentials example:

```

Current Password:Cisco
Current Enable Password:Cisco
New User Name:demouser
New Password:DemoP@ssw0rd
Confirm New Password:DemoP@ssw0rd
New Enable Password:DemoE^aP@ssw0rd
Confirm New Enable Password:DemoE^aP@ssw0rd

```

**Note**

In the provided example, passwords are displayed in plain text for clarity. In real-world scenarios, passwords are masked with asterisks (*).

Know your AP status using LED indicators

Displays the operational status and signal strength of a device

LED patterns are indicator light sequences that display the operational status and signal strength of a device.

These patterns use visual cues, such as blinking or solid lights, to convey specific conditions or performance metrics. In the context of the IW9165E device, LED patterns help identify system status and signal quality.

IW9165E LED Indicators

The IW9165E device features two LEDs located on the front panel:

1. System Status LED
2. RSSI Status LED

Table 5: Visual Reference: LED Status Indicators

LED	Color or Pattern	Indication
System Status LED	Blinking Red	WGB is disassociated.
	Solid Green	WGB is associated with the parent AP.
RSSI Status LED	Solid Green	RSSI $\geq$ -71 dBm.
	Blinking Green	RSSI between -81 dBm and -70 dBm.
	Solid Yellow	RSSI between -95 dBm and -81 dBm.
	Off	RSSI outside specified ranges.

Initial setup and core configuration

Learn how to enable a Workgroup Bridge (WGB) to join a wireless network by configuring the WLAN and its associated settings.

Configure the WLAN profile

Learn how to configure a WLAN profile to enable a Workgroup Bridge (WGB) to join a wireless network and establish secure, reliable communication with the access point (AP).

The purpose of this procedure is to enable a Workgroup Bridge (WGB) to join a wireless network by configuring the WLAN and its associated configuration. Completing this configuration ensures that the WGB can establish secure and reliable communication with the access point (AP), thereby maintaining proper network connectivity.

Procedure

1. Use the `wlan profile-name` command to enter the WLAN configuration submenu.

Example

```
Device# wlan test-wlan
```

Here, *profile-name* refers to the name of the configured WLAN.

2. Use the `ccx aironet-iesupport` command to configure the Cisco Client Extensions (CCX) option and enable support for Aironet Information Element (IE) on the WLAN.

Example

```
Device# ccx aironet-iesupport
```



Note

This configuration is mandatory for the WGB to associate with the AP.

Configure wireless policy profile

Perform this task to configure wireless policy profile and enable VLAN client support for a WGB on the AP. This ensures seamless client connectivity and proper VLAN assignment for WGBs in the network.

Before you begin

- Ensure that you have administrative access to the device before configuring.
- Verify that the VLAN ID you assign exists and is configured on the network infrastructure.

Procedure

1. Use the `wireless profile policy profile-policy` command to access the wireless policy configuration mode for the desired profile.

```
Device# wireless profile policy Corp-Policy
```

2. Use the **vlan *vlan-id*** command to map the WLAN policy profile to the corresponding VLAN ID.

```
Device# vlan 20
```

3. Use the **wgb vlan** command to enable VLAN client support for the WGB.

```
Device# wgb vlan
```

Configure IP address

Configure an IPv4 address

Perform this task to configure an IPv4 address on a device using either the DHCP or a static configuration. This task ensures proper network connectivity and device management.

Before you begin

Procedure

1. Configure an IPv4 address on a device using one of the options.

Option

Description

Dynamically obtain IPv4 address

Use the **configure ap address ipv4 dhcp** command.

```
Device# configure ap address ipv4 dhcp
```

Manually assign a static IPv4 address

Use the **configure ap address ipv4 static *ipv4_addr netmask gateway*** command.

```
Device# configure ap address ipv4 static
192.168.10.25 255.255.255.0 192.168.10.1
```

2. (Optional) Use the **show ip interface brief** command to view the current IP address configuration.

```
Device# show ip interface brief
```

Configure an IPv6 address

Perform this task to configure IPv6 address for the device.

Procedure

1. Configure or obtain an IPv6 address on a device using one of the options.

Option

Description

Dynamically obtain IPv6 address

Use the **configure ap address ipv6 dhcp** command.

```
Device# configure ap address ipv6 dhcp
```

Option	Description
Automatically obtain an IPv6 address	Use the configure ap address ipv6 auto-config enable command. <pre>Device# configure ap address ipv6 auto-config enable</pre>  Note Enabling IPv6 auto-configuration also activates Stateless Address Auto-Configuration (SLAAC), but SLAAC does not apply to CoS of WGB. This command configures IPv6 address using DHCPv6 instead of SLAAC. Use the configure ap address ipv6 auto-config disable command to disable the IPv6 auto configuration on the AP.
Manually assign a static IPv6 address	Use the configure ap address ipv6 static <i>ipv6_addr prefix-length gateway</i> command. <pre>Device# configure ap address ipv6 static 2001:db8:abcd:100::25 64 2001:db8:abcd:100::1</pre> Configuring a static IPv6 address allows you to manage the AP through a wired interface, even if there is no uplink connection.

2. (Optional) Use the **show ipv6 interface brief** command to verify current IP address configuration.

```
Device# show ipv6 interface brief
```

Configuring WGB on the Radio Interface

A Workgroup Bridge (WGB) provides a way for non-wireless, wired devices to gain access to a wireless network. By acting as a bridge, the WGB connects wired endpoints to the WLAN, extending wireless connectivity to equipment that does not have native Wi-Fi capability. To enable this functionality, you must first create an SSID profile that defines the wireless parameters. The WGB is then configured on the radio interface, after which the SSID profile is associated with the interface to establish the connection.

Summary

WGB allows non-wireless devices to connect to a wireless network. This configuration involves creating an SSID profile, configuring the WGB on the radio interface, and associating the SSID profile with the interface.

Workflow

1. Create an SSID Profile

Choose the authentication method based on your network requirements.

2. Configure the Radio Interface

Access the radio interface settings. Apply the required configuration to enable WGB functionality.

3. Associate the SSID Profile with the Radio

Link the previously created SSID profile to the radio interface. This establishes the connection.

4. Enable the Radio Interface

Activate the radio interface to complete the WGB configuration. This will begin operation.

Create an SSID profile

Before you begin

Perform this task to configure an SSID profile that meets your network's authentication requirements and ensures secure access for users.

Procedure

Select an authentication protocol for the SSID profile based on your network requirements.

Options are:

- **Open authentication:** Allows access without requiring user credentials.
- **PSK authentication:** Provides encryption for secure access.
- **Dot 1x authentication:** Utilizes a centralized authentication server for user verification.



Note

For PSK configurations, ensure that the pre-shared key is strong and follows recommended security practices. MSCHAPv2 authentication using RADIUS is incompatible with FIPS mode on Cisco IW9165E APs.

Configure an SSID profile using open authentication

Open authentication allows devices to connect to the network without requiring credentials, making it suitable for specific scenarios like guest networks or public access points.

Procedure

Use the **configure ssid-profile *ssid-profile-name* ssid *radio-serv-name* authentication open** command to configure an SSID profile using open authentication.

```
Device# configure ssid-profile Guest-WiFi ssid Guest authentication open
```

Configure an SSID profile using PSK authentication

PSK authentication secures wireless networks by providing users with a shared key. This task provides instructions for configuring SSID profiles with PSK authentication, tailored to different key management protocols.

Procedure

Configure an SSID with PSK authentication, using one of these options: WPA2, 802.11r, or 802.11w.

Option	Description
Enhanced wireless security	Use the configure ssid-profile <i>ssid-profile-name</i> ssid <i>SSID_name</i> authentication psk <i>presared-key</i> key-management wpa2 command.
	<pre>Device# configure ssid-profile Corp-WiFi ssid CorpNet authentication psk StrongP@ss123 key-management wpa2</pre>
Fast roaming for mobile devices	Use the configure ssid-profile <i>ssid-profile-name</i> ssid <i>SSID_name</i> authentication psk <i>presared-key</i> key-management dot11r command.
	<pre>Device# configure ssid-profile Corp-WiFi ssid CorpNet authentication psk StrongP@ss123 key-management dot11r</pre>
Management frame protection	Use the configure ssid-profile <i>ssid-profile-name</i> ssid <i>SSID_name</i> authentication psk <i>presared-key</i> key-management dot11w command.
	<pre>Device# configure ssid-profile Corp-WiFi ssid CorpNet authentication psk StrongP@ss123 key-management dot11w</pre>

Configure an SSID profile using Dot1x authentication

Dot1x authentication is a network access control method that enhances security by requiring user credentials before granting access. This task guides you in configuring the SSID profile with appropriate key management options.

Perform this task to set up an SSID profile with Dot1x authentication, ensuring secure network access using Extensible Authentication Protocol (EAP).

Before you begin

Procedure

Use the **configure ssid-profile *ssid-profile-name* ssid *radio-serv-name* authentication eap profile *eap-profile-name* key-management dot11r wpa2 dot11w optional | required** command to configure an SSID profile using Dot1x authentication.

```
Device# configure ssid-profile Corp-WiFi ssid CorpNet authentication eap profile
EAP-Profile1 key-management wpa2
```

If..	Then..
If you want to enable fast roaming	Use the dot11r key-management option.
If WPA2 security is required	Use the wpa2 key-management option.
If management frame protection is needed	Use the dot11w key-management option with optional or required .

Configure an SSID profile using Dot1x EAP-PEAP authentication

Before you begin

Perform this task to set up a secure SSID profile using Dot 1x EAP-PEAP authentication, which provides enhanced security for wireless networks.

This task is applicable when configuring wireless profiles on devices that support Dot 1x EAP-PEAP authentication. This ensures the device can authenticate securely using a specified username and password.

Procedure

1. Use the **configure dot1x credential *credential_name* username *username* password *password*** command to create Dot1x credentials.

```
Device# configure dot1x credential Corp-Cred username corpuser password
C!sc0Str0ng
```

2. Use the **configure eap-profile *profile_name* dot1x-credential *credential_name*** command to configure the EAP profile and associate it with the configured Dot1x credentials.

```
Device# configure eap-profile Corp-EAP dot1x-credential Corp-Cred
```

3. Use the **configure eap-profile *profile_name* method peap** command to define the EAP method for the profile as PEAP.

```
Device# configure eap-profile Corp-EAP method peap
```

4. Use the **configure ssid-profile *ssid-profile-name* ssid *ssid name* authentication eap profile *eap-profile-name* key-management wpa2** command to create an SSID profile and set up authentication using the EAP profile.

```
Device# configure ssid-profile iot-peap ssid iot-peap authentication eap
profile p1 key-management wpa2
```

Configure radio interface for WGB

Before you begin

The IW9165E device does not support a 2.4 GHz radio. Therefore, only the dot11radio 1 interface can be configured as the uplink to operate in WGB mode.

Configure the radio interface to enable the WGB mode and establish a connection to the appropriate SSID profile.

Procedure

1. Use the **configure dot11radio *slot_id* mode wgb ssid-profile *ssid-profile-name*** command to configure a radio interface to a WGB SSID profile.

```
Device# configure dot11radio 1 mode wgb ssid-profile Corp-WiFi
```

 Note

Ensure that the SSID profile being used is already configured and accessible by the device.

2. Use the **configure dot11radio slot_id enable** command to enable a radio interface.

```
Device# configure dot11radio 1 enable
```

3. (Optional) Use the **configure dot11radio slot_id disable** command to disable a radio interface.

```
Device# configure dot11radio 1 disable
```

Configure security parameters

Use this process to configure security parameters on the WGB to ensure secure authentication and encryption for wireless communication.

Before you begin

Procedure

1. Set up the device parameters.
 - Configure the device username and password.
 - Configure the NTP server to ensure accurate time synchronization.
 - Define the hostname and assign a valid IP address.
2. Create and import trustpoints.

Establish trustpoints and import the required certificates using your preferred method.
3. (Optional) Configure the dot1x credentials.

Provide the necessary dot1x username and password credentials if required by your setup.
4. Create the EAP profile.

Map the EAP method, trustpoint name, and (optionally) the dot1x credentials to the EAP profile.
5. Bind the EAP profile to the SSID profile.

Associate the EAP profile with the desired SSID profile to enable secure wireless connections.
6. Bind the SSID profile to the radio.

Link the SSID profile to the preferred radio interface to activate the configuration.

 Note

- Ensure that the NTP server is reachable and the certificates are valid to avoid authentication failures.
- Use a secure method to import certificates to maintain system integrity.
- If the certificate import fails, verify the certificate format and re-import using a valid method.

What to do next **Note**

If you make any modifications to the dot1x credential profile, trustpoint profile, or EAP profile, the changes do not take effect immediately. You must manually re-attach the EAP profile to the SSID profile for the changes to apply.

Use **configure ssid-profile *ssid_prof_name* ssid *ssid* authentication eap profile *eap_prof_name* key-management *key_type*** command to re-attach the EAP profile to the SSID profile.

```
Device# configure ssid-profile Corp-SSID ssid CorpNet authentication eap
profile Corp-EAP key-management wpa2
```

Configure an EAP profile

This task guides you through the steps required to configure an Extensible Authentication Protocol (EAP) profile, ensuring secure and efficient authentication for your network.

Before you begin

An EAP profile is critical in ensuring secure authentication for wireless clients. Configuring the profile correctly ensures seamless integration with Dot1x credentials, SSID profiles, and radio configurations.

Before you begin configuring an EAP profile, ensure the following:

1. A valid Dot1x credential profile is already created.
2. The SSID profile has been configured.
3. The radio to which the SSID will be attached is properly set up.
4. Administrative access to the device's CLI.

Procedure

1. Use the **configure eap-profile *profile-name* method *fast* *leap* *peap* *tls*** command to configure the EAP profile with the desired method.

```
Device# configure eap-profile Corp-EAP method peap
```

If..	Then..
If the TLS method is selected for the EAP profile	Attach a CA trustpoint using Step 2.
If a profile is no longer needed	Use Step 4 to delete the EAP profile.

2. Use the **configure eap-profile *profile-name* trustpoint default name *trustpoint-name*** command to attach the CA trustpoint for TLS. By default, the WGB uses the internal MIC certificate for authentication.

```
Device# configure eap-profile Corp-EAP trustpoint default
```

Note

To ensure any newly created trustpoint to take effect, update the trustpoint name that is mapped to the eap-profile.

Example:

```
Device# configure eap-profile Corp-EAP trustpoint Corp-CA
```

3. Use the **configure eap-profile *profile-name* dot1x-credential *profile-name*** command to attach the dot 1x-credential profile.

```
Device# configure eap-profile Corp-EAP dot1x-credential Corp-Cred
```

4. (Optional) Use the **configure eap-profile *profile-name* delete** command to delete an EAP profile.

```
Device# configure eap-profile Corp-EAP delete
```

Configure Dot1X credential

This task configures a Dot1X credential to ensure the device is correctly set up for 802.1X authentication, enabling secure access control and network protection.

Procedure

1. Use the **configure dot1x credential *credential-profile-name* username *username* password *password*** command to configure the Dot1X credential.

```
Device# configure dot1x credential Corp-Cred username corpuser password C!sc0Str0ng
```

2. (Optional) Use the **show wgb eap dot1x credential profile** command to view the status of the WGB EAP Dot 1x profile.

```
Device# show wgb eap dot1x credential profile
```

Configure trustpoint manual enrollment for terminal

This procedure explains how to manually configure a trustpoint for terminal-based enrollment. It ensures secure communication between the device and the Certificate Authority (CA) server by enabling the use of a trusted certificate.

Procedure

1. Use the **configure crypto pki trustpoint *ca-server-name* enrollment terminal** command to create a trustpoint for the WGB.

```
Device# configure crypto pki trustpoint Corp-CA enrollment terminal
```

2. Use the **configure crypto pki trustpoint *ca-server-name* authenticate** command to authenticate the trustpoint manually.

Enter the base64-encoded CA certificate. If you use an intermediate certificate, you must import the entire certificate chain into the trustpoint. Type **quit** to finish.

```
Device# configure crypto pki trustpoint demotp authenticate

Enter the base 64 encoded CA certificate.
....And end with the word "quit" on a line by itself....

-----BEGIN CERTIFICATE-----
[base64 encoded root CA certificate]
-----END CERTIFICATE-----
-----BEGIN CERTIFICATE-----
[base64 encoded intermediate CA certificate]
-----END CERTIFICATE-----
quit
```

3. Use the **configure crypto pki trustpoint *ca-server-name* key-size *key-length*** command to configure a private key size.

```
Device# configure crypto pki trustpoint Corp-CA key-size 2048
```

4. Use the **configure crypto pki trustpoint *ca-server-name* subject-name *name* [*2ltr-country-code state-name locality org-name org-unit email*]** command to configure the subject-name for the trustpoint.

```
Device# configure crypto pki trustpoint Corp-CA subject-name AP1.cisco.com
US California SanJose CorpNet IT admin@cisco.com
```

5. Use the **configure crypto pki trustpoint *ca-server-name* enroll** command to generate a private key and CSR.

```
Device# configure crypto pki trustpoint Corp-CA enroll
```

Note

Generate a digitally signed certificate on the CA server using the CSR output.

6. Use the **configure crypto pki trustpoint *ca-server-name* import certificate** command to import the signed certificate.

```
Device# configure crypto pki trustpoint Corp-CA import certificate
```

Enter the base64-encoded CA certificate and type `quit` to finish importing the certificate.

7. (Optional) Use the **configure crypto pki trustpoint *trustpoint_name* import private-key** command to import a private key from an external device into the WGB.

Perform this step only if you create the private key and CSR externally, rather than generating them within the WGB.

Enter the base64-encoded private key and type `quit` to finish importing the key.

Example

```
Device# configure crypto pki trustpoint Corp-CA import private-key

Enter the base 64 encoded CA certificate or private key.
....And end with the word "quit" on a line by itself....

-----BEGIN PRIVATE KEY-----
[base64 encoded private key]
-----END PRIVATE KEY-----
quit
```

The device stores the private key file only if the key size is within 360-4096 bits. If the key size is outside this range or invalid, the device deletes the private key file and displays this message:

```
Key size of imported private key (0) is not within allowed range (360-4096).
```

8. (Optional) Use the **configure crypto pki trustpoint *trustpoint-name* delete** command to delete a trustpoint.

Example

```
Device# configure crypto pki trustpoint Corp-CA delete
```

Configure trustpoint auto-enrollment

Perform this task to automate the certificate enrollment process to improve the efficiency and security within the environment. This process uses the Simple Certificate Enrollment Protocol (SCEP) to ensure integrity and secure certificate issuance.



Note

- The SCEP certificate auto-enrollment feature has been validated only with Windows Server 2016 NDES (Network Device Enrollment Service) (version 10.0.14393.0).
- In release 26.1.1, SCEP auto-enrollment is not supported with WPA3 Enterprise.
- The system supports only client certificate renewal. CA certificate rollover is not supported. To update a CA certificate, manually re-install the certificate. You must delete the original trustpoint, or create a new trustpoint and associate the certificate with it.

Before you begin

- Ensure the Workgroup Bridge (WGB) has an active connection established to the infrastructure network.

- Ensure that the system time on all network devices is synchronized to the same Network Time Protocol (NTP) server.
- Configure the CA certificate chain on the SCEP server by including these parameters on separate certificates:
 - CA:True
 - Key Usage:Key Encipherment
 - Key Usage:Digital Signature

Procedure

1. Use the **configure crypto pki trustpoint *ca-server-name* enrollment url *ca-server-url*** command to enroll a trustpoint in the WGB using the server URL.

Example

```
Device# configure crypto pki trustpoint Corp-CA enrollment url
http://192.168.71.2/certsrv/mscep/mscep.dll
```

Note

Only HTTP URLs are accepted and HTTPS URLs are not supported.

2. Use the **configure crypto pki trustpoint *ca-server-name* authenticate** command to authenticate a trustpoint.

Example

```
Device# configure crypto pki trustpoint Corp-CA authenticate
```

Note

This command automatically fetches the Certificate Authority (CA) certificate from the CA server.

If CA authentication or enrollment operations fail, the system discards the certificates. You must re-initiate the certificate requests.

3. Use the **configure crypto pki trustpoint *ca-server-name* key-size *key-length*** command to configure a private key size.

Example

```
Device# configure crypto pki trustpoint Corp-CA key-size 2048
```

4. Use the **configure crypto pki trustpoint *ca-server-name* subject-name *name* [*2ltr-country-code* *state-name* *locality* *org-name* *org-unit* *email*]** command to configure the subject-name.

Example

```
Device# configure crypto pki trustpoint Corp-CA subject-name AP1.cisco.com
US California SanJose CorpNet IT admin@cisco.com
```

5. Use the **configure crypto pki trustpoint *ca-server-name* enroll** command to request a digitally signed certificate from the CA server and enroll the trustpoint in a secure environment.

Example

```
Device# configure crypto pki trustpoint Corp-CA enroll
```

6. (Optional) Use the **configure crypto pki trustpoint *ca-server-name* enroll [password *password*]** command if the SCEP server requires authentication, such as a challenge password.

Example

```
Device# configure crypto pki trustpoint Corp-CA enroll password *****
```

**Note**

If authentication is enabled on the SCEP server, the required shared secret (challenge password) can be found on the GUI page of the SCEP server.

The **authenticate** and **enroll** commands from step 2 and step 5 are action commands that do not appear in the **show running-config** command output. These commands are not applied to other WGB devices during certificate auto enrollment export or import.

7. Use the **configure crypto pki trustpoint *ca-server-name* auto-enroll enable [renew-percent] [regenerate] [max-retries *retries*] [retry-interval-minutes *retry-interval*]** command to enable auto-enroll.

Example

```
Device# configure crypto pki trustpoint Corp-CA auto-enroll enable 90
regenerate 10 retries 10 retry-interval
```

Parameter	Description	Default Value	Configuration Range	Additional Information
max-retries	Specifies the maximum number of times the WGB attempts to renew the certificate.	5	max-retries: 5 to 100	You can increase this value to allow more renewal attempts if failures are expected. This parameter is optional. If not configured, the system uses the default values.
retry-interval	Defines the time (in minutes) between each renewal attempt.	1	retry-interval-minutes: 1 to 480 minutes	You can adjust this value based on how frequently you want renewal attempts to occur after a failure. This parameter is optional. If not configured, the system uses the default values.

Parameter	Description	Default Value	Configuration Range	Additional Information
regenerate	Indicates the percentage of the certificate lifetime that has expired, after which a renewal attempt should be triggered.	95	renew-percent: 0 to 95	A value of 95 triggers a certificate renewal attempt after 95% of the client certificate's lifetime has passed. Set the regenerate value according to your organization's certificate lifecycle policy to ensure timely renewal.

 **Note**

If the regenerate value is configured as 0, the system will automatically set it to the default value 95.

 Note

Use the **configure crypto pki trustpoint *ca-server-name* auto-enroll disable** command to disable the auto-enroll.

8. (Optional) Use the **show crypto pki timers** command to show the time left for certificate renewal.

Example

```
Device# show crypto pki timers
```

Sample output:

Trustpoint	Rollover Timer	Shadow Timer	Renewal Timer
tls	Disabled	Disabled	0000D:00H:03M:08S

 Note

The timer for the client certificate is triggered only after auto-enroll is enabled in step 6.

9. (Optional) Use the **configure crypto pki trustpoint *trustpoint-name* delete** command to delete a trustpoint.

Example

```
Device# configure crypto pki trustpoint Corp-CA delete
```

Verify PKI trustpoint

Use the commands given in this section to verify if PKI trustpoint is properly configured during manual or auto-enrollment procedures.

Procedure

1. Use the **show crypto pki trustpoint** command to display a summary of all trustpoints.

Example

```
Device# show crypto pki trustpoint
```

Sample output:

```
Device# show crypto pki trustpoint
Crypto PKI trustpoints are:-
=====
Trustpoint name : tls
Enrollment method : Auto Enrollment
  URL path : http://192.XXX.XX.X/certsrv/mscep/mscep.dll
  Auto Renewal : Enabled
  CA-Cert file : /storage/wbridge_pki_cert/tls/tls_ca.pem
  Client-Cert file : /storage/wbridge_pki_cert/tls/tls_client.pem
  Subject :
C=US,ST=California,L=SanJose,O=CISCO,OU=IOT,CN=user1,emailAddress=user1@cisco.com

  Key size : 2048
```

2. Use the **show crypto pki trustpoint *trustpoint-name* certificate** command to view the content of the certificates that are created for a trustpoint.

Example

```
Device# show crypto pki trustpoint trustpoint-name certificate
```

Sample output:

```
Device# show crypto pki trustpoint tls certificate
CA Certificate:
Certificate:
  Data:
    Version: 3 (0x2)
    Serial Number:
      12:d5:b2:3d:69:70:8d:98:46:90:f5:e9:47:56:65:1e
    Signature Algorithm: sha256WithRSAEncryption
    Issuer: DC=local, DC=iottest, CN=WIN2016-AD-CA
    Validity
      Not Before: Feb 28 08:43:08 2020 GMT
      Not After : May 23 03:33:13 2034 GMT
    Subject: DC=local, DC=iottest, CN=WIN2016-AD-CA
    Subject Public Key Info:
      Public Key Algorithm: rsaEncryption
      Public-Key: (2048 bit)
      Modulus:
        [Modulus value]
      Exponent: 65537 (0x10001)
    X509v3 extensions:
      X509v3 Key Usage:
        Digital Signature, Certificate Sign, CRL Sign
      X509v3 Basic Constraints: critical
        CA:TRUE
      X509v3 Subject Key Identifier:
        0A:0C:44:AD:88:EF:2B:E5:9C:A9:53:3F:C7:95:35:41:1C:B2:C8:B3
```

```

1.3.6.1.4.1.311.21.1:
...
1.3.6.1.4.1.311.21.2:
..h{...6I3\.....W}...
Signature Algorithm: sha256WithRSAEncryption
Signature Value:
[Modulus value]

Client Certificate:
Certificate:
Data:
Version: 3 (0x2)
Serial Number:
16:00:00:2c:f8:0a:24:92:ca:d1:61:0e:9d:00:01:00:00:2c:f8
Signature Algorithm: sha256WithRSAEncryption
Issuer: DC=local, DC=iottest, CN=WIN2016-AD-CA
Validity
Not Before: Nov 13 06:21:13 2025 GMT
Not After : Nov 13 07:21:13 2025 GMT
Subject: C=US, ST=California, L=Sanjose, O=CISCO, OU=IOT, CN=user,
emailAddress=user@cisco.com
Subject Public Key Info:
Public Key Algorithm: rsaEncryption
Public-Key: (2048 bit)
Modulus:
[Modulus value]
Exponent: 65537 (0x10001)
X509v3 extensions:
X509v3 Subject Key Identifier:
76:B2:CC:17:F9:3A:A3:1C:47:18:9F:3D:64:A3:5F:89:90:E0:97:BE
X509v3 Authority Key Identifier:
0A:0C:44:AD:88:EF:2B:E5:9C:A9:53:3F:C7:95:35:41:1C:B2:C8:B3
X509v3 CRL Distribution Points:
Full Name:

URI:ldap:///CN=WIN2016-AD-CA,CN=win2016-ad,CN=CDP,CN=Public%20Key%20Services,CN=Services,CN=Configuration,

DC=iottest,DC=local?certificateRevocationList?base?objectClass=cRLDistributionPoint

Authority Information Access:
CA Issuers -
URI:ldap:///CN=WIN2016-AD-CA,CN=AIA,CN=Public%20Key%20Services,CN=Services,CN=Configuration,

DC=iottest,DC=local?cACertificate?base?objectClass=certificationAuthority
X509v3 Key Usage: critical
Digital Signature, Key Encipherment
Microsoft certificate template:
...1...SW....t..d..&...7....)....a...
X509v3 Extended Key Usage:
1.3.6.1.5.5.8.2.2, TLS Web Client Authentication
Microsoft Application Policies Extension:
0.0
..+.....0
..+.....
Signature Algorithm: sha256WithRSAEncryption
Signature Value:
[Signature value]
APFC58.9A17.AF98#

```

Configure manual certificate enrollment using a TFTP/HTTP/HTTPS server

Perform this task to manually enroll certificates using a TFTP/HTTP/HTTPS server. This ensures secure communication by retrieving, authenticating, and managing certificates for a trustpoint.

Procedure

1. Use the **configure crypto pki trustpoint *ca-server-name* enrollment server** *<proto>://<server_IP_address>/file-name* command to retrieve the CA and client certificate for a trustpoint.

Example

```
Device# configure crypto pki trustpoint Corp-CA enrollment server
http://192.168.1.100/certs/corp-ca-cert
```



Note

The enrollment server supports HTTP, TFTP, or HTTPS protocols. Specify the required protocol in the server URL for your deployment. It is not necessary to include the file extension in the URL's file name.

2. Use the **configure crypto pki trustpoint *ca-server-name* authenticate** command to retrieve and authenticate the CA certificate from the specified server.

```
Device# configure crypto pki trustpoint Corp-CA authenticate
```



Note

This command retrieves and authenticates the CA certificate from the specified server. The server should contain the CA certificate file with **.ca** extension in the specified path.

3. Use the **configure crypto pki trustpoint *ca-server-name* key-size *key-length*** command to set the private key size.

```
Device# configure crypto pki trustpoint Corp-CA key-size 2048
```

4. Use the **configure crypto pki trustpoint *ca-server-name* subject-name *name* [2ltr-country-code state-name locality org-name org-unit email]** command to configure the subject-name.

```
Device# configure crypto pki trustpoint Corp-CA subject-name AP1.cisco.com
US California SanJose CorpNet IT admin@cisco.com
```

5. Use the **configure crypto pki trustpoint *ca-server-name* enroll** command to generate a private key and a CSR. Then copy the CSR to the server.

Example

```
Device#configure crypto pki trustpoint Corp-CA enroll
```

 Note

This generates certificate request and sends the request to the server. The CSR file is written to the server with the **.req** extension.

6. Use the **configure crypto pki trustpoint *ca-server-name* import certificate** command to import the signed certificate into the WGB.

```
Device#configure crypto pki trustpoint Corp-CA import certificate
```

Ensure that the digitally signed certificate created from the CSR is saved with a **.crt** extension in the server before executing this command.

7. (Optional) Use the **show crypto pki trustpoint** command to display a summary of all trustpoints.

```
Device# show crypto pki trustpoint
```

8. (Optional) Use the **show crypto pki trustpoint *trustpoint-name* certificate** command to view the content of the certificates that are created for a trustpoint.

```
Device# show crypto pki trustpoint Corp-CA certificate
```

Configure a PKCS12 or PFX or P12 certificate enrollment using a TFTP/HTTP/HTTPS server

This task enables you to import a PKCS12 full certificate bundle for EAP-TLS authentication and private key configuration. This ensures secure communication and device authentication in WGB mode.

Procedure

1. Use **configure crypto pki trustpoint *trustpoint_name* import pkcs12 server** **<proto>://<server_IP_address>/path_to_certificate password certificate_password** command to import PKCS12 full certificate bundle for EAP-TLS authentication and private key.

Example

```
Device# configure crypto pki trustpoint Corp-CA import server
tftp://1.2.3.4/corp-ca.p12 password *****
```

 Note

You can use TFTP, HTTP, or HTTPS as the server protocol, depending on your environment and server configuration.

2. (Optional) Use the **show crypto pki trustpoint** command to verify the downloaded PKCS12 certificate.

```
Device# show crypto pki trustpoint

Crypto PKI trustpoints are:-
=====
Trustpoint name : example
Enrollment method : TFTP
TFTP path : tftp://192.168.0.1/users/example/ca
CA-Cert file : /storage/wbridge_pki_cert/example/example_ca.pem
Subject :
C=US, ST=Unknown, L=Unknown, O=Cisco, OU=Wnbu, CN=ap.cisco.com
,emailAddress=wgb@cisco.com
Key size : 2048
```

Trustpoint enrollment error codes and logs

This section describes possible issues that occur during the auto enrollment procedure using SCEP, the error codes and debug commands to troubleshoot.

Debug Commands

You can enable any debug level listed in the **Trustpoint debug levels** table for troubleshooting.

- Device# debug trustpoint {all | critical | debug | error | info}

Table 6: Trustpoint debug levels

Debug level	Description
all	Enable all levels of trustpoint debugging
critical	Enable trustpoint critical level debugging
debug	Enable trustpoint debugging
error	Enable trustpoint error debugging
info	Enable trustpoint info debugging

When a WGB certificate renewal or fetch operation is disrupted, specific error codes are displayed on the console. These error codes are only applicable for the [Configure trustpoint auto-enrollment](#) on page 48 commands (for SCEP based certificate operations).

The error codes are listed in the **Error codes for certificate fetch and renewal operations** table.

Table 7: Error codes for certificate fetch and renewal operations

Error Code	Description
1	General catch-all error code used when an unspecified error occurs that does not fit other categories.
70	Bad Algorithm - Unrecognized or unsupported algorithm identifier
71	Bad Message Check - Integrity check failed due to message corruption, tampering, or invalid digital signature
72	Bad Request - Transaction not permitted or supported (Commonly hit when SCEP server expects password but WGB does not provide it)
73	Bad Time - Message timestamp validation failed
74	Bad Certificate ID - No matching certificate found
89	Network communication timeout
91	Self-signed certificate generation error
93	File system operation error
95	Network message sending error, which occurs when the WGB is unable to reach the SCEP server
97	PKCS#7 cryptographic operation error

Error messages and logs

This section lists possible issues that may occur during the trustpoint enrollment process.

Table 8: Error logs and messages

Issue	Description and Cause	Error Message / Log
Client and CA certificate fetch failure	A network connection disruption prevents the WGB from reaching the SCEP server. Error code 95 indicates a network message sending error.	WCP_TP: Failed to get CA certificate: 95
SCEP certificate enrollment failure	Network disruption occurred while the WGB attempts to reach the SCEP server for a client certificate. The WGB attempts to renew the certificate every 60 seconds. After five retries (the default maximum), the process fails.	WCP_TP: Failed to Renew the certificate. Retry renewing the certificate after [60] sec for the trustpoint [tls]: 95 WCP_TP: Failed to Renew the client certificate for trustpoint [tls]. Maximum retry reached. Please check the clock and network configuration parameters.

Issue	Description and Cause	Error Message / Log
Incorrect SCEP server URL	The SCEP server URL provided in the configuration is incorrect, preventing a connection.	cannot connect: No route to host sscep: error while sending message
Password mismatch	A password is configured on the SCEP server, but no corresponding password is configured on the WGB.	sscep: pkistatus: FAILURE sscep: reason: Transaction not permitted or supported WCP_TP: Failed to get device certificate: 72

Feature History

Table 9:

Feature	Release	Feature Information
SCEP for certificate renewal on IW916x WGB	26.1.1	This feature enables automatic certificate enrollment and renewal for IW916x Workgroup Bridges (WGBs). WGBs securely obtain and update digital certificates from a Certificate Authority (CA) server using SCEP. This process enhances security, simplifies management, and supports large-scale deployments in environments requiring EAP-TLS authentication.

Verify the PKI timer information

Procedure

Use the **show crypto pki timers** command to view the public key infrastructure (PKI) timer information.

```
Device#show crypto pki timers
```

Configure WGB or uWGB timer

Configure timers for the WGB or uWGB modes to ensure proper timeout settings for association, authentication, EAP, and bridge client responses. The CLI commands for timer configuration are identical for both the WGB and uWGB modes.

Configure the association response timeout

Procedure

Use the **configure wgb association response timeout *response-millisecs*** command to configure the WGB association response timeout.

```
Device#configure wgb association response timeout 400
```

- Default Value: 100 milliseconds
 - Valid Range: 100-5000 milliseconds
-

Configure the authentication response timeout

Procedure

Use the **configure wgb authentication response timeout *response-millisecs*** command to configure the WGB authentication response timeout.

```
Device#configure wgb authentication response timeout 400
```

- Default Value: 100 milliseconds
 - Valid Range: 100 -5000 milliseconds
-

Configure the EAP timeout

Procedure

Use the **configure wgb eap timeout *timeout-secs*** command to configure the WGB EAP timeout.

```
Device#configure wgb eap timeout 15
```

- Default value: 3 seconds
 - Valid range: 2-60 seconds
-

Configure the bridge client response timeout

Procedure

Use the **configure wgb bridge client timeout *timeout-secs*** command to configure the WGB bridge client response timeout.

```
Device#configure wgb bridge client timeout 400
```

- Default Value: 300 seconds

- Valid Range: 10-1,000,000 seconds

Deauthenticate WGB wired client

Use the `clear wgb client {all | single mac-addr}` command to deauthenticate WGB wired client.

```
Device#clear wgb client all
```

Configure uWGB on the radio interface

The uWGB mode can associate with third-party APs using uplink radio MAC address, thus the uWGB role supports only one wired client.

Procedure

Use `configure dot11 slot_id mode uwgb uwgb_wired_client_mac_address ssid-profile ssid-profile` command to configure the wired client's MAC address.

```
Device# configure dot11 1 mode uwgb 00:11:22:33:44:55 ssid-profile IoT-SSID
```



Note

Most WGB configurations also apply to uWGB mode. The only difference is that you configure wired client's MAC address using this command:

What to do next

These configurations outlines the detailed information about uWGB setup. The settings are common for both WGB and uWGB:

- [Create an SSID profile](#) on page 41
- [Configure dot1X credential](#)
- [Configure EAP-TLS security](#)
- [Configure an EAP profile](#)
- [Configure trustpoint manual enrollment for terminal](#)
- [Configure trustpoint auto-enrollment for WGB](#)
- [Configure manual certificate enrollment using a TFTP server](#)
- [Configure a PKCS12 or PFX or P12 certificate enrollment using a TFTP server](#)
- [Configure WGB or uWGB timer](#)

Conversion between WGB and uWGB modes

Conversion from WGB to uWGB mode

Perform this task to convert the device from WGB to uWGB mode. This conversion enables enhanced functionality and integration of wired clients with the desired SSID profile.

Procedure

Use the **configure dot11radio radio_slot_id mode uwgb wired_client_mac ssid-profile ssid_profile_name** command to convert from WGB to uWGB mode.

```
Device#configure dot11radio 1 mode uwgb 00:11:22:33:44:55 ssid-profile
IoT_Profile
```

Conversion from uWGB to WGB mode

Perform this task to convert an AP from uWGB mode to WGB mode, enabling it to function in WGB mode.

Procedure

-
1. Use the **configure dot11radio radio_slot_id mode wgb ssid-profile ssid_profile_name** command to convert from uWGB to WGB mode. This conversion involves rebooting of the AP.

```
Device# configure dot11radio 1 mode wgb ssid-profile IoT_Profile

This command will reboot with downloaded configs.
Are you sure you want continue? [confirm]
```

2. After entering the command, the system prompts you to confirm the action. This step is necessary as the AP reboots to apply the new configuration.

When prompted, type **confirm** to proceed with the conversion.

Import and export WGB configuration

Import a WGB configuration

Perform this task to download a sample configuration file to all WGBs in the deployment. This ensures the devices are configured with the necessary settings for proper operation.

Procedure

Use the **copy configuration download {tftp:| sftp:scp:| | http:}ip-address [directory] [file-name]** command to download a sample configuration to all WGBs in the deployment.

```
copy configuration download tftp: 192.168.1.100 configs startup-config.cfg
```

**Note**

- When you execute the **copy configuration download** command, the AP starts to reboot. The new configuration takes effect only after the reboot.
- Ensure that the configuration file is accessible from the specified `sftp:` or `tftp:` server and that the file path is correctly specified.

Export WGB configuration

Export the configuration of an existing WGB to make it reusable for newly deployed WGBs. This ensures consistency and simplifies deployment.

You can upload the current configuration of a WGB to a server using the appropriate protocol. This configuration file can later be downloaded to configure additional WGBs, streamlining the setup process.

Procedure

Upload the WGB configuration to a server

Use the **copy configuration upload {tftp:| sftp:| scp:| http:}ip-address [directory] [file-name]** command to upload the working configuration of an existing WGB to a server.

```
Device# copy configuration upload tftp: 192.168.1.100 configs running-config.cfg
```

Upgrade the uWGB image

Learn how to upgrade the uWGB image by converting the device to WGB mode, downloading and installing the new software image, and reverting to uWGB mode.

To upgrade the uWGB software image, first convert the device from uWGB mode to WGB mode, as uWGB mode does not support TFTP or SFTP protocols for image upgrades. Then, download the software image by using either the TFTP or SFTP protocol. After the download, install the software image to complete the upgrade. Finally, revert the device from WGB mode back to uWGB mode.

Procedure

1. Connect a TFTP or SFTP server to the wired 0 port of the uWGB.
2. Use the **configure Dot11Radio slot_id disable** command to disable the radio interface.

```
Device#configure Dot11Radio 1 disable
```

3. Use the **configure Dot11Radio slot_id mode wgb ssid-profile ssid_profile_name** command to configure the device to WGB mode using an existing SSID profile.

```
Device# configure Dot11Radio 1 mode wgb ssid-profile WGB-SSID
```

This command will reboot with downloaded configs.
Are you sure you want continue? <confirm>

Note

This command reboots the device with the downloaded configuration.

4. Use the **configure ap address ipv4 static** *IPv4_address netmask Gateway_IPv4_address* command to assign a static IP address to the device.

```
Device# configure ap address ipv4 static 192.168.1.101 255.255.255.0
192.168.1.1
```

5. Use the **ping server_IP** command to test ICMP connectivity to the server.

```
Device# ping 192.168.1.20
      Sending 5, 100-byte ICMP Echos to 192.168.1.20, timeout is 2
seconds
      PING 192.168.1.20
      !!!!!
      Success rate is 100 percent (5/5), round-trip min/avg/max =
0.858/0.932/1.001 ms
```

6. Use the **archive download/reload** [*tftp | sftp | http*] :// *server_ip / file_path* command to download and upgrade the uWGB image using TFTP, SFTP, or HTTP.

```
archive download /reload tftp://192.168.1.100/xxxx_iosxe.17.13.01.SPA.bin
```

7. Use the **configure Dot11Radio slot_id mode uwgb wired_client_mac_addr ssid-profile ssid_profile_name** command to switch the device back to uWGB mode.

```
Device#configure Dot11Radio 1 mode uwgb 0011.2233.4455 ssid-profile uWGB-SSID
```

Configure WGB/uWGB Radio Parameters

Configuring WGB/uWGB Radio Parameters

Configure the WGB Radio Antenna

Learn how to configure the WGB radio antenna gain and select the antenna type using CLI commands.

This procedure describes how to configure the WGB radio antenna gain and select the antenna type.

Procedure

1. Use the **configure dot11 radio-interface antenna gain value** command to configure the WGB radio antenna gain.

Example

```
Device# configure dot11 0 antenna gain 10
```

The default antenna gain is 4 dBi. Adjust the antenna gain value as needed for your deployment.

2. Use the **configure dot11 radio-interface antenna { a-antenna | ab-antenna | abcd-antenna }** command to configure the WGB radio antenna.

Example

```
Device# configure dot11 0 antenna ab-antenna
```

The default antenna type is **abcd-antenna**. Choose the antenna type that fits your configuration.

Configure the 802.11ax guard interval

Learn how to configure the 802.11ax guard interval to set the guard interval value to 800ns, 1600ns, or 3200ns for your deployment needs.

This procedure describes how to configure the 802.11ax guard interval.

Procedure

Use the **configure dot11 radio-interface guard-interval radio-interface** command to configure the 802.11ax guard interval.

Example

```
Device# configure dot11 0 guard-interval 1600
```

802.11ax supports these guard interval values: 800ns, 1600ns, and 3200ns. By default, guard interval is set to 800ns. Longer guard intervals are commonly used in outdoor deployments.

Set the transmit power for a radio

Learn how to manually set the transmit power of the radio using the configuration command instead of the default AUTO(0) level.

This procedure describes how to manually set the transmit power of the radio.

Procedure

Use the **configure dot11 radio-interface txpower-level power-level** command to configure the transmit power of the radio.

Example

```
Device# configure dot11 0 txpower-level 5
```

By default, the transmit power of the radio is set to AUTO(0) level.

Assign the Country Code to a WGB or uWGB with -ROW PID

Learn how to assign the proper country code to a WGB or uWGB device with a -ROW PID so that the device loads the correct power table after rebooting.

This procedure describes how to assign the proper country code to a WGB or uWGB device with a -ROW PID.

On day 0, you should assign the proper country code to the WGB/uWGB with -ROW regulatory domain. The WGB will load the corresponding power table after rebooting.

Procedure

Use the **configure countrycode** *country-code* command to configure the country code to a WGB or uWGB device with a -ROW PID.

Example

```
Device# configure countrycode IN
```



Note

After you configure the ROW country code, perform a factory reset before you change the configuration to another country. Then, configure the new country code.

Enable or disable indoor deployment for -E Domain and United Kingdom

Learn how to enable or disable indoor deployment for the IW9167EH in the -E domain and United Kingdom, and verify the current mode and supported channels using CLI commands.

This procedure describes how to enable or disable indoor deployment for the IW9167EH in the -E domain and United Kingdom.

The IW9167EH supports indoor deployment for the -E domain and GB in the -ROW domain. In outdoor mode, the IW9167EH 5G radio supports channels 100, 104, 108, 112, 116, 120, 124, 128, 132, 136, and 140. When indoor deployment is enabled, the 5G radio supports these channels: 36, 40, 44, 48, 52, 56, 60, 64, 100, 104, 108, 112, 116, 120, 124, 128, 132, 136, and 140.

Procedure

1. Use the **configure wireless indoor-deployment enable** command to enable indoor deployment.

Example

```
Device# configure wireless indoor-deployment enable
```

2. Use the **configure wireless indoor-deployment disable** command to disable indoor deployment.

Example

```
Device# configure wireless indoor-deployment disable
```

3. (Optional) Use the **show controllers Dot11Radio radio-interface** command to view the WGB radio antenna gain.

Example

```
Device# show controllers Dot11Radio 1

Radio Info Summary:
=====
Radio: 5.0GHz
Carrier Set: (-Ei)  ( GB )
Base radio MAC: FC:58:9A:15:B7:C0
Supported Channels:
36 40 44 48 52 56 60 64 100 104 108 112 116 120 124 128 132 136 140

Device# show controllers Dot11Radio [1|2]
...
Radio Info Summary:
=====
Radio: 5.0GHz
Carrier Set: (-E)  ( GB )
Base radio MAC: FC:58:9A:15:B7:C0
Supported Channels:
100 104 108 112 116 120 124 128 132 136 140
```

In the command output, "-Ei" indicates indoor mode is enabled, and "-E" indicates indoor mode is disabled. The supported channels are also displayed.

Configure WGB roaming parameters

Learn how to configure Workgroup Bridge (WGB) roaming parameters, including threshold duration, signal strength, beacon miss count, packet retries, and static roaming channels.

This procedure describes how to configure WGB roaming parameters.

Procedure

1. Use the **configure wgb mobile period *time* rssi-threshold** command to configure the threshold duration and signal strength to trigger reconnection.

Example

```
Device# configure dot11 0 antenna gain 10
```

The default values are period 20s and threshold -70 dB.

2. Use the **config wgb beacon miss-count *count*** command to configure the beacon miss count that triggers reconnection.

Example

```
Device# config wgb beacon miss-count 8
```

The default value is 10.

3. Use the **configure wgb packet retries** *retry-count* command to configure the beacon miss count that triggers reconnection.

Example

```
Device# configure wgb packet retries 65
```

The default value is 64.

4. Use the **configure wgb mobile station interface dot11Radio** *slot_id* **scan** *channel_id* **add** command to configure the beacon miss count that triggers reconnection.

Example

```
Device# configure wgb mobile station interface dot11Radio 1 scan 40 add
```

5. Use the **configure wgb mobile station interface dot11Radio** *slot_id* **scan** *channel_id* **delete** command to delete the mobile channel.

Example

```
Device# configure wgb mobile station interface dot11Radio 1 scan 40 delete
```

6. Use the **configure wgb mobile station interface dot11Radio** *slot_id* **scan** **all** command to scan all channels.

Example

```
Device# configure wgb mobile station interface dot11Radio 1 scan all
```

Advanced features and optimizations

Learn how to configure advanced features that enhance access point performance, mobility, security, and traffic handling.

Configure transmission rate with high throughput

Limits the transmission rate for WGB in moving deployments by configuring the high throughput modulation and coding scheme. This manual configuration ensures stable connectivity during high-speed operations.

To configure high throughput transmission rate for WGB in moving deployments, perform this task. You can manually limit the transmission rate using the high throughput modulation and coding scheme (MCS).

Procedure

1. Use the **config dot11radio** *interface* **802.11ax disable** command to disable the 802.11ax standard on the specified dot11radio interface.

Example

```
Device# config dot11radio 1 802.11ax disable
```

2. Use the **config dot11radio interface 802.11ac disable** command to disable the 802.11ac standard on the selected dot11radio interface.

Example

```
Device# config dot11radio 1 802.11ac disable
```

3. Use the **config dot11radio interface speed ht-mcs m4 m5** command to configure the desired HT MCS rate for the specified dot11radio interface.

This action helps achieve the required transmission rates.

Example

```
Device# config dot11radio 1 speed ht-mcs m4 m5
```

4. Use the **debug wgb dot11 rate** command to check the WGB Tx MCS rate.

```

JWGB1#debug wgb dot11 rate
[*10/14/2023 03:16:08.6175]
[*10/14/2023 03:16:08.6175] 24:16:1B:F8:02:6E MAC Tx-Pkts Rx-Pkts Tx-Rate(Mbps) Rx-Rate(Mbps) RSSI Tx-Retries
JWGB1#[*10/14/2023 03:16:09.6179] 24:16:1B:F8:02:6E 0 330 0 HT-20,1SS,MCS5,(52) HT-20,1SS,MCS5,SGI(57) -70 0 15
[*10/14/2023 03:16:10.6183] 24:16:1B:F8:02:6E 332 330 2 HT-20,1SS,MCS5,(52) HT-20,1SS,MCS5,SGI(57) -71 25
[*10/14/2023 03:16:11.6187] 24:16:1B:F8:02:6E 327 2 HT-20,1SS,MCS5,(52) HT-20,1SS,MCS5,SGI(57) -71 18
[*10/14/2023 03:16:12.6190] 24:16:1B:F8:02:6E 330 2 HT-20,1SS,MCS5,(52) HT-20,1SS,MCS5,SGI(57) -70 13
[*10/14/2023 03:16:13.6194] 24:16:1B:F8:02:6E 333 2 HT-20,1SS,MCS5,(52) HT-20,1SS,MCS5,SGI(57) -71 21
[*10/14/2023 03:16:14.6198] 24:16:1B:F8:02:6E 331 2 HT-20,1SS,MCS5,(52) HT-20,1SS,MCS5,SGI(57) -70 16
[*10/14/2023 03:16:15.6202] 24:16:1B:F8:02:6E 328 2 HT-20,1SS,MCS5,(52) HT-20,1SS,MCS5,SGI(57) -70 24
[*10/14/2023 03:16:16.6206] 24:16:1B:F8:02:6E 330 2 HT-20,1SS,MCS5,(52) HT-20,1SS,MCS5,SGI(57) -70 21
[*10/14/2023 03:16:17.6210] 24:16:1B:F8:02:6E 332 2 HT-20,1SS,MCS5,(52) HT-20,1SS,MCS5,SGI(57) -70 22
[*10/14/2023 03:16:18.6214] 24:16:1B:F8:02:6E 327 2 HT-20,1SS,MCS5,(52) HT-20,1SS,MCS5,SGI(57) -71 22
[*10/14/2023 03:16:19.6218] 24:16:1B:F8:02:6E 333 2 HT-20,1SS,MCS5,(52) HT-20,1SS,MCS5,SGI(57) -71 18
[*10/14/2023 03:16:20.6221] 24:16:1B:F8:02:6E 330 2 HT-20,1SS,MCS5,(52) HT-20,1SS,MCS5,SGI(57) -71 17
[*10/14/2023 03:16:21.6258] 24:16:1B:F8:02:6E 328 3 HT-20,1SS,MCS5,(52) HT-20,1SS,MCS5,SGI(57) -70 16

```

Configure legacy rate for WGB

You can also configure legacy rates for WGB if required.

Procedure

Use the **config dot11radio interface speed legacy-rate/legacy-rate** command to configure the specific legacy rate on the dot11radio interface.

```
Device# config dot11radio 1 speed legacy-rate basic-6.0
```

- Both 802.11 management and control frames use legacy rates.
- Ensure that the WGB's legacy rates match or overlap with the Access Point's (AP) legacy rates to avoid WGB association failures.

802.11v features

Provides a wireless network management standard that optimizes client connectivity and improves overall network performance through enhanced management frames and procedures.

The 802.11v is a wireless network management standard that:

- enables network-assisted roaming to optimize client connectivity,
- helps balance client load by providing guidance to client devices, and
- improves wireless performance through enhanced management frames and procedures.

802.11v is part of the IEEE 802.11 family of Wi-Fi standards. It includes features such as network-assisted roaming, which allows network infrastructure (such as wireless controllers) to direct clients to better access points (APs), reducing congestion and improving overall network efficiency.

Roaming and management enhancements

The following sections detail how 802.11v supports roaming and client management:

- **Enhancement of roaming with 802.11v support:** When 802.11v support is enabled on a Workgroup Bridge (WGB), it enhances roaming by enabling the WGB to proactively select optimal APs based on updated neighborhood information. The WGB can actively initiate roaming to suitable APs from dynamically updated lists, and periodic checks ensure that the WGB maintains the most accurate AP neighbor data.
- **Basic service set transition request frame:** The Basic Service Set (BSS) Transition Request frame includes channel information of neighboring APs. Limiting scanning to these specified channels significantly reduces roaming latency in environments that use multiple channels.
- **Disassociate the client on the AP using WLC:** The Wireless LAN Controller (WLC) can disassociate a client based on factors such as AP load, Received Signal Strength Indicator (RSSI), and data rate. The WLC can notify 802.11v-enabled clients of an impending disassociation through the BSS transition management request frame. If the client fails to re-associate with another AP within a configurable time, the disassociation is enforced.

Administrators can enable the disassociation-imminent configuration on the WLC, which activates the optional field within the BSS transition management request frame. For detailed information of 802.11v configuration on the WLC, see [Cisco Catalyst 9800 Series Wireless Controller Software Configuration Guide](#).

Enable or disable 802.11v support

Enable 802.11v support on the WGB to optimize roaming performance by restricting channel scanning to those learned from the neighbor list.

From release 26.2.1, 802.11v support has been extended to include slot2 (6G), in addition to the existing support for slot1 (5G).

Procedure

Enable or disable 802.11v support on WGB.

Option	Description
Enable 802.11v support on WGB	Use the configure wgb mobile station interface dot11Radio <i>radio_slot_id</i> dot11v-bss-transition enable command.

```
Device# configure wgb mobile station interface
dot11Radio 1 dot11v-bss-transition enable
```

Option**Description****Note**

- When 802.11v support is enabled, the WGB scans only the channels provided in the neighbor list, improving efficiency during roaming.
- Ensure that the neighbor list is properly configured on the infrastructure side to facilitate seamless channel transitions.

Disable 802.11v support on WGB

Use the **configure wgb mobile station interface dot11Radio *radio_slot_id* dot11v-bss-transition disable** command.

```
Device# configure wgb mobile station interface
dot11Radio 1 dot11v-bss-transition disable
```

Configure BSS transition query interval

Perform this task to configure the time interval at which the WGB sends BSS transition query messages to the parent AP. This ensures optimal network performance by managing the frequency of transition queries.

Procedure

Use **configure wgb neighborlist-update-interval *interval*** command to configure the time interval that WGB sends BSS transition query message to the parent AP.

```
Device# configure wgb neighborlist-update-interval 50
```

**Note**

The valid range is from 1 to 100 and the default value is 10. Configure the time interval in seconds format.

Verify neighbor list

Ensure the neighbor list received from the associated AP is accurate and up to date.

Procedure

Use **show wgb dot11v bss-transition neighbour** command to display the neighbor list received from the associated AP.

```
Device#show wgb dot11v bss-transition neighbour
```

 Note

- This command provides details about neighboring APs that the device can transition to as part of 802.11v wireless network enhancements.
- Accurate neighbor lists can improve handoff and roaming efficiency for wireless clients.

Verify the channel list

Verify the channel list to ensure the device is correctly identifying channels from the dot11v neighbor, auxiliary radio scan, and residual channel scan. This step is crucial for troubleshooting connectivity or performance issues related to wireless networks.

Procedure

Use **show wgb dot11v bss-transition channel** command to check channel list from dot11v neighbor, aux radio scanned, and residual channel scanned.

```
Device#show wgb dot11v bss-transition channel
```

 Note

This command is typically used in scenarios where you need to validate the channels identified by the WGB.

Clear neighbor list

Perform this task to clear the neighbor list for error condition recovery. This ensures optimal device performance by resolving potential connectivity issues related to neighbors.

Procedure

Use **clear wgb dot11v bss-transition neighbor** command to clear neighbor list to provide error condition recovery.

```
Device#clear wgb dot11v bss-transition neighbor
```

 Note

This command is used specifically to reset the neighbor list in scenarios where error conditions need to be resolved.

Auxiliary scanning

Describes the configuration of aux-scan mode on WGB radio 2 to enhance roaming performance. This feature allows users to select between scanning-only or handoff modes.

Configure aux-scan mode as either scanning-only or handoff mode on WGB radio 2 (5 GHz) to improve roaming performance.

Scan-only mode

This is a short description.

The scanning-only mode is a wireless access point operational mode that:

- enables radio operation exclusively for scanning,
- continuously monitors the wireless environment to collect data on network performance, interference, and rogue devices, and
- allows configuration of scanning parameters such as channel lists and scanning intervals.

When slot 2 radio is configured in scanning-only mode, slot 1 (5G) radio is always selected as the uplink. Slot 2 (5G) radio continues to scan the configured SSID based on the channel list. By default, the channel list contains all supported 5G channels (based on reg domain). You can configure the scanning list manually, or the device can learn it from 802.11v.

When roaming is triggered, the algorithm looks for candidates in the scanning table and skips the scanning phase if the table is not empty. The WGB then associates to the selected candidate AP.

Configure scan-only mode

Enable the device to operate in scan-only mode, facilitating network monitoring and assessment without transmitting data.

Procedure

Use the **configure dot11Radio 2 mode scan only** command to configure scanning only mode.

```
Device# configure dot11Radio 2 mode scan only
```

Configure scanning table timer

Adjust the scanning table timer to optimize the candidate AP selection process and prevent roaming failures caused by outdated RSSI values.

Before you begin

The scanning table maintains a list of candidate APs detected by the device. By default, entries in this table expire after 1200 milliseconds. Modifying the expiration timer may help improve roaming efficiency by allowing more time for RSSI updates.

Procedure

Use the **configure wgb scan timeout interval** command to adjust the timer. By default, candidate AP entries in scanning table are automatically removed in 1200 ms.

```
Device#configure wgb scan timeout 1500
```

**Note**

- Scanning AP expire time is from 1 to 5000.
- From the scanning table, the AP selects the candidate with the best RSSI value. However, sometimes the RSSI values might not be updated and it lead to roaming failures.

Manually add or remove channels from the channel list

Perform this task to manually add or remove channels from the channel list to optimize wireless network performance or for specific configuration requirements.

Procedure

Add or remove channels from the channel list using one of the options.

Option**Description****Add a channel to the channel list**

Use the **configure wgb mobile station interface dot11Radio interface scan channel add** command.

```
Device#configure wgb mobile station interface
dot11Radio 1 scan 36 add
```

Remove a channel from the channel list

Use the **configure wgb mobile station interface dot11Radio interface scan channel delete** command.

```
Device# configure wgb mobile station interface
dot11Radio 1 scan 36 delete
```

Verify scanning table

Perform this task to confirm the current AP scanning details and identify the best AP for optimal connectivity.

Procedure

Use **show wgb scan** command to verify the scanning table.

```
Device#show wgb scan
Best AP expire time: 5000 ms

*****[ AP List ]*****
BSSID          RSSI    CHANNEL    Time
FC:58:9A:15:E2:4F    84      136        1531
FC:58:9A:15:DE:4F    37      136         41

*****[ Best AP ]*****
```

BSSID	RSSI	CHANNEL	Time
FC:58:9A:15:DE:4F	37	136	41

Auxiliary Scanning handoff mode

This is a short description.

An Auxiliary Scanning handoff mode is a wireless radio configuration that

- allows both radios (radio 1 and radio 2) to serve as uplink connections,
- supports dynamic switching of roles and traffic between radios after each roaming event, and
- enables efficient roaming by using a scanning radio to associate with the best available access point.

The Auxiliary Scanning list can be manually configured or learned automatically using the 802.11v standard. This handoff mode improves roaming performance by quickly associating with the best available access point.

Radio roles

The radio 2 shares the same MAC address with the radio 1 and supports scanning, association, and data serving. Both radios can operate in either a serving or scanning role. After each roaming event, the roles and traffic automatically switch between radio 1 and radio 2.

Roaming of AP

When roaming is triggered, the system algorithm checks the scanning database for the best AP to establish a connection. WGB always uses the radio in the scanning role to complete the roaming association with the new AP. This configuration reduces roaming interruptions to between 20 and 50 milliseconds.

This table shows an example of aux-scan handoff radio mode configuration on IW9165E:

Slot 0 (2.4 G)	Slot 1 (5G)	Slot 2 (5G only)	Slot 3 (scanning radio)
N/A	WGB	Scan handoff	N/A

This table shows how long roaming interruptions last for different methods when using three different modes:

Roaming interruption time	Normal channel setting	Auxiliary Scanning only	Auxiliary Scanning Handoff
Scanning	$(40+20)*3=180$ ms	0-40 ms	0 ms
Association	30-80 ms	30-80 ms	20-50 ms
Total	~210 ms	70-120 ms	20-50 ms

Guidelines and restrictions for Auxiliary Scanning

- The `different-parent` threshold applies to both `scan-only` and `handoff` modes.
 - In `scan-only` mode, roaming decisions are strictly based on selecting a different candidate BSSID. This supports combinations such as dual 2.4 GHz and dual 5 GHz.
 - In `handoff` mode, the WGB can either roam to a different BSSID or switch radios while remaining on the same parent BSSID.

- The `same-parent` threshold is only relevant when the WGB is operating in `handoff` mode.

Configure radio 2 in Aux-Scan handoff mode

Perform this task to configure the WGB slot 2 radio in auxiliary-scan handoff mode, ensuring seamless connectivity and optimized network performance.

Before you begin

Auxiliary-scan handoff mode allows the radio to scan for available access points without interrupting active connections. This feature is particularly useful for improving handoff reliability in environments with multiple access points.

Procedure

1. Use the `configure dot11Radio radio-num mode scan handoff` command to configure the WGB slot 2 radio to aux-scan mode:

```
Device# configure dot11Radio 2 mode scan handoff
```

2. (Optional) Use the `show running-config` command to view the radio configuration.

```
Device# show running-config
...
Radio Id                : 1
  Admin state            : ENABLED
  Mode                   : WGB
  Spatial Stream         : 1
  Guard Interval         : 800 ns
  Dot11 type             : 11n
  11v BSS-Neighbor      : Disabled
  A-MPDU priority        : 0x3f
  A-MPDU subframe number : 12
  RTS Protection         : 2347(default)
  Rx-SOP Threshold       : AUTO
  Radio profile          : Default
  Encryption mode        : AES128
Radio Id                : 2
  Admin state            : ENABLED
  Mode                   : SCAN - Handoff
  Spatial Stream         : 1
  Guard Interval         : 800 ns
  Dot11 type             : 11n
  11v BSS-Neighbor      : Disabled
  A-MPDU priority        : 0x3f
  A-MPDU subframe number : 12
  RTS Protection         : 2347(default)
  Rx-SOP Threshold       : AUTO
  Radio profile          : Default
```

Configure RSSI delta threshold for candidate BSSID

This section explains how the WGB evaluates candidate APs during auxiliary scans. By adjusting the RSSI delta threshold, you can control how much stronger a new signal must be before it triggers a roam or radio switch. This adjustment helps prevent unnecessary transitions when signal strengths are similar.

Procedure

1. Use the **configure wgb mobile aux-scan delta-rssi different-parent***threshold* command to configure the RSSI-delta threshold (in dB) when the candidate BSSID is different from the current BSSID.

```
Device# configure wgb mobile aux-scan delta-rssi different-parent 7
```

Default threshold value is 6 dB.

2. Use the **configure wgb mobile aux-scan delta-rssi same-parent***threshold* command to configure the RSSI-delta threshold (in dB) when the candidate remains on the same parent BSSID.

```
Device# configure wgb mobile aux-scan delta-rssi same-parent 7
```



Note

This applies only in handoff mode.

Default threshold value is 100 dB.

Verify WGB scan

Perform this task to confirm the current role of each radio and analyze the auxiliary scanning results, including the best AP selection and performance metrics.

WGB scan provides detailed information about the auxiliary scanning process for each radio. This data helps to determine the best AP based on signal strength (RSSI), channel, and scan time.

Procedure

Use the **show wgb scan** command to view the current role of each radio and the results of aux scanning.

```
Device#show wgb scan
Best AP expire time: 2500 ms

Aux Scanning Radio Results (slot 2)
*****[ AP List ]*****
BSSID          RSSI    CHANNEL  Time
FC:58:9A:15:DE:4E  54      153      57
FC:58:9A:15:E2:4E  71      153      64

*****[ Best AP ]*****
BSSID          RSSI    CHANNEL  Time
FC:58:9A:15:DE:4E  54      153      57

Aux Serving Radio Results
*****[ AP List ]*****
BSSID          RSSI    CHANNEL  Time
FC:58:9A:15:DE:4E  58      153      57
FC:58:9A:15:E2:4E  75      153      133

*****[ Best AP ]*****
```

BSSID	RSSI	CHANNEL	Time
FC:58:9A:15:DE:4E	58	153	57

Optimized roaming with dual-radio WGBs

Enhances roaming efficiency for wireless workgroup bridges by utilizing dual-radio configurations to minimize service disruption and downtime during network transitions.

Dual-radio WGBs are wireless workgroup bridges that

- use two radios to enhance roaming efficiency,
- minimize service disruption by skipping the active scanning phase with an existing scanning table, and
- initiate roaming when beacon frames are missed or packet retry thresholds are reached.

From the Cisco IOS-XE 17.15.1 release, devices with dual-radio configurations have improved roaming efficiency. This reduces service downtime.

Trigger factors for roaming

Trigger factors for roaming include:

- **Low RSSI:** Measures the power level that a wireless device, such as an AP, receives from a signal. Use RSSI values to determine the quality of the wireless connection to troubleshoot and optimize wireless networks.
- **Beacon miss-count:** Indicates the number of consecutive beacon frames that a client device has missed from an AP in a wireless network.
- **Maximum packet retries:** Specifies the maximum number of times a data packet can be retransmitted if the client device does not send an acknowledgement.

Configuration options for dual-radio

Here are the possible configurations for the IW9165E AP in a dual-radio setup:

Dual-radio	AP
5 GHz radio 1 + radio 2 (scanning only mode)	IW9165E
5 GHz radio 1 + radio 2 (aux-scan handoff mode)	

Layer 2 NAT

Enables one-to-one Layer 2 NAT to map unique public IP addresses to private IP addresses for end devices. This functionality allows devices with duplicate private IP addresses to communicate across public networks in industrial deployments.


One-to-one (1:1) Layer 2 NAT allows you to assign a unique public IP address to an existing private IP address (end device). This enables the end device to communicate with a public network.

Layer 2 NAT maintains two translation tables:

- private-to-public subnet translations
- public-to-private subnet translations

In industrial deployments, such as Human Machine Interfaces (HMIs) or robots, the same firmware is often programmed on every machine. This results in duplicate IP addresses across multiple devices. Layer 2 NAT resolves this issue by enabling devices with duplicate private IP addresses to communicate with public networks.

Zone Level view of Machines

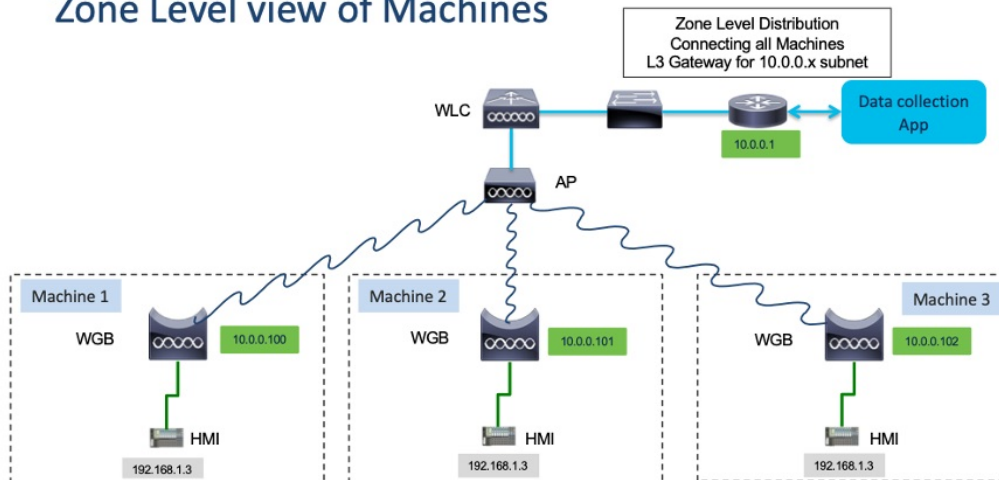

Configure Layer 2 NAT

The Layer 2 NAT (Network Address Translation) configuration commands are used to control IP address translation for wired clients within a VLAN at Layer 2.

These commands allow administrators to:

- Enable or disable Layer 2 NAT globally on the device.
- Define a default VLAN where NAT rules are applied.
- Translate individual host addresses from private to public, or from public to private.
- Translate entire subnets from private-to-public or public-to-private.

This configuration ensures seamless communication between private networks and external/public networks by dynamically or statically mapping IP addresses, while maintaining VLAN-based traffic segregation.

Procedure

1. Use the **configure l2nat enable disable** command to enable or disable Layer 2 NAT.

```
Device# configure l2nat enable
```

2. Use the **configure l2nat default-vlan vlan_id** command to define the VLAN where all NAT rules are applied.

```
Device# configure l2nat default-vlan 10
```

 Note

If you do not specify a VLAN ID, VLAN 0 is used.

3. Use the **configure l2nat add delete inside from host** *original_ip_addr* to *translated_ip_addr* command to translate a private IP address of a wired client to a public IP address.

```
Device# configure l2nat add inside from host 192.168.1.10 to 203.0.113.10
```

4. Use the **configure l2nat add delete outside from host** *original_ip_addr* to *translated_ip_addr* command to translate a public IP address to a private IP address.

```
Device# configure l2nat add outside from host 203.0.113.20 to 192.168.1.20
```

5. Use the **configure l2nat add delete inside from network** *original_nw_prefix* to *translated_nw_prefix subnet_mask* command to translate a private subnet to a public subnet.

```
Device# configure l2nat add inside from network 192.168.1.0 to 203.0.113.0
255.255.255.0
```

6. Use the **configure l2nat add delete outside from network** *original_nw_prefix* to *translated_nw_prefix subnet_mask* command to translate a public subnet to a private subnet.

```
Device# configure l2nat add outside from network 203.0.113.0 to 192.168.1.0
255.255.255.0
```

Verify Layer 2 NAT Configuration

Use the following commands to verify Layer 2 NAT configuration, check translation statistics, and clear rules or counters for troubleshooting.

- **show l2nat entry:** Displays the Layer 2 NAT running entries.
- **show l2nat config:** Displays the Layer 2 NAT configuration details.
- **show l2nat stats:** Displays the Layer 2 NAT packet translation statistics.
- **show l2nat rules:** Displays the Layer 2 NAT rules from the configuration.
- **clear l2nat statistics:** Clears packet translation statistics.
- **clear l2nat rule:** Clears Layer 2 NAT rules.
- **clear l2nat config:** Clears Layer 2 NAT configuration.
- **debug l2nat:** Enables debugging of packet translation process.
- **debug l2nat all:** Prints out the NAT entry match result when a packet arrives.

⚠ Caution


This command may create overwhelming log print in console. Console may lose response because of this command, especially when Syslog service is enabled with a broadcast address.

- **undebg l2nat:** Disables debugging of packet translation process.

Configuration Example of Host IP Address Translation

Configuration Example of Host IP Address Translation

In this scenario, the end client (172.16.1.36) connected to WGB needs to communicate with the server (192.168.150.56) connected to the gateway. Layer 2 NAT provides an address for the end client on the outside network (192.168.150.36) and an address for the server on the inside network (172.16.1.56).

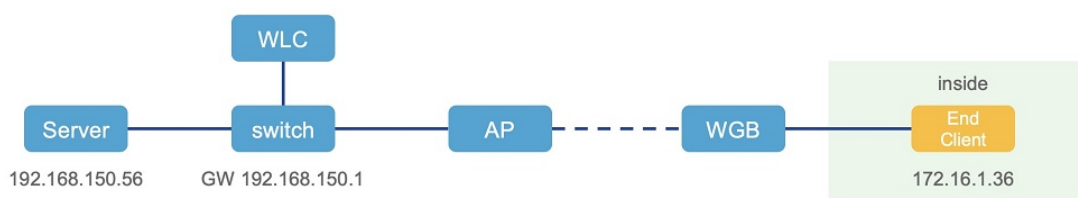

Layer 2 NAT configuration example

This example displays Layer 2 NAT configuration details. In the output, I2O means 'inside to outside' and O2I means 'outside to inside'.

```

Device# show l2nat config

L2NAT Configuration are:
=====
Status: enabled
Default Vlan: 0
The Number of L2nat Rules: 4
Dir      Inside                Outside                Vlan
O2I      172.16.1.56            192.168.150.56        0
I2O      172.16.1.36            192.168.150.36        0
I2O      172.16.1.255          192.168.150.255       0
I2O      172.16.1.1            192.168.150.1         0
  
```

Layer 2 NAT rules example

This example displays the Layer 2 NAT rules.

```

Device# show l2nat rule

Dir      Inside                Outside                Vlan
O2I      172.16.1.56            192.168.150.56        0
I2O      172.16.1.36            192.168.150.36        0
I2O      172.16.1.255          192.168.150.255       0
I2O      172.16.1.1            192.168.150.1         0
  
```

Layer 2 NAT entries example

This example displays the current Layer 2 NAT entries.

```
Device# show l2nat entry
```

Direction	Original	Substitute	Age	Reversed
inside-to-outside	172.16.1.36@0	192.168.150. 36@0	-1	false
inside-to-outside	172.16.1.56@0	192.168.150. 56@0	-1	true
inside-to-outside	172.16.1.1@0	192.168.150. 1@0	-1	false
inside-to-outside	172.16.1.255@0	192.168.150. 255@0	-1	false
outside-to-inside	192.168.150.36@0	172.16.1.36@0	-1	true
outside-to-inside	192.168.150.56@0	172.16.1.56@0	-1	false
outside-to-inside	192.168.150.1@0	172.16.1.1@0	-1	true
outside-to-inside	192.168.150.255@0	172.16.1.255@0	-1	true

WGB wired clients example

This example displays the WGB wired clients over the bridge.

Before Layer 2 NAT is enabled:

```
Device# show wgb bridge
```

```
***Client ip table entries***
```

mac	vap	port	vlan_id	seen_ip	confirm_ago	fast_brg
B8:AE:ED:7E:46:EB	0	wired0	0	172.16.1.36	0.360000	true
24:16:1B:F8:05:0F	0	wbridge1	0	0.0.0.0	3420.560000	true

After Layer 2 NAT is enabled:

```
Device# show wgb bridge
```

```
***Client ip table entries***
```

mac	vap	port	vlan_id	seen_ip	confirm_ago	fast_brg
B8:AE:ED:7E:46:EB	0	wired0	0	192.168.150.36	0.440000	true
24:16:1B:F8:05:0F	0	wbridge1	0	0.0.0.0	3502.220000	true



Note

If the wired client in NAT experiences E2E traffic issues, you can restart the client registration process by using the **clear wgb client single** command:

Layer 2 NAT packet translation statistics example

This example displays the Layer 2 NAT packet translation statistics.

```
Device# show l2nat stats
```

Direction	Original	Substitute	ARP	IP	ICMP
UDP TCP					
inside-to-outside	172.16.1.1@2660	192.168.150.1@2660	1	4	4
0 0					
inside-to-outside	172.16.1.36@2660	192.168.150.36@2660	3	129	32
90 1					
inside-to-outside	172.16.1.56@2660	192.168.150.56@2660	2	114	28
85 1					

inside-to-outside	172.16.1.255@2660	192.168.150.255@2660	0	0	0
0 0					
outside-to-inside	192.168.150.1@2660	172.16.1.1@2660	1	4	4
0 0					
outside-to-inside	192.168.150.36@2660	172.16.1.36@2660	3	39	38
0 1					
outside-to-inside	192.168.150.56@2660	172.16.1.56@2660	2	35	34
0 1					
outside-to-inside	192.168.150.255@2660	172.16.1.255@2660	0	0	0
0 0					




Note

To reset the statistics, you can use the **clear l2nat stats** command.

Configuration Example of Network Address Translation

Configuration Example of Network Address Translation

In this scenario, Layer 2 NAT translates inside addresses in the 172.16.1.0/24 subnet to addresses in the 192.168.150.0/24 subnet, replacing only the network prefix during translation. The host bits remain the same.

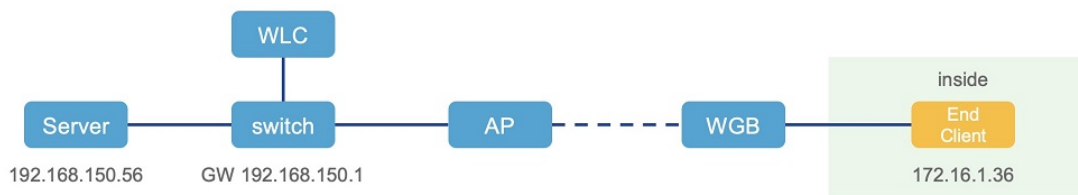

The command used for this scenario is here:

```
Device# configure l2nat add inside from network 172.16.1.0 to 192.168.150.0
255.255.255.0
```

Native VLAN on Ethernet Ports

Enables the separation of wired client traffic from the Workgroup Bridge management VLAN by configuring a native VLAN on the Ethernet port.

In a typical Workgroup Bridge (WGB) deployment, a single wired client connects directly to the WGB Ethernet port. Consequently, the wired client traffic must reside on the same VLAN as the WGB management VLAN. If you require the wired client traffic to be on a different VLAN than the WGB management VLAN, configure the native VLAN on the Ethernet port.

Important

Configuring native VLAN ID per Ethernet port is not supported. Both Ethernet ports share the same native VLAN configuration.

Caution

When WGB broadcast tagging is enabled and a single wired passive client connects directly to the WGB Ethernet port, an issue may arise where the infrastructure downstream (DS) side client fails to ping the WGB behind the passive client. To resolve this, configure the following commands: `configure wgb ethport native-vlan enable` and `configure wgb ethport native-vlan id X`, where X is the same VLAN as the WGB management VLAN.

To verify your configuration, use the `show wgb ethport config` or `show running-config` command.

Configure Native VLAN on Ethernet Ports

The native VLAN configuration commands are used to manage how untagged traffic is handled on the Workgroup Bridge (WGB) Ethernet port.

These commands allow administrators to:

- Enable or disable native VLAN configuration on the WGB Ethernet port.
- Specify the native VLAN ID to ensure that untagged traffic is correctly assigned to the intended VLAN.

Procedure

1. Use the `config wgb ethport ethport native-vlan enable disable` command to enable or disable native VLAN configuration.

```
Device# config wgb ethport 1 native-vlan enable
```

2. Use the `config wgb ethport ethport native-vlan vlan_id` command to specify the native VLAN ID.

```
Device# config wgb ethport native-vlan id 2735
```

3. (Optional) Use the `show wgb ethport config` or `show running-config` command to verify your configuration.

```
Device# show wgb ethport config
```

Low latency profile

Optimizes IEEE 802.11 networks to meet the low latency and Quality of Service requirements essential for IoT applications. These configurations ensure consistent performance for latency-sensitive traffic in wireless environments.

Low latency profiles are configurations that optimize IEEE 802.11 networks to meet the low latency and Quality of Service requirements essential for IoT applications.

- Enhanced Distributed Channel Access (EDCA): Prioritizes wireless channel access for latency-sensitive traffic to ensure consistent performance.
- Aggregated MAC Protocol Data Unit (AMPDU): Combines multiple data frames into a single transmission to reduce overhead and improve efficiency.
- Packet Retry: Ensures successful data delivery by retransmitting aggregated or individual packets based on network conditions.

IoT Application Support

These features collectively support the deployment of IoT devices and applications that demand low latency and high Quality of Service in wireless environments.

Enable or disable an optimized-video EDCA profile

Configure an optimized low-latency profile for video use cases to improve video performance by reducing delays and enhancing the quality of service.

This task focuses on enabling or disabling the optimized-video EDCA profile on a specific radio interface of WGB. The optimized-video profile ensures better handling of video traffic by prioritizing it in the network.

Procedure

1. Enable or disable the optimized-video EDCA profile on a specific radio interface of WGB using one of the options.

Option

Description

Enable optimized video EDCA profile

Use the **configure dot11Radio *radio_slot_id* profile optimized-video enable** command.

```
Device# configure dot11Radio 1 profile
optimized-video enable
```

Disable optimized video EDCA profile

Use the **configure dot11Radio *radio_slot_id* profile optimized-video disable** command.

```
Device# configure dot11Radio 1 profile
optimized-video disable
```

2. (Optional) Use the **show controllers dot11Radio *radio_slot_id*** command to verify the configuration:

```
Device# show controllers dot11Radio 1
EDCA profile: optimized-video
EDCA in use
=====
AC Type CwMin CwMax Aifs Txop ACM
AC_BE L 4 10 11 0 0
AC_BK L 6 10 11 0 0
AC_VI L 3 4 2 94 0
AC_VO L 2 3 1 47 0

Packet parameters in use
=====
wbridge1 A-MPDU Priority 0: Enabled
wbridge1 A-MPDU Priority 1: Enabled
wbridge1 A-MPDU Priority 2: Enabled
wbridge1 A-MPDU Priority 3: Enabled
wbridge1 A-MPDU Priority 4: Disabled
wbridge1 A-MPDU Priority 5: Disabled
wbridge1 A-MPDU Priority 6: Disabled
wbridge1 A-MPDU Priority 7: Disabled
wbridge1 A-MPDU subframe number: 3
wbridge1 Packet retries drop threshold: 16
```

Enable or disable optimized-automation EDCA profile

Enable the optimized low-latency profile for automation use cases to improve performance and efficiency in wireless network environments.

Procedure

1. Enable or disable the optimized-video EDCA profile on a specific radio interface of WGB using one of the options.

Option

Description

Enable optimized-automation EDCA profile

Use the **configure dot11Radio *radio_slot_id* profile optimized-automation enable** command.

```
Device# configure dot11Radio 1 profile
optimized-automation enable
```

Disable optimized-automation EDCA profile

Use the **configure dot11Radio *radio_slot_id* profile optimized-automation disable** command.

```
Device# configure dot11Radio 1 profile
optimized-automation disable
```

2. (Optional) Use the **show controllers dot11Radio *radio_slot_id*** command to verify the configuration:

```
Device# show controllers dot11Radio 1

EDCA profile: optimized-automation
EDCA in use
=====
AC Type CwMin CwMax Aifs Txop ACM
AC_BE L 7 10 12 0 0
AC_BK L 8 10 12 0 0
AC_VI L 7 7 3 0 0
AC_VO L 3 3 1 0 0

Packet parameters in use
=====
wbridge1 A-MPDU Priority 0: Enabled
wbridge1 A-MPDU Priority 1: Enabled
wbridge1 A-MPDU Priority 2: Enabled
wbridge1 A-MPDU Priority 3: Enabled
wbridge1 A-MPDU Priority 4: Disabled
wbridge1 A-MPDU Priority 5: Disabled
wbridge1 A-MPDU Priority 6: Disabled
wbridge1 A-MPDU Priority 7: Disabled
wbridge1 A-MPDU subframe number: 3
wbridge1 Packet retries drop threshold: 16
```

Configure customized-wmm EDCA profile

Customize the Wi-Fi Multimedia (WMM) profile to optimize traffic queues and improve QoS for specific types of network traffic.

WMM enhances the performance of Wi-Fi networks by prioritizing traffic based on the type of data being transmitted. Configuring a customized WMM EDCA (Enhanced Distributed Channel Access) profile allows you to fine-tune the performance parameters for voice, video, background, and best-effort traffic.

Procedure

1. Use the **configure dot11Radio *radio_slot_id* profile customized-wmm enable** command to enable the customized WMM profile.

```
Device# configure dot11Radio 1 profile customized-wmm enable
```

2. Use the **configure dot11Radio {0|1|2}wmm {be|vi|vo|bk}{cwmmin *cwmmin_num*|cwmax *cwmax_num*|aifs *aifs_num*|txoplimit *txoplimit_num*}** command to configure customized WMM profile parameters.

```
configure dot11Radio 1 wmm vo cwmmin 3
```

Parameter descriptions:

- be—best-effort traffic queue (CS0 and CS3)
- bk—background traffic queue (CS1 and CS2)
- vi—video traffic queue (CS4 and CS5)
- vo—voice traffic queue (CS6 and CS7)
- aifs—Arbitration Inter-Frame Spacing, <1-15> in units of slot time
- cwmmin—Contention Window min, <0-15> $2^n - 1$, in units of slot time
- cwmax—Contention Window max, <0-15> $2^n - 1$, in units of slot time
- txoplimit—Transmission opportunity time, <0-255> integer number, in units of 32us

3. (Optional) Disable the customized WMM profile.

Use the **configure dot11Radio *radio_slot_id* profile customized-wmm disable** command to disable the customized WMM profile.

```
Device#configure dot11Radio 1 profile customized-wmm disable
```

Configure EDCA parameters using Controller GUI

Configure Enhanced Distributed Channel Access (EDCA) parameters to optimize wireless channel access for voice, video, and other QoS traffic.

Procedure

1. Navigate to **Configuration > Radio Configurations > Parameters**.

This page allows you to configure global parameters for 6 GHz, 5 GHz, and 2.4 GHz radios.

Note

You cannot configure or modify parameters, if the radio network is enabled. Disable the network status on the **Configuration > Radio Configurations > Network** page to continue.

2. In the **EDCA Parameters** section, choose an EDCA profile from the **EDCA Profile** drop-down list.

Configuration > Radio Configurations > Parameters

6 GHz Band **5 GHz Band** 2.4 GHz Band

⚠ 5 GHz Network is operational. Configuring EDCA Profile, DFS Channel Switch Announcement will result in loss of connectivity of clients.

EDCA Parameters

EDCA Profile

Client Load Based Configuration

DFS (802.11h)

iot-low-latency ▼
wmm-default
custom-voice
optimized-video-voice
optimized-voice
svp-voice
fastlane
iot-low-latency

⚠ DTPC Support is enabled. Please disable Power Conservation Mode.

EDCA parameters provide preferential wireless channel access for voice, video, and other QoS traffic.

3. Click **Apply**.

Configure EDCA parameters using Controller CLI

To optimize wireless network performance for IoT low-latency applications by adjusting Enhanced Distributed Channel Access (EDCA) parameters.

Perform these steps on the command-line interface (CLI) of a Cisco Wireless Controller.

Procedure

1. Use the **configure terminal** command to enter the global configuration mode.

```
Device# configure terminal
```

2. Use the **ap dot11 {5ghz | 24ghz | 6ghz} shutdown** command to disable the radio network.

```
Device(config)# ap dot11 5ghz shutdown
```

3. Use the **ap dot11 {5ghz | 24ghz | 6ghz} edca-parameters iot-low-latency** command to enable the iot-low-latency EDCA profile for the 5 GHz, 2.4 GHz, or 6 GHz network.

```
Device(config)# ap dot11 5ghz edca-parameters iot-low-latency
```

4. Use the **no ap dot11 {5ghz | 24ghz | 6ghz} shutdown** command to enable the radio network.

```
Device(config)# no ap dot11 5ghz shutdown
```

5. Use the **end** command to return to privileged EXEC mode.

```
Device(config)# end
```

6. (Optional) Use the **show ap dot11 {5ghz | 24ghz | 6ghz} network** command to view the current configuration.

```
Device# show ap dot11 5ghz network
EDCA profile type check                : iot-low-latency
```

A-MPDU

Aggregation is the process of grouping multiple packet data frames into a single larger frame for transmission, rather than sending them individually. This method enhances efficiency and reduces overhead in wireless communications. Two common aggregation methods are Aggregated MAC Protocol Data Unit (A-MPDU) and Aggregated MAC Service Data Unit (A-MSDU). A-MPDU parameters specifically define the size of the aggregated packet and the necessary spacing between aggregated packets, allowing the receiving WLAN station to properly decode the data.

Configure A-MPDU

Before you begin

Configure A-MPDU parameters to optimize the aggregation and transmission of packet data frames, ensuring efficient decoding by WLAN stations.

Procedure

1. Use the **ap dot11 {5ghz | 24ghz | 6ghz} rf-profile *profile-name*** command to configure profile-based A-MPDU parameters.

```
Device# ap dot11 5ghz rf-profile Video-Optimized
```

2. Use the **dot11n a-mpdu tx block-ack window-size *window-size*** command to configure transmission block-acknowledgment (block-ack) window size.

```
Device(config-rf-profile)# dot11n a-mpdu tx block-ack window-size 64
```

 Note

RF profile level configured value takes preference over globally configured value.

3. Use the **exit** command to return to global configuration mode.

```
Device(config-rf-profile)# exit
```

4. Use the **ap dot11 {5ghz | 24ghz | 6ghz} dot11n a-mpdu tx block-ack window-size *window-size*** command to configure transmission block-acknowledgment window size globally.

```
Device(config)# ap dot11 24ghz dot11n a-mpdu tx block-ack window-size 32
```

5. Use the **wireless tag rf *rf-tag-name*** command to create an RF tag.

```
Device(config)# wireless tag rf Branch-RF-Tag
```

6. Use the **5ghz-rf-policy *rf-profile-name*** command to bind RF tags to RF profiles and to apply them to specific radios.

```
Device(config-wireless-rf-tag)# 5ghz-rf-policy Video-Optimized
```

7. Use the **end** command to return to privileged EXEC mode.

```
Device(config-wireless-rf-tag)# end
```

8. (Optional) Use the **show controllers dot11Radio *radio_slot_id*** command to show the configured A-MPDU length value.

```
Device# show controllers dot11Radio 1

Radio Aggregation Config:
=====

TX A-MPDU Priority: 0x3f
TX A-MSDU Priority: 0x3f
TX A-MPDU Window:   0x7f
```

SNMP features

Provides a standardized framework for monitoring and managing WGB devices through protocol-based communication between managers and agents. It enables network administrators to assess device health and configure parameters efficiently.

The Simple Network Management Protocol (SNMP) on WGB is a functional element that

- facilitates monitoring and management of the WGB device through the SNMP protocol,
- includes roles for information exchange (manager, agent, MIB), and
- supports network health assessment and parameter configuration.

The SNMP framework on WGB includes:

- **SNMP Manager:** Controls and monitors the activities of network devices using SNMP, typically implemented as a network management system (NMS).
- **SNMP Agent:** The software component within the managed device that maintains and reports device data.
- **SNMP MIB:** A collection of managed objects (variables) which can be queried or set by the SNMP manager.

SNMP process

This illustration shows the SNMP process. When an SNMP manager requests data, the agent receives the request and relays it to the subagent, which responds. The agent then sends an SNMP response packet to the manager.

Figure 5: SNMP Process



SNMP versions

Cisco IOS software supports the following versions of SNMP:

- **SNMPv2c**—The community-string-based administrative framework for SNMPv2. SNMPv2c is an update of the protocol operations and data types of SNMPv2p (SNMPv2 classic), and uses the community-based security model of SNMPv1.
- **SNMPv3**—Version 3 of SNMP. SNMPv3 uses the following security features to provide secure access to devices:
 - **Message integrity**—Ensuring that a packet has not been tampered with in transit.
 - **Authentication**—Determining that the message is from a valid source.
 - **Encryption**—Scrambling the contents of a packet to prevent it from being learned by an unauthorized source.

Supported SNMP MIB files

The Management Information Base (MIB) is a database containing objects that can be managed on a device. These managed objects, also called variables, can be set or read to provide information about network devices and interfaces. The objects are organized in a hierarchical structure and are grouped in collections identified by object identifiers. Access to MIBs is provided through network management protocols such as SNMP.

The MIB module provides network management information on IEEE 802.11 wireless device association management and data packet forwarding configuration and statistics.

An Object Identifier (OID) uniquely identifies a MIB object on a managed network device. The OID shows the object's location in the MIB hierarchy and provides a way to access the MIB object in a network of managed devices.

Supported OIDs

The list of objects that are supported by the SNMP Management and Information Base (MIB):

- CISCO-DOT11-ASSOCIATION-MIB OIDs are given here.

Table 10: Supported OIDs

OID Object Name	OID	OID Type	OID Description
cDot11ParentAddress	1.3.6.1.4.1.9.9.273.1.1.1	String	Provides the MAC address of the parent access point.

OID Object Name	OID	OID Type	OID Description
cDot11ActiveWirelessClients	1.3.6.1.4.1.9.9.273.1.1.2.1.1	Gauge	The device on this interface is currently associating with the number of wireless clients.
cDot11ActiveBridges	1.3.6.1.4.1.9.9.273.1.1.2.1.2	Gauge	The device on this interface is currently associating with the number of bridges.
cDot11ActiveRepeaters	1.3.6.1.4.1.9.9.273.1.1.2.1.3	Gauge	The device on the interface is currently associating with the number of repeaters.
cDot11AssStatsAssociated	1.3.6.1.4.1.9.9.273.1.1.3.1.1	Counter	When device restarts, the object counts the number of stations associated with the device on the interface.
cDot11AssStatsAuthenticated	1.3.6.1.4.1.9.9.273.1.1.3.1.2	Counter	When the device restarted, it currently counts the number of stations authenticated with the device on the interface.
cDot11AssStatsRoamedIn	1.3.6.1.4.1.9.9.273.1.1.3.1.3	Counter	When the device restarted, the object counts the number of stations roamed from another device to the device on the interface.
cDot11AssStatsRoamedAway	1.3.6.1.4.1.9.9.273.1.1.3.1.4	Counter	This object counts the number of stations roamed away from the device on the interface since device re-started.
cDot11AssStatsDeauthenticated	1.3.6.1.4.1.9.9.273.1.1.3.1.5	Counter	This object counts the number of stations deauthenticated with this device on the interface since device re-started

OID Object Name	OID	OID Type	OID Description
cDot11AssStatsDisassociated	1.3.6.1.4.1.9.9.273.1.1.3.1.6	Counter	This object counts the number of stations disassociated with this device on the interface since device re-started
cd11IfCipherMicFailClientAddress	1.3.6.1.4.1.9.9.273.1.1.4.1.1	String	This is MAC address of the client attached to the radio interface that caused the most recent MIC failure
cd11IfCipherTkipLocalMicFailures	1.3.6.1.4.1.9.9.273.1.1.4.1.2	Counter	When the device restarted, the object counts the number of MIC failures encountered on the radio interface.
cd11IfCipherTkipRemotMicFailures	1.3.6.1.4.1.9.9.273.1.1.4.1.3	Counter	When the device restarted, the object counts the number of MIC failures reported by clients on the radio interface.
cd11IfCipherTkipCounterMeasInvok	1.3.6.1.4.1.9.9.273.1.1.4.1.4	Counter	When the device restarted, the object counts the number of TKIP Counter Measures invoked on the interface.
cd11IfCipherCcmpReplaysDiscarded	1.3.6.1.4.1.9.9.273.1.1.4.1.5	Counter	When the device restarted, the object counts the number of received unicast fragments discarded by replay mechanism on the interface.
cd11IfCipherTkipReplaysDetected	1.3.6.1.4.1.9.9.273.1.1.4.1.6		When the device restarted, the object counts the number of TKIP replay errors detected on this interface.
cDot11ClientRoleClassType	1.3.6.1.4.1.9.9.273.1.2.1.1.3	Counter	The role classification of the client
cDot11ClientDevType	1.3.6.1.4.1.9.9.273.1.2.1.1.4	EnumVal	The device type of the client.

OID Object Name	OID	OID Type	OID Description
cDot11ClientRadioType	1.3.6.1.4.1.9.9.273.1.2.1.1.5	EnumVal	The radio classification of the client.
cDot11ClientWepEnabled	1.3.6.1.4.1.9.9.273.1.2.1.1.6	EnumVal	Whether WEP key mechanism is used for transmitting frames of data for the client
cDot11ClientWepKeyMixEnabled	1.3.6.1.4.1.9.9.273.1.2.1.1.7	EnumVal	Whether this client is using WEP key mixing
cDot11ClientMicEnabled	1.3.6.1.4.1.9.9.273.1.2.1.1.8	EnumVal	Whether the MIC is enabled for the client
cDot11ClientPowerSaveMode	1.3.6.1.4.1.9.9.273.1.2.1.1.9	EnumVal	The power management mode of the client.
cDot11ClientAid	1.3.6.1.4.1.9.9.273.1.2.1.1.10	Gauge	This is the association identification number of clients or multicast addresses associating with the device.
cDot11ClientDataRateSet	1.3.6.1.4.1.9.9.273.1.2.1.1.11	String	Is a set of data rates at which this client can transmit and receive data
cDot11ClientSoftwareVersion	1.3.6.1.4.1.9.9.273.1.2.1.1.12	String	Cisco IOS software version
cDot11ClientName	1.3.6.1.4.1.9.9.273.1.2.1.1.13	String	Cisco IOS device hostname
cDot11ClientAssociationState	1.3.6.1.4.1.9.9.273.1.2.1.1.14	EnumVal	The object indicates the state of the authentication and association process
cDot11ClientVlanId	1.3.6.1.4.1.9.9.273.1.2.1.1.17	Gauge	The VLAN which the wireless client is assigned to when it is successfully associated to the wireless station.
cDot11ClientSubIfIndex	1.3.6.1.4.1.9.9.273.1.2.1.1.18	Integer	This is the ifIndex of the sub-interface which this wireless client is assigned to when it is successfully associated to the wireless station.

OID Object Name	OID	OID Type	OID Description
cDot11ClientAuthenAlgorithm	1.3.6.1.4.1.9.9.273.1.2.1.1.19	EnumVal	The IEEE 802.1x authentication methods performed between the wireless station and this client during association
cDot11ClientDot1xAuthenAlgorithm	1.3.6.1.4.1.9.9.273.1.2.1.1.21	Octet String	The IEEE 802.1x authentication methods performed between the wireless client and the authentication server.
cDot11ClientUpTime	1.3.6.1.4.1.9.9.273.1.3.1.1.2	Gauge	The time in seconds that this client has been associated with this device
cDot11ClientSignalStrength	1.3.6.1.4.1.9.9.273.1.3.1.1.3	Integer	The device-dependent measure the signal strength of the most recently received packet from the client.
cDot11ClientSigQuality	1.3.6.1.4.1.9.9.273.1.3.1.1.4	Gauge	The device-dependent measure the signal quality of the most recently received packet from the client.
cDot11ClientPacketsReceived	1.3.6.1.4.1.9.9.273.1.3.1.1.6	Counter	The number of packets received from this client.
cDot11ClientBytesReceived	1.3.6.1.4.1.9.9.273.1.3.1.1.7	Counter	The number of bytes received from the client.
cDot11ClientPacketsSent	1.3.6.1.4.1.9.9.273.1.3.1.1.8	Counter	The number of packets sent to the client.
cDot11ClientBytesSent	1.3.6.1.4.1.9.9.273.1.3.1.1.9	Counter	The number of bytes sent to the client.
cDot11ClientMsduRetries	1.3.6.1.4.1.9.9.273.1.3.1.1.11	Counter	The counter increases when it successfully transmits an MSDU after one or more retransmissions.

OID Object Name	OID	OID Type	OID Description
cDot11ClientMsduFails	1.3.6.1.4.1.9.9.273.1.3.1.1.12	Counter	The counter increments when the client fails to transmit an MSDU successfully because the number of transmit attempts exceeds a certain limit.

Configure SNMP parameters

This procedure describes how to configure Simple Network Management Protocol (SNMP) on the WGB. You can enable SNMPv2c or SNMPv3 depending on your network requirements. The steps include setting community strings or usernames, defining authentication and encryption methods, and enabling SNMP functionality on the device.

- Configure all SNMP parameters before enabling the SNMP feature using the CLI command: **configure snmp enabled**.
- All SNMP configurations will be automatically removed when the SNMP feature is disabled.

Procedure

1. Use the **configure snmp v2c community-id length *length*** command to enter the SNMP v2c community ID (SNMP v2c only).

```
Device#configure snmp v2c community-id 50
```

2. Use the **configure snmp version {v2c | v3}** command to specify the SNMP protocol version.

```
Device# configure snmp version v3
```

3. Use the **configure snmp auth-method {md5 | sha}** command to specify the SNMP v3 authentication protocol (SNMP v3 only).

```
Device# configure snmp auth-method md5
```

4. Use the **configure snmp v3 username length *length*** command to enter the SNMP v3 username (SNMP v3 only).

```
Device# configure snmp v3 username length 32
```

5. Use the **configure snmp v3 password length *length*** command to enter the SNMP v3 user password (SNMP v3 only).

```
Device# configure snmp v3 password length 12
```

The valid range for *length* is 8 to 64 characters.

6. Use the **configure snmp encryption {des | aes | none}** command to specify the SNMP v3 encryption protocol (SNMP v3 only).

```
Device#configure snmp encryption des
```

Encryption values are **des** or **aes**. Use **none** if a v3 encryption protocol is not needed.

7. Use the **configure snmp secret length *length*** command to enter the SNMP v3 encryption passphrase (SNMP v3 only).

```
Device#configure snmp secret length 12
```

The valid range for *length* is 8 to 64 characters.

8. Use the **configure snmp enabled** command to enable SNMP functionality on the WGB.

```
Device#configure snmp enabled
```

To configure SNMP **v2c**, repeat Step 1, Step 2 and Step 8.

To configure SNMP **v3**, repeat Step 2 through Step 8.

9. (Optional) Use the **configure snmp disabled** command to disable SNMP configuration.

```
Device# configure snmp disabled
```

SNMP configuration examples

Configuring SNMP v2c:

```
Device#configure snmp v2 community-id 25
Device#configure snmp version v2c
Device#configure snmp enabled
```

Configuring SNMP v3 (security level AuthPriv):

```
Device#configure snmp auth-method md5
Device#configure snmp v3 username length 32
Device#configure snmp v3 password length 25
Device#configure snmp secret length 12
Device#configure snmp encryption aes
Device#configure snmp version v3
Device#configure snmp enabled
```

Configuring SNMP v3 (security level AuthNoPriv):

```
Device#configure snmp auth-method md5
Device#configure snmp v3 username length 32
Device#configure snmp v3 password length 32
Device#configure snmp encryption none
Device#configure snmp version v3
Device#configure snmp enabled
```

Verifying SNMP

Use the **show snmp** command to verify the SNMP configuration.

SNMP version v3

```
Device# show snmp

SNMP: enabled
Version: v3
Community ID: test
Username: username
```

```

Password: password
Authentication method: SHA
Encryption: AES
Encryption Passphrase: passphrase
Engine ID: 0x8000000903c0f87fe5f314

```

SNMP version v2c

```

Device# show snmp

SNMP: enabled
Version: v2c
Community ID: test
Username: username
Password: password
Authentication method: SHA
Encryption: AES
Encryption Passphrase: passphrase
Engine ID: 0x8000000903c0f87fe5f314

```

QoS ACL classification and marking

Identifies network traffic using access control list rules and assigns specific priority values to ensure optimal performance. This process enables granular control over traffic flows such as voice, video, and data across the network.

Quality of Service (QoS) ACL classification and marking identify network traffic using access control list (ACL) rules and assign a traffic class or priority value.

- Classification uses ACLs to match traffic flows based on parameters such as source or destination IP address, protocol type, port numbers, or other header fields.
- Marking occurs after classification, where packets are tagged with specific QoS values, such as DSCP, IP precedence, or CoS, to indicate their priority level.

Starting with Cisco Unified Industrial Wireless Software Release 17.14.1, you can classify packets from two wired ports and assign them to different access control driver queues. In addition to TCP and UDP, the WGB supports ethertype-based and DSCP-based classification to meet jitter and latency requirements.

Rule-based traffic classifications

A rule-based traffic classification is a network management technique that:

- uses custom rules to classify incoming Ethernet packets by criteria such as 802.1p, DSCP, and protocol type,
- assigns classified packets to priority queues on the wireless side for QoS enforcement, and
- ensures critical services receive higher priority, reducing latency and optimizing network performance.

Rule configuration criteria

You can configure mapping rules using the following parameters:

- Ethernet type (for example, Profinet)
- Transport layer port numbers or port ranges
- DSCP values
- Source and destination IP addresses

- Protocol types

Packet classification and assignment

As incoming packets arrive at the Ethernet port, WGB applies the defined rules to:

- Identify critical services or traffic flows
- Classify packets based on predefined criteria
- Assign packets to the appropriate access control queues on the wireless network

Benefits of rule-based mapping

By using customized rule-based classification and mapping, you can:

- Enforce QoS policies effectively
- Prioritize critical applications and services
- Reduce latency for time-sensitive traffic
- Improve overall network performance and user experience

QoS and ACL traffic classification methods

Traffic classification is the process of distinguishing one type of network traffic from another by examining packet fields. It is enabled only when QoS is active. During classification, the device performs a lookup and assigns a QoS label to the packet. The QoS label defines the QoS actions to be applied and identifies the output queue for forwarding.

- Classification relies on fields across packet layers
- Packets are grouped into service classes based on Ethertype, DSCP, or TCP/UDP ports, and consistently treated within those classes.
- The data plane records rule hits for analysis, while the control plane configures data forwarding.

Layer 2 classification fields

Layer 2 Ethernet frames use the Ethertype field (2 bytes) to carry classification information. This field normally indicates the type of data encapsulated in the frames.

Layer 3 classification fields

Layer 3 IP packets carry classification information in the Type of Service (ToS) field (8 bits). It has:

- IP precedence values that range from 0–7, and
- DSCP values that range from 0–63.

Layer 4 classification fields

Layer 4 TCP segments or UDP datagrams use the source or destination port fields for classification. These port numbers allow devices to classify traffic based on applications or services.

Traffic assignment to service classes

The system assigns traffic to a specific service class based on Ethertype, DSCP, or UDP/TCP port (or port range). Packets within a service class are treated consistently. WGBs classify packets from wired ports and map them to different driver queues according to user configuration.

Data plane role in classification


Data plane statistics provide counters showing how many times each rule is matched by traffic. These counters help administrators analyze rule effectiveness and optimize performance.

Control plane role in classification

The control plane is responsible for managing and configuring how data is forwarded through the network.

The following flowchart illustrates how packets from a WGB Ethernet port are classified and mapped to QoS rules based on existing profiles, Ethertype, port identifiers, and DSCP values.

Figure 6: Flowchart of traffic flows from WGB ethernet port

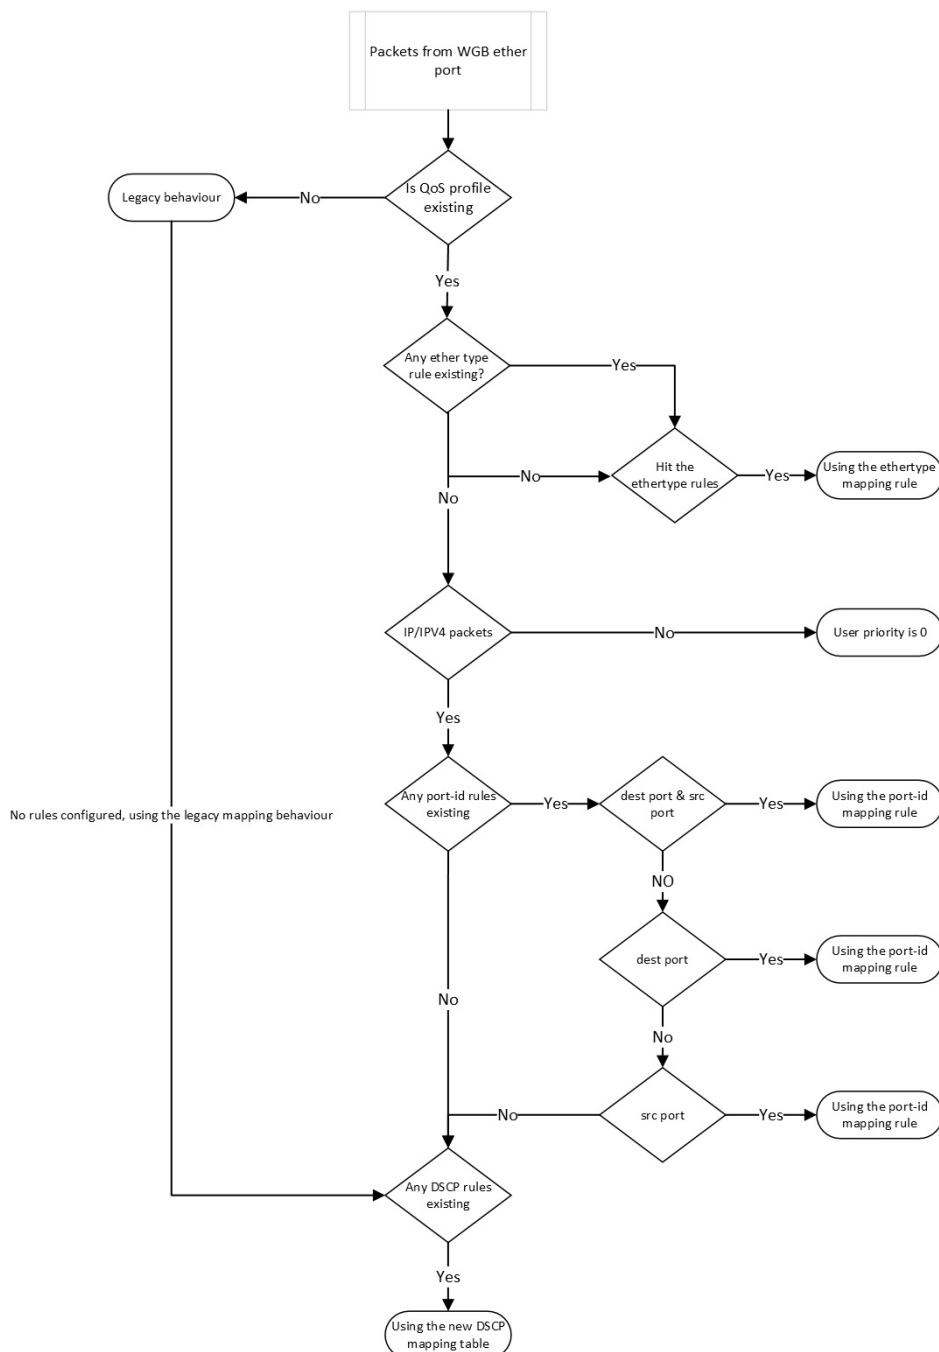

Legacy QoS mapping behavior

Summary

Access points assign traffic priority by retrieving VLAN-based TCI values, applying a fixed priority of 6 for Profinet, and using DSCP-to-dot 1p mapping for IP and IPv6 traffic.

Workflow

Access points determine traffic priority based on ethertype using the following rules:

1. Retrieve TCI Priority: Access points retrieve the Tag Control Information (TCI) priority from the VLAN element for the specified ethertype 0x8100.
2. Assign TCI Priority for Profinet: For ethertype 0x8892 (profinet), access points assign the TCI priority as 6.
3. Set DSCP Priority for IP and IPv6: For ethertype 0x0800 (IP) and 0x86DD (IPv6), access points set the DSCP priority according to the default dscp2dot 1p mapping table.

How Access Points assign QoS priorities

Summary

Access points assign QoS priorities based on protocol type and configured rules, with defaults applied for non-IP traffic or when no rules are set.

Workflow

Here's how the process of enabling QoS on access points works:

1. The access point determines the priority for an ethertype QoS mapping of 0x8892 (profinet) based on the configuration setting.
2. For etheretypes 0x0800 (IP) and 0x86DD (IPv6), the access point assigns priority according to mapping rules that consider either the port or DSCP:
 - The access point checks the UDP/TCP port (or port range) rule.
 - The access point checks the DSCP rule.
3. The access point assigns a user priority value of 0 to packets that are not IPv4/IPv6.
4. If no rule configuration is present, the QoS profile defaults to the legacy mapping behavior.



Note

If 802.1p priority exists, it overrides any customised rule.

Configure QoS Mapping Profile

This procedure allows you to define the different classification rules for configuring WGB QoS mapping.

Procedure

1. Use the **config wgb qos-mapping profile-name enable** command to enable the specified QoS mapping profile.

```
Device# configure wgb qos-mapping demo-profile enable
```

2. Use the **config wgb qos-mapping profile-name add ethtype hex hex-number priority priority** command to add a mapping rule based on Ethernet type.

```
Device# configure wgb qos-mapping demo-profile add ethtype hex 8892 priority 5
```

 Note

If the specified profile does not exist, the command creates a new empty profile and adds the mapping rule to it.

You can delete the rules based on ethernet type using the **config wgb qos-mapping profile-name delete ethtype hex hex-number**

 Note

If the specified profile does not exist, the command displays a warning. If deleting the mapping rule leaves the profile empty, the profile is automatically removed.

3. Use the **config wgb qos-mapping profile-name add [srcport number | dstport number | range start-number ending-number] priority priority** command to add a mapping rule based on port ID or range.

```
Device# config wgb qos-mapping voice-profile add dstport 5004 priority 6
```

 Note

If the specified profile does not exist, the command creates a new empty profile and adds the mapping rule.

You can delete rules based on port-id/range using the **config wgb qos-mapping profile-name delete [srcport number | range start-number ending-number [dstport number | range start-number ending-number]]**

 Note

If the specified profile does not exist, the command displays a warning. If deleting the mapping rule leaves the profile empty, the profile is automatically removed.

4. Use the **config wgb qos-mapping profile-name add dscp number priority priority** command to add a mapping rule based on DSCP value.

```
Device# configure wgb qos-mapping demo-profile add dscp 63 priority 4
```

 Note

If the specified profile does not exist, the command creates a new empty profile and adds the mapping rule.

You can delete a mapping rule based on DSCP value using the **config wgb qos-mapping profile-name delete dscp number priority priority** command.

 Note

If the specified profile does not exist, the command displays a warning. If deleting the mapping rule leaves the profile empty, the profile is automatically removed.

After deleting the DSCP mapping rule, the rules are reset to the default values of the DSCP mapping.

5. Use the **config wgb qos-mapping profile-name disable** command to disable the specified QoS mapping profile.

```
Device# configure wgb qos-mapping demo-profile disable
```

When disabled, the profile is cleared from the datapath but retained in the WGB configuration file. If the profile does not exist, a warning is issued and no new profile is created.

6. (Optional) Use the **config wgb qos-mapping profile-name delete** command to delete the specified QoS mapping profile.

```
Device# configure wgb qos-mapping demo-profile delete
```

When deleted, the profile is removed from both the datapath and the WGB configuration.

Verify Quality of Service Map

To verify the QoS mapping configuration on the Control Plane, run the **show wgb qos-mapping**.

```
Device# show wgb qos-mapping

Number of QoS Mapping Profiles: 2
=====
Profile name : qos1
Profile status : active
Number of Rules: 8
Rules:
L4 srcport : 31000-31100, dstport : 6666-7777, priority : 7
L4 srcport : 23000, dstport : N/A, priority : 3
L4 srcport : N/A, dstport : 20000-20100, priority : 5
L4 srcport : N/A, dstport : 2222, priority : 2
L4 srcport : 12300-12500, dstport : N/A, priority : 6
IPv4/IPv6 dscp: 43, priority : 1
```

```
Ethernet type : 0x8892, priority : 0
L4 srcport : 8888, dstport : 9999, priority : 4
```

```
Profile name : qos2
Profile status : inactive
Number of Rules: 8
```

Rules:

```
L4 srcport : 31000-31100, dstport : 6666-7777, priority : 2
L4 srcport : 23000, dstport : N/A, priority : 6
L4 srcport : N/A, dstport : 20000-20100, priority : 4
L4 srcport : N/A, dstport : 2222, priority : 7
L4 srcport : 12300-12500, dstport : N/A, priority : 3
IPv4/IPv6 dscp: 43, priority : 0
Ethernet type : 0x8892, priority : 1
L4 srcport : 8888, dstport : 9999, priority : 5
```

To verify the WGB QoS mapping configuration on the Data Plane, run the **show datapath qos-mapping rule**.

```
Device# show datapath qos-mapping rule
```

```
Status: active
QoS Mapping entries
===== dscp mapping =====
Default dscp2dot1p Table Value:
[0]->0 [1]->0 [2]->0 [3]->0 [4]->0 [5]->0 [6]->0 [7]->0
[8]->1 [9]->1 [10]->1 [11]->1 [12]->1 [13]->1 [14]->1 [15]->1
[16]->2 [17]->2 [18]->2 [19]->2 [20]->2 [21]->2 [22]->2 [23]->2
[24]->3 [25]->3 [26]->3 [27]->3 [28]->3 [29]->3 [30]->3 [31]->3
[32]->4 [33]->4 [34]->4 [35]->4 [36]->4 [37]->4 [38]->4 [39]->4
[40]->5 [41]->5 [42]->5 [43]->5 [44]->5 [45]->5 [46]->5 [47]->5
[48]->6 [49]->6 [50]->6 [51]->6 [52]->6 [53]->6 [54]->6 [55]->6
[56]->7 [57]->7 [58]->7 [59]->7 [60]->7 [61]->7 [62]->7 [63]->7
```

```
active dscp2dot1p Table Value:
[0]->0 [1]->0 [2]->0 [3]->0 [4]->0 [5]->0 [6]->0 [7]->0
[8]->1 [9]->1 [10]->1 [11]->1 [12]->1 [13]->1 [14]->1 [15]->1
[16]->7 [17]->2 [18]->2 [19]->2 [20]->2 [21]->2 [22]->2 [23]->2
[24]->3 [25]->3 [26]->3 [27]->3 [28]->3 [29]->3 [30]->3 [31]->3
[32]->4 [33]->4 [34]->4 [35]->4 [36]->4 [37]->4 [38]->4 [39]->4
[40]->5 [41]->5 [42]->5 [43]->5 [44]->5 [45]->5 [46]->5 [47]->5
[48]->6 [49]->6 [50]->6 [51]->6 [52]->6 [53]->6 [54]->6 [55]->6
[56]->7 [57]->7 [58]->7 [59]->7 [60]->7 [61]->7 [62]->7 [63]->7
```

To verify the WGB QoS mapping statistics on Data Plane, run the **show datapath qos-mapping statistics** command.

```
Device# show datapath qos-mapping statistics

===== pkt stats per dscp-mapping rule =====
dscp up pkt_cnt
16 7 0
```

To clear the WGB QoS mapping statistics on Data Plane, run the **clear datapath qos-mapping statistics** command.

**Note**

The command clears packet count statistics per rule on data-plane.

Packet Capture: TCP dump utilities

Provides network packet analysis by capturing and displaying traffic transmitted over WGB wired interfaces. This utility assists in monitoring and troubleshooting network communications to ensure correct frame relay between wired clients and wireless networks.

TCP dump utilities are network packet analyzers that perform the following functions:

- Capture packets transmitted over network interfaces.
- Display and save packet data for monitoring and troubleshooting.
- Enable in-depth analysis of wired network traffic on WGBs.

The TCP Dump on WGB chapter provides information on how to enable TCP dump through the WGB wired interface on the Catalyst IW9167EH IW9165E .

Packet Capture Modes and Capabilities

The WGB packet capture utility supports the following modes and behaviors:

- Default: Displays captured packets with header in real time on the WGB terminal.
- Verbose: Parses and prints real-time packets on the WGB terminal, displaying headers and data in hexadecimal format.
- Capture: Captures packets to file storage instead of printing them in real time.

 Note

The TCP dump utility does not support the simultaneous capture of packets to storage and printing them on the WGB terminal.

 Note

In default or verbose mode, the WGB terminal can print a maximum of 1000 packet entries.

 Note

Every round of Packet Capture (PCAP) clears the existing PCAP file. Before any new PCAP session, transfer the current PCAP file to an external server to prevent it from being overwritten. PCAP stops automatically when the PCAP file reaches a size of 100 MB.

The utility supports various protocol filters for debugging, including:

- Transmission Control Protocol, Internet Control Message Protocol (ICMP) and ICMPv6
- Profinet with IP proto 0x8892
- Address Resolution Protocol (ARP)
- Internet Group Management Protocol (IGMP)
- User Datagram Protocol
- Dynamic Host Configuration Protocol (DHCP) with port 67 or port 68 and DHCPv6 with port 546 or port 547
- Common Industrial Protocol (CIP) with TCP port 44818
- Domain Name System (DNS) with port 53
- Simple Network Management Protocol with port 161 or port 162

Filter expressions for a PCAP comprise at least one primitive, which consists of qualifiers followed by an identifier. The three kinds of qualifiers are:

- Type: Specifies the type of the identifier (port, host, network, or range of ports).
- Dir: Specifies the transfer direction of the packets.
- Proto: Limits the capture to a specific protocol.

Note

When constructing filter expressions, use logical operators AND, OR, and NOT, and use parentheses to group expressions to ensure correct interpretation.

Enable wired packet captures

This procedure enables packet capture (PCAP) on a WGB to monitor wired traffic. It allows you to capture packets by protocol (IP, TCP, UDP), apply verbose output for detailed analysis, save packet data to PCAP files, and use custom filters (including VLAN) to analyze specific traffic across native and non-native VLANs.

Procedure

1. Enable PCAP using one of the options given here:

Option	Description
--------	-------------

Run PCAP with the default filter	Use the debug traffic wired [0] 1[ip tcp udp][verbose capture] command.
---	--

```
Device# configure wgb mobile station interface dot11Radio 1
dot11v-bss-transition enable
```

[0] 1 specifies the wired interface number. If not selected, capture packets from all the wired interface.

```
Device# debug traffic wired 1 ip

APXXXX.XXXX.XXXX#reading from file /dev/click_wired_log,
link-type EN10MB
(Ethernet)
1 08:35:50.529851 IP 209.165.200.213 > 209.165.200.1: ICMP
echo request, id
13721, seq 1, length 64
2 08:35:50.534813 IP 209.165.200.1 > 209.165.200.213: ICMP
echo reply, id
13721, seq 1, length 64
```

This option is the default and captures packets with IP protocol headers.

```
Device# debug traffic wired 1 udp verbose

APXXXX.XXXX.XXXX#reading from file /dev/click_wired_log,
link-type EN10MB
(Ethernet)
1 08:25:59.696990 IP6 fe80::322c:712c:5787:f246.dhcpv6-client
>
ff02::1:2.dhcpv6-server: dhcp6 solicit
0x0000: 3333 0001 0002 fc58 9a16 e428 86dd 6001
0x0010: 7b92 006d 1101 fe80 0000 0000 0000 322c
0x0020: 712c 5787 f246 ff02 0000 0000 0000 0000
0x0030: 0000 0001 0002 0222 0223 006d 00a6 010c
0x0040: d064 0008 0002 ffff 0006 001e 0034 0011
0x0050: 0015 0016 0017 0018 001f 0038 0040 0043
0x0060: 0052 0053 005e 005f 0060 0001 000a 0003
0x0070: 0001 fc58 9a16 e428 0014 0000 0027 0013
0x0080: 0006 4150 4643 3538 0439 4131 3604 4534
```

Option	Description
	<pre>0x0090: 3238 0000 0300 0c00 0000 0100 0000 0000 0x00a0: 0000 00</pre>
	The verbose option captures detailed information from UDP protocol packets. <pre>Device# debug traffic wired 1 tcp capture % Writing packets to "/pcap/APXXXX.XXXX.XXXX_capture.pcap0" APXXXX.XXXX.XXXX#reading from file /dev/click_wired_log, link-type EN10MB (Ethernet)</pre>
Run PCAP with the custom filter	Use the debug traffic wired [0 1] filter <i>expression</i> [verbose capture] command. Enable only one PCAP process at a time. Do not use unsupported characters like " ` \$ ^ & \ > < ? ; and ~ in the filter expressions. <pre>Device# debug traffic wired 0 filter icmp APXXXX.XXXX.XXXX#reading from file /dev/click_wired_log, link-type EN10MB (Ethernet) 1 10:38:59.948729 IP 209.165.200.213 > 209.165.200.1: ICMP echo request, id 16204, seq 1, length 64 2 10:38:59.954308 IP 209.165.200.1 > 209.165.200.213: ICMP echo reply, id 16204, seq 1, length 64</pre>
	This option is the default and captures packets with IP protocol headers. <pre>Device# debug traffic wired 1 filter icmp verbose APXXXX.XXXX.XXXX##reading from file /dev/click_wired_log, link-type EN10MB (Ethernet) 17:13:30.706493 IP 209.165.200.213 > 209.165.200.1: ICMP echo request, id 986, seq 1, length 64 0x0000: fc58 9a17 afd4 f8e4 3b9d 7322 0800 4500 0x0010: 0054 57a0 4000 4001 889e c0a8 6cc8 c0a8 0x0020: 6c51 0800 940c 03da 0001 7f3d 5365 0000 0x0030: 0000 cea2 0000 0000 0000 1011 1213 1415 0x0040: 1617 1819 1a1b 1c1d 1e1f 2021 2223 2425 0x0050: 2627 2829 2a2b 2c2d 2e2f 3031 3233 3435 0x0060: 3637 17:13:30.710567 IP 209.165.200.1 > 209.165.200.213: ICMP echo reply, id 986, seq 1, length 64 0x0000: f8e4 3b9d 7322 fc58 9a17 afd4 0800 4500 0x0010: 0054 9102 0000 4001 8f3c c0a8 6c51 c0a8 0x0020: 6cc8 0000 9c0c 03da 0001 7f3d 5365 0000 0x0030: 0000 cea2 0000 0000 0000 1011 1213 1415 0x0040: 1617 1819 1a1b 1c1d 1e1f 2021 2223 2425 0x0050: 2627 2829 2a2b 2c2d 2e2f 3031 3233 3435 0x0060: 3637</pre>

Option**Description**

The verbose option captures detailed information from UDP protocol packets.

```
Device# debug traffic wired 1 filter icmp capture

% Writing packets to "/tmp/pcap/APXXXX.XXXX.XXXX_capture.pcap0"
APXXXX.XXXX.XXXX#reading from file /dev/click_wired_log,
link-type EN10MB
(Ethernet)
```

The capture option saves TCP packet information to a PCAP file.

**Run PCAP in
multiple VLANs
using custom
filter**

Use the **debug traffic wired [0| 1][filter expression |ip }** command.

 Note

Some custom filters miss traffic in non-native VLANs. For example, the custom filter command **debug traffic wired 0 filter icmp** fails to capture downlink ICMP traffic in non-native VLANs

```
Device#debug traffic wired 0 filter "icmp or (vlan and icmp)"

1 12:27:40.833815 IP 209.165.200.102 > 209.165.200.1: ICMP
echo request, id 27279, seq 1,
length 64
2 12:27:40.841331 IP 209.165.200.1 > 209.165.200.102: ICMP
echo reply, id 27279, seq 1, length
64
```

Add VLAN to the filter expression to capture bidirectional traffic from a wired client on a non-native VLAN.

```
Device#debug traffic wired 0 ip

1 12:27:40.833815 IP 209.165.200.102 > 209.165.200.1: ICMP
echo request, id 27279, seq 1,
length 64
2 12
```

Use the default IP filter to capture all IP traffic, including native and non-native VLANs.

2. To upload the packets to an external server, use the command given here: Use the **copy pcap file-name.pcap0 {tftp| sftp}://server-ip [directory][file-name]** command to upload the packets to an external server.

```
Device# copy pcap APXXXX.XXXX.XXXX_capture.pcap0
scp://iot@209.165.200.213:/capture/wgb_sniffer.pcap
copy ""/pcap/APXXXX.XXXX.XXXX_capture.pcap0"" to
"scp://iot@209.165.200.213:/capture/wgb_dhcp_sniffer_0_46_29.pcap" (Y/N)Y
iot@209.165.200.213 password:
APXXXX.XXXX.XXXX_capture.pcap0 0% 0 0.0KB/s --:-- ETA
APXXXX.XXXX.XXXX_capture.pcap0 100% 2530 916.5KB/s 00:00
```

 Note

Complete the PCAP process and save the packets to a file before uploading. Use a TFTP, SFTP, or SCP server to transfer the PCAP file to an external server.

Disable wired packet captures

Procedure

1. Use the **no debug traffic wired** *[0-3]{ip tcp udp}**[verbose capture]* command to disable PCAP with the default filter.

```
Device# no debug traffic wired 1 ip verbose
```

2. Use the **no debug traffic wired** *[0-3]filter expression**[verbose capture]* command to disable PCAP with the custom filter.

```
Device# no debug traffic wired 0 filter "icmp or (vlan and icmp)" capture
```

 Note

You can also use the **no debug** or **undebug all** command to terminate the capture process.

Verify wired packet capture

- To verify the debug status, use the **show debug** command.

```
Device#show debug
traffic:
  wired tcp debugging is enabled
```

- To view the captured internal wired packets stored in the file, use the **show pcap** command.

 Note

After capturing packets to the file, use the **show pcap** command to view them.

```
Device#show pcap
reading from file /pcap/APXXXX.XXXX.XXXX_capture.pcap0, link-type EN10MB
(Ethernet)
1  00:00:00.000000 IP 0.0.0.0 > 224.0.0.1: igmp query v2
```

```

2 09:41:48.903670 IP 209.165.200.189 > 209.165.200.1: ICMP echo request, id
  29920, seq 1, length 64
3 09:41:48.908927 IP 209.165.200.1 > 209.165.200.189: ICMP echo reply, id
  29920, seq 1, length 64
4 09:41:49.904914 IP 209.165.200.102 > 209.165.200.1: ICMP echo request, id
  29920, seq 2, length 64
5 09:41:49.909009 IP 209.165.200.1 > 209.165.200.102: ICMP echo reply, id
  29920, seq 2, length 64

```

- To filter and view the basic content of captured packets sequentially, run the **show pcap [filter expression]** command.

```

Device#show pcap filter "src 209.165.200.189"
reading from file /pcap/APXXXX.XXXX.XXXX_capture.pcap0, link-type EN10MB
(Ethernet)
 1 09:41:48.903670 IP 209.165.200.189 > 209.165.200.1: ICMP echo request,
id 29920, seq 1, length 64
 2 09:41:48.908927 IP 209.165.200.1 > 209.165.200.189: ICMP echo reply, id
  29920, seq 1, length 64

```

- To filter and view the detailed content of a specific packet, run the **show pcap [filter expression][detail no]** command.

```

Device#show pcap filter "src 209.165.200.189" detail 2
2024-04-25 09:41:49.904914
000000 18 59 f5 96 af 74 00 50 56 85 8a 0a 08 00 45 00
000010 00 54 14 6c 40 00 40 01 b7 9d 64 16 53 72 64 16
000020 53 01 08 00 70 81 74 e0 00 02 d4 3e 2b 66 00 00
000030 00 00 50 24 04 00 00 00 00 00 10 11 12 13 14 15
000040 16 17 18 19 1a 1b 1c 1d 1e 1f 20 21 22 23 24 25
000050 26 27 28 29 2a 2b 2c 2d 2e 2f 30 31 32 33 34 35
000060 36 37

```

Port address translation

Describes the network address translation method that maps multiple internal private IP addresses and port numbers to unique public IP addresses. This functionality enables client devices within an internal local subnet to reuse IP addresses across different automated guided vehicles.

Port Address Translation (PAT), also known as Network Address and Port Translation (NAPT), is a network address translation method that:

- translates multiple internal wired client private IP addresses and port numbers
- to unique public IP addresses and port numbers
- before sending packets to the external network.

A private IP address is used only within an internal network. A public IP address is globally unique and used on the Internet. NAPT mapping uses both the IP address and the port number. This allows packets from multiple internal hosts to map to the same external IP address with different port numbers.

From Release 17.16.1, PAT is supported on the IW9165E Workgroup Bridge (WGB) Access Points (APs) of each AGV.

From Release 26.1.1, you can use port numbers from 1 to 1024 on both TCP and UDP protocols, though these should be used with caution as they belong to the reserved category of ports; the valid port range is 1 to 65535.

NAPT operational details and limitations

NAPT supports TCP and UDP for communication between devices on the internal and external networks.

The following list outlines the limitations for WGB:

- NAT is not supported for incoming packets with an 802.1Q VLAN tag behind the device.
- Multicast traffic is not supported for NAT inside wired clients.
- FTP traffic is supported in active mode; in passive mode, it is supported only when the FTP server is located within the NAT inside.
- The TFTP protocol is supported only when the TFTP server resides inside the NAT.
- Application Layer Gateway (ALG) is not supported.

The following list outlines the limitations for uWGB:


- Access Control Lists (ACLs) are not supported.
- The NAPT supports only one private LAN as the NAPT inside network.

Note

Profinet clients on the AGV must be configured with a unique IP address that belongs to the global subnet.

This image illustrates the concept of Network Address Port Translation (NAPT), demonstrating how a Wireless Gateway Bridge (WGB) translates incoming packets from an external network to an internal host by mapping external IP addresses and ports to internal ones.

Figure 7: NAPT Translation Between Internal and External Networks

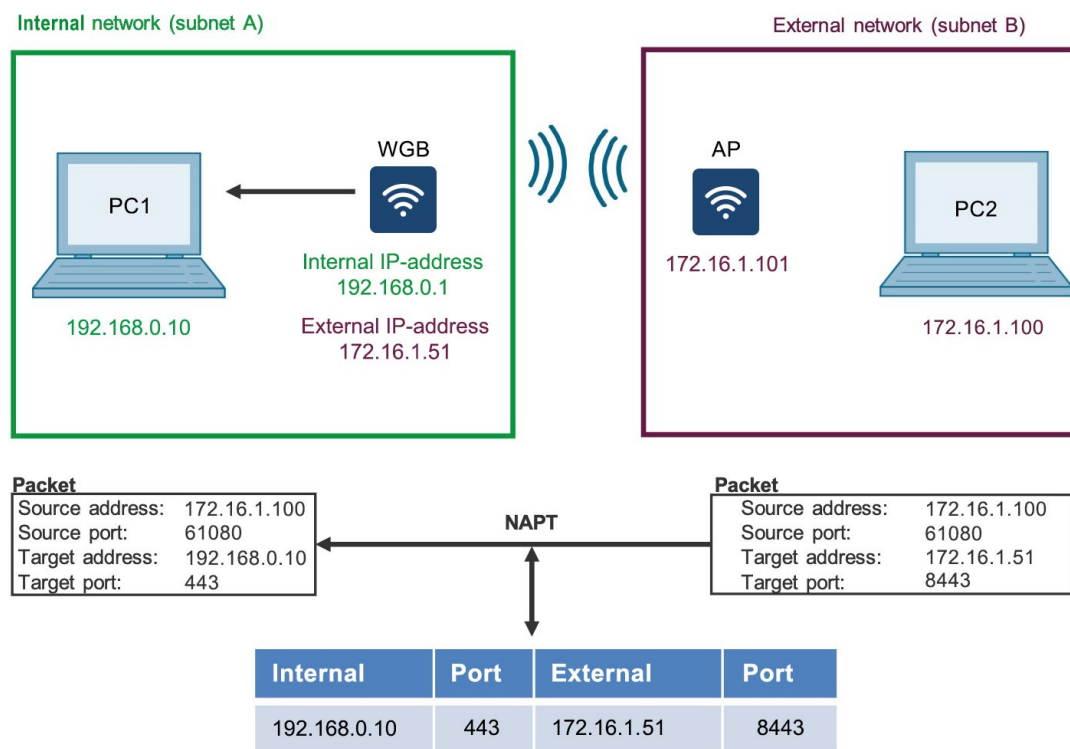

NAPT rules and mapping tables

A NAPT rule and mapping table is a network translation mechanism that:

- defines how a Workgroup Bridge (WGB) translates internal private addresses and ports to an external, routable address and port,
- maintains a table that maps internal device traffic to corresponding global IP/port pairs, and
- supports both TCP and UDP protocols for address and port translation.

The configuration supports a maximum of 256 IP NAT rules on WGB.

NAPT mapping table

The mapping table is created and managed based on the traffic and NAPT rules.

NAPT uses entries containing the source IP address, source port number, protocol type, destination IP address, and destination port number (TCP or UDP). These entries enable the system to translate addresses, filter packets, and index the NAPT mapping table.



Note

The maximum number of mapping entries in NAPT translation table is 4096.

This table shows an example of a NAPT mapping.

Table 11: NAPT Mapping Table

Protocol	Internal Local IP Address and Port	WGB Global IP Address	External Global IP Address and Port
TCP	192.168.0.10: 80	172.16.100.11	172.16.100.11: 61080

Upstream and downstream data flows

Upstream and downstream data flows are types of network traffic flows that:

- use Network Address and Port Translation (NAPT) to translate source or destination addresses,
- allow secure transfer of data between internal and external networks, and
- maintain privacy and integrity of IP addresses.

Downstream data flow using NAPT

Downstream data flow refers to the flow of data from the external network to the AGV's internal network. The gateway (WGB or uWGB) manages communication between the external and internal networks..

When packets arrive with an external IP address and port number, the mapping table is checked to identify the corresponding internal destination.

The packets are then translated and forwarded to the internal network based on the destination IP address and port number.

The diagram illustrates how address and port translation manages both upstream (internal-to-external) and downstream (external-to-internal) traffic flows between private LAN clients and external networks.

Figure 8: Upstream and downstream data flow using NAPT in WGB


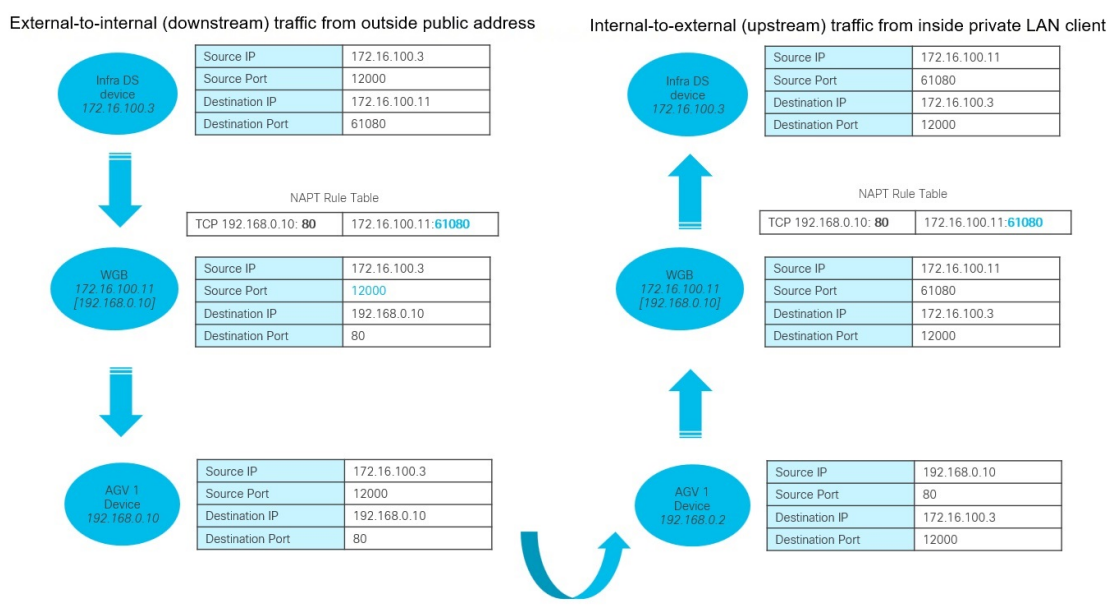


Figure 9: Upstream and downstream data flow using NAPT in uWGB

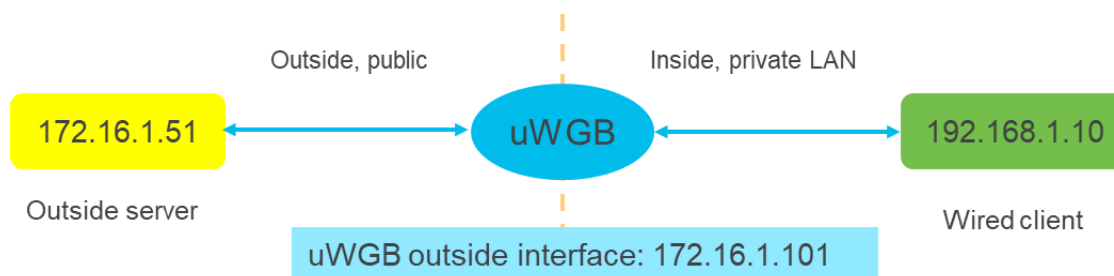

Upstream data flow using SNAT

Upstream data flow refers to the transfer of packets from internal networks to external networks. The gateway enables communication between the two networks.

All outgoing packets from the internal network are translated to the external network using Source Network Address Translation (SNAT).

For upstream traffic, SNAT replaces the source IP address and port numbers with the gateway's IP address, ensuring that internal IP addresses are not exposed to the external network.

Configure NAPT on WGB

This procedure describes how to configure Source Network Address Translation (SNAT) for upstream data flow and Network Address and Port Translation (NAPT) for downstream data flow.

Complete Steps 1 to 3 to configure upstream data flow using SNAT.

Complete Steps 4 and 5 to configure downstream data flow using NAPT.

Procedure

1. Use the **configure ip nat enable** command to enable NAPT.

```
Device#configure ip nat enable
```

Use the **configure ip nat disable** command to disable the NAPT.

2. Use the **configure ip nat address add ip** *inside-ip-address* **netmask** *netmask* command to configure inside IPv4 address and netmask.

```
Device# configure ip nat address add ip 192.168.0.1 netmask 255.255.255.0
```

3. (Optional) Use the **configure ip nat inside port range** *min-port-number* *max-port-number* command to configure SNAT port range for upstream data flow.

```
Device# configure ip nat inside port range 32000 33000
```

The valid range for the port is 1 to 65535. This range must not overlap with the SNAT port range. By default, the minimum port value is 30000 and the maximum is 59999. The minimum configurable value for both ranges is 1.

4. Use the **configure ip nat outside port range** *min-port-number* *max-port-number* command to configure NAPT port range for downstream data flow.

```
Device# configure ip nat outside port range 34000 62000
```

The valid range for the port is 1 to 65535.



Note

Ensure the NAPT and SNAT port ranges do not overlap.

Do not use reserved ports 1233, 1234, or 20000.

5. Use the **configure ip nat rule add inside ip** *inside-ip-address* **port** *inside-port-number* **outside port** *outside-port-number* **protocol** **tcp** **udp** command to configure the NAPT mapping rule for downstream data flow.

```
Device#configure ip nat rule add inside ip 192.168.0.10 port 80 outside port 61080 protocol tcp
```

inside-ip-address is the internal wired client network IP address.

inside-port-number is the internal wired client network TCP or UDP port number.

Outside port number must be within the configured NAPT range.

The valid range for the port is 1 to 65535. This range must not overlap with the NAPT port range.

6. (Optional) Use the **show ip nat configuration** command to view the current NAPT configuration.

```
Device# show ip nat configuration
```

```
IP NAT Configuration are:
```

```
=====
```

```
Status: enabled
```

```

inside interface ip/netmask: 192.168.0.1/255.255.255.0
SNAT port range: 10000 - 20000
NAPT port range: 61000 - 65535
The number of ip nat rules: 1
Id      Outside_port  Inside_ip      Inside_port    Protocol
0       61080           192.168.0.10   80             tcp

```

7. (Optional) Use the **show ip nat translations** command to view the current NAPT translation entries from the NAPT rule table.

```

Device# show ip nat translations
UDP:
  src_ip    port    dst_ip    port    =>    src_ip    port    dst_ip
  port      direction  expiry_time
(192.168.0.10, 41278, 172.16.1.51, 22000) => (172.16.1.101, 30004, 172.16.1.51,
22000) [forward] exp: 290
(172.16.1.51, 22000, 172.16.1.101, 61080) => (172.16.1.51, 22000, 192.168.0.10,
41278) [reverse] exp: 290
=====
TCP:
  src_ip    port    dst_ip    port    =>    src_ip    port    dst_ip
  port      direction  expiry_time
(192.168.0.10, 80, 172.16.100.3, 443) => (172.16.100.11, 30000, 172.16.100.3,
443) [forward] exp: 138
(172.16.100.3, 443, 172.16.100.11, 30000) => (172.16.100.3, 443, 192.168.0.10,
80) [reverse] exp: 138

```

In the output, 'forward' refers to the log details of data packets processed by the WGB, including the source, destination, and translation information.

'Reverse' refers to the log details of return traffic, ensuring that responses from the destination reach the original source by reversing the traffic direction. It ensures the response from the destination correctly reaches back to the source by reversing the direction of the original traffic.

Manage uWGB in NAPT deployment

Follow this procedure to manage uWGB in a NAPT deployment.

Before you begin

Ensure that all uWGB wired clients are in the private LAN.

Procedure

1. Use the **configure dot11Radio 1 mode uwgb mac_address ssid-profile test_ssid** command to configure radio mode to uWGB.

```

Device# configure dot11Radio 1 mode uwgb FC:58:9A:17:0D:52 ssid-profile
testssid

```

You can choose any unique MAC address, or use the optional method given below to calculate a unique MAC address.

 Note

Ensure that the MAC address does not conflict with existing devices on the network to prevent connectivity issues.

To calculate the unique MAC address, add the offset value 0x12 to the base MAC address.

To find the base MAC address, use the **show controllers dot11Radio interface** command, as shown in Step 2.

Use the formula: base MAC address + offset = unique MAC address.

 Note

Verify that the offset value is 0x12 or greater. For example, adding 0x12 to FC:58:9A:17:0D:40 results in FC:58:9A:17:0D:52.

2. (Optional) Use the **show controllers dot11Radio 1** command to find the base MAC address.

```
Device#show controllers dot11Radio 1
wifil1      Link encap:Ethernet  HWaddr FC:58:9A:17:0D:40
            UP BROADCAST RUNNING MULTICAST  MTU:1500  Metric:1
            RX packets:9109 errors:70 dropped:59043 overruns:0 frame:0
            TX packets:27920 errors:13 dropped:0 overruns:0 carrier:0
            collisions:0 txqueuelen:2699
            RX bytes:913806 (892.3 KiB)  TX bytes:5399794 (5.1 MiB)
```

3. (Optional) Use the **show wgb dot11 associations** command to verify the uWGB is in the WGB state.

```
Device#show wgb dot11 associations
Uplink Radio ID          : 1
Uplink Radio MAC         : FC:58:9A:17:0D:52
SSID Name                : SSID_NAME
Connected Duration       : 56 hours, 37 minutes, 11 seconds
Parent AP MAC            : B0:B8:67:3D:5E:D6
Uplink State             : CONNECTED
Auth Type                : PSK
Key management Type      : WPA2
Uclient mac              : FC:58:9A:17:0D:52
Current state          : WGB
Uclient timeout          : 60 Sec
Dot11 type               : 11ac
Channel                  : 157
Bandwidth                : 20 MHz
Current Datarate (Tx/Rx) : 156/144 Mbps
Max Datarate             : 156 Mbps
RSSI                     : 35
IP                   : 172.16.1.101/24
Default Gateway          : 172.16.1.1
IPv6                     : ::/128
Assoc timeout            : 100 Msec
Auth timeout             : 100 Msec
Dhcp timeout             : 60 Sec'
```

4. Configure NAPT to enable end-to-end traffic flow for uWGB wired clients.

Configure NAPT on uWGB

This procedure describes how to configure Source Network Address Translation (SNAT) for upstream data flow and Network Address and Port Translation (NAPT) for downstream data flow.

Follow Step 1 through Step 4 to configure support for upstream data flow using SNAT.

Follow Step 5 and Step 6 to configure support for downstream data flow using NAPT.

Procedure

1. Use the **configure ip nat enable** command to enable NAPT.

```
Device#configure ip nat enable
```

Note

Use the **configure ip nat disable** command to disable the NAPT.

2. (Optional) Use the **configure ip nat inside port range *min-port-number max-port-number*** command to configure SNAT port range for upstream data flow.

```
Device# configure ip nat inside port range 32000 33000
```

The valid range for the port is 1 to 65535. This range must not overlap with the SNAT port range. By default, the minimum port value is 30000 and the maximum is 59999. The minimum configurable value for both ranges is 1.

Note

The SNAT port range is the source port that the uWGB uses when sending traffic from internal network to the external network.

Ensure that the SNAT port range and the NAPT port range do not overlap.

3. Use the **configure ip nat address add ip *inside- ip-address netmask netmask*** command to configure the gateway IPv4 address for the internal wired client on the uWGB.

```
Device# configure ip nat address add ip 192.168.0.1 netmask 255.255.255.0
```

4. Use the **configure interface nat-outside address ipv4 static *static-ip-address static-netmask gateway-ip-address*** command to configure external IPv4 address on the uWGB.

```
Device# configure interface nat-outside address ipv4 static 172.16.1.101
255.255.255.0 172.16.1.1
```

static-ip-address is the uWGB own public address

gateway-ip-address is the uWGB external IP address.

The outside port number is automatically generated for upstream data flow.

The configuration supports the internal-to-external traffic flow.

5. Use the **configure ip nat outside port range** *min-port-number max-port-number* command to configure NAPT port range on the uWGB to receive traffic from the external network to the internal network.

```
Device# configure ip nat outside port range 34000 62000
```

The valid range for the port is 1 to 65535. This range must not overlap with the NAPT port range. The default minimum port value is 61000 and the maximum is 65535. The minimum configurable value for both ranges is 1.

6. Use the **configure ip nat rule add inside ip** *inside-ip-address* **port** *inside-port-number* **outside port** *outside-port-number* **protocol** **tcp udp** command to configure the NAPT mapping rule for downstream data flow.

```
Device#configure ip nat rule add inside ip 192.168.0.10 port 80 outside port 61080 protocol tcp
```

inside-ip-address is the internal wired client network IP address.

inside-port-number is the internal wired client network TCP or UDP port number.

Outside port number must be within the configured NAPT range.

7. (Optional) Use the **show ip nat configuration** command to view the current NAPT configuration.

```
Device# show ip nat configuration

IP NAT Configuration are:
=====
Status: enabled
inside interface ip/netmask: 192.168.1.1/255.255.255.0
SNAT port range: 30000 - 59999
NAPT port range: 60000 - 65000
outside proxy ip/netmask/gateway: 172.16.1.101/255.255.255.0/172.16.1.1
The number of ip nat rules: 2

```

Id	Outside_port	Inside_ip	Inside_port	Protocol
0	61001	192.168.1.10	20001	udp
1	61002	192.168.1.10	20002	tcp

8. (Optional) Use the **show ip nat translations** command to view the current NAPT translation entries from the NAPT rule table.

```
Device#show ip nat translations

ICMP:
  src_ip    dst_ip    port    =>    src_ip    dst_ip    port
direction  expiry_time
(172.16.1.1, 172.16.1.101, 30257) => (172.16.1.1, 192.168.1.10, 267) [reverse]
exp: 272
(192.168.1.10, 172.16.1.1, 11) => (172.16.1.101, 172.16.1.1, 30001) [forward]
exp: 272
=====
UDP:
  src_ip    port    dst_ip    port    =>    src_ip    port    dst_ip
port  direction  expiry_time
(192.168.1.10, 20000, 172.16.1.51, 35200) => (172.16.1.101, 61001, 172.16.1.51, 35200) [reverse] exp: 214
(192.168.1.10, 51184, 172.16.1.51, 22000) => (172.16.1.101, 30001, 172.16.1.51, 22000) [forward] exp: 161
```

```

(172.16.1.51, 35200, 172.16.1.101, 61001) => (172.16.1.51, 35200, 192.168.1.10,
20000) [forward] exp: 214
(172.16.1.51, 22000, 172.16.1.101, 30001) => (172.16.1.51, 22000, 192.168.1.10,
51184) [reverse] exp: 161
=====
TCP:
  src_ip    port    dst_ip    port    =>    src_ip    port    dst_ip
port    direction    expiry_time
(192.168.1.10, 44155, 172.16.1.51, 23000) => (172.16.1.101, 30002, 172.16.1.51,
23000) [forward] exp: 238
(172.16.1.51, 23000, 172.16.1.101, 30002) => (172.16.1.51, 23000, 192.168.1.10,
44155) [reverse] exp: 238
=====

```

In the output, 'forward' refers to the log details of data packets processed by the uWGB, including the source, destination, and translation information.

'Reverse' refers to the log details of return traffic, ensuring that responses from the destination reach the original source by reversing the traffic direction. It ensures the response from the destination correctly reaches back to the source by reversing the direction of the original traffic.

Delete NAPT mapping rule

This procedure describes how to delete NAPT configuration entries. You can remove a specific NAPT mapping rule by specifying the inside and outside parameters. You can also delete a rule by its rule ID or clear all NAPT rules from the configuration. Choose the method based on whether you want to remove a specific rule or reset the entire NAPT configuration.

Procedure

Delete NAPT mapping rule using one of the options given here:

Option	Description
Delete a NAPT mapping rule	Use the configure ip nat rule delete inside ip <i>inside-ip-address</i> port <i>inside-port-number</i> outside port <i>outside-port-number</i> protocol tcp udp command.
	<pre>Device#configure ip nat rule delete inside ip 192.168.1.10 port 80 outside port 61080 protocol tcp</pre>
Delete the NAPT mapping rule as per the rule-id	Use the configure ip nat entry delete <i>rule-id</i> command.
	<pre>Device# configure ip nat entry del 0</pre>

Option**Description****Note**

You can use the **show ip nat configuration** command to view the rule-id.

Delete all the NAT mapping rules Use the **configure ip nat entry delete all** command.

```
Device# configure ip nat entry delete all
```

Delete NAT IP address

This procedure explains how to delete the configured NAT IP addresses. You can remove the gateway IPv4 address assigned to the internal wired client. Alternatively, you can delete the external IPv4 address configured on the NAT outside interface.

**Note**

To remove all the NAT configuration, you should also delete the IP address and interface.

Procedure

Delete the NAT IP address using one of the options given here:

Option**Description**

Delete gateway IPv4 address for the internal wired client

Use the **configure ip nat address delete** command.

```
Device#configure ip nat address delete
```

Delete the external IPv4 address

Use the **configure interface nat-outside address delete** command.

```
Device#configure interface nat-outside  
address delete
```

802.1X authentication for wired clients

Describes the 802.1X authentication framework used to secure wired client access within enterprise network environments. This process ensures that only authorized devices gain network connectivity.

This reference provides details on the implementation and function of 802.1X authentication for wired clients.

Best practice for connecting 802.1X wired clients behind a WGB

Outlines best practices for connecting 802.1X wired clients behind a Workgroup Bridge (WGB) to ensure proper authentication.

Starting from Cisco IOS XE 26.2.1, we recommend you to ensure proper forwarding of EAP packets for wired client authentication when using a Workgroup Bridge (WGB) by following these guidelines:

- Connect wired clients directly to the WGB rather than through a Cisco switch. A switch might perform wired 802.1X authentication and can consume or drop EAP packets.
- Connect wired clients directly to the WGB's wired0 or wired1 ports to ensure EAP packets are forwarded correctly for client authentication.
- To connect multiple wired clients, use a non-Cisco switch or hub behind the WGB to prevent interference with EAP packet forwarding.
- It is acceptable to connect wired clients behind the WGB using a power injector if the power injector properly forwards EAP packets.

Enable 802.1X authentication for wired clients on a WGB

Configure a Workgroup Bridge (WGB) to authenticate wired clients using 802.1X, enhancing network security.

Authenticate all wired clients connected through the WGB using 802.1X to control network access.

Use this task when you want to secure wired client connections through a WGB by enforcing 802.1X authentication protocols.

Before you begin

- Ensure the WGB uplink is established as described in [Configuring WGB on the Radio Interface](#).
- Configure the RADIUS server with the 802.1X credentials for the wired clients and add the WGB as a network device.
- Configure the primary RADIUS server on the WGB. Configure a secondary RADIUS server if fallback is required.

Follow these steps to enable 802.1X authentication for wired clients on the WGB:

Procedure

1. Use the **configure wgb wired authentication dot1x enable** command to enable 802.1X wired authentication support on the WGB. This command enforces 802.1X authentication on the WGB's wired ports.

Example

```
Device# configure wgb wired authentication dot1x enable
```

2. (Optional) Use the **configure wgb wired authentication dot1x disable** command to disable the 802.1X wired authentication support.

Example

```
Device# configure wgb wired authentication dot1x disable
```

 Note

The system also disables the feature automatically if you remove the primary RADIUS server configuration using the **configure radius authentication primary delete** command.

3. (Optional) Use the **show running-config | include Wired** command to display the current running configuration related to wired interfaces, including their status, type, IP address, and port information.

```
Device# show running-config | include Wired

Wired Client 802.1x Auth : Disable
APC882.3468.1318#
APC882.3468.1318#show running-config | include Wired
Wired Client 802.1x Auth : Enable
APC882.3468.1318#
```

Debug commands

Lists the debug commands available for troubleshooting WGB wired-client-1x and describes each debug level.

You can enable any debug level listed in this table for troubleshooting.

- `Device# debug wgb wired-client-1x {error | event | info | packet}`

Use this command to troubleshoot by displaying detailed debug information about the wired client's activities on the WGB.

Table 12: WGB wired-client-1x debug levels

Debug level	Description
error	Enables error-level debugging.
event	Enables event-level debugging.
info	Enables informational debugging.
packet	Enables packet-level debugging.

AAA user authentications

Learn how to configure an external AAA server and how to enable or disable RADIUS authentication for login users.

AAA user authentication is a network management mechanism that:

- controls access to network resources through user authentication,
- assigns differentiated privilege levels to users, and
- manages usernames and passwords centrally on the AAA server.

From Release 17.15.1, AAA-based user management and authentication are supported on IW9167EH IW9165E WGB.

The AAA server assigns privilege levels (0-15) via Authorization-Reply messages. Only levels 1 (view user) and 15 (management user) are supported. Levels 2-14 are reserved and must not be assigned.

If a user is added without a privilege level, WGB will assign the lowest privilege level to that user.

Features of AAA-based user management and authentication

AAA-based user management and authentication includes these features:

- Provides multiple-user support
- Stores usernames and passwords on the AAA server
- Authenticates users with AAA
- Supports differentiated user privileges
- Restricts CLI access based on user privileges



Note

Similar to a Cisco Router or Switch, the Workgroup Bridge (WGB) can also create and store usernames and passwords locally.

Configure AAA Server

Before you begin

- You can add a secondary AAA server (RADIUS or TACACS+) before adding a primary AAA server. Once the primary AAA server is added, clients connect to the primary AAA server.
- When both primary and secondary RADIUS servers are configured, the WGB attempts to connect with the primary RADIUS server three times before switching to the secondary RADIUS server.
- For the TACACS+ server, the connection attempt is done only once with the primary TACACS+ server. If the primary TACACS+ server fails to respond, the secondary TACACS+ server is used.



Note

The WGB AAA RADIUS server configuration command is officially supported starting from the 17.15.1 release.

If you downgrade the image from release 17.15.1 or later to 17.14.1 or earlier, or upgrade from 17.14.1 or earlier to 17.15.1 or later, the configured RADIUS server port resets to zero. Reconfigure the RADIUS server port.

Procedure

Add or remove a AAA server (RADIUS or TACACS+).

Option	Description
Configure a AAA server	Use the config radius tacplus authentication primary secondary add ipv4 ipv6 ip-address port port-number secret secret-string command.

```
Device# configure radius authentication primary add ipv4
10.10.10.5 port 100 secret radiusSecret123
```

**Note**

Do not use unsupported characters in secret-string parameters. These characters include the vertical bar (|), semicolon (;), dollar sign (\$), less than (<), greater than (>), ampersand (&), caret (^), grave accent (`), backslash (\), carriage return (\r), and double quotation marks ("").

Remove a AAA server	Use the config radius tacplus authentication primary secondary delete command.
----------------------------	---

```
Device# configure radius authentication primary delete
```

Enable or disable RADIUS authentication for login user

Procedure

1. Enable or disable AAA RADIUS authentication for the login user using one of the options.

Option	Description
Enable AAA RADIUS authentication for the login user	Use the config ap management aaa radius enable command.
Disable AAA RADIUS authentication for the login user	Use the config ap management aaa radius disable command.

```
Device# config ap management aaa
radius enable
```

```
Device# config ap management aaa
radius disable
```

2. (Optional) Use the **show running-config | include aaa** command to verify the AAA server (RADIUS or TACACS+) configuration.

```
Device# show running-config | include aaa
```

```
AAA server configuration:-
```

```
=====
```

```
Status: Enabled
```

```
AAA server type : radius
```

```
Primary RADIUS IP address : 192.0.2.0
```

```
Primary RADIUS port : 1812
.
.
.
```

Enable or disable TACACS+ authentication for login user

Procedure

1. Enable or disable AAA RADIUS authentication for the login user using one of the options.

Option

Description

Enable AAA TACACS+ authentication for the login user

Use the **config ap management aaa tacplus enable** command.

```
Device# config ap management aaa
tacplus enable
```

Disable AAA TACACS+ authentication for the login user

Use the **config ap management aaa tacplus disable** command.

```
Device# config ap management aaa
tacplus disable
```

2. (Optional) Use the **show running-config | include aaa** command to verify the AAA server (TACACS+) configuration.

```
Device# show running-config | include aaa

AAA server configuration:-
=====
Status: Enabled
AAA server type : tacplus
Primary TACPLUS IP address : 192.0.2.0
Primary TACPLUS port : 49
.
.
.
```

AAA authentication configuration example

When AAA RADIUS authentication is enabled, using the **show running-config** command generates this sample output.

```
Device# show running-config

AAA server configuration:-
=====
Status: Enabled
AAA server type : radius
Primary RADIUS IP address : 192.0.2.0
```

```
Primary RADIUS port : 1812
.
.
.
```

When AAA TACACS+ authentication is enabled, using the show running-config command generates this sample output.

```
Device# show running-config

AAA server configuration:-
=====
Status: Enabled
AAA server type : tacplus
Primary TACPLUS IP address : 192.0.2.0
Primary TACPLUS port : 49
.
.
.
```

Verification and monitoring

Learn how to verify and monitor access point operation using the available verification and logging capabilities.

Verify the WGB and uWGB configuration

Perform these tasks to verify WGB and uWGB related show configurations.

Procedure

1. Check whether the AP is in WGB or uWGB mode using one of the options.

Option Description

WGB Use the **show run** command.

```
Device#show run
AP Name           : APFC58.9A15.C808
AP Mode           : WorkGroupBridge
CDP State         : Enabled
Watchdog monitoring : Enabled
SSH State         : Disabled
AP Username       : admin
Session Timeout   : 300
```

Radio and WLAN-Profile mapping:-

```
=====
Radio ID      Radio Mode      SSID-Profile      SSID
      Authentication
-----
1             WGB             myssid            demo
              OPEN
```

Radio configurations:-

Option Description

```

=====
Radio Id           : NA
  Admin state      : NA
  Mode             : NA
Radio Id           : 1
  Admin state      : DISABLED
  Mode             : WGB
  Dot11 type       : 11ax
Radio Id           : NA
  Admin state      : NA
  Mode             : NA

```

uWGB Use the **show run** command.

```

Device#show run
AP Name           : APFC58.9A15.C808
AP Mode           : WorkGroupBridge
CDP State         : Enabled
Watchdog monitoring : Enabled
SSH State         : Disabled
AP Username       : admin
Session Timeout   : 300

```

Radio and WLAN-Profile mapping:-

```

=====
Radio ID    Radio Mode    SSID-Profile    SSID
      Authentication
-----
1           UWGB          myssid          demo
      OPEN

```

Radio configurations:-

```

=====
Radio Id           : NA
  Admin state      : NA
  Mode             : NA
Radio Id           : 1
  Admin state      : DISABLED
  Mode             : UWGB
  Uclient mac      : 0009.0001.0001
  Current state     : WGB
  UClient timeout   : 0 Sec
  Dot11 type       : 11ax
Radio Id           : NA
  Admin state      : NA
  Mode             : NA

```

2. Check information about wireless clients associated with the WGB or uWGB using one of the options.**Option Description****WGB** Use the **show wgb dot11 associations** command.

```

Device#show wgb dot11 associations
Uplink Radio ID : 1

```

Option	Description
--------	-------------

```

Uplink Radio MAC : 00:99:9A:15:B4:91
SSID Name : roam-m44-open
Parent AP Name : APFC58.9A15.C964
Parent AP MAC : 00:99:9A:15:DE:4C
Uplink State : CONNECTED
Auth Type : OPEN
Dot11 type : 11ax
Channel : 100
Bandwidth : 20 MHz
Current Datarate (Tx/Rx) : 86/86 Mbps
Max Datarate : 143 Mbps
RSSI : 53
IP : 192.168.1.101/24
Default Gateway : 192.168.1.1
IPV6 : ::/128
Assoc timeout : 100 Msec
Auth timeout : 100 Msec
Dhcp timeout : 60 Sec

```

uWGB

Use the **show wgb dot11 associations** command.

```

Device#show wgb dot11 associations
Uplink Radio ID : 1
Uplink Radio MAC : 00:09:00:01:00:01
SSID Name : roam-m44-open
Parent AP MAC : FC:58:9A:15:DE:4C
Uplink State : CONNECTED
Auth Type : OPEN
Uclient mac : 00:09:00:01:00:01
Current state : UWGB
Uclient timeout : 60 Sec
Dot11 type : 11ax
Channel : 36
Bandwidth : 20 MHz
Current Datarate (Tx/Rx) : 77/0 Mbps
Max Datarate : 143 Mbps
RSSI : 60
IP : 0.0.0.0
IPV6 : ::/128
Assoc timeout : 100 Msec
Auth timeout : 100 Msec
Dhcp timeout : 60 Sec

```

Syslog

Syslogs are a category of protocols that send event data logs to a centralized location for storage and analysis. These are widely used for monitoring and troubleshooting network devices by capturing event messages. The term Syslog may also refer to the protocol itself or the system that implements it.

- **Protocol Type:** Syslog is a standardized protocol commonly used for logging system events.
- **Transport Protocol:** Currently, Syslog supports only UDP mode for data transmission.
- **Debug Log Collection:** When the debug command is enabled on a WGB, it collects debug logs and sends them to the Syslog server.

- Log Categorization: Logs sent to the Syslog server from WGB are categorized under the "kernel facility" and logged at the "warning level."

Enable or disable the WGB syslog

Perform this task to configure the syslog functionality on a Workgroup Bridge (WGB). This allows you to enable or disable logging to a specific host, ensuring proper monitoring and debugging.

Procedure

1. Enable or disable WGB syslog using one of the options.

Option

Description

Enable WGB syslog

Use the **logging host enable** *server_ip* UDPcommand.

```
Device# logging host enable 192.168.1.200 udp
```

Disable WGB syslog

Use the **logging host disable** command.

```
Device# logging host disable
```

2. (Optional) Use the **show running-config** command to view current syslog configuration.

```
Device# show running-config
```

Radio Statistics Commands

Radio Statistics Commands

The **debug wgb dot11 rate** command displays debugging information related to data rates negotiated. It helps troubleshoot connectivity, performance, or roaming issues by showing how the WGB selects and uses data rates when communicating with the access point.

```
Device# debug wgb dot11 rate
```

```
[*03/13/2023 18:00:08.7814]
Tx-Rate (Mbps)          MAC      Tx-Pkts    Rx-Pkts
Rx-Rate (Mbps)    RSSI    SNR Tx-Retries
[*03/13/2023 18:00:08.7814] FC:58:9A:17:C2:51      0          0
HE-20, 2SS, MCS6, GI0.8 (154)  HE-20, 3SS, MCS4, GI0.8 (154)  -30      62
0
[*03/13/2023 18:00:09.7818] FC:58:9A:17:C2:51      0          0
HE-20, 2SS, MCS6, GI0.8 (154)  HE-20, 3SS, MCS4, GI0.8 (154)  -30      62
0
```

In this example, FC:58:9A:17:C2:51 is the parent AP radio MAC.

The **show interfaces dot11Radio slot-id statistics** command displays detailed statistics for a wireless radio interface. It provides information such as transmitted and received packets, errors, retries, signal quality, and other performance metrics. This is useful for monitoring the health of the radio interface, identifying connectivity issues, and troubleshooting wireless performance.

```
Device# show interfaces dot11Radio 1 statistics
```

```
Dot11Radio Statistics:
```

DOT11 Statistics (Cumulative Total/Last 5 Seconds):

RECEIVER		TRANSMITTER	
Host Rx K Bytes:	965570/0	Host Tx K Bytes:	1611903/0
Unicasts Rx:	379274/0	Unicasts Tx:	2688665/0
Broadcasts Rx:	3166311/0	Broadcasts Tx:	0/0
Beacons Rx:	722130099/1631	Beacons Tx:	367240960/784
Probes Rx:	588627347/2224	Probes Tx:	78934926/80
Multicasts Rx:	3231513/0	Multicasts Tx:	53355/0
Mgmt Packets Rx:	764747086/1769	Mgmt Packets Tx:	446292853/864
Ctrl Frames Rx:	7316214/5	Ctrl Frames Tx:	0/0
RTS received:	0/0	RTS transmitted:	0/0
Duplicate frames:	0/0	CTS not received:	0/0
MIC errors:	0/0	WEP errors:	2279546/0
FCS errors:	0/0	Retries:	896973/0
Key Index errors:	0/0	Tx Failures:	8871/0
		Tx Drops:	0/0

Rate Statistics for Radio::

[Legacy]:

6 Mbps:

Rx Packets:	159053/0	Tx Packets:	88650/0
		Tx Retries:	2382/0

9 Mbps:

Rx Packets:	43/0	Tx Packets:	23/0
		Tx Retries:	71/0

12 Mbps:

Rx Packets:	1/0	Tx Packets:	119/0
		Tx Retries:	185/0

18 Mbps:

Rx Packets:	0/0	Tx Packets:	5/0
		Tx Retries:	134/0

24 Mbps:

Rx Packets:	235/0	Tx Packets:	20993/0
		Tx Retries:	5048/0

36 Mbps:

Rx Packets:	0/0	Tx Packets:	781/0
		Tx Retries:	227/0

54 Mbps:

Rx Packets:	133/0	Tx Packets:	9347/0
		Tx Retries:	1792/0

[SU]:

M0:

Rx Packets:	7/0	Tx Packets:	0/0
		Tx Retries:	6/0

M1:

Rx Packets:	1615/0	Tx Packets:	35035/0
		Tx Retries:	3751/0

M2:

Rx Packets:	15277/0	Tx Packets:	133738/0
		Tx Retries:	22654/0

M3:

Rx Packets:	10232/0	Tx Packets:	1580/0
		Tx Retries:	21271/0

M4:

Rx Packets:	218143/0	Tx Packets:	190408/0
		Tx Retries:	36444/0

M5:

Rx Packets:	399283/0	Tx Packets:	542491/0
		Tx Retries:	164048/0

M6:

Rx Packets:	3136519/0	Tx Packets:	821537/0
-------------	-----------	-------------	----------

```

M7:
  Rx Packets:      1171128/0
  Tx Retries:      329003/0
  Tx Packets:      303414/0
  Tx Retries:      154014/0

Beacons missed: 0-30s 31-60s 61-90s 90s+
                  2         0         0         0

```

The **show wgb dot11 uplink latency** command displays latency statistics for the Workgroup Bridge (WGB) uplink connection to the access point (AP). It helps measure the time taken for frames to traverse from the WGB to the AP, providing insight into wireless link performance and potential delay issues.

```

AP# show wgb dot11 uplink latency

Latency Group Total Packets Total Latency Excellent(0-8) Very Good(8-16) Good
(16-32 ms) Medium (32-64ms) Poor (64-256 ms) Very Poor (256+ ms)
AC_BK      0      0      0      0      0
  0         0      0      0      0      0
AC_BE      1840    4243793  0      1809      10
 14         7      0      0      0
AC_VI      0      0      0      0      0
  0         0      0      0      0
AC_VO      24     54134    0      24      0
  0         0      0      0      0

```

The **show wgb dot11 uplink** command displays information about the Workgroup Bridge (WGB) uplink to the access point (AP). It provides details such as the associated SSID, BSSID, channel, signal strength, data rates, authentication type, and overall status of the uplink connection. This is useful for verifying connectivity and monitoring the WGB's wireless link to the AP.

```

AP# show wgb dot11 uplink

HE Rates: 1SS:M0-11 2SS:M0-11
Additional info for client 8C:84:42:92:FF:CF
RSSI: -24
PS : Legacy (Awake)
Tx Rate: 278730 Kbps
Rx Rate: 410220 Kbps
VHT_TXMAP: 65530
CCX_Ver: 5
Rx Key-Index Errs: 0

      mac      intf TxData TxUC TxBytes TxFail TxDcrd TxCumRetries
MultiRetries MaxRetriesFail RxData RxBytes RxErr      TxRt (Mbps)
      RxRt (Mbps)      LER PER stats_ago
8C:84:42:92:FF:CF wbridge1 1341 1341 184032 0 0 543
96 0 317 33523 0 HE-40,2SS,MCS6,GIO.8 (309)
HE-40,2SS,MCS9,GIO.8 (458) 27272 0 1.370000
Per TID packet statistics for client 8C:84:42:92:FF:CF
Priority Rx Pkts Tx Pkts Rx(last 5 s) Tx (last 5 s)
0 35 1314 0 8
1 0 0 0 0
2 0 0 0 0
3 0 0 0 0
4 0 0 0 0
5 0 0 0 0
6 182 24 1 0
7 3 3 0 0

Rate Statistics:
Rate-Index Rx-Pkts Tx-Pkts Tx-Retries

```

0	99	3	0
4	1	1	9
5	21	39	35
6	31	185	64
7	26	124	68
8	28	293	82
9	77	401	151
10	32	140	97
11	2	156	37

Configure event logging

For WGB field deployment, event logging collects useful information such as WGB state changes and received or transmitted packets. This information provides a log history to help analyze issues, particularly during roaming.

You can configure the WGB trace filter for packet types such as probe, auth, assoc, eap, dhcp, icmp, and arp.

The product supports four types of events.

- Basic event: covers most WGB basic-level information messages.
- Detail event: covers the basic event and additional debug-level messages.
- Trace event: records WGB trace events if enabled.
- All event: bundles trace events and detail events.

The log format is [*timestamp* | *module* | *level* | *event log string*].



Note

Starting from UIW Release 17.17.1, we recommend using the commands mentioned in the "Configure remote server" procedure to obtain more comprehensive diagnostic information.

Procedure

1. Use the `config wgb event trace {enable | disable}` command to enable or disable WGB trace.

```
Device# config wgb event trace enable
```

2. (Optional) Use the `show wgb event [basic | detail | trace | all]` command to manually dump event log messages to memory and to display WGB logging.

```
Device# show wgb event all

[*08/16/2023 08:18:25.167578] UP_EVT:4 R1 IFC:58:9A:17:B3:E7] parent_rssi:
-42 threshold:
-70
[*08/16/2023 08:18:25.329223] UP_EVT:4 R1 State CONNECTED to SCAN_START
[*08/16/2023 08:18:25.329539] UP_EVT:4 R1 State SCAN_START to STOPPED
[*08/16/2023 08:18:25.330002] UP_DRV:1 R1 WGB UPLINK mode stopped
[*08/16/2023 08:18:25.629405] UP_DRV:1 R1 Delete client FC:58:9A:17:B3:E7
[*08/16/2023 08:18:25.736718] UP_CFG:8 R1 configured for standard: 7
[*08/16/2023 08:18:25.989936] UP_CFG:4 R1 band 1 current power level: 1
[*08/16/2023 08:18:25.996692] UP_CFG:4 R1 band 1 set tx power level: 1
```

```
[*08/16/2023 08:18:26.003904] UP_DRV:1 R1 WGB uplink mode started
[*08/16/2023 08:18:26.872086] UP_EVT:4 Reset aux scan
[*08/16/2023 08:18:26.872096] UP_EVT:4 Pause aux scan on slot 2
[*08/16/2023 08:18:26.872100] SC_MST:4 R2 reset uplink scan state to idle
[*08/16/2023 08:18:26.872104] UP_EVT:4 Aux bring down vap - scan
[*08/16/2023 08:18:26.872123] UP_EVT:4 Aux bring up vap - serv
[*08/16/2023 08:18:26.872514] UP_EVT:4 R1 State STOPPED to SCAN_START
[*08/16/2023 08:18:26.872709] SC_MST:4 R1 Uplink Scan Started.
[*08/16/2023 08:18:26.884054] UP_EVT:8 R1 CH event 149
```

It might take a long time to display the output of the show wgb event command in the console. Interrupting printing with Ctrl+C does not affect the log dump to memory.

3. (Optional) Use the **clear wgb event [basic | detail | trace | all]** command to erase WGB events in memory.

```
Device# clear wgb event all
```

4. (Optional) Use the **copy event-logging flash** command to save all event logs to WGB flash.

```
Device# copy event-logging flash
```

The package file includes four separate log files, each for a different log level.

5. (Optional) Use the **copy event-logging upload[tftp | sftp | scp] ://ip-address[dir]/filename.tar.gz** command to save event logs to a remote server.

```
Device# copy event-logging upload
tftp://192.168.100.100/tftpuser/evtlog-2023-05-31_11:45:49.tar.gz

Starting upload of WGB config
tftp://192.168.100.100/tftpuser/evtlog-2023-05-31_11:45:49.tar.gz ...
It may take a few seconds. If longer, please cancel command, check network
and try again.
#####
100.0%
Config upload completed.
```

Configure remote server

This task configures the log transfer settings on the device. The log transfer settings define the transfer protocol (TFTP or SFTP), authentication credentials (for SFTP), the remote server IP address, and an optional server path. This setup ensures that event logs and system logs are securely uploaded to a remote server for storage, monitoring, or troubleshooting.

Procedure

1. Use the **transfer upload mode {delete | sftp | tftp}** command to select the protocol for log transfer.

```
Device# transfer upload mode tftp
```

2. Use the **transfer upload credential add username password password** command to configure the username and password.

```
Device# transfer upload credential add Cisco password Cisco123
```

3. Use the **transfer upload server-ip add *remote-server-ip*** command to configure the remote server IP address.

```
Device# transfer upload server-ip add 192.168.71.11
```

4. (Optional) Use the **transfer upload server-ip add *remote-server-ip* path *remote-server-path*** command to configure the remote server path.

```
Device# transfer upload server-ip add 192.168.71.11 path /upload/wgb
```

These static configurations are persistent and remain effective even after a device reload.

5. Use the **transfer upload start** command to collect event logs and transfer them to the remote server.

```
Device# transfer upload start
```

After configuring the remote server, the device collects and transfers these types of data:

- Core files to support troubleshooting.
- Syslog files to monitor system events and activities.
- WGB or uWGB running configuration to back up settings.
- Radio reset history to identify potential connectivity issues.
- Event logging data to track system performance and incidents.

10 Mbps Speed Port Support on Cisco IW9167EH WGB

10 Mbps Speed Port Support on Cisco IW9167EH WGB

10 Mbps speed negotiation on Ethernet port

Before Cisco IOS XE Release 17.16.1, the IW9167EH WGB did not support 10 Mbps speed on its ethernet ports. However, some clients still used devices with 10 Mbps Ethernet ports. To ensure compatibility with these devices, support for 10 Mbps speed was introduced.

Starting with Cisco IOS XE Release 17.16.1, the IW9167EH WGB supports 10 Mbps speed negotiation on the wired 0 port. This document describes how to enable and disable 10 Mbps speed negotiation on the WGB wired 0 port.

The WGB wired 0 port connects wired devices to the WGB, bridging wired and wireless network segments.

Speed negotiation

Speed negotiation, or auto-negotiation, is a process in which two connected Ethernet devices automatically select optimal common transmission parameters, such as speed and duplex mode, to optimize communication

Speed and duplex are auto-negotiated based on the capabilities of the locally connected endpoint.

 Note

Disable the 10 Mbps feature when you connect devices that support 100 Mbps and 1 Gbps.

Benefits

This feature allows you to connect your 10 Mbps Ethernet devices to the IW9167EH WGB APs without replacing them.

Enable a 10 Mbps speed port on Cisco IW9167EH WGB

Learn how to enable the 10 Mbps speed on the Ethernet port of a Cisco IW9167EH WGB device. Use this procedure to configure and verify the port speed using CLI commands.

This procedure describes how to enable the 10 Mbps speed on the Ethernet port. You can run the **show** commands as needed, and you do not have to use a specific sequence.

Procedure

1. Use the **configure wired *wired-port-number* speed *port-speed* enable** command to enable 10 Mbps speed capability on the wired 0 port.

Example

```
Device#configure wired 0 speed 10 enable
```

2. (Optional) Use the **show running-config** command to verify 10 Mbps speed port status on the wired 0 port.

```
Device#show running-config

feature 10M speed
Interface wired0 10Mbps Configuration:
=====
Status: Enable
```

3. Use the **show ip interface brief** command to verify speed negotiation on the wired 0 port.

```
Device#show ip interface brief

Interface          IP-Address      Method   Status   Protocol   Speed
Duplex
*wired0            unassigned      unset    up        up          10
full
wired1             n/a             n/a      down     down        n/a
n/a
auxiliary-client   192.168.163.91  static   up        up          n/a
n/a
wifi0              n/a             n/a      down     down        n/a
n/a
wifi1              n/a             n/a      up        up          n/a
n/a
```

wifi2	n/a	n/a	up	up	n/a
n/a					

Disable the 10 Mbps Speed Port on Cisco IW9167EH WGB

Learn how to disable the 10 Mbps speed capability on the Ethernet port of a Cisco IW9167EH WGB device. Use this procedure to ensure the port does not operate at 10 Mbps speed.

This procedure describes how to disable the 10 Mbps speed on the Ethernet port. You can run the **show** commands as needed and do not have to follow a specific sequence.

Procedure

1. Use the **configure wired *wired-port-number* speed *port-speed* disable** command to disable 10 Mbps speed capability on the wired 0 port.

```
Device# configure wired 0 speed 10 disable
```

2. (Optional) Use the **show running-config** command to verify 10 Mbps Speed Port Status on the wired 0 port.

```
Device# show running-config

feature 10M speed
Interface wired0 10Mbps Configuration:
=====
Status: Disable
```

WPA3-Enterprise and SCEP for WGB

Describes the support for WPA3-Enterprise and SCEP on Workgroup Bridges. This configuration ensures secure authentication and certificate management for wireless client connectivity.

Overview of WPA3-Enterprise and SCEP for WGB

Explains how WPA3-Enterprise and SCEP security configurations enhance Workgroup Bridge (WGB) deployments with robust encryption, automated certificate management, and 6-gigahertz radio compliance.

A WPA3-Enterprise and SCEP security configuration is a wireless security architecture that:

- provides robust encryption and authentication for industrial Workgroup Bridge (WGB),
- enables automated renewal of digital certificates through Simple Certificate Enrollment Protocol (SCEP), reducing manual overhead, and
- ensures compliance with WPA3 requirements for the 6 GHz radio band, including Protected Management Frames (PMF).

This configuration also extends the available enterprise authentication options on WGB. In addition to the certificate-based EAP-TLS path required by the SCEP use case, it supports PEAP and EAP-FAST for deployments using username-based

or password-based enterprise authentication. For all EAP methods, the AAA path validates the WGB authentication request correctly. When using SCEP renewal, the WGB must have SCEP server reachability and maintain the correct system time.

Guidelines and limitations

Outlines security limitations and supported features for this release.

This section describes the security limitations and supported features for this release.

- Only AES-CCMP 128 encryption is supported.
- Ensure your WGB device is configured to operate on the 6 GHz radio.
- Only 802.1x SHA256 with the SHA256 AKM cipher is supported.
- You can use EAP methods such as PEAP, EAP-FAST, and EAP-TLS.
- PMF is mandatory for WPA3 on the 6 GHz radio to maintain compliance and security, and it is not configurable on WGB devices..

Configure WPA3-Enterprise security for your WGB device

Configure WPA3-Enterprise security on your industrial WGB device

Enable industry-standard WPA3-Enterprise security on your Workgroup Bridge (WGB) device.

Use this task to ensure your WGB is secured with WPA3-Enterprise, protecting your wireless connection and meeting modern security requirements.

Before you begin

- Ensure your WGB device is configured to operate on the 6GHz radio.
- Verify your RADIUS server is configured to support the chosen EAP method—PEAP, EAP-FAST, EAP-TLS.
- Ensure your SCEP server is accessible for certificate renewal.

Follow these steps to configure WPA3-Enterprise security:

Procedure

Use the **configure ssid-profile** *ssid-profile-name* **ssid** *ssid-name* **authentication eap profile** *eap-profile-name* **key-management wpa3** command to enable WPA3 key management.

Example

```
Device# configure ssid-profile Corp-WiFi ssid CorpNet authentication eap profile
key-management wpa3
```

Your WGB device is now secured using WPA3-Enterprise, ensuring compliance with modern security standards. To verify the configuration, use the optional verification step.

Configure WPA3-Enterprise on a Workgroup Bridge Using the GUI

Configure WPA3-Enterprise authentication on a workgroup bridge using the GUI.

Set up a secure WPA3-Enterprise wireless connection on a device operating in workgroup bridge mode.

WPA3-Enterprise provides stronger wireless security protocols for network devices operating as workgroup bridges. This task walks you through configuring profiles and associating them for secure communications.

Before you begin

- Ensure you have access to the device's GUI and correct administrative credentials.
- Have the necessary information for credential profiles and EAP profiles.

Follow these steps to configure WPA3-Enterprise on a workgroup bridge

Procedure

1. Navigate to the **Credential Profiles** section and create a new **Credential Profile** for WPA3-Enterprise authentication.
 2. Access the **EAP Profiles** area and create a new **EAP Profile** with the appropriate authentication settings.
 3. Bind the created **Credential Profile** to the **EAP Profile** to enable authentication
 4. Go to the **SSID Profiles** section, create a new **SSID Profile**, and set the Key Management to **WPA3**.
 5. Associate the **SSID Profile** with the radio interface configured in Workgroup Bridge (WGB).
-

The device is configured with WPA3-Enterprise authentication for secure wireless connectivity as a Workgroup Bridge (WGB).

4 Manage the Workgroup Bridges through Web UI

Topics:

- [Workgroup Bridge](#)
- [Access the Cisco Workgroup Bridge Web UI](#)
- [Monitor the client details and configurations](#)
- [Configure and authenticate wireless profiles](#)
- [Configure a static route for NAT wired client access to the WebUI in uWGB mode](#)
- [Configure WGB and uWGB radio modes](#)
- [Set IP address](#)
- [Modify the RSSI threshold](#)
- [Create NAT rules](#)
- [Manage firmware images](#)
- [Import or export a configuration file](#)

Manage the Workgroup Bridges through Web UI

Workgroup Bridge

Learn how the Workgroup Bridge (WGB) access point provides wireless connectivity to wired clients connected to its Ethernet port.

Workgroup Bridge (WGB) is an Access Point (AP) mode that:

- provides wireless connectivity to wired clients that are connected to the Ethernet port of the WGB AP,
- connects a wired network to a wireless segment by learning wired clients' MAC addresses on the Ethernet interface and reporting them to the wireless controller using Internet Access Point Protocol (IAPP) messages through an infrastructure AP, and
- establishes a single wireless connection to the root AP, which in turn, treats the WGB as a wireless client.

For more details on WGB, see the chapter [WGB](#).

Table 13: Feature History Table

Feature	Release Information	Feature Description
Manage the Workgroup Bridges through Web UI	IOS XE 17.18.1	This feature enables you to configure the IW916X WGB through the Web UI.

Cisco Web UI is a browser-based graphical user interface (GUI) that simplifies device setup, monitoring, and troubleshooting, making it particularly helpful for users unfamiliar with the Command-Line Interface (CLI).

Access the Cisco Workgroup Bridge Web UI

Learn how to access the Cisco Workgroup Bridge (WGB) Web UI dashboard by connecting a wired client, verifying connectivity, and logging in with the appropriate credentials.

This procedure describes how to access the Cisco Workgroup Bridge (WGB) Web UI dashboard by connecting a wired client, verifying connectivity, and logging in with the appropriate credentials.

Before you begin

- Ensure your WGB switch has a wired client and is reachable on the 192.168.0.x network.
- Configure the wired client and switch to access the Cisco WGB Web UI at its default IP address (192.168.0.10).
- Perform these steps to access the Cisco WGB Web UI dashboard.

Procedure

1. Access the Cisco WGB Web UI using a browser. Enter the IP address 192.168.0.10. Log in with the default credentials:

- username—Cisco
- password—Cisco

The Cisco WGB Web UI redirects you to its homepage. Ensure that the wired client and the Cisco WGB switch are on the 192.168.0.x network by verifying the client IP address.

2. Ping 192.168.0.10 from the client to verify connectivity.
3. Update the explicit login credentials.

4. Log in using the new credentials to access the Cisco WGB Web UI.

Monitor the client details and configurations


Learn how to monitor client details and configurations using the Cisco WGB Web UI to track live activity, device connectivity, and client-specific information for troubleshooting and network management.

You can track live activity and device connectivity to troubleshoot issues and ensure a seamless network. Monitor client details, such as MAC address, IP address, VLAN information, port, and last heard time (in seconds), to achieve this.

This procedure describes how to monitor client details.

Procedure

1. From Cisco WGB Web UI, choose **Monitor** to view the client details.
2. Choose a number from the **Items per page** drop-down to set how many client entries appear on each page.

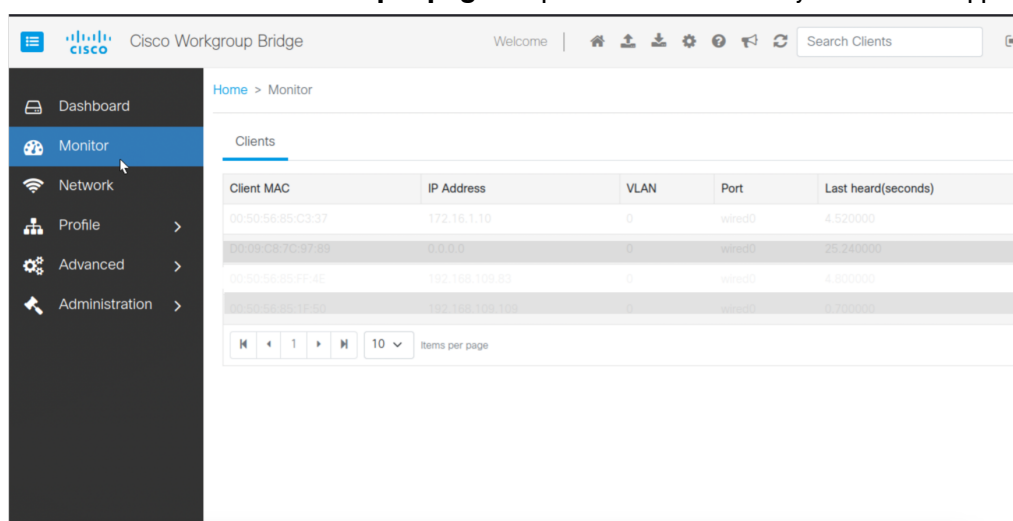

Configure and authenticate wireless profiles

Learn how wireless profiles provide a pre-configured set of network settings to enable secure, consistent, and automated wireless connections, and describes the process for configuring secure wireless access using 802.1X authentication.

A wireless profile is a pre-configured set of network settings that enables devices to connect to a wireless network automatically and securely.

- Allows devices to connect automatically without manual reconfiguration.
- Stores network details such as SSID, security type, encryption method, and passphrase.
- Minimizes credential entry errors and ensures secure, consistent connections.
- Simplifies distribution and management of network settings across multiple devices.
- Enables easy switching between saved networks (for example, home, office, or public Wi-Fi).

Configuring secure wireless access using 802.1X authentication

To configure secure wireless access using 802.1X authentication, complete these tasks:

Create a WLAN

Creates a Wireless Local Area Network (WLAN) to provide wireless connectivity and enable device mobility within a specific area.

This procedure describes how to create a WLAN.

You can create Wireless Local Area Network (WLAN) to provide wireless connectivity within a specific area, enabling devices to connect to the network without physical cables. WLANs enhance mobility by allowing users to move freely within the network's coverage area while maintaining connectivity. They reduce the need for extensive cabling, simplifies setup, and lower costs.

Before you begin

Configure Extensible Authentication Protocol (EAP), if you access multiple SSID.

Procedure

1. Choose **Profile > WLAN** .
2. Click **Create** .
3. Select **Authentication** in **WLAN Profile Configurations** .

The **Authentication** types are:

- **Open** : It provides access to networks without a password.
- **OWE** : Opportunistic Wireless Encryption (OWE) provides automatic encryption for open networks without a password.
- **PSK** : Pre-Shared Key (PSK) secures networks using a shared password for authentication and encryption.
- **SAE** : Simultaneous Authentication of Equals (SAE) secures networks with strong password-based authentication and encryption.
- **EAP** : Extensible Authentication Protocol (EAP) supports various authentication methods.

You can configure EAP in WLAN either in **Default EAP Profile** or **EAP Profile List** . For details on EAP Profile configuration, see [Create EAP profile](#) on page 144 .

To select the **EAP Profile List** , you need to provide t **Username** , **Password** , and **Key Management** information. For more details, see [Map EAP profile to SSID](#) on page 145 .

4. Update the required **Key Management** details based on **Authentication** .

The **Key Management** types are:

- **dot11r** : 802.11r (Fast Transition)
- **dot11w** : 802.11w (Protected Management Frames)
- **WPA2** : secures Wi-Fi with AES encryption.
- **WAP3** : enhances Wi-Fi with stronger encryption and password security.

5. Click **Update & apply to device** .
-

Create 802.1X profile


You can use a 802.1X Profile to define authentication settings for IEEE 802.1X, enabling secure, controlled, and authenticated network access for users and devices.

Perform these steps to create 802.1X profile.

Procedure

1. Choose **Profile > EAP**.
2. Click **Create** in **DOT1x PROFILE** area.
3. Enter **Dot1x Profile Name**, **Username** and **Password**.

4. Click **Update & Apply to Device**.

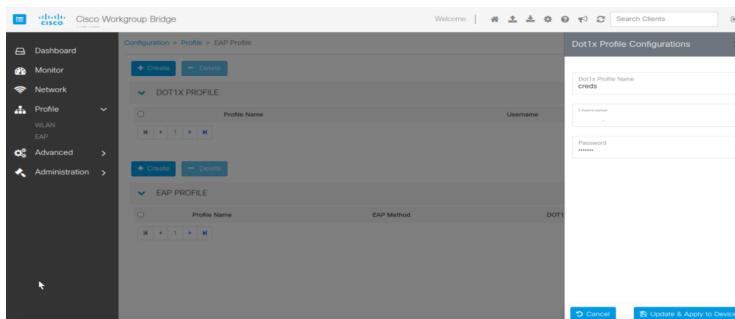

EAP profiles and SSID maps

This is a short description.

You can use EAP profiles to define secure authentication methods (example: Protected Extensible Authentication Protocol (PEAP), Extensible Authentication Protocol - Transport Layer Security (EAP-TLS)) for validating users or devices on a wireless network. Similarly, you can configure SSID maps to associate network names (SSIDs) with specific policies, VLANs, or EAP profiles. Together, they ensure secure access, proper segmentation, and efficient network management.

Create EAP profile

To securely authenticate users and devices in networks, EAP is required as it provides robust access control and data protection. EAP is essential for IIoT ecosystems that require scalable and secure device authentication. It offers flexibility and multiple authentication methods, which are critical for network security and safeguarding sensitive data.


Before you begin

Configure 802.1x profile. For more details see, [Create 802.1X profile](#) on page 144.

Perform these steps to create EAP profile.

Procedure

1. Choose **Profile > EAP**.
2. Click **Create** in **EAP PROFILE** area.
3. Update the **Profile Name**, **EAP Method** and **Dot1x Credential Profile** in **EAP Profile Configurations**.

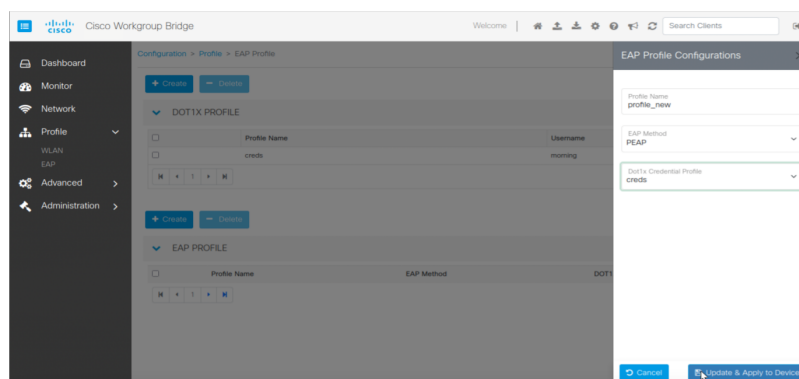

4. Click **Update & Apply to Device**.


Map EAP profile to SSID

Mapping the Extensible Authentication Protocol (EAP) to an Service Set Identifier (SSID) provides secure and authenticated access for devices connecting to the wireless network.

Perform these steps to map EAP profile to SSID.

Procedure

1. Choose **Profile > WLAN**.
2. Click **Create**.
3. Update **Profile Name** and **DTIM Period**.
4. Select **EAP** in **Authentication**.
5. Select the **Profile Name** provided while creating the EAP in **EAP Profile** from the drop-down.
6. Select **Key Management** from the drop-down.

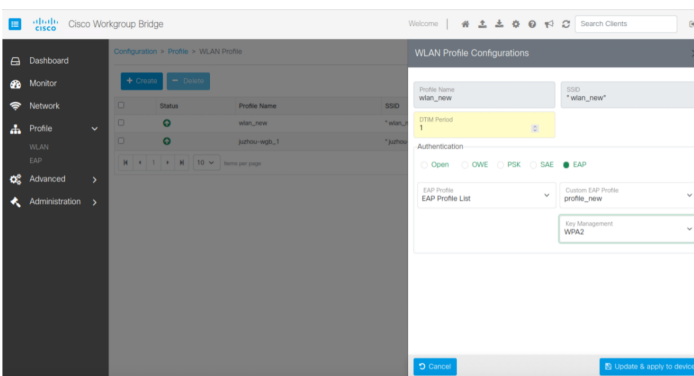

7. Click **Update & apply to device**.

Map the SSID to the uplink radio


Learn how to map a Service Set Identifier (SSID) to an uplink radio to enable proper traffic routing and ensure connectivity to the upstream network.

This procedure describes how to map SSID to uplink radio.

You can map a Service Set Identifier (SSID) to an uplink radio to enable proper traffic routing and ensure connectivity to the upstream network.

Procedure

1. From the **Network** page, choose the desired uplink radio in **Wireless Interface**.
2. Select the WLAN to be mapped from the **WLAN Profile** drop-down.
3. Select **WGB** in **Radio Mode**.
4. Click **Update & apply to device**.

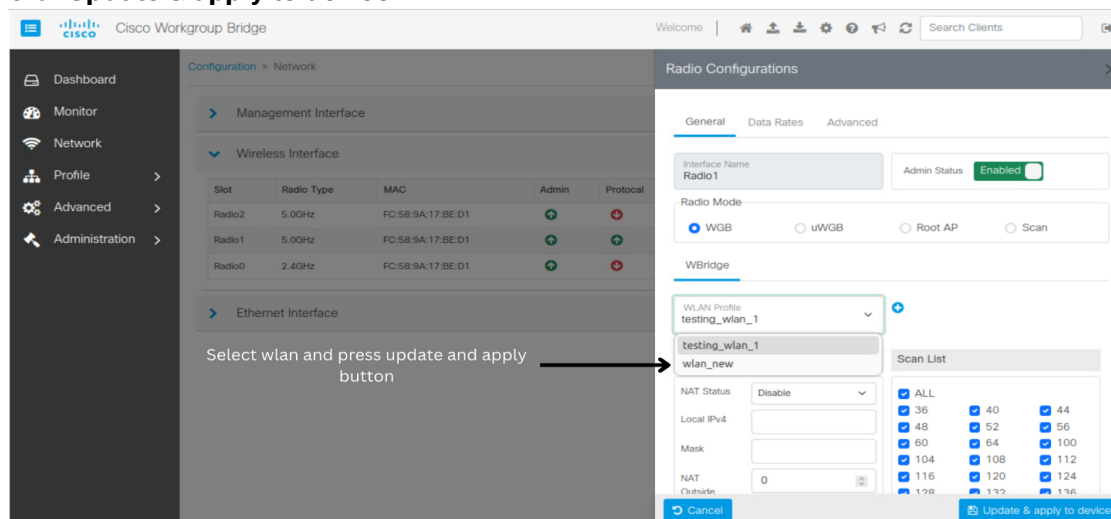

Configure a static route for NAT wired client access to the WebUI in uWGB mode

Learn how to configure a static route for a NAT wired client to access the WebUI in uWGB mode by adding the necessary routes and interface settings on a Linux client.

This procedure describes how to configure a static route for NAT wired client access to the WebUI in uWGB mode.

You can add a route to the NAT wired client to access the WebUI in uWGB mode via private LAN port.

Run these commands on the Linux client.

Procedure

1. `sudo ifconfig ens192 172.16.1.10 netmask 255.255.255.0`
 ens192 –NAT wired client interface.
 172.16.1.10 –IP address of NAT wired client.
2. `sudo ip route add 172.16.1.0/24 dev ens192`
3. `sudo ip route add 192.168.109.0/24 via 172.16.1.11 dev ens192`

The Cisco WGB Web UI for uWGB can be accessed from the NAT wired client.

172.16.1.11 –Configure WGB LAN port in **WLAN > Radio Configuration > uWGB mode > NAT**.

192.168.109.0 –Outside network IP address.

After configuring uWGB mode, access the Cisco WGB Web UI using the IP address 172.16.1.11 from the NAT wired client.

Create a NAT rule to access uWGB mode. For details on NAT rules creation, see [Create NAT rules](#) on page 151 .

Configure WGB and uWGB radio modes

Learn how to configure the radio mode on the Cisco IoT Workgroup Bridge (IW916x) to operate in either WGB or uWGB mode, depending on the network infrastructure and Root Access Point (RAP) type.

The radio mode on the Cisco IoT Workgroup Bridge (IW916x) can be configured to operate in one of two distinct modes: WGB or uWGB. The mode selection depends on the type of Root Access Point (RAP) in the network infrastructure and is designed to ensure compatibility and seamless connectivity.

- WGB mode: Standard Workgroup Bridge operation for connecting non-wireless devices to a wireless network.
- uWGB mode: Universal Workgroup Bridge operation for enhanced compatibility with specific network infrastructures.

Configure the radio in WGB mode

Learn how to configure the radio in Workgroup Bridge (WGB) mode using the Cisco WGB Web UI to optimize network configurations and enable Cisco-specific enhancements.

This procedure describes how to configure WGB mode.

You can optimize network configurations and improve operational efficiency by switching to WGB mode. In this mode, the WGB uses Cisco's proprietary protocol extensions for enhanced performance and features. This mode is ideal for Cisco infrastructure deployments. If the Root Access Point (RAP) is a Cisco Access Point, setting the Radio Mode to WGB enables full use of Cisco-specific enhancements.

Procedure

1. From Cisco WGB Web UI, choose **Network** .
2. Select a desired radio from the list of available **Wireless Interface** .
3. Select **WGB** in **Radio Mode > Radio Configurations** .

The radio modes can be changed to any mode like **WGB** , **uWGB** , **Root AP** or **Scan** mode.

Configure uWGB mode on the radio

Learn how to configure uWGB mode on the radio to enable universal compatibility and seamless integration with non-Cisco Access Points (APs) using the Cisco WGB Web UI.

This procedure describes how to configure the device to operate in uWGB mode for interoperability in mixed-vendor environments and to access or manage the WebUI in uWGB mode.

You can optimize network configurations and enhance operational efficiency by switching to uWGB mode. In this mode, the WGB uses standard protocols to provide universal compatibility. This functionality allows seamless integration with non-Cisco Access Points (APs). This mode ensures interoperability in mixed-vendor environments. Setting the Radio Mode to uWGB provides universal compatibility and reliable connectivity if the Root Access Point (RAP) is a non-Cisco AP.


Once configuration is complete, use the WGB private LAN port address of the NAT wired client to access the WebUI in uWGB mode. For more details about NAT on uWGB, refer to [NAPT on uWGB](#) .

Before you begin

To access or manage the WebUI in uWGB mode, configure the device with Network Address port translation (NAPT).

Procedure

1. From Cisco WGB Web UI, choose **Network**.
2. Select a desired radio from the list of available **Wireless Interface**.
3. Select **uWGB** in **Radio Mode > Radio Configurations**.
The radio modes can be changed to any mode like **WGB**, **uWGB**, **Root AP** or **Scan** mode.
4. Choose **Radio MAC** from drop-down.
Enter client MAC.
5. Choose **NAT Status** from **NAT** drop-down.
6. Enter the IP address of the NAT wired client in the **Local IPv4** field to access the web UI.
7. Click **Update & apply to device**.

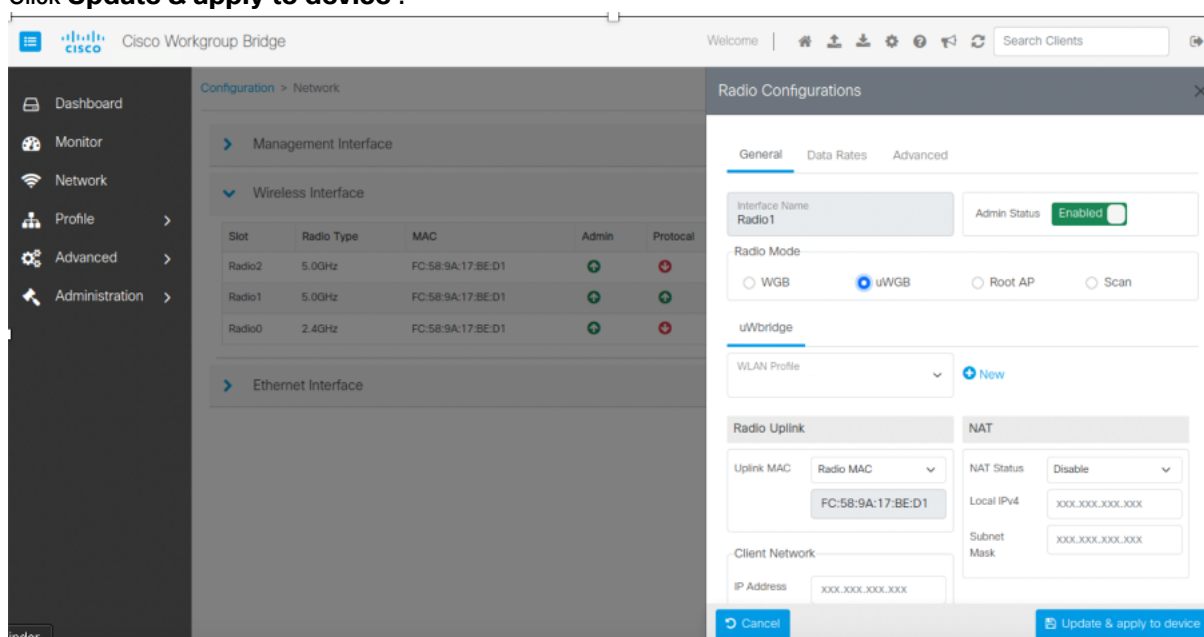

Set IP address

Learn how to configure network settings like switching between Dynamic and Static IP, modifying radio modes (example: WGB, uWGB, Root AP, Scan), enabling NAT, creating NAT rules, and setting local IPv4 addresses to efficiently manage IP configurations and radio modes.

The IP address used for accessing Cisco WGB Web UI can be set as either static or through DHCP to enhance the operational efficiency. With this approach, you can switch from static IP to dynamic IP and dynamic IP to static IP.

Switch from static IP to dynamic IP

Learn how to switch from a static IP address to dynamic IP allocation to enable automatic IP assignment and simplify network management.

This procedure describes how to change a static IP address to a dynamic IP address.

You can switch from a static IP to dynamic IP allocation to enable automatic IP address assignment. This change simplifies network management by removing the need for manual configuration and by reducing the risk of IP conflicts. It also helps conserve IP resources, as addresses are assigned dynamically only when devices are connected.

Procedure

1. Choose **Network > Management Interface** .
 2. Select **auxiliary-client** .
 3. Change **Static** to **DHCP** from **IPv4 Type** drop-down.
 4. Click **Update & apply to device** .
-

Switch from dynamic IP to static IP

Learn how to switch from dynamic IP to static IP allocation to assign a fixed IP address to a device, ensuring consistent network identification and improved reliability.

This procedure describes how to change a dynamic IP address to a static IP address.

You can switch from dynamic IP to static IP allocation to assign a fixed IP address to a device. This ensures consistent network identification, improves reliability for devices like servers or printers, and simplifies tasks such as port forwarding or troubleshooting by keeping the IP address unchanged.

Procedure

1. Choose **Network > Management Interface**.
 2. Select **auxiliary-client** in **Interface** .
 3. Change **DHCP** to **Static** in the **IPv4 Type** drop-down.
 4. Update:
 - **Static IP Address** : specify the manually assigned IP.
 - **Network Mask** : specify the network and host portions of an IP address.
 - **Gateway IP** : specify the IP address of the router that interconnects networks.
 - **DNS1 IP** : specify the IP address of the primary DNS server.
-

Modify the RSSI threshold

Learn how to modify the Received Signal Strength Indicator (RSSI) threshold to optimize wireless network performance and ensure reliable connectivity for devices.

This procedure describes how to modify the RSSI threshold.

The Received Signal Strength Indicator (RSSI) measures the power of a wireless signal and is used to evaluate connection quality and strength in wireless networks.

You can set an RSSI threshold to define the minimum signal strength required for maintaining a reliable and optimal wireless connection.

Procedure

1. Choose **Network** .
2. Choose the desired **Radio Type** in the **Wireless Interface** .
3. Choose **Mobility** and **RSSI** threshold to optimize wireless network performance and ensure seamless connectivity for devices.
4. Select **Advanced** in **Radio Configurations** .
5. Update **RSSI Threshold** from drop-down in the **Mobility**.

The RSSI Threshold values are:

- -30 dBm to -50 dBm: Excellent signal strength (ideal for most applications).
- -50 dBm to -60 dBm: Good signal strength (suitable for reliable connectivity).
- -60 dBm to -70 dBm: Fair signal strength (may experience minor connectivity issues).
- -70 dBm to -80 dBm: Weak signal strength (likely to experience performance issues).
- Less than -80 dBm: Very poor signal strength (connectivity may fail or be highly unreliable).

The default RSSI threshold value is -70 dBm.

6. Modify these parameters in the **Antenna** drop-down to optimize signal strength, quality, coverage, and performance in wireless networks:

- **Antenna Number** : optimizes signal reception and coverage.
- **Antenna Gain** : measured in dBi, indicates an antenna's ability to focus signals, with higher values signifying stronger, more directional transmission.

In **Antenna Gain** field, you can:

- Enter a value
- Use the in-field arrows to select a value.


Values range from 2 dBi to 12 dBi.

- **Tx Power** : maintains signal quality without interference.

Values range from 1 dBm to 30 dBm.

- **Spatial Stream** : Improves throughput and performance.

Values range from 1 to 8.

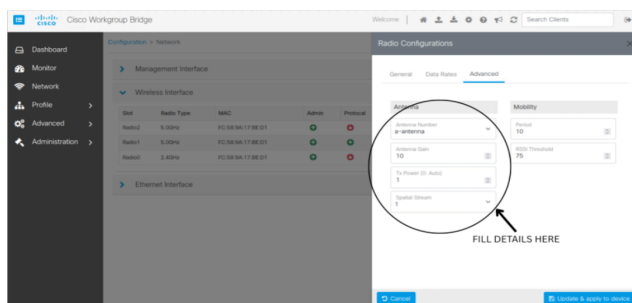

Create NAT rules

Learn how to create Network Address Translation (NAT) rules to enable multiple devices to share a public IP address and manage network traffic securely.


This procedure describes how to create NAT rules.

You can use Network Address Translation (NAT) rules to convert private IP addresses into a single public IP address, allowing multiple devices on your network to share one public IP for internet access. This helps conserve public IP addresses and improves security by hiding internal IPs from external networks.

NAT also lets you set rules to control and manage traffic, guaranteeing only authorized data flows between your private and public networks, making it an essential tool for efficient and secure network management.

Procedure

1. From **Network** page, choose the desired uplink radio in **Wireless Interface**.
2. Set the **NAT Outside Port Min** and **NAT Outside Port Max** values in **Radio Configurations > NAT**.
Both **NAT Outside Port Min** and **NAT Outside Port Max** values for NAT port ranges must fall within the range of 1 to 65535.
3. From Cisco WGB Web UI, choose **Advance > NAT**.
4. Click **Create** and update these values:
 - **Global port:** Specify 443 as the external (public-facing) port for communication.
 - **Local IP:** Specify the internal (private) IP address of the device being mapped.
 - **Local Port:** Specify the type of traffic, such as TCP or UDP, to be translated.
 - **Traffic Type:** Specify the type of traffic, such as TCP or UDP, to be translated.
5. Click **Update & Apply to Device**.

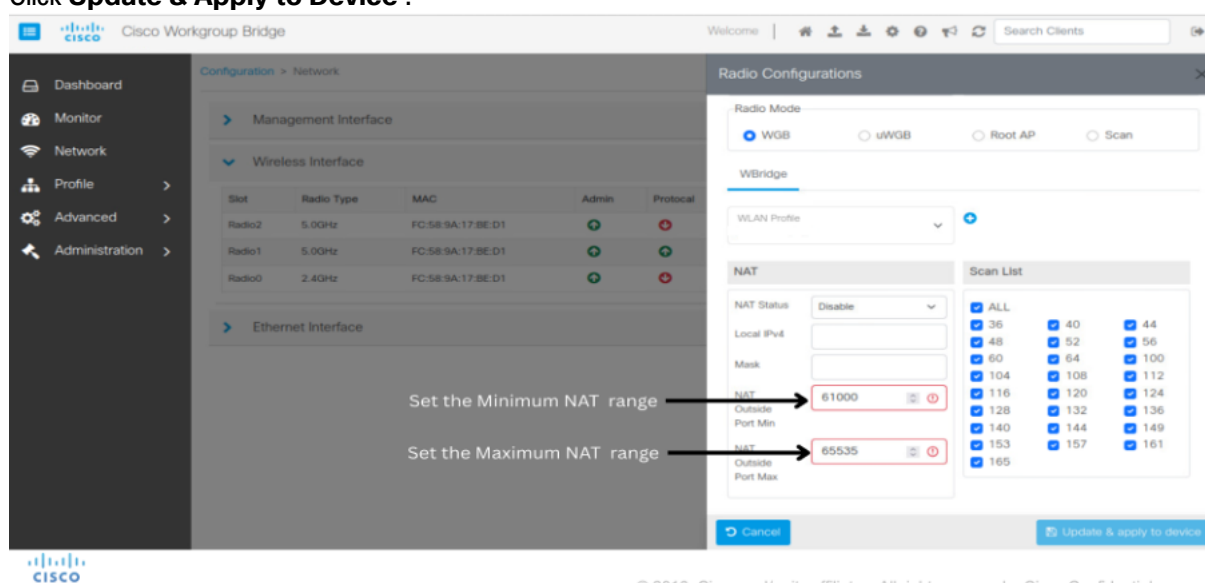

Manage firmware images

Learn how to manage administrative tasks such as reloading images, activating backups, performing factory resets, upgrading firmware, and importing or exporting configurations to maintain and update device operations efficiently.

You can efficiently maintain and update device operations by reloading images, activating backups, performing factory resets, upgrading firmware, or importing and exporting configurations.

Reload the firmware image

Learn how to reload the currently running firmware image to apply changes or address potential software issues.

This procedure describes how to reload the currently running firmware image.

You can reload the currently running firmware image to apply changes or address potential software issues.

Procedure

1. Choose **Administration > Firmware** .
 2. Click **Reboot** in **Running Software** .
-

Load a backup image

Learn how to load a backup firmware image to restore your device to a previous stable state or recover from firmware-related issues.

This procedure describes how to load the back up firmware image.

You can load a backup image to restore the device to a previous stable state or recover from firmware-related issues.

Procedure

1. Choose **Administration > Firmware** .
 2. Click **Activate** in **Backup Software** .
-

Perform a factory reset

Learn how to perform a factory reset to restore the device to its default settings, clearing all configurations and customizations.

This procedure describes how to factory reset the device.

You can perform a factory reset to restore the device to its default settings, clearing all configurations and customizations.

Procedure

1. Choose **Administration > Firmware** .
2. Click **Clear Configuration** .

Note

After selecting **Clear Configuration**, the WGB goes to Day 0 scenario.

Upgrade the firmware image


Learn how to upgrade the firmware image to access new features, enhancements, or bug fixes for improved device performance.

This procedure describes how to upgrade the currently running firmware image.

You can upgrade the firmware image to access new features, enhancements, or bug fixes for improved device performance.

Procedure

1. Choose **Administration > Firmware > Browse**.
2. Select the required image.
3. Click **Upgrade** and wait for 180 seconds for the image to reboot and open the Web UI.

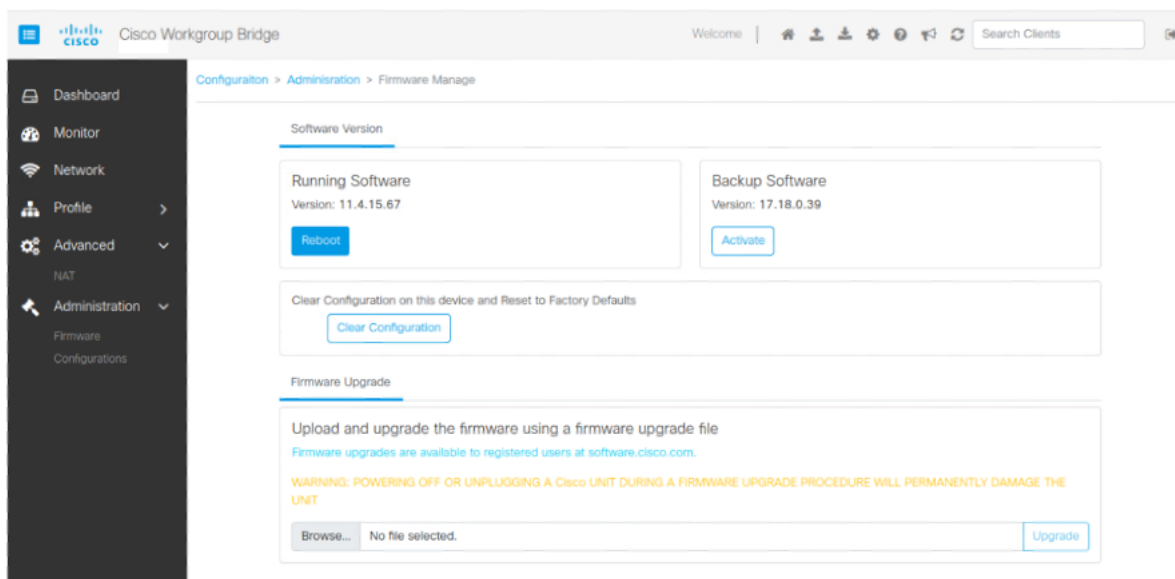

Import or export a configuration file

Learn how to import or export a configuration file to back up current settings or restore them when needed.

This procedure describes how to import or export a configuration file.

You can import or export a configuration file to back up current settings or to restore settings when needed.


Procedure

1. Choose **Administration > Configurations**.
2. Click **View detail** to check the current configurations in Cisco WGB.
3. Click **Download** to download the configuration.
4. Upload the desired configuration to import it later when needed.
5. Click **Upload & Apply**.

Note

The desired configuration file must be of .txt format only.

When you download the configuration, the file is saved to your browser.

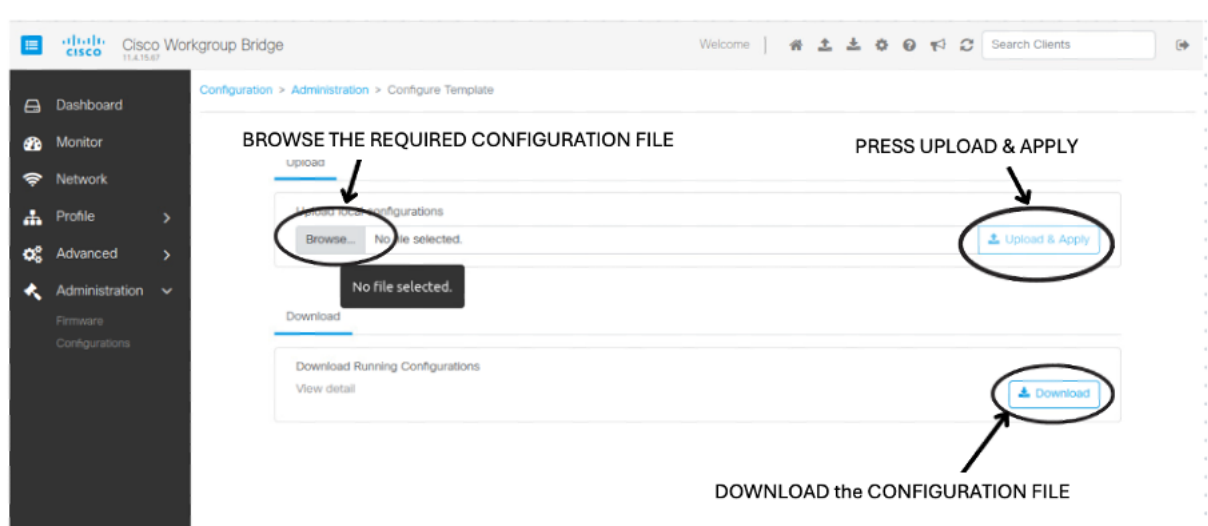

5 Automated Frequency Coordination

Topics:

- [AFC support for 6 GHz standard power mode](#)
- [Verify AFC status on an AP](#)

AFC support for 6 GHz standard power mode

This topic explains the Automated Frequency Coordination (AFC) support for 6 GHz standard power mode in Cisco Catalyst IW9167EH access points, including antenna compatibility, regulatory requirements, and supported power and frequency bands.

This topic explains the Automated Frequency Coordination (AFC) support for 6 GHz standard power mode in Cisco Catalyst IW9167EH access points, including antenna compatibility, regulatory requirements, and supported power and frequency bands.

- The Cisco Catalyst IW9167EH access point supports multiple antenna options, including Self-Identifying Antennas (SIA), dual-band, and single-band antennas for the 6 GHz band.
- The IW9167EH supports AFC for 6 GHz Standard Power mode, requiring the AP to obtain available frequencies and power levels from the AFC system before enabling standard power.
- The AFC system determines available frequencies and maximum allowable power based on regulatory information (FCC for the United States and ISED for Canada). It also coordinates AP operation to avoid interference.

Reference information for AFC 6 GHz standard power mode

The AFC system response is sent to the controller, which assigns a standard power channel to the AP based on the allowed channel list. Standard Power APs coordinate through an AFC service, which uses AP location and antenna characteristics to create a propagation map and assign maximum transmission power.

- A power cycle is mandatory after the first installation of the SIA antenna.

Table 14: Radio 6 GHz power mode support

Deployment Mode	Low Power Indoor Support	Standard Power Support
Outdoor	No	Yes

The transmission power is limited to a maximum of 36 dBm Effective Isotropic Radiated Power (EIRP), and APs must be coordinated through an AFC service. In the U.S., APs are allowed to operate in the UNII-5 frequency band (5.925 GHz to 6.425 GHz) and the UNII-7 frequency band (6.525 GHz to 6.875 GHz).

From Release 17.18.1, the -A (Canada) domain supports standard power using AFC and operates in the UNII-5, UNII-6, and UNII-7 frequency bands, which range from 5.925 GHz to 6.875 GHz.

Table 15: 6 GHz target power

Antenna Gain	Max Conducted per Path Power (SP/AFC)		Tx x Rx Chains	Max EIRP (SP/AFC)
	20-80 MHz	160 MHz		
7 dBi	17 dBm	17 dBm	4x4	30 dBm
10 dBi	10 dBm	17 dBm	4x4	33 dBm
13 dBi	13 dBm	14 dBm	4x4	36 dBm
15 dBi	15 dBm	12 dBm	4x4	36 dBm

Verify AFC status on an AP

Learn how to verify the AFC request and response data, as well as the current operating power mode, on an AP using commands.

This procedure describes how to verify the AFC request and response data, as well as the current operating power mode, on an AP using commands.

Procedure

1. Use the **show rrm afc** command to verify the AFC request and response data on the AP.

Example

```
Device# show rrm afc

Location Type: 1
Deployment Type: 2
Height: 129
Uncertainty: 5
Height Type: 0
Request Status: 5
Request Status Timestamp: 2023-08-31T06:20:17Z
Request Id Sent: 5546388983266789933
Ellipse 1: longitude: -121.935066 latitude: 37.512830 major axis: 43 minor
axis:
9 orientation: 36.818100
AFC Response Request ID: 5546388983266789933
AFC Response Ruleset ID: US_47_CFR_PART_15_SUBPART_E
```

2. Use the **show controllers dot11Radio 2 | i Radio** command to verify the current operating power mode.

Example

```
Device# show controllers dot11Radio 2 | i Radio
Dot11Radio2      Link encap:Ethernet  HWaddr 24:16:1B:F8:06:C0
Radio Info Summary:
Radio: 6.0GHz (SP)
```
