



# Lossless Compression R1 ATM Cell Switching and External BITS Clocking Source

**Last Updated: December 13, 2011**

The Lossless Compression R1, ATM Cell Switching, and External BITS Clocking Source features introduce a new compression technique in DSP firmware and add enhancements to Cisco IOS that include cell switching on ATM segmentation and reassembly (SAR), and the use of an external BITS clocking source. These features enable Cisco multiservice routers to be used to transparently groom and compress traffic in a wireless service provider network and enable a service provider to optimize the bandwidth used to backhaul the traffic from a cell site to the mobile central office for more efficient use of existing T1 and E1 lines.

## Feature Specifications for Cisco Lossless Compression R1, ATM Cell Switching, and External BITS Clocking Source

### Feature History

Release	Modification
12.3(4)XD	These features were introduced.
12.3(7)T	These features were integrated into Cisco IOS Release 12.3(7)T.

### Supported Platforms

Cisco 3660, Cisco 3745

- [Finding Feature Information, page 2](#)
- [Prerequisites for Cisco Lossless Compression R1 ATM Cell Switching and External BITS Clocking Source, page 2](#)
- [Restrictions for Cisco Lossless Compression R1 ATM Cell Switching and External BITS Clocking Source, page 3](#)
- [Information About Lossless Compression R1 ATM Cell Switching and External BITS Clocking Source, page 3](#)
- [How to Configure Lossless Compression R1 ATM Cell Switching and External BITS Clocking Source, page 4](#)



**Americas Headquarters:**  
Cisco Systems, Inc., 170 West Tasman Drive, San Jose, CA 95134-1706 USA

- [Verifying Lossless Compression R1 ATM Cell Switching and External BITS Clocking Source Configuration](#), page 17
- [Additional References](#), page 18
- [Feature Information for Lossless Compression R1 ATM Cell Switching and External BITS Clocking Source](#), page 19

## Finding Feature Information

Your software release may not support all the features documented in this module. For the latest feature information and caveats, see the release notes for your platform and software release. To find information about the features documented in this module, and to see a list of the releases in which each feature is supported, see the Feature Information Table at the end of this document.

Use Cisco Feature Navigator to find information about platform support and Cisco software image support. To access Cisco Feature Navigator, go to [www.cisco.com/go/cfn](http://www.cisco.com/go/cfn). An account on Cisco.com is not required.

## Prerequisites for Cisco Lossless Compression R1 ATM Cell Switching and External BITS Clocking Source

The Lossless Compression R1, ATM Cell Switching, and External BITS Clocking Source features require a Cisco 3660 or Cisco 3745 with the following components installed:

**Table 1** Supported Network Modules

Feature	Cisco 3660	Cisco 3745
Lossless compression R1	NM-HDV	NM-HDV
ATM cell switching	AIM-ATM or AIM-ATM-VOICE-30 NM- <i>x</i> FE2W with VWIC- <i>x</i> MFT-T1/E1	AIM-ATM or AIM-ATM-VOICE-30 NM- <i>x</i> FE2W with VWIC- <i>x</i> MFT-T1/E1 VWIC- <i>x</i> MFT-T1/E1 (on-board WIC slot)
BITS clocking	NM-HDV NM- <i>x</i> FE2W with VWIC- <i>x</i> MFT-T1/E1	NM-HDV NM- <i>x</i> FE2W with VWIC- <i>x</i> MFT-T1/E1 VWIC- <i>x</i> MFT-T1/E1 (on-board WIC slot)

## Restrictions for Cisco Lossless Compression R1 ATM Cell Switching and External BITS Clocking Source

- Operations, administration, and maintenance (OAM) cell insertion is not supported on cell-switched PVCs.
- AIM-ATM and AIM-ATM-VOICE-30 modules support a maximum of four T1/E1s. This can consist of two incoming and two outgoing, or three incoming and one outgoing T1/E1s. An IMA group cannot be split between multiple AIMS.
- Certain combinations of AIM modules can become inoperable when installed in a Cisco 3745. This problem only affects Cisco 3745 routers manufactured before June 11, 2003. See the following field notice for detailed information about this problem:

[http://www-tac.cisco.com/Support\\_Library/field\\_alerts/fn25194.html](http://www-tac.cisco.com/Support_Library/field_alerts/fn25194.html)


- Voice activity detection (VAD) and echo cancellation are disabled when lossless compression is enabled.
- Lossless compression R1 is supported for VoATM calls with AAL2 and subcell multiplexing. VoIP calls are not supported at this time.
- ATM cell switching is limited to a maximum of 25 connections per AIM-ATM.
- Do not configure more than 29 LLCC channels per NM-HDV module. Configuring more than 29 LLCC channels can cause unreliable operation.
- J1 controller is not supported.
- Traffic policing is not supported.
- For Cisco 3660 routers with two NM-HDV modules installed, do not install the modules in the following slot combinations:
  - Slot 1 and Slot 3
  - Slot 2 and Slot 4
  - Slot 5 and Slot 6

Using these slot combinations can result in packet loss.

## Information About Lossless Compression R1 ATM Cell Switching and External BITS Clocking Source

The Lossless Compression R1, ATM Cell Switching, and External BITS Clocking Source features work together to groom and compress T1 and E1 traffic between cell sites and a mobile central office. These features require a Cisco 3660 or Cisco 3745 router to be installed at the base transceiver station (BTS). This cell site router performs ATM switching and compression of cell site traffic for transport to the base station controller (BSC). A Cisco MGX 8850 with AUSM and VISM-PR terminates the T1/E1 lines that carry lossless compression codec (LLCC) traffic, converting the traffic back to PCM before passing it to the BSC. The figure below shows a sample topology that makes use of the Lossless Compression R1, ATM Cell Switching, and External BITS Clocking Source features.

**Figure 1** Lossless Compression R1, ATM Cell Switching, and External BITS Clocking Source Features

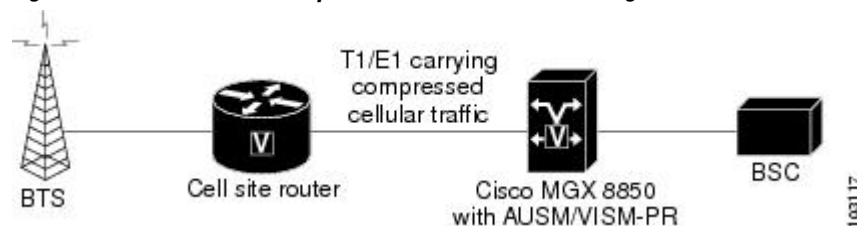

- [Lossless Compression Codec on NM-HDV, page 4](#)
- [ATM Cell Switching on AIM-ATM and AIM-ATM-VOICE-30, page 4](#)
- [BITS Cloning on the Cisco 3660 and Cisco 3745, page 4](#)

## Lossless Compression Codec on NM-HDV

The Lossless Compression R1 feature introduces a new compression technique in DSP firmware and the VISM card-- the lossless compression codec (LLCC). LLCC operates in a similar fashion to the existing clear channel codec: the decoded 64kbps PCM stream is a bit-exact replica of the PCM stream provided on the TDM side of the encoding DSP. However, rather than simply packetizing the PCM stream, the LLCC encoder applies a lossless data compression scheme. This results in a net reduction in the data transmission rate, yielding a reduction in the packet transmission rate.

## ATM Cell Switching on AIM-ATM and AIM-ATM-VOICE-30

The Cisco ATM Cell Switching feature enables the router to perform cell switching between two ATM connections on AIM-ATM and AIM-ATM-VOICE-30 cards, giving the router the ability to receive ATM traffic from the BTS and backhaul it to the mobile central office.

## BITS Cloning on the Cisco 3660 and Cisco 3745


BITS (Building Integrated Timing Supply) network cloning enables a Cisco 3660 or Cisco 3745 router to derive network timing from the central office. BITS must be configured on the cell site router to support this feature.

# How to Configure Lossless Compression R1 ATM Cell Switching and External BITS Cloning Source

The procedures for configuring the Lossless Compression R1, ATM Cell Switching, and External BITS Cloning Source features require the following tasks:

The instructions that follow refer to the sample configuration shown in the figure below. With this configuration, the cell site router supports three E1 connections to the BTS. Compressed cellular traffic is transported to the BSC (by way of the Cisco MGX 8850) over the E1 1/0 and E1 1/1 interfaces. Additionally, BITS cloning is derived from E1 1/1.

**Figure 2**      **Sample Configuration**

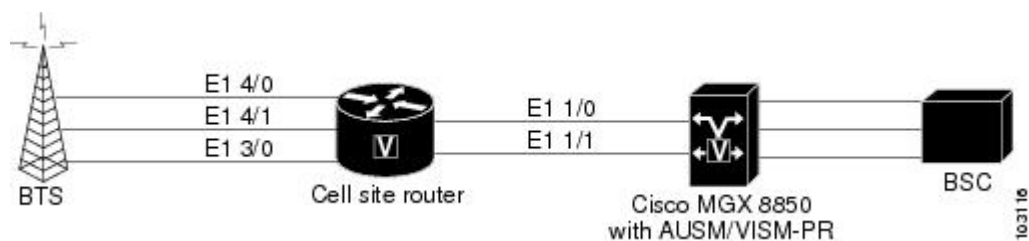

- [Configuring the Cell Site Router for BITS Cloning, page 5](#)
- [Configuring ATM Cell Switching, page 6](#)

- [Configuring the Lossless Compression Codec, page 9](#)
- [Disabling Connection Admission Control, page 15](#)

## Configuring the Cell Site Router for BITS Clocking

BITS clocking enables the router at a cell site to derive timing from the mobile central office. BITS clocking ensures that data flows to a single network clock source, preventing mismatches and data slips in traffic between the BTS and the BSC. The procedure that follows configures the AIM to receive BITS clocking from E1 1/1 controller.

### Summary Steps

- 1 **enable**
- 2 **configure terminal**
- 3 **network-clock-participate** *slot number*
- 4 **network-clock-select** **priority** *slot number*
- 5 **controller e1** *slot/port*
- 6 **clock source** {**line** [**primary** | **bits**] | **internal**}

### Detailed Steps

#### SUMMARY STEPS

1. **enable**
2. **configure terminal**
3. **network-clock-participate** **slot** *number*
4. **network-clock-select** **priority** *slot number*
5. **controller t1** | **e1** *slot/port*
6. **clock source** { **line** [**primary** | **bits**] | **internal** }

#### DETAILED STEPS

Command or Action	Purpose
<b>Step 1</b> <b>enable</b>  <b>Example:</b> Router> enable	Enables privileged EXEC mode. Enter your password when prompted.
<b>Step 2</b> <b>configure terminal</b>  <b>Example:</b> Router# configure terminal	Enters global configuration mode.

Command or Action	Purpose
<b>Step 3</b> <code>network-clock-participate slot <i>number</i></code>  <b>Example:</b>  <pre>Router(config)# network-clock-participate slot 1</pre>	Allows the network module in the specified slot to use the network clock for its timing.
<b>Step 4</b> <code>network-clock-select priority <i>slot number</i></code>  <b>Example:</b>  <pre>Router(config)# network-clock-select 1 E1 1/1</pre>	Specifies a port to be used as a timing source for the network clock, and the priority level for the use of that port. The source that is given the highest priority is used first; if it becomes unavailable, the source with the second-highest priority is used, and so forth.
<b>Step 5</b> <code>controller t1   e1 slot/port</code>  <b>Example:</b>  <pre>Router(config)# controller e1 1/1</pre>	Enters controller configuration mode for the selected T1 or E1.
<b>Step 6</b> <code>clock source { line [primary   bits]   internal }</code>  <b>Example:</b>  <pre>Router(config-controller)# clock source line bits</pre>	Specifies that the clock is generated from the T1 or E1 BITS source.

## Configuring ATM Cell Switching

The procedure that follows configures the cell site router to switch ATM traffic with the Cisco MGX 8850 at the BSC. This procedure configures ATM switching between E1 3/0 and E1 1/0, using the AIM installed in Slot 1.

### Summary Steps

- 1 `enable`
- 2 `configure terminal`
- 3 `network-clock-participate slot number`
- 4 `network-clock-participate slot number`
- 5 `network-clock-participate aim number`
- 6 `controller t1 | e1 slot /port`
- 7 `mode atm aim aim-slot`
- 8 `controller t1 | e1 slot/port`
- 9 `mode atm aim aim-slot`
- 10 `interface atm interface-number /subinterface-number`
- 11 `pvc vpi /vci l2transport`
- 12 `interface atm interface-number /subinterface-number`
- 13 `pvc vpi /vci l2transport`

14. `connect id atm slot /port-1 atm slot/port-2`

Detailed Steps

**SUMMARY STEPS**

1. `enable`
2. `configure terminal`
3. `network-clock-participate slot number`
4. `network-clock-participate slot number`
5. `network-clock-participate aim number`
6. `controller t1 | e1 slot/port`
7. `mode atm aim aim-slot:`
8. `controller t1 | e1 slot/port`
9. `mode atm aim aim-slot`
10. `interface atm interface-number /subinterface-number`
11. `pvc vpi /vci l2transport`
12. `interface atm interface-number /subinterface-number`
13. `pvc vpi /vci l2transport`
14. `connect id atm slot /port-1 atm slot/port-2`

**DETAILED STEPS**

	Command or Action	Purpose
Step 1	<p><code>enable</code></p> <p><b>Example:</b></p> <pre>Router&gt; enable</pre>	Enables privileged EXEC mode. Enter your password when prompted.
Step 2	<p><code>configure terminal</code></p> <p><b>Example:</b></p> <pre>Router# configure terminal</pre>	Enters global configuration mode.
Step 3	<p><code>network-clock-participate slot number</code></p> <p><b>Example:</b></p> <pre>Router(config)# network-clock-participate slot 1</pre>	Enables the network module in the specified slot to use the network clock for its timing.

	Command or Action	Purpose
<b>Step 4</b>	<b>network-clock-participate slot <i>number</i></b>  <b>Example:</b> Router(config)# network-clock-participate slot 3	Enables the network module in the specified slot to use the network clock for its timing.
<b>Step 5</b>	<b>network-clock-participate aim <i>number</i></b>  <b>Example:</b> Router(config)# network-clock-participate aim 0	Specifies that the AIM in Slot 0 will derive clocking from the network source.
<b>Step 6</b>	<b>controller t1   e1 slot/port</b>  <b>Example:</b> Router(config)# controller e1 1/0	Enters controller configuration mode for the selected T1 or E1.
<b>Step 7</b>	<b>mode atm aim <i>aim-slot</i>:</b>  <b>Example:</b> Router(config-controller)# mode atm aim 0	Sets the mode of the T1 or E1 controller in AIM Slot 0.
<b>Step 8</b>	<b>controller t1   e1 slot/port</b>  <b>Example:</b> Router(config)# controller e1 3/0	Enters controller configuration mode for the selected T1 or E1.
<b>Step 9</b>	<b>mode atm aim <i>aim-slot</i></b>  <b>Example:</b> Router(config-controller)# mode atm aim 0	Sets the mode of the T1 or E1 controller in AIM Slot 0.
<b>Step 10</b>	<b>interface atm <i>interface-number</i> /<i>subinterface-number</i></b>  <b>Example:</b> Router(config) # interface atm 1/0	Enters configuration mode for the selected ATM interface.



Command or Action	Purpose
<p><b>Step 11</b> <code>pvc vpi /vci l2transport</code></p> <p><b>Example:</b></p> <pre>Router(config-if)# pvc 10/110 l2transport</pre>	Creates a PVC for the virtual path identifier (VPI) and virtual channel identifier (VCI) and specifies that the PVC is switched, not terminated.
<p><b>Step 12</b> <code>interface atm interface-number /subinterface-number</code></p> <p><b>Example:</b></p> <pre>Router (config) # interface atm 3/0</pre>	Enters configuration mode for the selected ATM interface.
<p><b>Step 13</b> <code>pvc vpi /vci l2transport</code></p> <p><b>Example:</b></p> <pre>Router(config-if)# pvc 30/130 l2transport</pre>	Creates a PVC for the VPI and VCI and specifies that the PVC is switched.
<p><b>Step 14</b> <code>connect id atm slot /port-1 atm slot/port-2</code></p> <p><b>Example:</b></p> <p><b>Example:</b></p> <pre>Router(config)# connect Switched-Conn atm 1/0 10/110 atm 3/0 30/130</pre>	Defines connections between T1 or E1 controller ports and the ATM interface.

## Configuring the Lossless Compression Codec

The procedure that follows configures an LLCC voice channel on E1 4/0 and sends it over the ATM network using E1 1/0 and the AIM installed in Slot 1.

### Summary Steps

- 1 **enable**
- 2 **configure terminal**
- 3 **network-clock-participate slot *number***
- 4 **network-clock-participate slot *number***
- 5 **network-clock-participate aim *number***
- 6 **voice service {pots | voatm | vofr | voip}**
- 7 **session protocol aal2**
- 8 **subcell-mux**
- 9 **codec aal2-profile custom *profile-number* codec**
- 10 **controller t1 | e1 *slot/port***
- 11 **mode atm aim *aim-slot***

- 12 controller t1 | e1 slot/port**
- 13 ds0-group ds0-group-number timeslots timeslot-list type signaling method**
- 14 interface atm interface-number /subinterface-number**
- 15 pvc vpi /vci**
- 16 vbr-rt peak-rate average-rate burst**
- 17 encapsulation aal2**
- 18 dial-peer voice tag voatm**
- 19 destination-pattern string**
- 20 session protocol aal2-trunk**
- 21 session target interface pvc vpi/vci**
- 22 signal-type cas | cept | ext-signal | transparent**
- 23 codec aal2-profile custom profile-number codec**
- 24 voice-port {slot-number/subunit-number/port | slot/port:ds0-group-no}**
- 25 playout-delay {fax | maximum | nominal} milliseconds**
- 26 connection {plar | tie-line | plar-opx} digits [{trunk digits [answer-mode]}**

#### Detailed Steps

**SUMMARY STEPS**

1. enable
2. configure terminal
3. network-clock-participate slot *number*
4. network-clock-participate slot *number*
5. network-clock-participate aim *number*
6. voice service {pots | voatm | vofr | voip}
7. session protocol aal2
8. subcell-mux
9. codec aal2-profile custom *profile-number* codec
10. controller t1 | e1 slot/port
11. mode atm aim *aim-slot*
12. controller t1 | e1 slot/port
13. ds0-group *ds0-group-number* timeslots *timeslot-list* type *signaling method*
14. interface atm *interface-number* /*subinterface-number*
15. pvc *vpi* /*vci*
16. vbr-rt *peak-rate average-rate burst*
17. encapsulation aal2
18. dial-peer voice *tag* voatm
19. destination-pattern *string*
20. session protocol aal2-trunk
21. session target *interface* pvc *vpi/vci*
22. signal-type cas | cept | ext-signal | transparent
23. codec aal2-profile custom *profile-number* codec
24. voice-port {*slot-number/subunit-number/port* | *slot/port:ds0-group-no*}
25. playout-delay {fax | maximum | nominal} *milliseconds*
26. connection {plar | tie-line | plar-opx} *digits* | {trunk *digits* [*answer-mode*]}

**DETAILED STEPS**

	Command or Action	Purpose
Step 1	enable	Enables privileged EXEC mode. Enter your password when prompted.
	Example:	
	Router> enable	

	Command or Action	Purpose
<b>Step 2</b>	<b>configure terminal</b>  <b>Example:</b> Router# <b>configure terminal</b>	Enters global configuration mode.
<b>Step 3</b>	<b>network-clock-participate slot <i>number</i></b>  <b>Example:</b> Router(config)# <b>network-clock-participate slot 1</b>	Enables the network module in the specified slot to use the network clock for its timing.
<b>Step 4</b>	<b>network-clock-participate slot <i>number</i></b>  <b>Example:</b> Router(config)# <b>network-clock-participate slot 4</b>	Enables the network module in the specified slot to use the network clock for its timing.
<b>Step 5</b>	<b>network-clock-participate aim <i>number</i></b>  <b>Example:</b> Router(config)# <b>network-clock-participate aim 0</b>	Specifies that the AIM in Slot 0 will derive clocking from the network source.
<b>Step 6</b>	<b>voice service {pots   voatm   vofr   voip}</b>  <b>Example:</b> Router(config)# <b>voice service voatm</b>	Enters voice service configuration mode and specifies VoATM as the encapsulation type.
<b>Step 7</b>	<b>session protocol aal2</b>  <b>Example:</b> Router(config-voi-serv)# <b>session protocol aal2</b>	Enters voice-service-session configuration mode and specifies ATM adaptation layer 2 (AAL2) trunking.
<b>Step 8</b>	<b>subcell-mux</b>  <b>Example:</b> Router(conf-voi-serv-sess)# <b>subcell-mux</b>	Enables AAL2 common part sublayer (CPS) subcell multiplexing.

	Command or Action	Purpose
<b>Step 9</b>	<p><b>codec aal2-profile custom</b> <i>profile-number</i> <b>codec</b></p> <p><b>Example:</b></p> <pre>Router# codec aal2-profile custom 51 0 0 llcc 40 0 15</pre>	Sets the codec profile for the DSP on a per-call basis and specifies the lossless compression codec.
<b>Step 10</b>	<p><b>controller t1   e1 slot/port</b></p> <p><b>Example:</b></p> <pre>Router(config)# controller e1 1/0</pre>	Enters controller configuration mode for the selected T1 or E1.
<b>Step 11</b>	<p><b>mode atm aim</b> <i>aim-slot</i></p> <p><b>Example:</b></p> <pre>Router(config-controller)# mode atm aim 0</pre>	Sets the mode of the T1 or E1 controller in AIM Slot 0.
<b>Step 12</b>	<p><b>controller t1   e1 slot/port</b></p> <p><b>Example:</b></p> <pre>Router(config)# controller e1 4/0</pre>	Enters controller configuration mode for the selected T1 or E1.
<b>Step 13</b>	<p><b>ds0-group</b> <i>ds0-group-number</i> <b>timeslots</b> <i>timeslot-list</i> <b>type</b> <i>signaling method</i></p> <p><b>Example:</b></p> <pre>Router(config-controller)# ds0-group 0 timeslots 1 type ext-sig</pre>	Specifies the DS0 time slots that make up a logical voice port on a T1 or E1 controller and specifies the signaling type used by the router.
<b>Step 14</b>	<p><b>interface atm</b> <i>interface-number /subinterface-number</i></p> <p><b>Example:</b></p> <pre>Router(config) # interface atm 1/0</pre>	Enters configuration mode for the selected ATM interface.
<b>Step 15</b>	<p><b>pvc</b> <i>vpi /vci</i></p> <p><b>Example:</b></p> <pre>Router(config-if-atm)# pvc 10/110</pre>	Enters configuration mode for the selected PVC.

Command or Action	Purpose
<p><b>Step 16</b> <code>vbr-rt</code> <i>peak-rate average-rate burst</i></p> <p><b>Example:</b></p> <pre>Router(config-if-atm-pvc)# vbr-rt 1920 1920 255</pre>	<p>Configures real-time variable bit rate (VBR) for VoATM voice connections.</p>
<p><b>Step 17</b> <code>encapsulation</code> <i>aal2</i></p> <p><b>Example:</b></p> <pre>Router(config-if-atm-pvc)# encapsulation aal2</pre>	<p>Configures the encapsulation type for the ATM virtual circuit.</p>
<p><b>Step 18</b> <code>dial-peer</code> <i>voice tag voatm</i></p> <p><b>Example:</b></p> <pre>Router(config)# dial-peer voice 1001 voatm</pre>	<p>Defines a dial-peer and specifies the method of voice encapsulation as VoATM.</p>
<p><b>Step 19</b> <code>destination-pattern</code> <i>string</i></p> <p><b>Example:</b></p> <pre>Router(config-dial-peer)# destination-pattern 1001</pre>	<p>Specifies the prefix to be used by the dial peer.</p>
<p><b>Step 20</b> <code>session protocol</code> <i>aal2-trunk</i></p> <p><b>Example:</b></p> <pre>Router(config-dial-peer)# session protocol aal2-trunk</pre>	<p>Specifies the dial peer uses AAL2 nonswitched trunk session protocol.</p>
<p><b>Step 21</b> <code>session target</code> <i>interface pvc vpi/vci</i></p> <p><b>Example:</b></p> <pre>Router(config-dial-peer)# session target atm 1/0 pvc 10/100 9</pre>	<p>Specifies the network-specific address for the VoATM dial peer.</p>
<p><b>Step 22</b> <code>signal-type</code> <i>cas   cept   ext-signal   transparent</i></p> <p><b>Example:</b></p> <pre>Router(config-dial-peer)# signal-type ext-signal</pre>	<p>Specifies that external signaling is used when connecting to the dial peer. The DSP does not generate any signaling frames.</p>

	Command or Action	Purpose
Step 23	<p><code>codec aal2-profile custom <i>profile-number</i> codec</code></p> <p><b>Example:</b></p> <pre>Router(config-dial-peer)# <b>codec aal2-profile custom 51 llcc</b></pre>	Sets the codec profile for the DSP on a per-call basis and specifies the lossless compression codec.
Step 24	<p><code>voice-port {<i>slot-number/subunit-number/port</i>   <i>slot/port:ds0-group-no</i>}</code></p> <p><b>Example:</b></p> <pre>Router(config)# <b>voice-port 2/0:0</b></pre>	Enters voice-port configuration mode.
Step 25	<p><code>playout-delay {<i>fax</i>   <i>maximum</i>   <i>nominal</i>} <i>milliseconds</i></code></p> <p><b>Example:</b></p> <pre>Router(config-voice-port)# <b>playout-delay nominal 25</b></pre>	Tunes the playout buffer to accommodate packet jitter caused by switches in the WAN. The <b>nominal</b> keyword specifies the initial (and minimum allowed) delay time that the DSP inserts before playing out voice packets, in milliseconds.
Step 26	<p><code>connection {<i>plar</i>   <i>tie-line</i>   <i>plar-opx</i>} <i>digits</i>   {<i>trunk digits</i> [<i>answer-mode</i>]}</code></p> <p><b>Example:</b></p> <pre>Router(config-voice-port)# <b>connection trunk 1001</b></pre>	Associates this voice-port to destination-pattern 1001.

**Note**

To ensure that the voice-port configuration takes affect, issue the **shutdown** command, followed by **no shutdown** to enable it again.

## Disabling Connection Admission Control

Connection admission control (CAC) is a set of actions taken by each ATM switch during connection setup to determine whether the requested QoS will violate the QoS guarantees for established connections. CAC reserves bandwidth for voice calls, however, the bandwidth required when LLCC is used is dynamic and usually less than what is generally reserved by CAC. Disabling CAC may help in better utilization of bandwidth when LLCC is used. The procedure that follows disables CAC.

### Summary Steps

- 1 **enable**
- 2 **configure terminal**
- 3 **interface atm *interface-number/subinterface-number***
- 4 **pvc *vpi/vci***

5 **cac\_off**

- [Detailed Steps, page 16](#)

## Detailed Steps

### SUMMARY STEPS

1. **enable**
2. **configure terminal**
3. **interface atm** *interface-number /subinterface-number*
4. **pvc** *vpi /vci*
5. **cac\_off**

### DETAILED STEPS

Command or Action	Purpose
<b>Step 1</b> <b>enable</b>  <b>Example:</b> Router> enable	Enables privileged EXEC mode. Enter your password when prompted.
<b>Step 2</b> <b>configure terminal</b>  <b>Example:</b> Router# configure terminal	Enters global configuration mode.
<b>Step 3</b> <b>interface atm</b> <i>interface-number /subinterface-number</i>  <b>Example:</b> Router(config) # <b>interface atm 1/0</b>	Enters configuration mode for the selected ATM interface.
<b>Step 4</b> <b>pvc</b> <i>vpi /vci</i>  <b>Example:</b> Router(config-if-atm)# <b>pvc 10/110</b>	Enters configuration mode for the selected PVC.
<b>Step 5</b> <b>cac_off</b>  <b>Example:</b> Router# (config-if-atm-vc)# <b>cac_off</b>	Disables call admission control.



# Verifying Lossless Compression R1 ATM Cell Switching and External BITS Clocking Source Configuration

This section provides a set of **show** commands you can use to verify the configuration of the Lossless Compression R1, ATM Cell Switching, and External BITS Clocking Source features. It includes the following commands:

## **show connection all**

The following example shows output from the **show connection all** command. In this example, Switched-Conn is a cell-switched connection established between PVC 10/110 and PVC 30/130, which are configured under ATM1/0 and ATM3/0 respectively.

```
Router# show connection all
ID      Name                Segment 1                Segment 2                State
=====
3       V-100-700             E1 1/0(VOICE) 00        DSP 07/00/00             UP
4       V-120-700             E1 1/2(VOICE) 00        DSP 07/00/00             UP
5       Switched-Conn         ATM1/0 10/110            ATM3/0 30/130            UP
```

The **show connection all** command displays the state of Switched-Conn. If it is in the UP state, then it means the ATM cell switching connection is operational.

## **show voice dsp**

The following example shows output from the **show voice dsp** command:

```
Router# show voice dsp
DSP DSP          DSPWARE CURR BOOT          PAK TX/RX
TYPE NUM CH CODEC  VERSION STATE STATE  RST AI VOICEPORT TS ABORT PACK COUNT
==== == == =====
C549 000 04 llcc      4.3.392 busy  idle    0 4/0:0  04    0 1752/1752
```

The **show voice dsp** command shows if the LLCC codec has been applied to the voice port. Additionally, the TX/RX COUNT indicates if packet exchange is occurring. If LLCC is operational, then TX/RX COUNT will display similar values.

## **show voice call port-id**

The **show voice call** command gives detailed information about the lossless compression codec. The following example shows output from the **show voice call** command:



### **Note**

The **show voice call** command has a limitation that causes it to display invalid values. To ensure that accurate values are reported, invoke this command twice and look at the second output.

```
Router# show voice call 4/0:0
4/0:0 1
      vtsp level 0 state = S_CONNECTvpm level 1 state = S_TRUNKED
vpm level 0 state = S_UP
lossless compression summary:
  average compression ratio since reset      = 50
  current compression ratio                  = 50
  max buffer size (ms)                       = 41
  nominal buffer size (ms)                   = 25
  current buffer size (ms)                    = 26
```

```

total encoder input frame count      = 5534
total encoder output frame count     = 2767
encoded tx front-end compressed frame count = 2767
encoded tx back-end compressed frame count = 0
encoded tx frame count (no compression) = 0
underflow error count                = 0
overflow error count                 = 0
decode error count                   = 0
tx signalling frame count            = 11
rx signalling frame count            = 10
rx bad checksum frame count          = 0
rx good checksum frame count         = 2777

```

### show voice trunk supervisory summary

The following example shows output from the **show voice trunk supervisory summary** command:

```

Router# show voice trunk supervisory summary
SLOW SCAN
4/0:0(1) : state : TRUNK_SC_CCS_CONNECT, master

```

### show interfaces

The following example shows output from the **show interfaces** command:

```

Router# show interfaces atm1/0
ATM1/0 is up, line protocol is up
Hardware is ATM AIM E1
MTU 4470 bytes, sub MTU 4470, BW 1920 Kbit, DLY 20000 usec,
  reliability 0/255, txload 1/255, rxload 1/255
Encapsulation ATM, loopback not set
Encapsulation(s): AAL5
255 maximum active VCs, 256 VCs per VP, 0 current VCCs
VC Auto Creation Disabled.
VC idle disconnect time: 300 seconds
Last input never, output never, output hang never
Last clearing of "show interface" counters never
Input queue: 0/75/0/0 (size/max/drops/flushes); Total output drops: 0
Queueing strategy: Per VC Queueing
30 second input rate 0 bits/sec, 0 packets/sec
30 second output rate 0 bits/sec, 0 packets/sec
  0 packets input, 0 bytes, 0 no buffer
    Received 0 broadcasts, 0 runts, 0 giants, 0 throttles
  0 input errors, 0 CRC, 0 frame, 0 overrun, 0 ignored, 0 abort
  0 packets output, 0 bytes, 0 underruns
  0 output errors, 0 collisions, 1 interface resets
  0 output buffer failures, 0 output buffers swapped out

```

## Additional References

### Related Documents

Related Topic	Document Title
Configuring voice features	<i>Cisco IOS Voice Configuration Library</i>
Configuring ATM advanced integration modules	<a href="#">AIM-ATM and AIM-ATM-VOICE-30 on the Cisco 2600 Series, Cisco 3660, and Cisco 3700 Series</a>

Related Topic	Document Title
Configuring high-density voice network modules	<a href="#">Digital E1 Packet Voice Trunk Network Module Interfaces</a>

Standards	
Standards <sup>1</sup>	Title
No new standards are supported by this feature.	

MIBs	
MIBs	MIBs Link
<ul style="list-style-type: none"> <li>No new MIBs are supported by this feature.</li> <li>CISCO-VOICE-COMMON-DIAL-CONTROL-MIB was modified.</li> </ul>	<p>To locate and download MIBs for selected platforms, Cisco IOS releases, and feature sets, use Cisco MIB Locator found at the following URL:</p> <p><a href="http://www.cisco.com/go/mibs">http://www.cisco.com/go/mibs</a></p>

RFCs	
RFCs <sup>2</sup>	Title
No new RFCs are supported by this feature.	

Technical Assistance	
Description	Link
The Cisco Support and Documentation website provides online resources to download documentation, software, and tools. Use these resources to install and configure the software and to troubleshoot and resolve technical issues with Cisco products and technologies. Access to most tools on the Cisco Support and Documentation website requires a Cisco.com user ID and password.	<a href="http://www.cisco.com/cisco/web/support/index.html">http://www.cisco.com/cisco/web/support/index.html</a>

## Feature Information for Lossless Compression R1 ATM Cell Switching and External BITS Clocking Source

The following table provides release information about the feature or features described in this module. This table lists only the software release that introduced support for a given feature in a given software

<sup>1</sup> Not all supported standards are listed.

<sup>2</sup> Not all supported RFCs are listed.

release train. Unless noted otherwise, subsequent releases of that software release train also support that feature.

Use Cisco Feature Navigator to find information about platform support and Cisco software image support. To access Cisco Feature Navigator, go to [www.cisco.com/go/cfn](http://www.cisco.com/go/cfn). An account on Cisco.com is not required.

**Table 2**      **Feature Information for Phrase Based on Module Title**

<b>Feature Name</b>	<b>Releases</b>	<b>Feature Information</b>
Lossless Compression R1, ATM Cell Switching, and External BITS Clocking Source	12.3(4)XD	These features were introduced.
Lossless Compression R1, ATM Cell Switching, and External BITS Clocking Source	12.3(7)T	These features were integrated into Cisco IOS Release 12.3(7)T.

Cisco and the Cisco logo are trademarks or registered trademarks of Cisco and/or its affiliates in the U.S. and other countries. To view a list of Cisco trademarks, go to this URL: [www.cisco.com/go/trademarks](http://www.cisco.com/go/trademarks). Third-party trademarks mentioned are the property of their respective owners. The use of the word partner does not imply a partnership relationship between Cisco and any other company. (1110R)

Any Internet Protocol (IP) addresses and phone numbers used in this document are not intended to be actual addresses and phone numbers. Any examples, command display output, network topology diagrams, and other figures included in the document are shown for illustrative purposes only. Any use of actual IP addresses or phone numbers in illustrative content is unintentional and coincidental.

© 2011 Cisco Systems, Inc. All rights reserved.