



Cisco Optical Site Manager Topology

This chapter describes the different Cisco Optical Site Manager views. In this chapter, you will also learn to add new racks.

- [Cisco Optical Site Manager Topology, on page 1](#)
- [Create a Rack, on page 2](#)
- [Open the Card View, on page 3](#)
- [View Passive Device Details, on page 3](#)
- [View Voltage, Temperature and Current Information, on page 4](#)
- [View Power Monitoring Parameters, on page 4](#)

Cisco Optical Site Manager Topology

The **COSM Topology** page offers two distinct views:


Rack View

The Rack view provides a visual representation of a rack, including its nodes and cards. Hovering over a device or node in this view displays the device's name as a tooltip.

Table View

The Table view displays the Chassis list along with details such as node UIDs, rack number, chassis type, and description. It also provides the option to add a new rack.

Figure 1: Cisco Optical Site Manager Topology

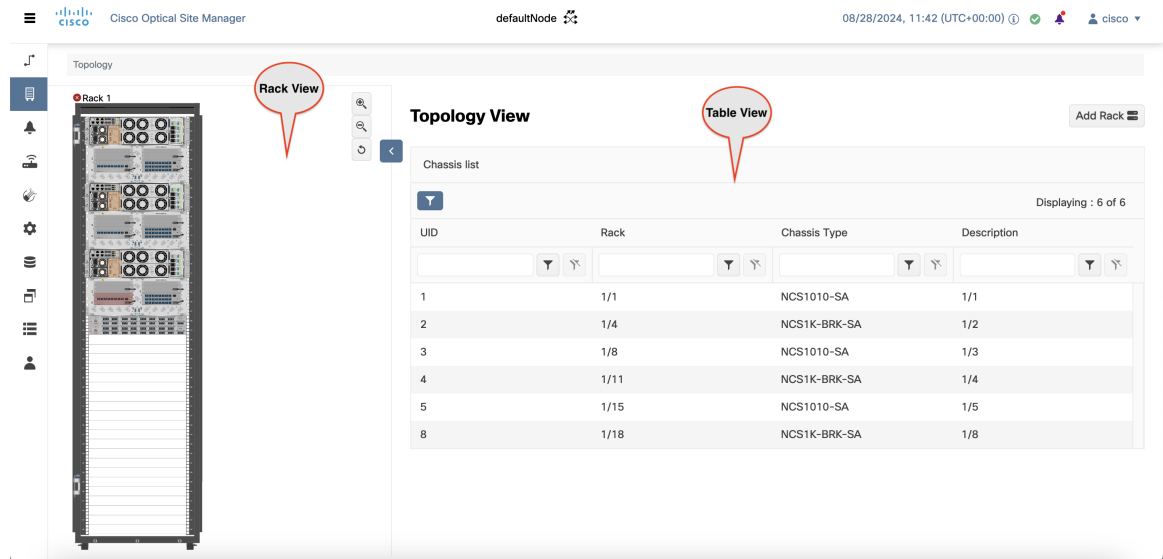

Create a Rack

Use this task to add a rack.

Before you begin

[Log into Cisco Optical Site Manager](#)

Procedure

- Step 1** Click **COSM Topology** in the left panel.
The COSM Topology page appears.
- Step 2** Click **Add Rack**.
The Add rack dialog box appears.
- Step 3** Enter a rack ID in the **Rack ID** field.
You can enter any value from 1 through 32767.
- Step 4** Click **Apply**.
The rack is added to the rack and table views.

Open the Card View

Use this task to open the card view.

Before you begin

[Log into Cisco Optical Site Manager](#)

Procedure

-
- Step 1** Click **COSM Topology** in the left panel.
The Rack and Chassis view appear.
- Step 2** Navigate to the chassis view using any one of the following steps:
- Click the chassis icon in the logical view.
 - Click the ID in the Chassis List or the Chassis ID in the Cisco Optical Site Manager List in the tabular view.
 - Click the rack ID in the left panel to open the rack view and identify the chassis of interest.
 - Click the chassis name in the expanded rack tree view in the left panel.
- Step 3** From the Rack view, right-click the slot that contains the card and choose **Open Card**.
The card view appears.
-

View Passive Device Details

Use this task to view a passive device to a passive chassis. You can also use this task to identify a specific passive device that is associated to a USB port by using the LED blink function.

Before you begin

- [Log into Cisco Optical Site Manager](#)

Procedure

-
- Step 1** Click **COSM Topology** in the left panel.
- Step 2** Click the rack name in the Rack view.
- Step 3** Click the **Provisioning** tab.
- Step 4** Click **Passives** to expand the section.

The passive devices are displayed in the table.

- Step 5** Select the check box corresponding to a device and click **Edit**.
The **USB Port** field for the selected device becomes editable.
 - Step 6** Select the USB port from the drop-down list.
 - Step 7** Click **Apply**.
 - Step 8** (Optional) Click **LED Blink** to start blinking the LED of the passive device.
 - Step 9** (Optional) Click **LED Status** to know the LED status of the associated device.
 - Step 10** (Optional) Click **LED Blink** again to stop the blinking.
-

View Voltage, Temperature and Current Information

Use this task to display the voltage, temperature and current information of a chassis.

Before you begin

[Log into Cisco Optical Site Manager](#)

Procedure

-
- Step 1** Click **COSM Topology** in the left panel.
The COSM Topology page appears.
 - Step 2** Click the rack name from the Rack view.
 - Step 3** Right-click the outer edge of the chassis from the Rack view and select **Open** to open the Chassis view.
Alternatively, you can also double-click the chassis to open the Chassis view.
The Chassis view appears.
 - Step 4** Click the **Provisioning** tab.
 - Step 5** Click the **Voltage/Temperature/Current** section to expand it.
Expand the **Voltage**, **Temperature**, and **Current** sections to view the voltage , temperature, and current information of the chassis.
-

View Power Monitoring Parameters

Use this task to display the power monitoring parameters of a chassis.

Before you begin

[Log into Cisco Optical Site Manager](#)

Procedure

-
- Step 1** Click **COSM Topology** in the left panel.
The COSM Topology page appears.
- Step 2** Click the rack name from the Rack view.
- Step 3** Right-click the chassis from the Rack view and select **Open**.
Alternatively, you can also double-click the chassis to open the Chassis view.
The Chassis view appears.
- Step 4** Click the **Provisioning** tab.
- Step 5** Click the **Power Monitor** section to expand it.
The Power Monitor section displays the environment type, power summary, voltage thresholds of the chassis.
-

