



Configure Controllers

There are six types of controllers for Cisco NCS 1010. The controllers are the OTS, OTS-OCH, OSC, DFB, OCH, and OMS controllers. This chapter describes the tasks that are used to configure and view these controllers.

Table 1: Controllers

Controller Types	Description
Optical Transport Section (OTS)	The OTS controller holds all the optical parameters for the OTS optical interfaces.
OTS-OCH	The OTS-OCH controller is created on the LINE side of the OLT and ILA nodes using the <code>hw-module</code> command in Flex-Grid configuration. OTS-OCH controller supports optical cross-connection between the LINE side and ADD/DROP side of the OLT nodes only. The channel IDs must be the same for both LINE side and COM side OTS-OCH controllers.
Optical Service Channel (OSC)	The OSC controller represents the optical layer of the OSC channel. Line ports host the OSC controller.
Distributed Feedback (DFB)	The DFB controller represents the dedicated DFB laser on the line side of the OLT and ILA nodes with a RAMAN module for link continuity. The line ports host the DFB controller along with the OSC controller.
Optical Channel (OCH)	By default, the OCH controllers are automatically configured when Mux/Demux panels and breakout panels are brought up.
Optical Multiplex Section (OMS)	By default, the OMS controllers are automatically configured when Mux/Demux panels and breakout panels are brought up.

- [ILA controller models in NCS 1010, on page 2](#)
- [OLT controller models and their port mappings, on page 16](#)
- [OTS Controllers, on page 29](#)

- [OTS-OCH Controllers, on page 78](#)
- [DFB controllers, on page 84](#)
- [OCH Controller, on page 87](#)
- [OTS controllers, on page 91](#)
- [OTS-OCH controllers, on page 108](#)
- [DFB controllers, on page 117](#)
- [OCH controllers, on page 122](#)
- [OMS Controller, on page 124](#)
- [OSC Controllers, on page 126](#)
- [AINS, on page 138](#)
- [Headless mode, on page 143](#)
- [Headless mode, on page 144](#)
- [ASE loading, on page 144](#)
- [Optical channel monitoring, on page 149](#)
- [Automatic-In-Service \(AINS\) state, on page 154](#)

ILA controller models in NCS 1010

This reference lists all the ILA controller models available for the Cisco NCS 1010 platform and details the mapping between their physical ports and controllers. Use this information to identify controller-port assignments for supported in-line amplifier (ILA) line cards, including release-specific models and supported features.

ILA controller models

The ILA controller model is available for the NCS 1010 ILA line cards:

- [NCS1K-ILA-C](#): C-band In-Line Amplifier without Raman
- [NCS1K-ILA-R-C](#): C-band In-Line Amplifier with one side Raman
- [NCS1K-ILA-2R-C](#): C-band In-Line Amplifier with both sides Raman
- [NCS1K-ILA-L](#): L-band In-Line Amplifier without Raman
- [NCS1K-E-ILA-R-C](#): C-band In-Line Amplifier with East-facing Raman, Enhanced
- [NCS1K-E-ILA-2R-C](#): C-band In-Line Amplifier with both sides Raman, Enhanced
- [NCS1K-E-ILA-R-C-2](#): C-band In Line Amplifier with West-facing Raman, Enhanced



Note For release information of the ILA line cards, refer to *Hardware Installation Guide for Cisco NCS 1010 and Cisco NCS 1000 Passive Modules*.

Port and controller mapping for each ILA line card

The figures and tables show the three ILA variants and the mapping between physical ports and controllers:

Figure 1: NCS1K-ILA-C front view

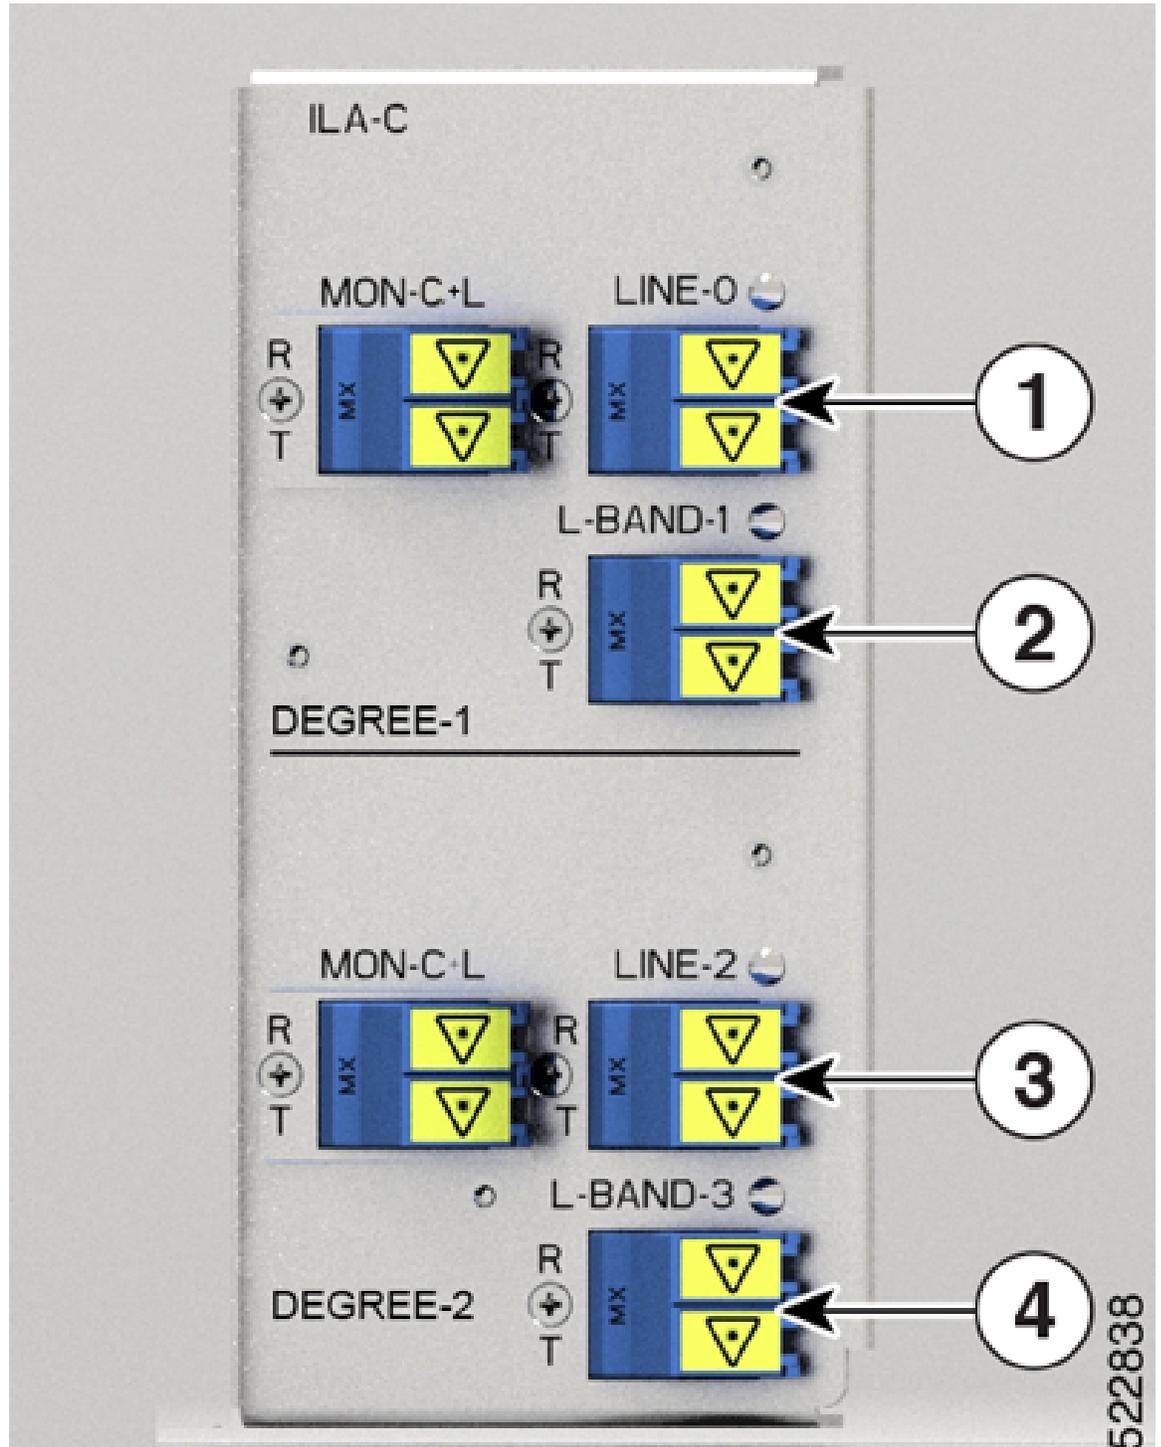


Table 2: NCS1K-ILA-C port mapping

Callout	Port labl	Controller types
1	LINE-0	Parent Controller: OTS0/0/0/0 Child Controller: OSC0/0/0/0, Line OTS-OCH 0/0/0/0/x
2	L-BAND-1	Parent Controller: OTS0/0/0/1
3	LINE-2	Parent Controller: OTS0/0/0/2 Child Controller: OSC0/0/0/2, Line OTS-OCH 0/0/0/2/x
4	L-BAND-3	Parent Controller: OTS0/0/0/3

Figure 2: NCS1K-ILA-R-C front view

Table 3: NCS1K-ILA-R-C port mapping

Callout	Port labl	Controller types
1	RAMAN pump and LINE-0	Parent Controller: OTS0/0/0/0 Child Controller: OSC0/0/0/0, DFB0/0/0/0, Line OTS-OCH 0/0/0/0/x
2	L-BAND-1	Parent Controller: OTS0/0/0/1
3	LINE-2	Parent Controller: OTS0/0/0/2 Child Controller: OSC0/0/0/2, Line OTS-OCH 0/0/0/2/x
4	L-BAND-3	Parent Controller: OTS0/0/0/3

Figure 3: NCS1K-ILA-2R-C front view


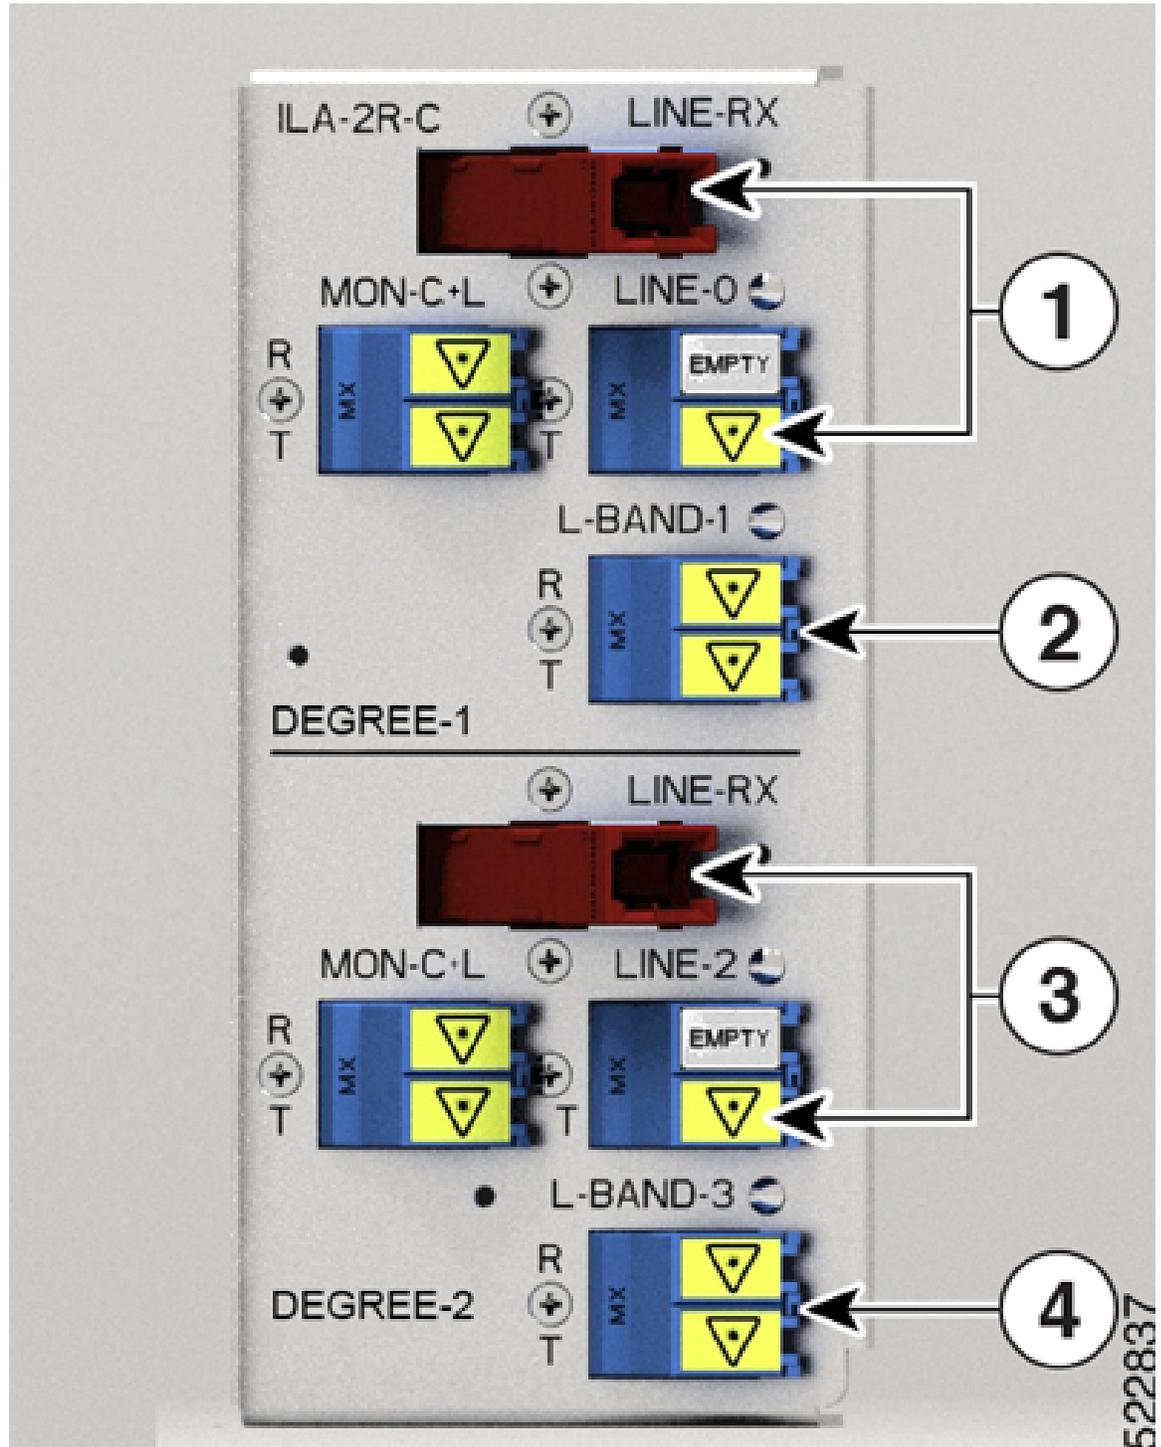


Table 4: NCS1K-ILA-2R-C port mapping

Callout	Port labl	Controller types
1	RAMAN pump and LINE-0	Parent Controller: OTS0/0/0/0 Child Controller: OSC0/0/0/0, DFB0/0/0/0, Line OTS-OCH 0/0/0/0/x
2	L-BAND-1	Parent Controller: OTS0/0/0/1
3	RAMAN pump and LINE-2	Parent Controller: OTS0/0/0/2 Child Controller: OSC0/0/0/2, DFB0/0/0/2, Line OTS-OCH 0/0/0/2/x
4	L-BAND-3	Parent Controller: OTS0/0/0/3

Figure 4: NCS1K-ILA-L front view

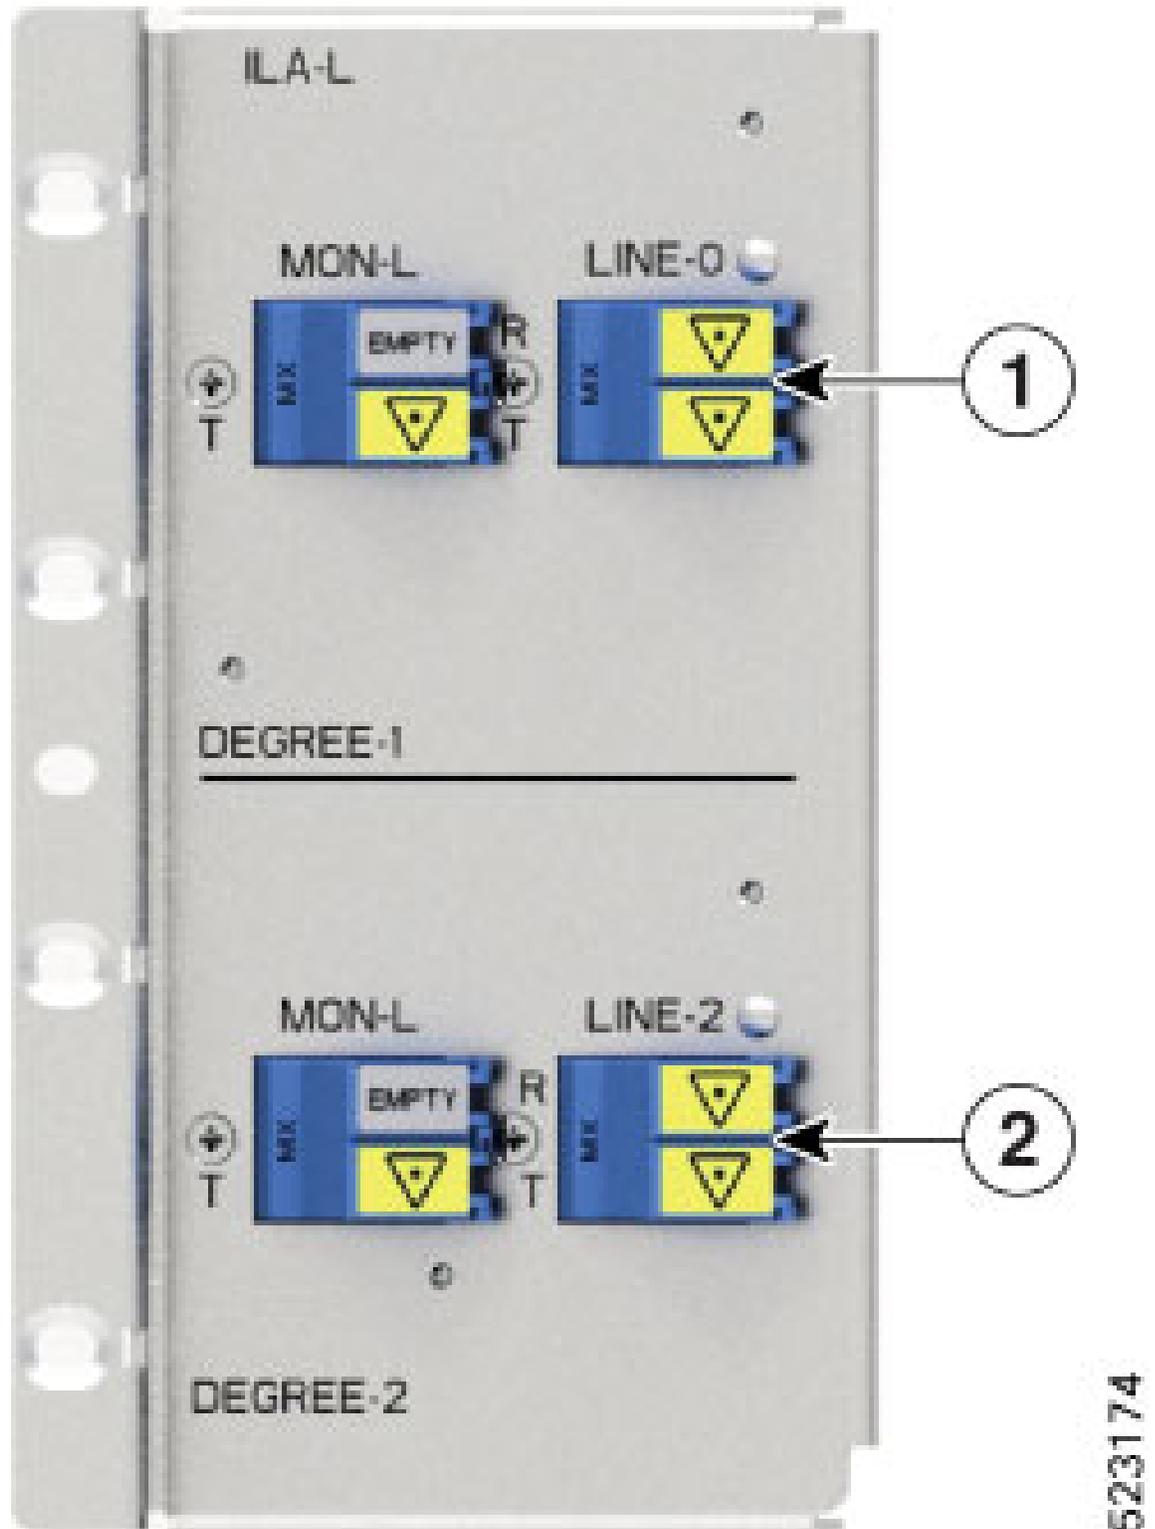

523174

Table 5: NCS1K-ILA-L port mapping

Callout	Port labl	Controller types
1	LINE-0	Parent Controller: OTS0/0/0/0 Child Controller: OSC0/0/0/0, Line OTS-OCH 0/0/0/0/x
2	LINE-2	Parent Controller: OTS0/0/0/2 Child Controller: OSC0/0/0/2, Line OTS-OCH 0/0/0/2/x

The figures and tables show the three ILA variants that are introduced in Release 7.10.1 and the mapping between their physical ports and controllers:



Note The new ILA variants have ports that are highlighted in red to indicate the Raman ports.

Figure 5: NCS1K-E-ILA-R-C front view

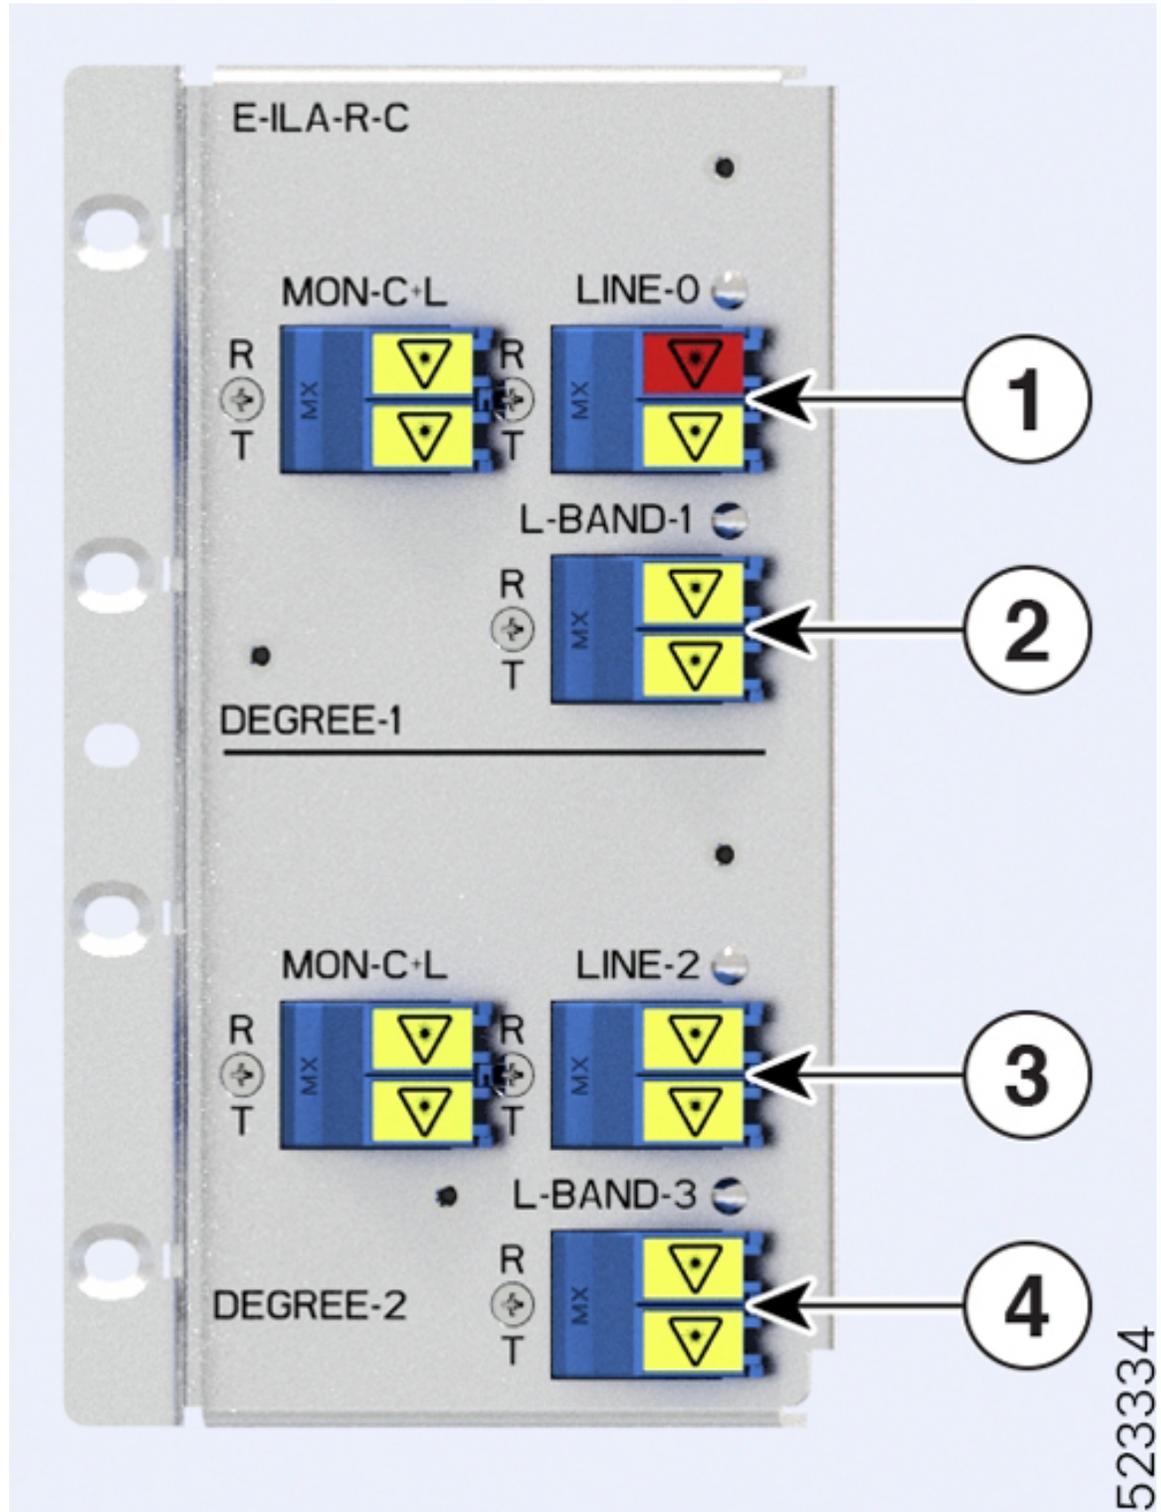


Table 6: E-ILA-R-C port mapping

Callout	Port labl	Controller types
1	RAMAN port and LINE-0	Parent Controller: OTS0/0/0/0 Child Controller: OSC0/0/0/0, DFB0/0/0/0, Line OTS-OCH 0/0/0/0/x
2	L-BAND-1	Parent Controller: OTS0/0/0/1
3	LINE-2	Parent Controller: OTS0/0/0/2 Child Controller: OSC0/0/0/2, Line OTS-OCH 0/0/0/2/x
4	L-BAND-3	Parent Controller: OTS0/0/0/3

Figure 6: NCS1K-E-ILA-2R-C front view

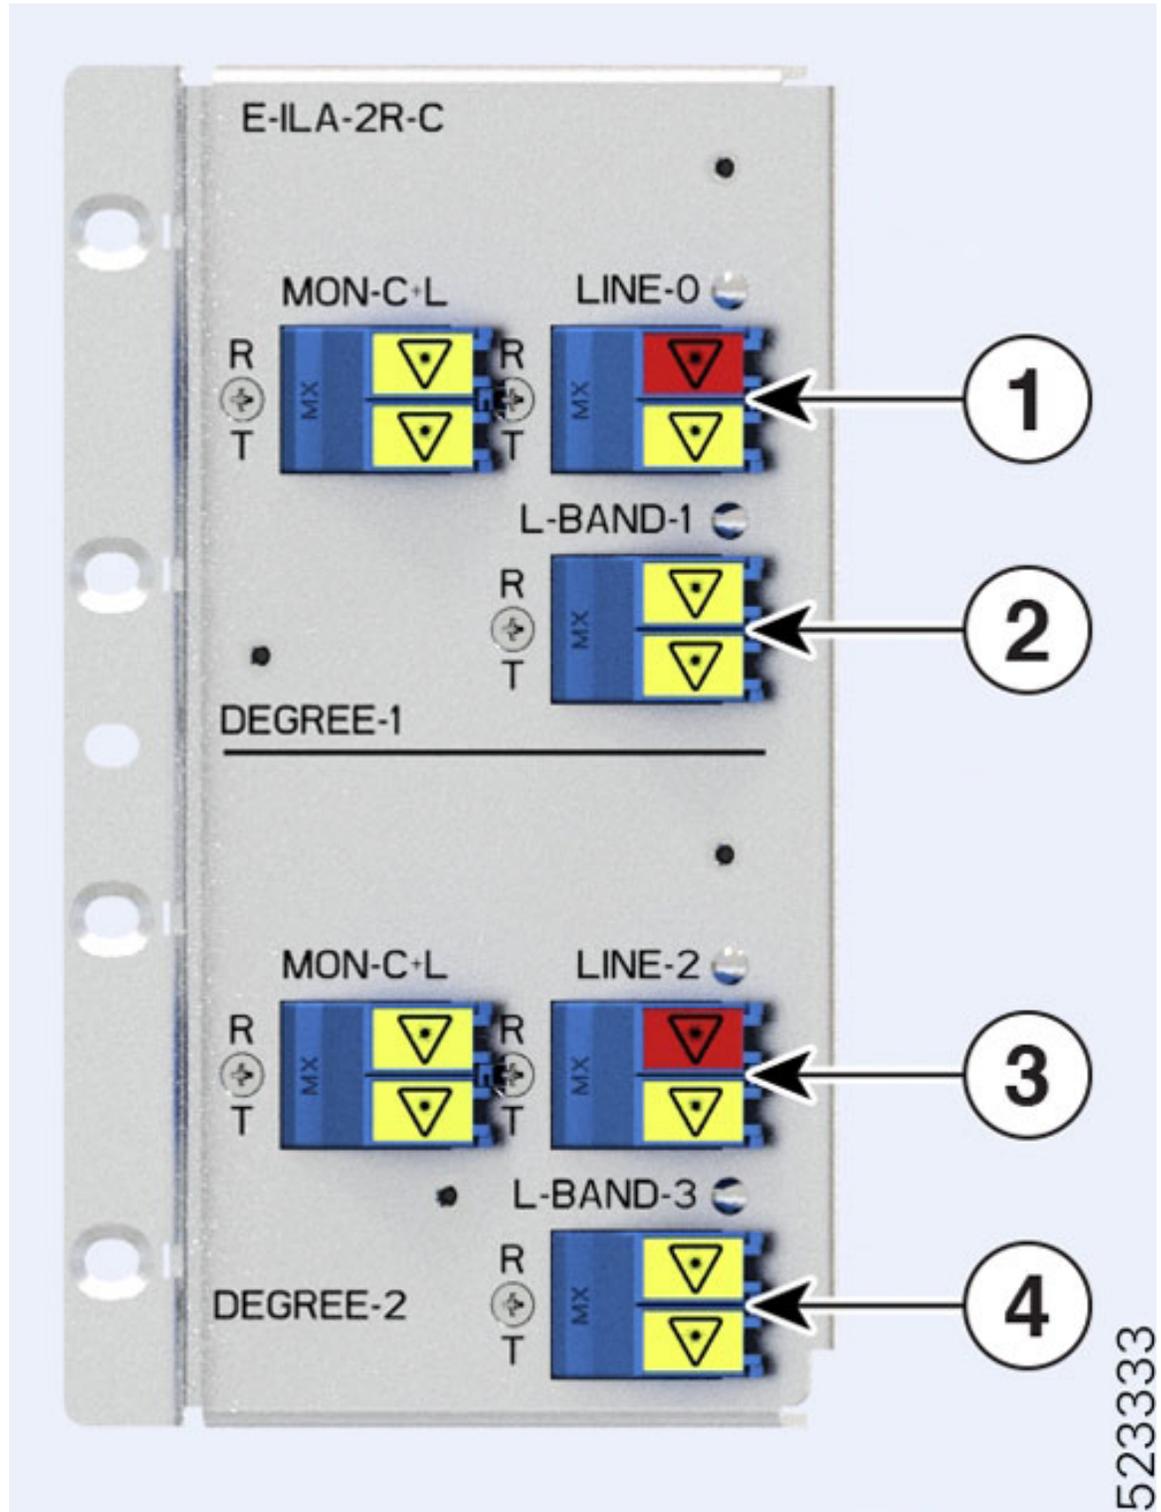


Table 7: E-ILA-2R-C port mapping

Callout	Port labl	Controller types
1	RAMAN port and LINE-0	Parent Controller: OTS0/0/0/0 Child Controller: OSC0/0/0/0, DFB0/0/0/0, Line OTS-OCH 0/0/0/0/x
2	L-BAND-1	Parent Controller: OTS0/0/0/1
3	RAMAN port and LINE-2	Parent Controller: OTS0/0/0/2 Child Controller: OSC0/0/0/2, DFB0/0/0/2, Line OTS-OCH 0/0/0/2/x
4	L-BAND-3	Parent Controller: OTS0/0/0/3

The figure and table show the new ILA variant that is introduced in Release 7.11.1 and the mapping between its physical ports and controllers:

Figure 7: NCS1K-E-ILA-R-C-2 front view

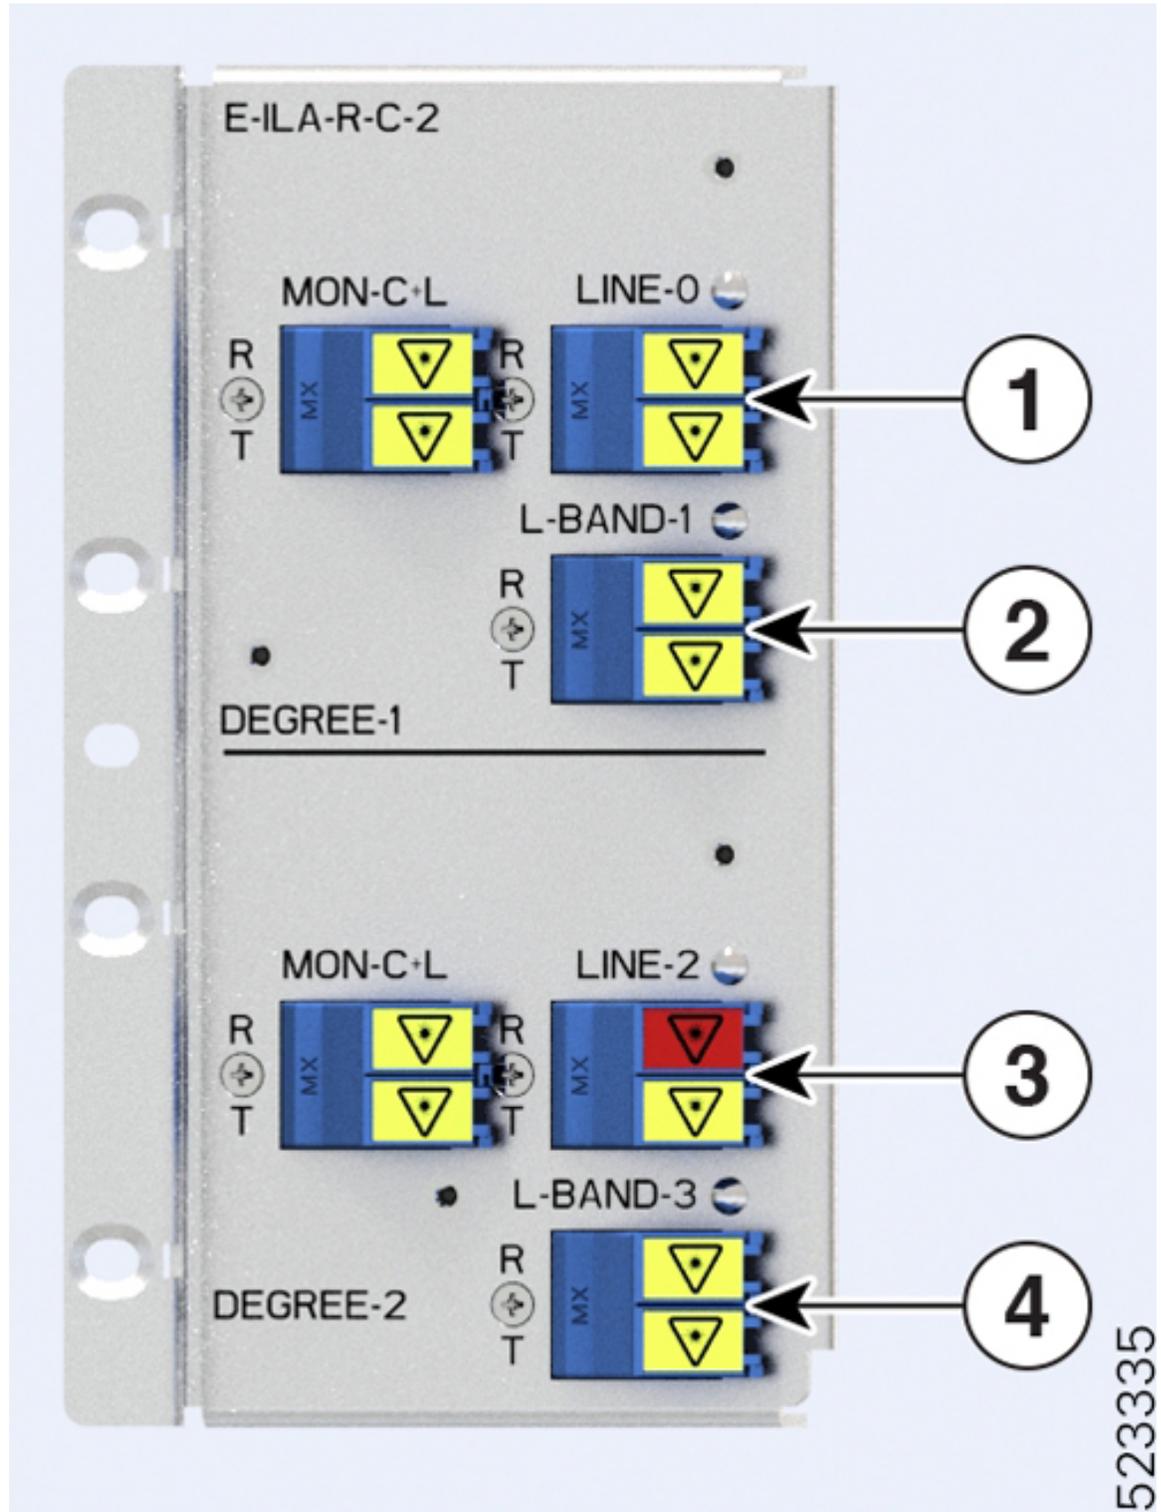


Table 8: E-ILA-R-C-2 port mapping

Callout	Port labl	Controller types
1	LINE-0	Parent Controller: OTS0/0/0/0 Child Controller: OSC0/0/0/0, Line OTS-OCH 0/0/0/0/x
2	L-BAND-1	Parent Controller: OTS0/0/0/1
3	RAMAN port and LINE-2	Parent Controller: OTS0/0/0/2 Child Controller: OSC0/0/0/2, DFB0/0/0/2, Line OTS-OCH 0/0/0/2/x
4	L-BAND-3	Parent Controller: OTS0/0/0/3

OLT controller models and their port mappings

This reference lists all the OLT controller models available for the Cisco NCS 1010 and NCS 1020 platform. It details the mapping between physical ports and controllers for each OLT and E-OLT cards. Use this information to identify controller-port assignments for supported optical line terminal (OLT) line cards, including release-specific models and supported features.

OLT controller models

The OLT controller model is available for the NCS 1010 OLT line cards:

- [NCS1K-OLT-C](#): C-band Optical Line Terminal without Raman
- [NCS1K-OLT-R-C](#): C-band Optical Line Terminal with Raman
- [NCS1K-OLT-L](#): L-band Optical Line Terminal without Raman
- [NCS1K-E-OLT-L](#): L-band Optical Line Terminal without Raman, enhanced
- [NCS1K-E-OLT-C](#): C-band Optical Line Terminal without Raman, enhanced
- [NCS1K-E-OLT-R-C](#): C-band Optical Line Terminal with Raman, enhanced



Note For release information of the OLT line cards, refer to *Hardware Installation Guide for Cisco NCS 1010 and Cisco NCS 1000 Passive Modules*.

Port and controller mapping for each OLT line card

The figures and tables show the two OLT variants and the mapping between physical ports and controllers:

Figure 8: NCS1K-OLT-C

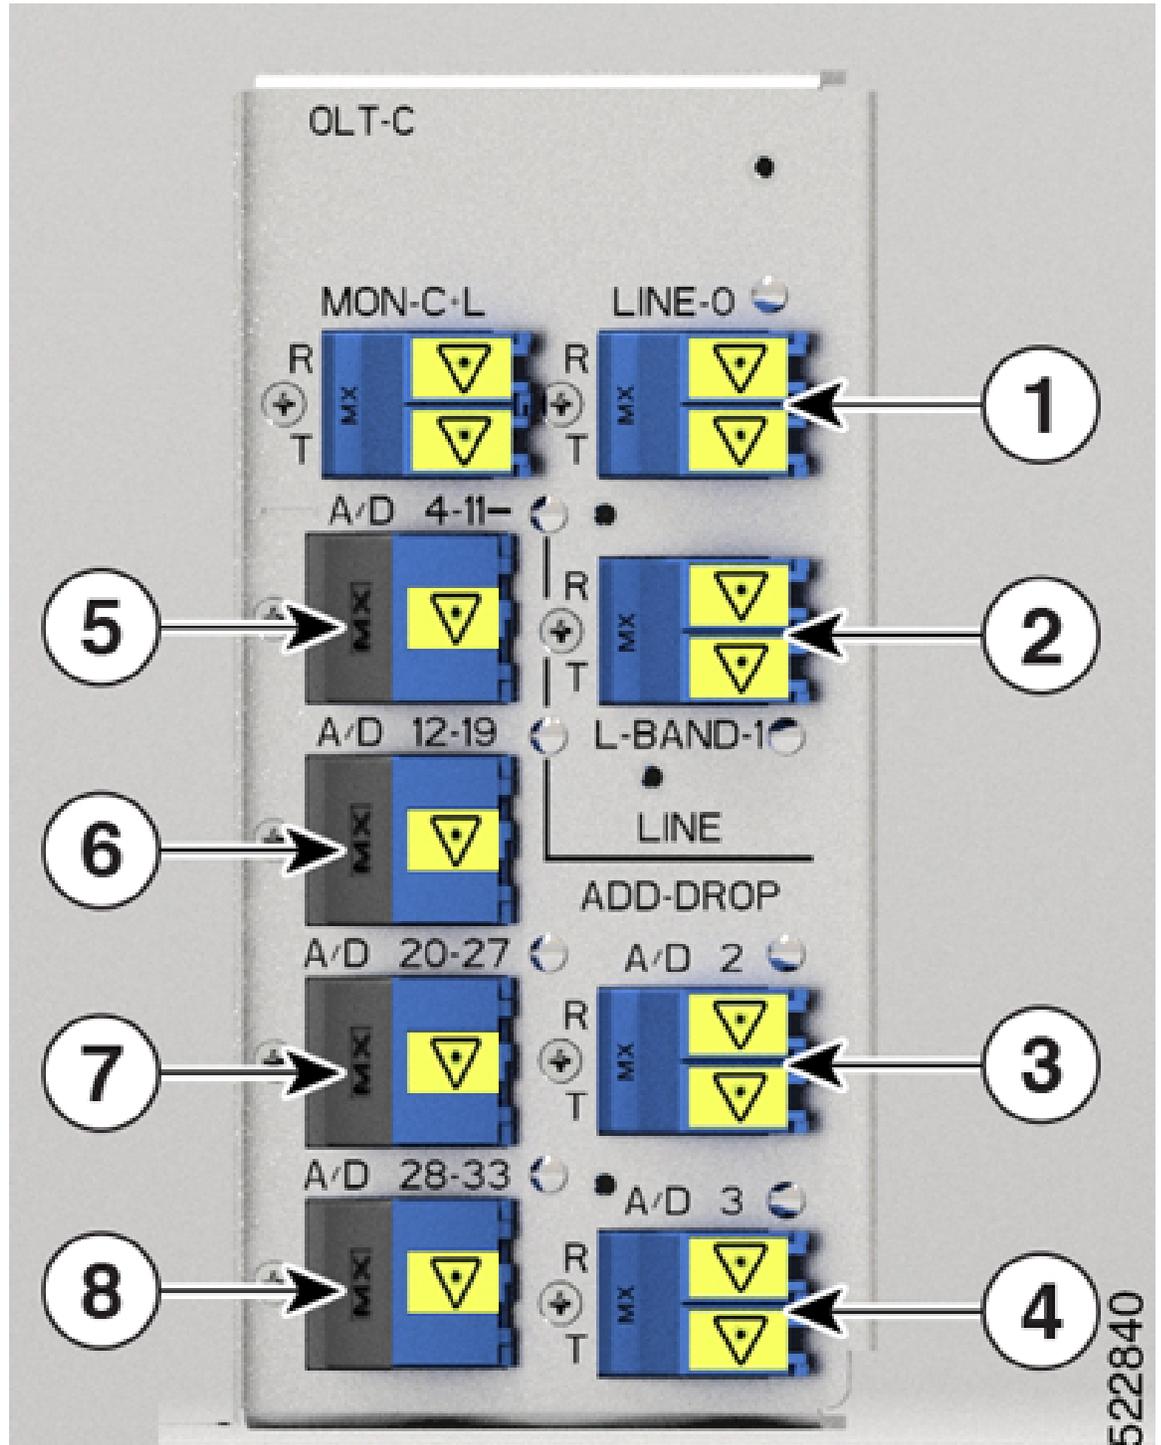


Table 9: NCS1K-OLT-C Port Mapping

Callout	Port label	Controller types
1	LINE-0	Parent Controller: OTS0/0/0/0 Child Controller: OSC0/0/0/0, Line OTS-OCH 0/0/0/0/x
2	L-BAND-1	Parent Controller: OTS0/0/0/1
3	A/D 2	Parent Controller: OTS0/0/0/2 Child Controller: COM OTS-OCH 0/0/0/2/x
4	A/D 4	Parent Controller: OTS0/0/0/3 Child Controller: COM OTS-OCH 0/0/0/3/x
5	A/D 4-11	Parent Controller: OTS0/0/0/4-11 Child Controller: COM OTS-OCH 0/0/0/4-11/x
6	A/D 12-19	Parent Controller: OTS0/0/0/12-19 Child Controller: COM OTS-OCH 0/0/0/12-19/x
7	A/D 20-27	Parent Controller: OTS0/0/0/20-27 Child Controller: COM OTS-OCH 0/0/0/20-27/x
8	A/D 28-33	Parent Controller: OTS0/0/0/28-33 Child Controller: COM OTS-OCH 0/0/0/28-33/x

Figure 9: NCS1K-OLT-R-C

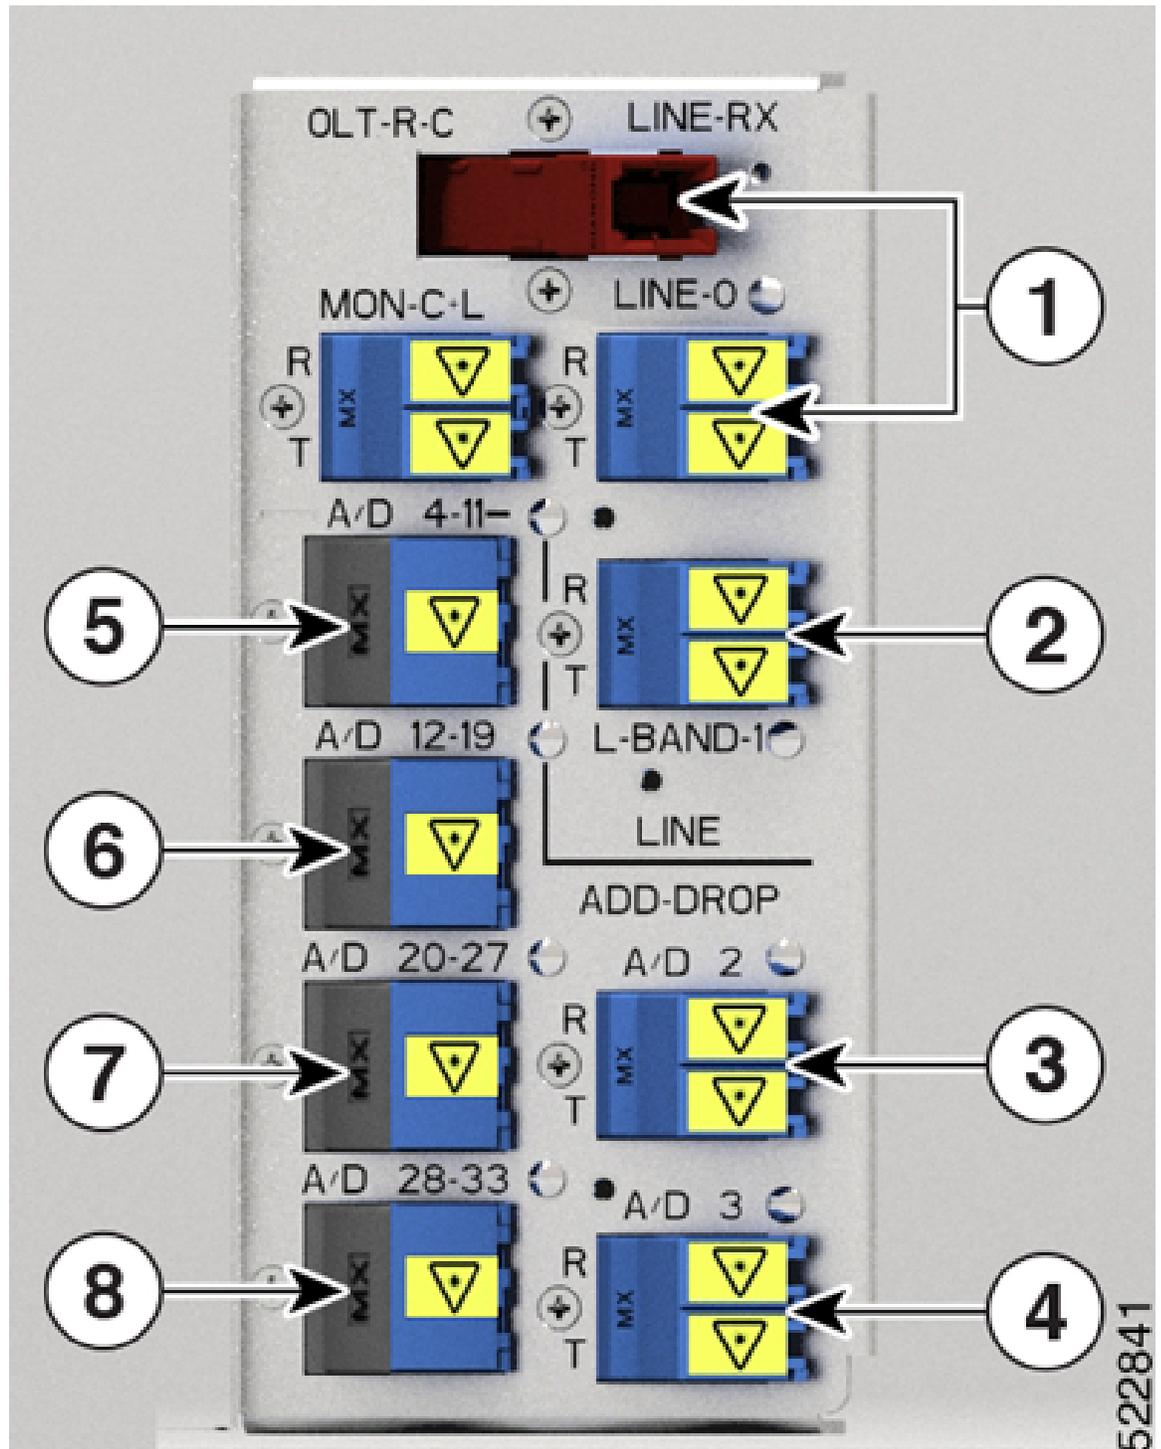


Table 10: NCS1K-OLT-R-C Port Mapping

Callout	Port label	Controller types
1	LINE-RX and LINE-0	Parent Controller: OTS0/0/0/0 Child Controller: OSC0/0/0/0, DFB0/0/0/0, Line OTS-OCH 0/0/0/0/x
2	L-BAND-1	Parent Controller: OTS0/0/0/1
3	A/D 2	Parent Controller: OTS0/0/0/2 Child Controller: COM OTS-OCH 0/0/0/2/x
4	A/D 3	Parent Controller: OTS0/0/0/3 Child Controller: COM OTS-OCH 0/0/0/3/x
5	A/D 4-11	Parent Controller: OTS0/0/0/4-11 Child Controller: COM OTS-OCH 0/0/0/4-11/x
6	A/D 12-19	Parent Controller: OTS0/0/0/12-19 Child Controller: COM OTS-OCH 0/0/0/12-19/x
7	A/D 20-27	Parent Controller: OTS0/0/0/20-27 Child Controller: COM OTS-OCH 0/0/0/20-27/x
8	A/D 28-33	Parent Controller: OTS0/0/0/28-33 Child Controller: COM OTS-OCH 0/0/0/28-33/x

Figure 10: NCS1K-OLT-L


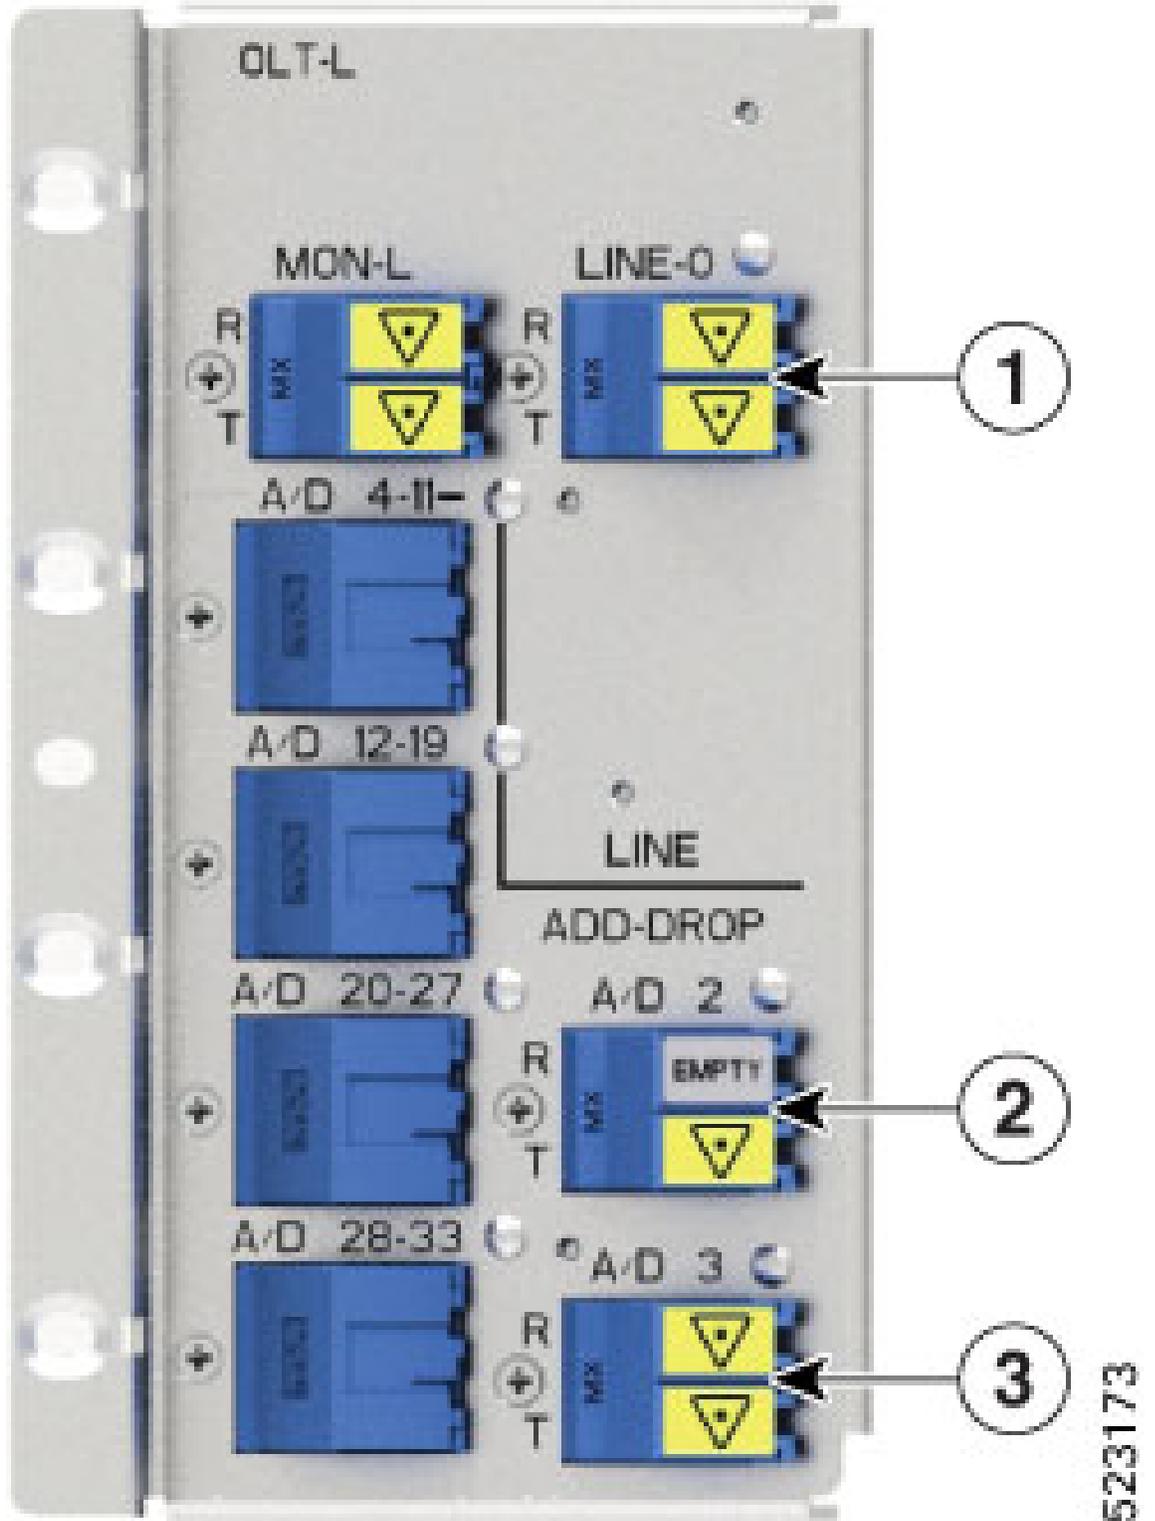


Table 11: NCS1K-OLT-L Port Mapping

Callout	Port label	Controller types
1	LINE-0	Parent Controller: OTS0/0/0/0 Child Controller: OSC0/0/0/0, Line OTS-OCH 0/0/0/0/x
2	A/D 2	Parent Controller: OTS0/0/0/2 Child Controller: OSC0/0/0/2, Line OTS-OCH 0/0/0/2/x
3	A/D 3	Parent Controller: OTS0/0/0/3

The figures and tables show the three OLT variants that are introduced in Release 7.10.1 and the mapping between their physical ports and controllers:

Figure 11: NCS1K-E-OLT-L

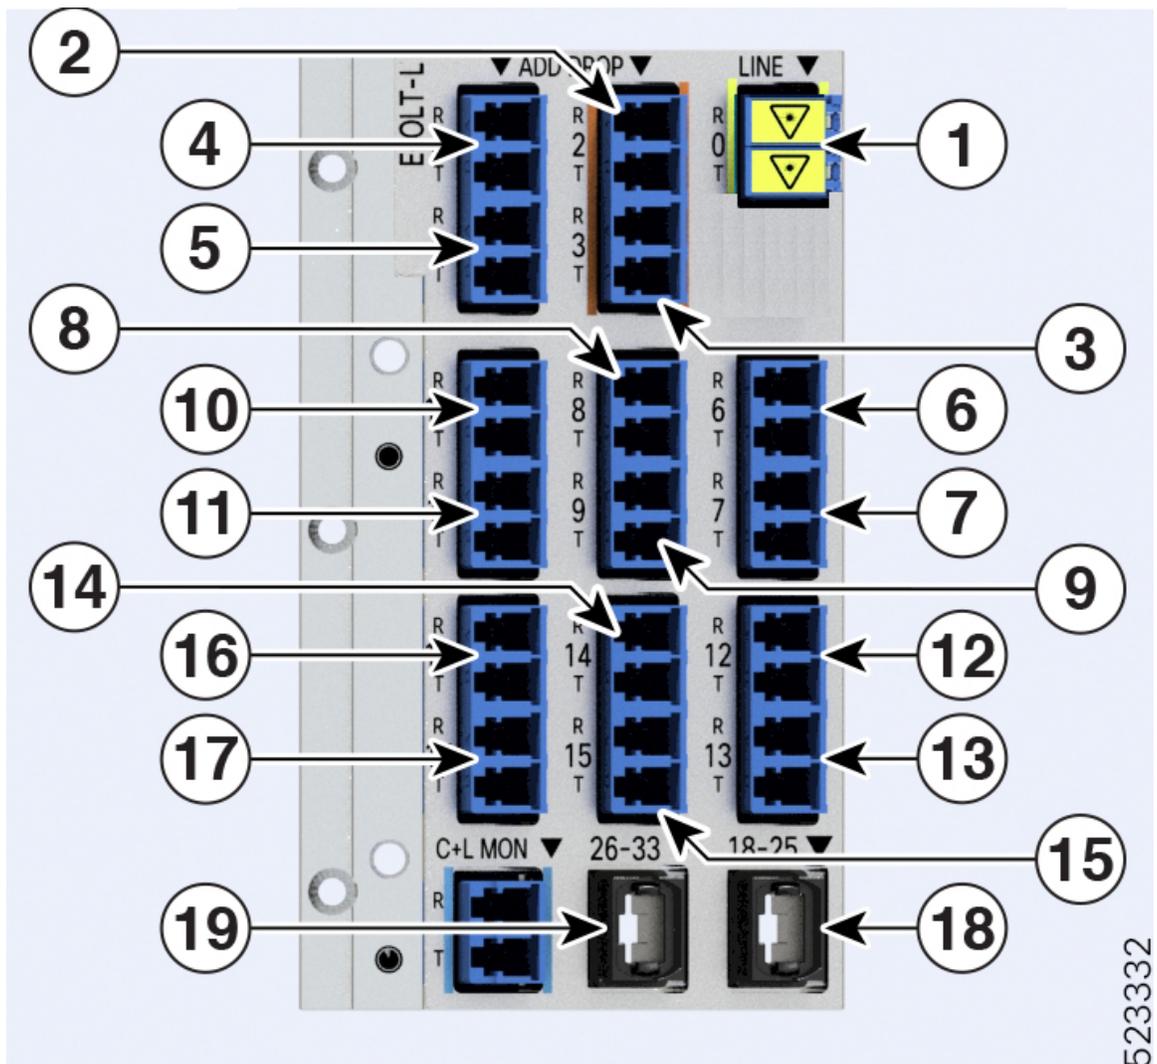

523332

Table 12: NCS1K-E-OLT-L Port Mapping

Callout	Port	Controller types
1	LINE-0	Parent Controller: OTS0/0/0/0 Child Controller: OSC0/0/0/0, Line OTS-OCH 0/0/0/0/x
2	2	Parent Controller: OTS0/0/0/2 Child Controller: COM OTS-OCH 0/0/0/2/x
3	3	Parent Controller: OTS0/0/0/3 Child Controller: COM OTS-OCH 0/0/0/3/x
4	4	Parent Controller: OTS0/0/0/4 Child Controller: COM OTS-OCH 0/0/0/4/x
5	5	Parent Controller: OTS0/0/0/5 Child Controller: COM OTS-OCH 0/0/0/5/x
6	6	Parent Controller: OTS0/0/0/6 Child Controller: COM OTS-OCH 0/0/0/6/x
7	7	Parent Controller: OTS0/0/0/7 Child Controller: COM OTS-OCH 0/0/0/7/x
8	8	Parent Controller: OTS0/0/0/8 Child Controller: COM OTS-OCH 0/0/0/8/x
9	9	Parent Controller: OTS0/0/0/9 Child Controller: COM OTS-OCH 0/0/0/9/x
10	10	Parent Controller: OTS0/0/0/10 Child Controller: COM OTS-OCH 0/0/0/10/x
11	11	Parent Controller: OTS0/0/0/11 Child Controller: COM OTS-OCH 0/0/0/11/x
12	12	Parent Controller: OTS0/0/0/12 Child Controller: COM OTS-OCH 0/0/0/12/x
13	13	Parent Controller: OTS0/0/0/13 Child Controller: COM OTS-OCH 0/0/0/13/x
14	14	Parent Controller: OTS0/0/0/14 Child Controller: COM OTS-OCH 0/0/0/14/x

Callout	Port	Controller types
15	15	Parent Controller: OTS0/0/0/15 Child Controller: COM OTS-OCH 0/0/0/15/x
16	16	Parent Controller: OTS0/0/0/16 Child Controller: COM OTS-OCH 0/0/0/16/x
17	17	Parent Controller: OTS0/0/0/17 Child Controller: COM OTS-OCH 0/0/0/17/x
18	18-25	Parent Controller: OTS0/0/0/18-25 Child Controller: COM OTS-OCH 0/0/0/18-25/x
19	26-33	Parent Controller: OTS0/0/0/26-33 Child Controller: COM OTS-OCH 0/0/0/26-33/x

Figure 12: NCS1K-E-OLT-C

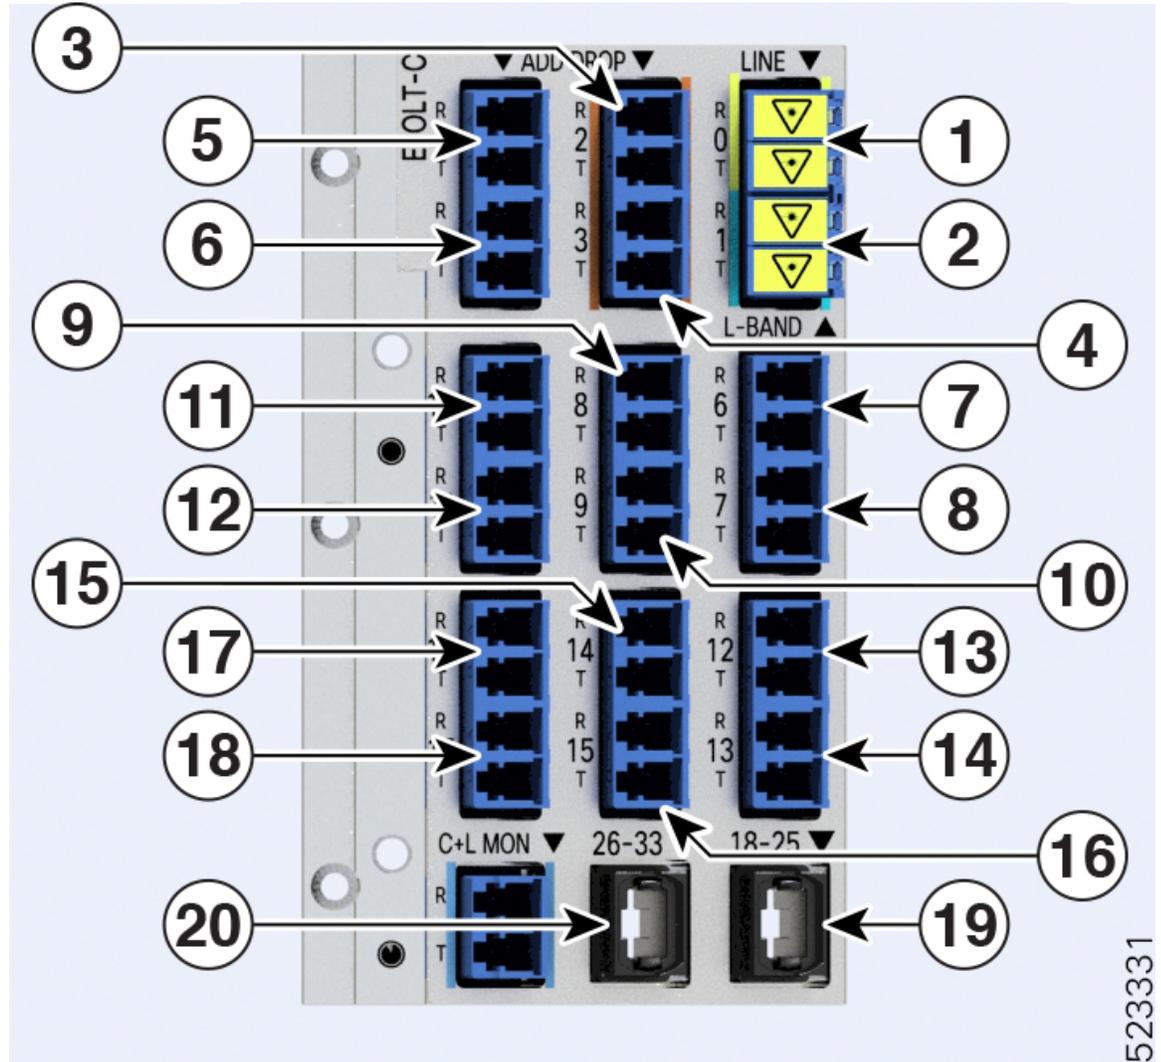


Table 13: NCS1K-E-OLT-C Port Mapping

Callout	Port label	Controller types
1	LINE-0	Parent Controller: OTS0/0/0/0 Child Controller: OSC0/0/0/0, Line OTS-OCH 0/0/0/0/x
2	1	Parent Controller: OTS0/0/0/1
3	2	Parent Controller: OTS0/0/0/2 Child Controller: COM OTS-OCH 0/0/0/2/x

Callout	Port label	Controller types
4	3	Parent Controller: OTS0/0/0/3 Child Controller: COM OTS-OCH 0/0/0/3/x
5	4	Parent Controller: OTS0/0/0/4 Child Controller: COM OTS-OCH 0/0/0/4/x
6	5	Parent Controller: OTS0/0/0/5 Child Controller: COM OTS-OCH 0/0/0/5/x
7	6	Parent Controller: OTS0/0/0/6 Child Controller: COM OTS-OCH 0/0/0/6/x
8	7	Parent Controller: OTS0/0/0/7 Child Controller: COM OTS-OCH 0/0/0/7/x
9	8	Parent Controller: OTS0/0/0/8 Child Controller: COM OTS-OCH 0/0/0/8/x
10	9	Parent Controller: OTS0/0/0/9 Child Controller: COM OTS-OCH 0/0/0/9/x
11	10	Parent Controller: OTS0/0/0/10 Child Controller: COM OTS-OCH 0/0/0/10/x
12	11	Parent Controller: OTS0/0/0/11 Child Controller: COM OTS-OCH 0/0/0/11/x
13	12	Parent Controller: OTS0/0/0/12 Child Controller: COM OTS-OCH 0/0/0/12/x
14	13	Parent Controller: OTS0/0/0/13 Child Controller: COM OTS-OCH 0/0/0/13/x
15	14	Parent Controller: OTS0/0/0/14 Child Controller: COM OTS-OCH 0/0/0/14/x
16	15	Parent Controller: OTS0/0/0/15 Child Controller: COM OTS-OCH 0/0/0/15/x
17	16	Parent Controller: OTS0/0/0/16 Child Controller: COM OTS-OCH 0/0/0/16/x
18	17	Parent Controller: OTS0/0/0/17 Child Controller: COM OTS-OCH 0/0/0/17/x

Callout	Port label	Controller types
19	18-25	Parent Controller: OTS0/0/0/18-25 Child Controller: COM OTS-OCH 0/0/0/18-25/x
20	26-33	Parent Controller: OTS0/0/0/26-33 Child Controller: COM OTS-OCH 0/0/0/26-33/x

Figure 13: NCS1K-E-OLT-R-C



Note In the image, the port that is highlighted in red is the Raman port.

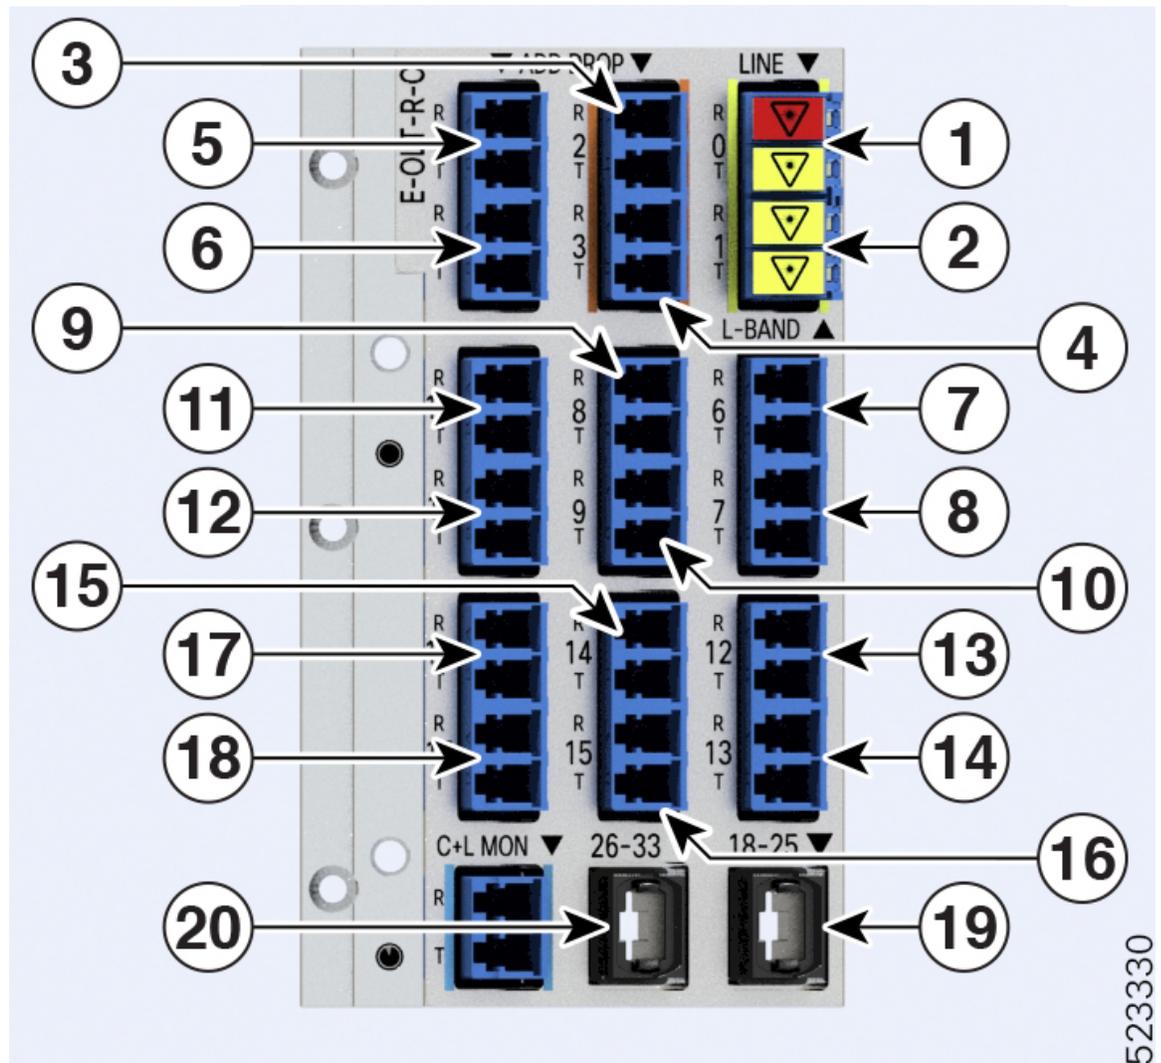


Table 14: NCS1K-E-OLT-R-C Port Mapping

Callout	Port label	Controller types
1	LINE-0	Parent Controller: OTS0/0/0/0 Child Controller: OSC0/0/0/0, Line OTS-OCH 0/0/0/0/x
2	1	Parent Controller: OTS0/0/0/1
3	2	Parent Controller: OTS0/0/0/2 Child Controller: COM OTS-OCH 0/0/0/2/x
4	3	Parent Controller: OTS0/0/0/3 Child Controller: COM OTS-OCH 0/0/0/3/x
5	4	Parent Controller: OTS0/0/0/4 Child Controller: COM OTS-OCH 0/0/0/4/x
6	5	Parent Controller: OTS0/0/0/5 Child Controller: COM OTS-OCH 0/0/0/5/x
7	6	Parent Controller: OTS0/0/0/6 Child Controller: COM OTS-OCH 0/0/0/6/x
8	7	Parent Controller: OTS0/0/0/7 Child Controller: COM OTS-OCH 0/0/0/7/x
9	8	Parent Controller: OTS0/0/0/8 Child Controller: COM OTS-OCH 0/0/0/8/x
10	9	Parent Controller: OTS0/0/0/9 Child Controller: COM OTS-OCH 0/0/0/9/x
11	10	Parent Controller: OTS0/0/0/10 Child Controller: COM OTS-OCH 0/0/0/10/x
12	11	Parent Controller: OTS0/0/0/11 Child Controller: COM OTS-OCH 0/0/0/11/x
13	12	Parent Controller: OTS0/0/0/12 Child Controller: COM OTS-OCH 0/0/0/12/x
14	13	Parent Controller: OTS0/0/0/13 Child Controller: COM OTS-OCH 0/0/0/13/x

Callout	Port label	Controller types
15	14	Parent Controller: OTS0/0/0/14 Child Controller: COM OTS-OCH 0/0/0/14/x
16	15	Parent Controller: OTS0/0/0/15 Child Controller: COM OTS-OCH 0/0/0/15/x
17	16	Parent Controller: OTS0/0/0/16 Child Controller: COM OTS-OCH 0/0/0/16/x
18	17	Parent Controller: OTS0/0/0/17 Child Controller: COM OTS-OCH 0/0/0/17/x
19	18-25	Parent Controller: OTS0/0/0/18-25 Child Controller: COM OTS-OCH 0/0/0/18-25/x
20	26-33	Parent Controller: OTS0/0/0/26-33 Child Controller: COM OTS-OCH 0/0/0/26-33/x

OTS Controllers

There are two types of controller models supported on Cisco NCS 1010. They are:

ILA Controller Model

When the NCS1K-ILA-2R-C, NCS1K-ILA-L, NCS1K-E-ILA-R-C, NCS1K-E-ILA-2R-C, NCS1K-E-ILA-R-C-2, NCS1K-ILA-R-C and NCS1K-ILA-C cards are brought up, four OTS controllers are created by default. The OTS controllers are:

- OTS controllers for side 1:
 - LINE 0 port: ots 0/0/0/0 (L band line OTS controller)
 - L-BAND 1 port: ots 0/0/0/1 (L band line OTS controller)
- OTS controllers for side 2:
 - LINE 2 port: ots 0/0/0/2 (L band line OTS controller)
 - L-BAND 3 port: ots 0/0/0/3 (L band line OTS controller)

Table 15: Feature History

Feature Name	Release Information	Feature Description
NCS 1010 L-Band and C+L-Band Support.	Cisco IOS XR Release 7.9.1	NCS 1010 now supports C+L-Band. The addition of the L-Band to the existing C-Band provides more channels increasing the data transfer capacity of the optical line system.

- L-band gain range: (ILA)
 - EDFA Gain Range 1 range: 10.8 — 25.8
 - EDFA Gain Range 2 range: 18.8 — 38.8
- EDFA1: Instance 1 (OLT)
 - 0 -> Gain Range Mode 1: 13.3dB — 26.3dB
 - 1 -> Gain Range mode 2: 21.3dB — 39.3dB

The following figures and tables show the three ILA variants and the mapping between physical ports and controllers:

Figure 14: NCS1K-ILA-2R-C

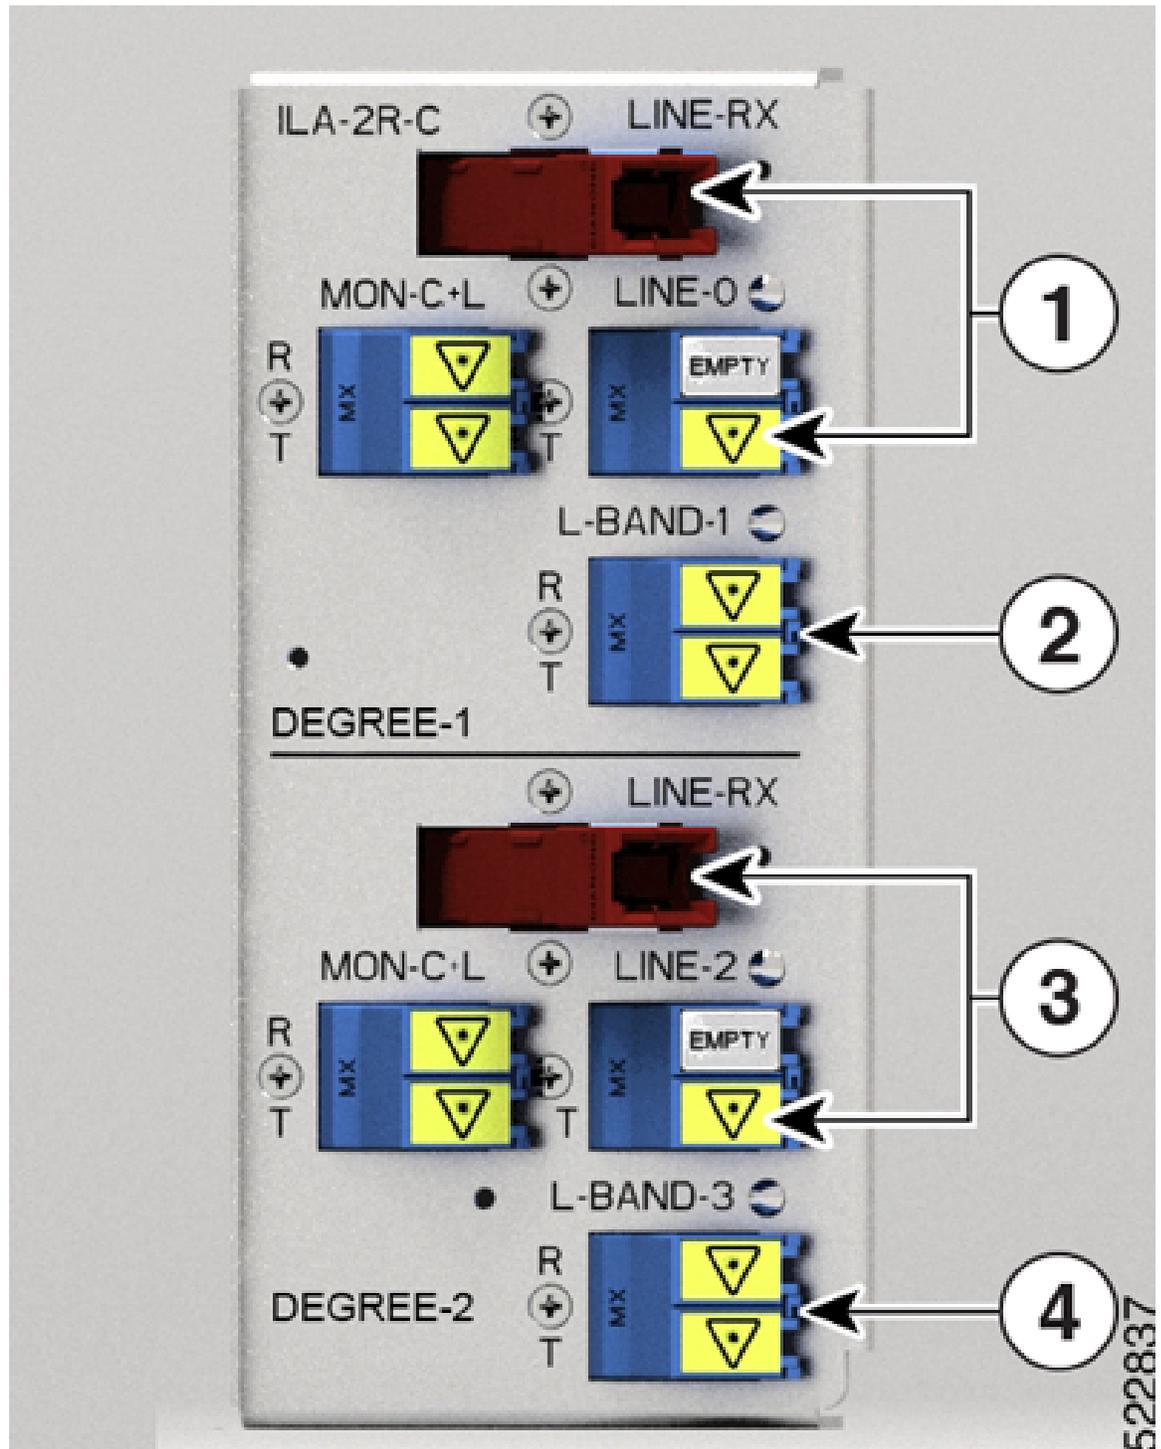


Table 16: NCS1K-ILA-2R-C Port Mapping

1	Parent Controller: OTS0/0/0/0 Child Controller: OSC0/0/0/0, DFB0/0/0/0, Line OTS-OCH 0/0/0/0/x
2	Parent Controller: OTS0/0/0/1
3	Parent Controller: OTS0/0/0/2 Child Controller: OSC0/0/0/2, DFB0/0/0/2, Line OTS-OCH 0/0/0/2/x
4	Parent Controller: OTS0/0/0/3

Figure 15: NCS1K-ILA-R-C

Table 17: NCS1K-ILA-R-C Port Mapping

1	Parent Controller: OTS0/0/0/0 Child Controller: OSC0/0/0/0, DFB0/0/0/0, Line OTS-OCH 0/0/0/0/x
2	Parent Controller: OTS0/0/0/1
3	Parent Controller: OTS0/0/0/2 Child Controller: OSC0/0/0/2, Line OTS-OCH 0/0/0/2/x
4	Parent Controller: OTS0/0/0/3

Figure 16: NCS1K-ILA-C


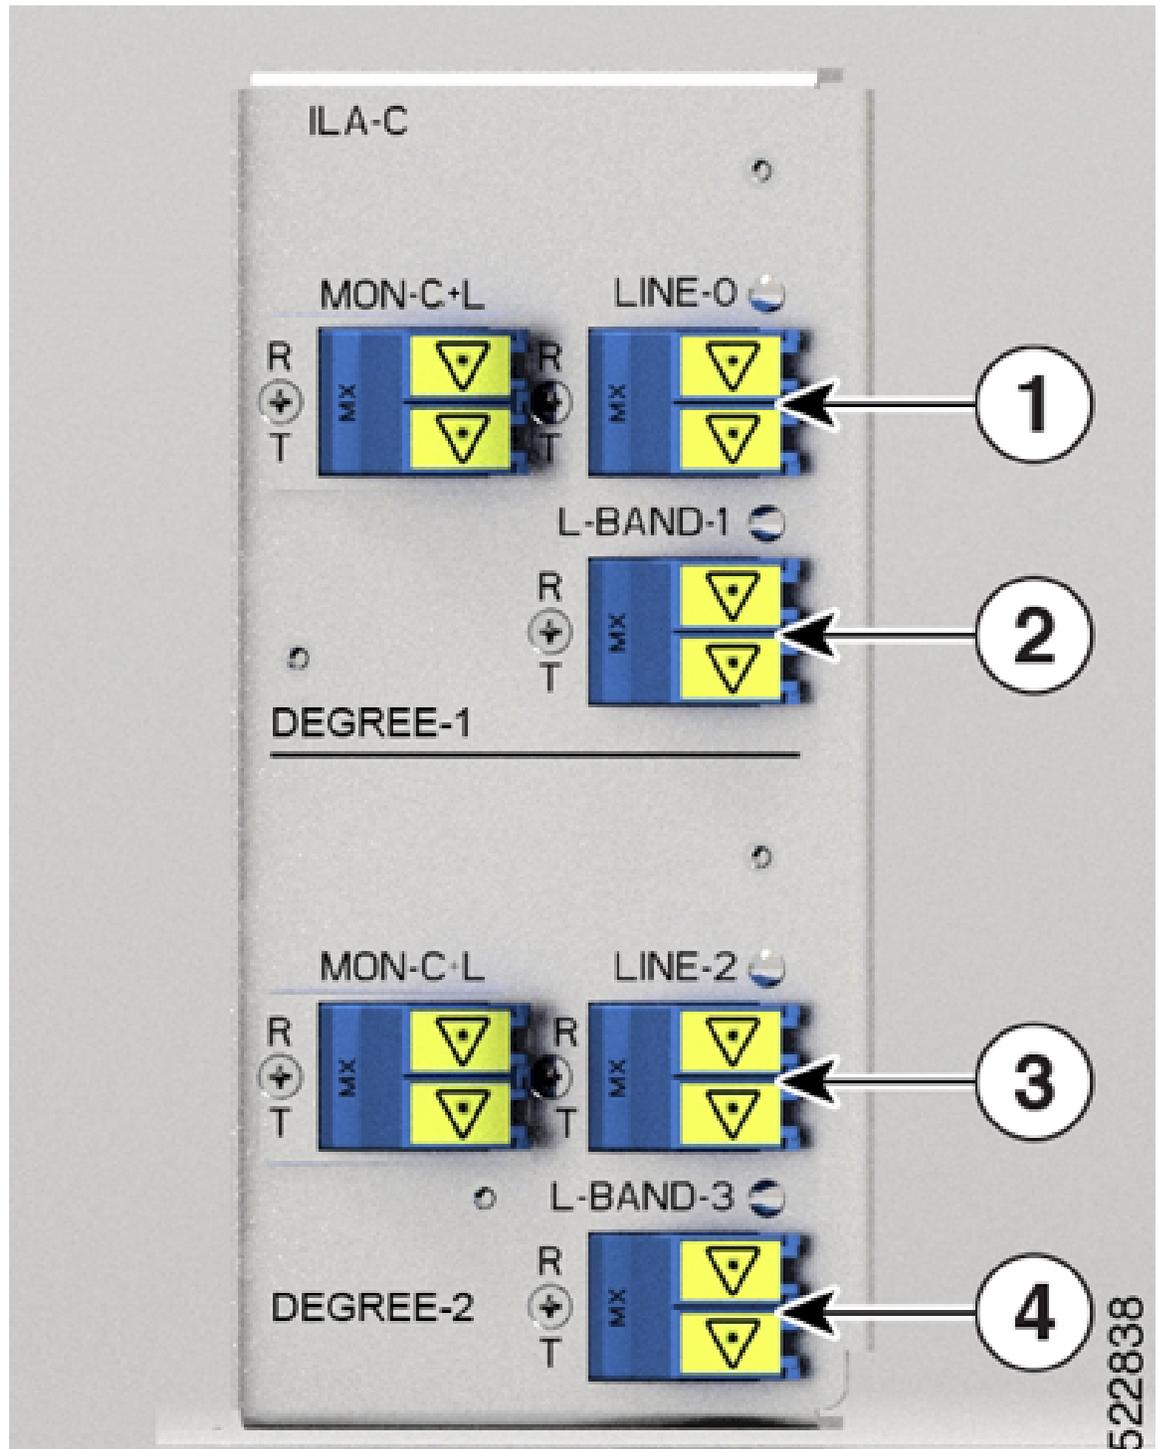


Table 18: NCS1K-ILA-C Port Mapping

1	Parent Controller: OTS0/0/0/0 Child Controller: OSC0/0/0/0, Line OTS-OCH 0/0/0/0/x
2	Parent Controller: OTS0/0/0/1
3	Parent Controller: OTS0/0/0/2 Child Controller: OSC0/0/0/2, Line OTS-OCH 0/0/0/2/x
4	Parent Controller: OTS0/0/0/3

Figure 17: NCS1K-ILA-L

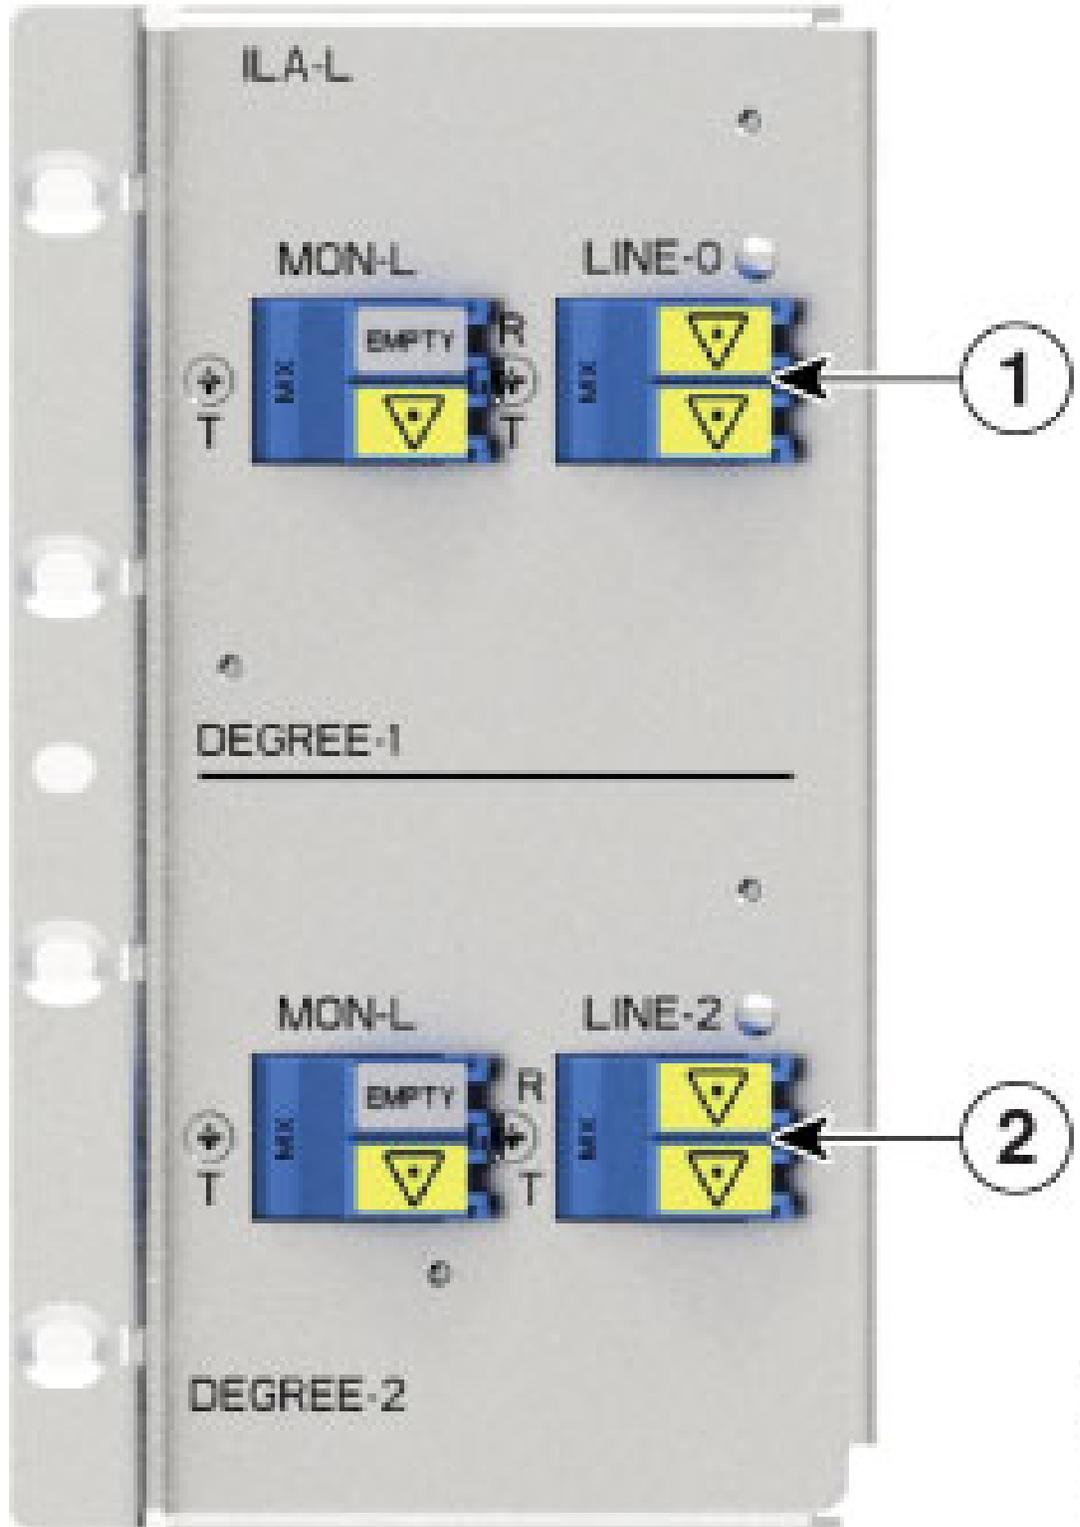

523174

Table 19: NCS1K-ILA-L Port Mapping

1	Parent Controller: OTS0/0/0/0 Child Controller: OSC0/0/0/0, Line OTS-OCH 0/0/0/0/x
2	Parent Controller: OTS0/0/0/2 Child Controller: OSC0/0/0/2, Line OTS-OCH 0/0/0/2/x

The following figures and tables show the three ILA variants that are introduced in Release 7.10.1 and the mapping between their physical ports and controllers:



Note The new ILA variants have ports that are highlighted in red to indicate the Raman ports.

Figure 18: NCS1K-E-ILA-2R-C

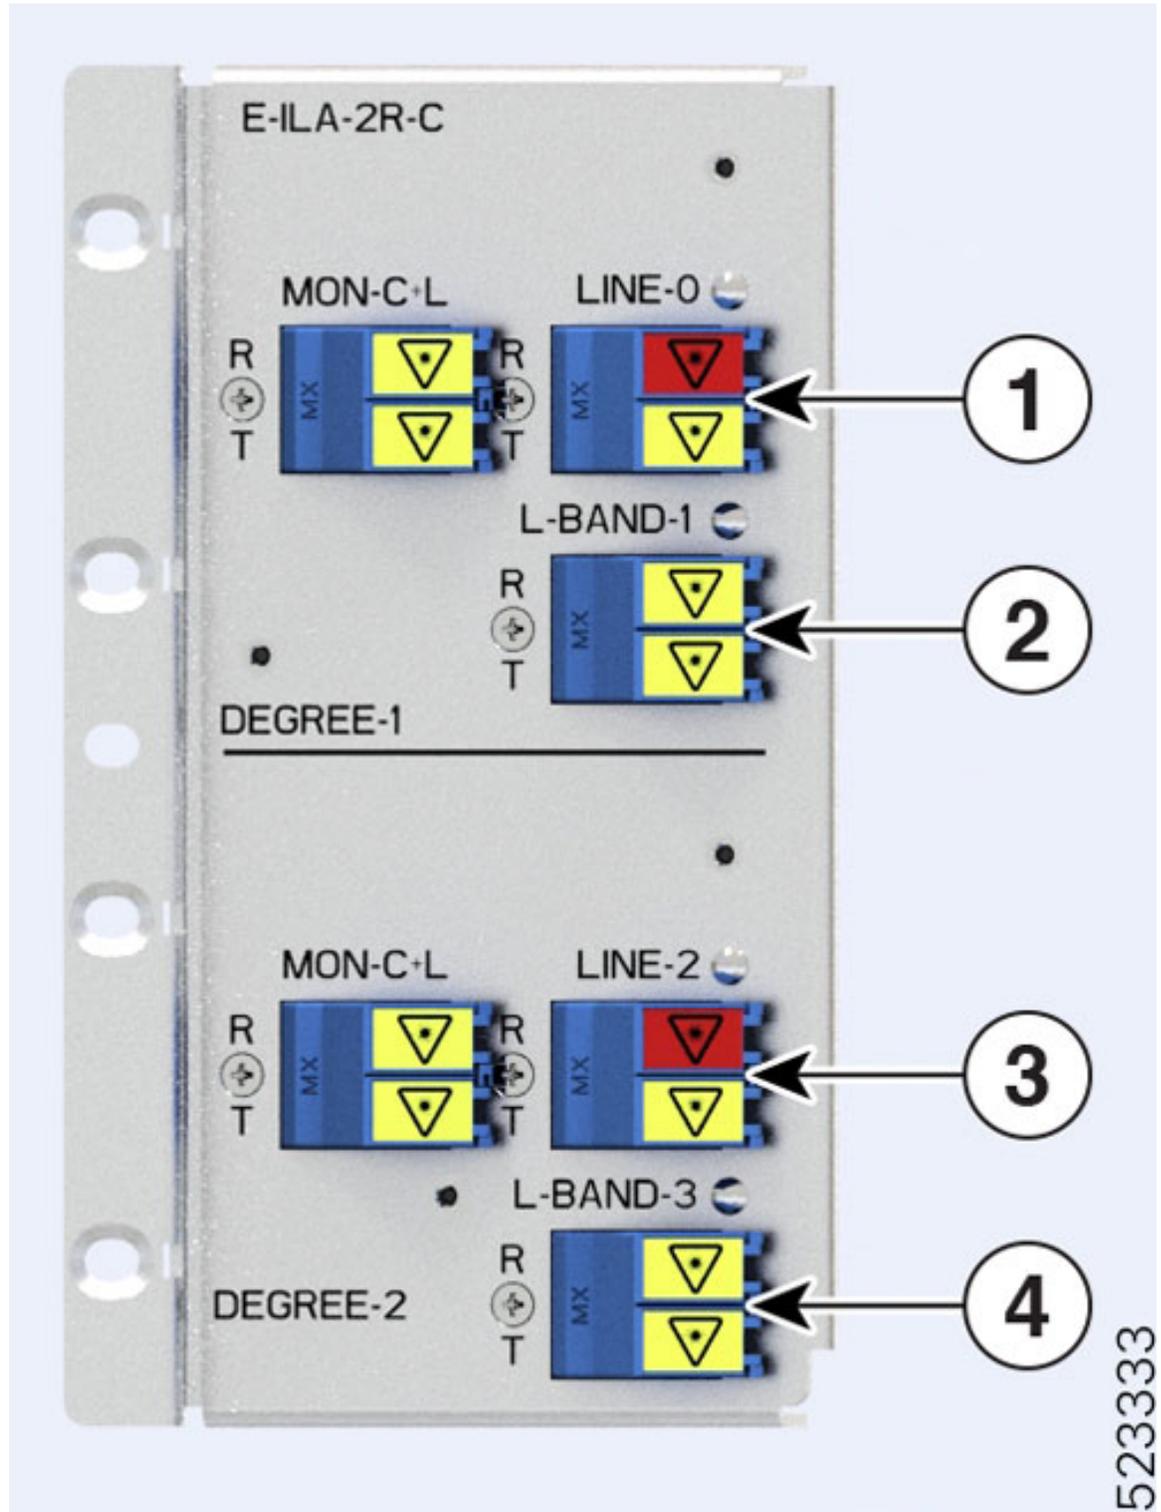


Table 20: E-ILA-2R-C Port Mapping

1	Parent Controller: OTS0/0/0/0 Child Controller: OSC0/0/0/0, DFB0/0/0/0, Line OTS-OCH 0/0/0/0/x
2	Parent Controller: OTS0/0/0/1
3	Parent Controller: OTS0/0/0/2 Child Controller: OSC0/0/0/2, DFB0/0/0/2, Line OTS-OCH 0/0/0/2/x
4	Parent Controller: OTS0/0/0/3

Figure 19: NCS1K-E-ILA-R-C

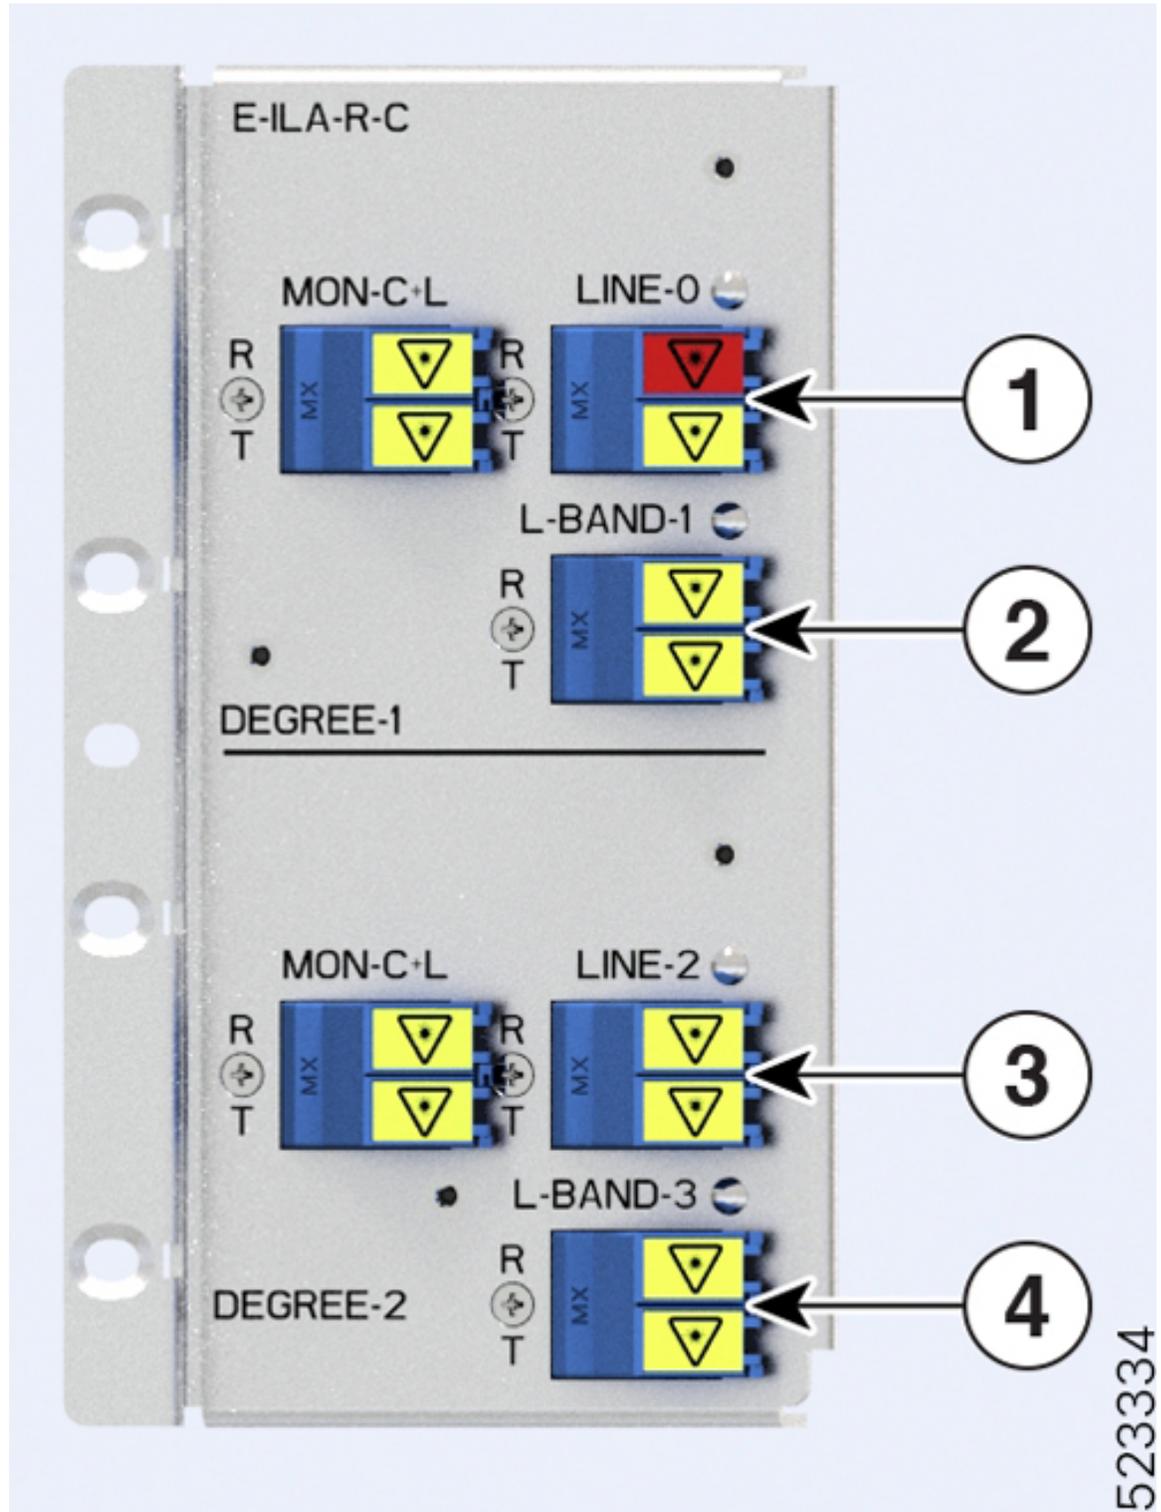


Table 21: E-ILA-R-C Port Mapping

1	Parent Controller: OTS0/0/0/0 Child Controller: OSC0/0/0/0, DFB0/0/0/0, Line OTS-OCH 0/0/0/0/x
2	Parent Controller: OTS0/0/0/1
3	Parent Controller: OTS0/0/0/2 Child Controller: OSC0/0/0/2, Line OTS-OCH 0/0/0/2/x
4	Parent Controller: OTS0/0/0/3

The following figures and tables show the new ILA variant that is introduced in Release 7.11.1 and the mapping between its physical ports and controllers:

Figure 20: NCS1K-E-ILA-R-C-2

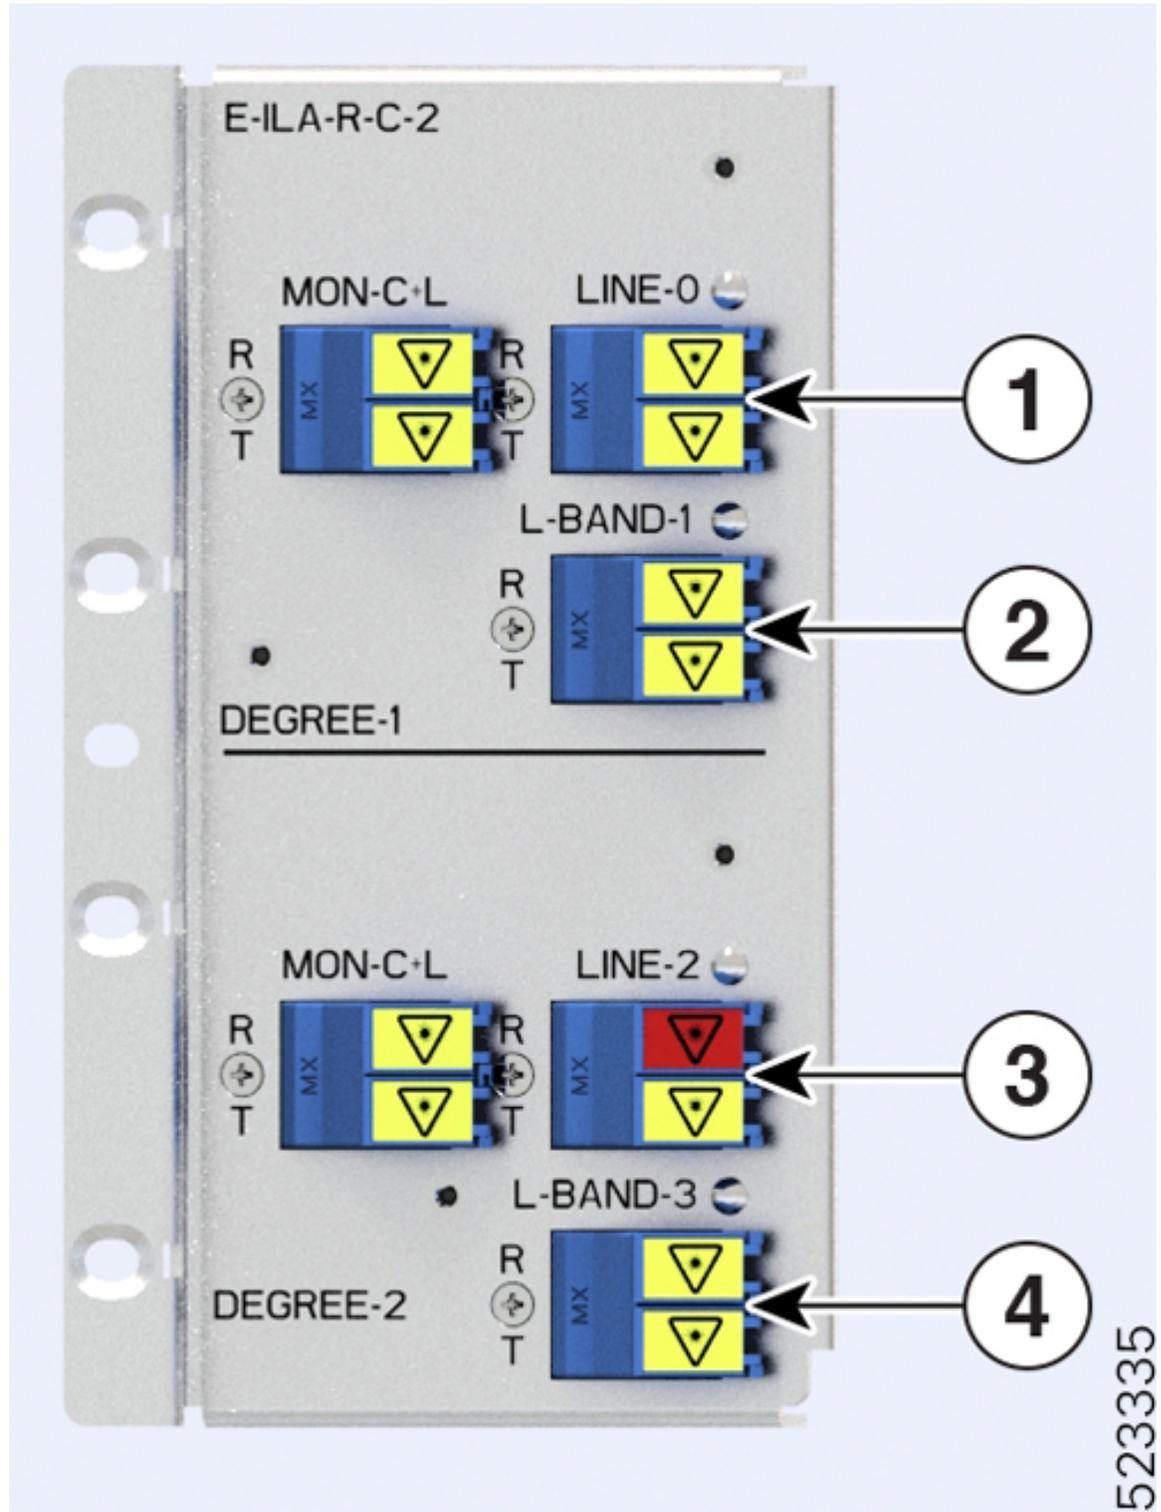


Table 22: E-ILA-R-C-2 Port Mapping

1	Parent Controller: OTS0/0/0/0 Child Controller: OSC0/0/0/0, Line OTS-OCH 0/0/0/0/x
2	Parent Controller: OTS0/0/0/1
3	Parent Controller: OTS0/0/0/2 Child Controller: OSC0/0/0/2, DFB0/0/0/2, Line OTS-OCH 0/0/0/2/x
4	Parent Controller: OTS0/0/0/3

To view the card type, use the following command:

```
RP/0/RP0/CPU0:ios#show platform
```

The following output highlights the *NCS1K-ILA-C* card type for the ILA controller model.

```
Fri Mar 25 09:23:43.417 UTC
Node           Type                               State           Config state
-----
0/RP0/CPU0     NCS1010-CNTLR-K9 (Active)         IOS XR RUN      NSHUT, NMON
0/PM0          NCS1010-AC-PSU                    OPERATIONAL     NSHUT, NMON
0/PM1          NCS1010-AC-PSU                    OPERATIONAL     NSHUT, NMON
0/FT0          NCS1010-FAN                       OPERATIONAL     NSHUT, NMON
0/FT1          NCS1010-FAN                       OPERATIONAL     NSHUT, NMON
0/0/NXR0      NCS1K-ILA-C                       OPERATIONAL     NSHUT, NMON
0/2            NCS1K-BRK-SA                      OPERATIONAL     NSHUT, NMON
RP/0/RP0/CPU0:ios#
```

The following output highlights the *NCS1K-E-ILA-R-C* card type for the ILA controller model.

```
Fri Jun 9 07:04:19.710 UTC
Node           Type                               State           Config state
-----
0/RP0/CPU0     NCS1010-CNTLR-K9 (Active)         IOS XR RUN      NSHUT, NMON
0/PM0          NCS1010-AC-PSU                    OPERATIONAL     NSHUT, NMON
0/PM1          NCS1010-AC-PSU                    OFFLINE         NSHUT, NMON
0/FT0          NCS1010-FAN                       OPERATIONAL     NSHUT, NMON
0/FT1          NCS1010-FAN                       OPERATIONAL     NSHUT, NMON
0/0/NXR0      NCS1K-E-ILA-R-C                   OPERATIONAL     NSHUT, NMON
```

To view the OTS controller status on the ILA cards, use the `show controller description` command.

```
RP/0/RP0/CPU0:ios#show controller description
```

The following output highlights the status of the OTS controller interfaces (*ots0/0/0/0...ots0/0/0/3*) on the ILA cards

```
Fri Mar 25 09:24:53.386 UTC
Interface           Status           Description
-----
Osc0/0/0/0         up
Osc0/0/0/2         up
Ots0/0/0/0         up
Ots0/0/0/1         up
Ots0/0/0/2         up
Ots0/0/0/3         up
RP/0/RP0/CPU0:ios#
```

To view the parameters of the LINE 0 OTS controller, use the following command:

```
RP/0/RP0/CPU0:ios#show controllers ots 0/0/0/0
```

The following output displays the parameters of the LINE 0 OTS controller *ots 0/0/0/0*.

```
Fri Mar 25 09:27:44.146 UTC

Controller State: Up

Transport Admin State: In Service

LED State: Green

Alarm Status:
-----
Detected Alarms: None

Alarm Statistics:
-----
LOW-TX-PWR = 0
RX-LOS-P = 0
RX-LOC = 0
TX-POWER-FAIL-LOW = 0
INGRESS-AUTO-LASER-SHUT = 0
INGRESS-AUTO-POW-RED = 0
INGRESS-AMPLI-GAIN-LOW = 0
INGRESS-AMPLI-GAIN-HIGH = 0
EGRESS-AUTO-LASER-SHUT = 0
EGRESS-AUTO-POW-RED = 0
EGRESS-AMPLI-GAIN-LOW = 0
EGRESS-AMPLI-GAIN-HIGH = 0
HIGH-TX-BR-PWR = 0
HIGH-RX-BR-PWR = 0
SPAN-TOO-SHORT-TX = 0
SPAN-TOO-SHORT-RX = 0

Parameter Statistics:
-----
Total RX Power(C+L) = 20.00 dBm
Total TX Power(C+L) = 20.00 dBm
Total RX Power = 20.00 dBm
Total TX Power = 23.01 dBm
RX Signal Power = -30.00 dBm
TX Signal Power = 20.00 dBm
TX Voa Attenuation = 0.0 dB
Egress Ampli Gain = 8.0 dB
Egress Ampli Tilt = 0.0 dB
Egress Ampli Gain Range = Normal
Egress Ampli Safety Control mode = auto
Egress Ampli Osri = OFF
Egress Ampli Force Apr = OFF

Configured Parameters:
-----
TX Voa Attenuation = 0.0 dB
Egress Ampli Gain = 8.0 dB
Egress Ampli Tilt = 0.0 dB
Egress Ampli Gain Range = Normal
Egress Ampli Safety Control mode = auto
Egress Ampli Osri = OFF
Egress Ampli Force Apr = OFF
```

To view the parameters of the LINE 2 OTS controller, use the following command:

```
RP/0/RP0/CPU0:ios#show controllers ots 0/0/0/2
```

The following output displays the parameters of the LINE 2 OTS controller *ots 0/0/0/2*.

```
Wed Jun 29 15:54:05.699 UTC
```

```
Controller State: Up
```

```
Transport Admin State: In Service
```

```
LED State: Green
```

```
Alarm Status:
```

```
-----
```

```
Detected Alarms: None
```

```
Alarm Statistics:
```

```
-----
```

```
RX-LOS-P = 0
```

```
RX-LOC = 0
```

```
TX-POWER-FAIL-LOW = 0
```

```
INGRESS-AUTO-LASER-SHUT = 0
```

```
INGRESS-AUTO-POW-RED = 0
```

```
INGRESS-AMPLI-GAIN-LOW = 0
```

```
INGRESS-AMPLI-GAIN-HIGH = 0
```

```
EGRESS-AUTO-LASER-SHUT = 0
```

```
EGRESS-AUTO-POW-RED = 0
```

```
EGRESS-AMPLI-GAIN-LOW = 0
```

```
EGRESS-AMPLI-GAIN-HIGH = 0
```

```
HIGH-TX-BR-PWR = 0
```

```
HIGH-RX-BR-PWR = 0
```

```
SPAN-TOO-SHORT-TX = 0
```

```
SPAN-TOO-SHORT-RX = 0
```

```
Parameter Statistics:
```

```
-----
```

```
Total RX Power(C+L) = 20.00 dBm
```

```
Total TX Power(C+L) = 20.00 dBm
```

```
Total RX Power = 20.00 dBm
```

```
Total TX Power = 23.01 dBm
```

```
RX Signal Power = -30.00 dBm
```

```
TX Signal Power = 20.00 dBm
```

```
TX Voa Attenuation = 0.0 dB
```

```
Egress Ampli Gain = 8.0 dB
```

```
Egress Ampli Tilt = 0.0 dB
```

```
Egress Ampli Gain Range = Normal
```

```
Egress Ampli Safety Control mode = auto
```

```
Egress Ampli Osri = OFF
```

```
Egress Ampli Force Apr = OFF
```

```
Configured Parameters:
```

```
-----
```

```
TX Voa Attenuation = 0.0 dB
```

```
Egress Ampli Gain = 8.0 dB
```

```
Egress Ampli Tilt = 0.0 dB
```

```
Egress Ampli Gain Range = Normal
```

```
Egress Ampli Safety Control mode = auto
```

```
Egress Ampli Osri = OFF
```

```
Egress Ampli Force Apr = OFF
```

The following output displays the parameters of the LINE 1 OTS controller *ots 0/0/0/1*.

```
RP/0/RP0/CPU0:OLT-C-14#show controllers ots 0/0/0/1
Mon Feb 27 20:34:00.257 UTC
```

```
Controller State: Up
```

```
Transport Admin State: In Service
```

```
LED State: Green
```

```
Alarm Status:
```

```
-----
```

```
Detected Alarms: None
```

```
Alarm Statistics:
```

```
-----
```

```
RX-LOS-P = 1
```

```
RX-LOC = 0
```

```
TX-POWER-FAIL-LOW = 2
```

```
INGRESS-AUTO-LASER-SHUT = 0
```

```
INGRESS-AUTO-POW-RED = 0
```

```
INGRESS-AMPLI-GAIN-LOW = 0
```

```
INGRESS-AMPLI-GAIN-HIGH = 0
```

```
EGRESS-AUTO-LASER-SHUT = 0
```

```
EGRESS-AUTO-POW-RED = 0
```

```
EGRESS-AMPLI-GAIN-LOW = 0
```

```
EGRESS-AMPLI-GAIN-HIGH = 0
```

```
HIGH-TX-BR-PWR = 0
```

```
HIGH-RX-BR-PWR = 0
```

```
SPAN-TOO-SHORT-TX = 0
```

```
SPAN-TOO-SHORT-RX = 0
```

```
Parameter Statistics:
```

```
-----
```

```
Total Rx Power = 19.39 dBm
```

```
Total Tx Power = 3.99 dBm
```

```
Configured Parameters:
```

```
-----
```

OLT Controller Model

When the NCS1K-E-OLT-C, NCS1K-E-OLT-R-C, NCS1K-E-OLT-L, NCS1K-OLT-L, NCS1K-OLT-R-C, and NCS1K-OLT-C cards are brought up, 34 and 33 OTS controllers are created by default for C band and L Band OLT cards respectively.

- LINE 0 port: *ots 0/0/0/0* (C band line OTS controller)
- L-BAND 1 port: *ots 0/0/0/1* (L band line OTS controller)
- LC port: *ots 0/0/0/2* (Add1 Rx/Drop1 Tx OTS controller)
- LC port: *ots 0/0/0/3* (Add2 Rx/Drop2 Tx OTS controller)
- MPO ports: *ots 0/0/0/4* to *ots 0/0/0/11*
- MPO ports: *ots 0/0/0/12* to *ots 0/0/0/19*
- MPO ports: *ots 0/0/0/20* to *ots 0/0/0/27*

- MPO ports: ots 0/0/0/28 to ots 0/0/0/33

For the new OLT variants, the following lists the Add/Drop ports that are mapped to the OTS controllers:

- LINE 0 port: ots 0/0/0/0 (C band line OTS controller)
- L-BAND 1 port: ots 0/0/0/1 (L band line OTS controller)
- LC port: ots 0/0/0/2...17 (Add1...16 Rx/Drop1...16 Tx OTS controller)
- MPO ports: ots 0/0/0/18 to ots 0/0/0/25
- MPO ports: ots 0/0/0/26 to ots 0/0/0/33

The following figures and tables show the two OLT variants and the mapping between physical ports and controllers:

Figure 21: NCS1K-OLT-R-C

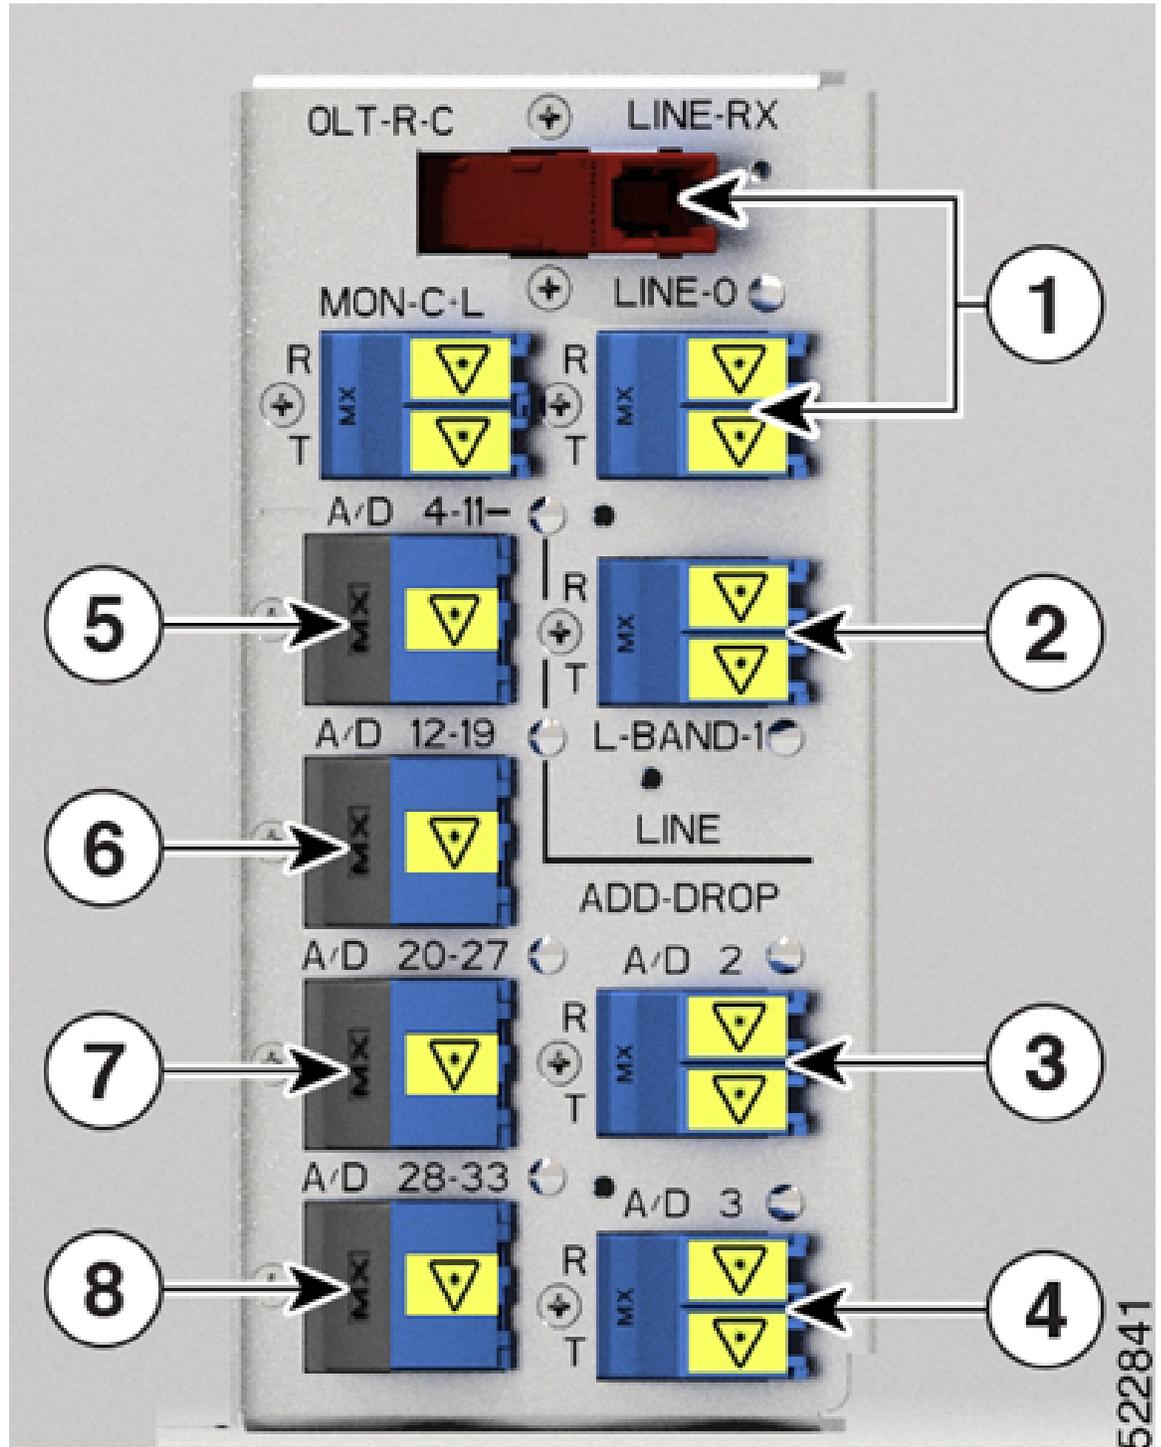


Table 23: NCS1K-OLT-R-C Port Mapping

1	Parent Controller: OTS0/0/0/0 Child Controller: OSC0/0/0/0, DFB0/0/0/0, Line OTS-OCH 0/0/0/0/x
2	Parent Controller: OTS0/0/0/1
3	Parent Controller: OTS0/0/0/2 Child Controller: COM OTS-OCH 0/0/0/2/x
4	Parent Controller: OTS0/0/0/3 Child Controller: COM OTS-OCH 0/0/0/3/x
5	Parent Controller: OTS0/0/0/4-11 Child Controller: COM OTS-OCH 0/0/0/4-11/x
6	Parent Controller: OTS0/0/0/12-19 Child Controller: COM OTS-OCH 0/0/0/12-19/x
7	Parent Controller: OTS0/0/0/20-27 Child Controller: COM OTS-OCH 0/0/0/20-27/x
8	Parent Controller: OTS0/0/0/28-33 Child Controller: COM OTS-OCH 0/0/0/28-33/x

Figure 22: NCS1K-OLT-C

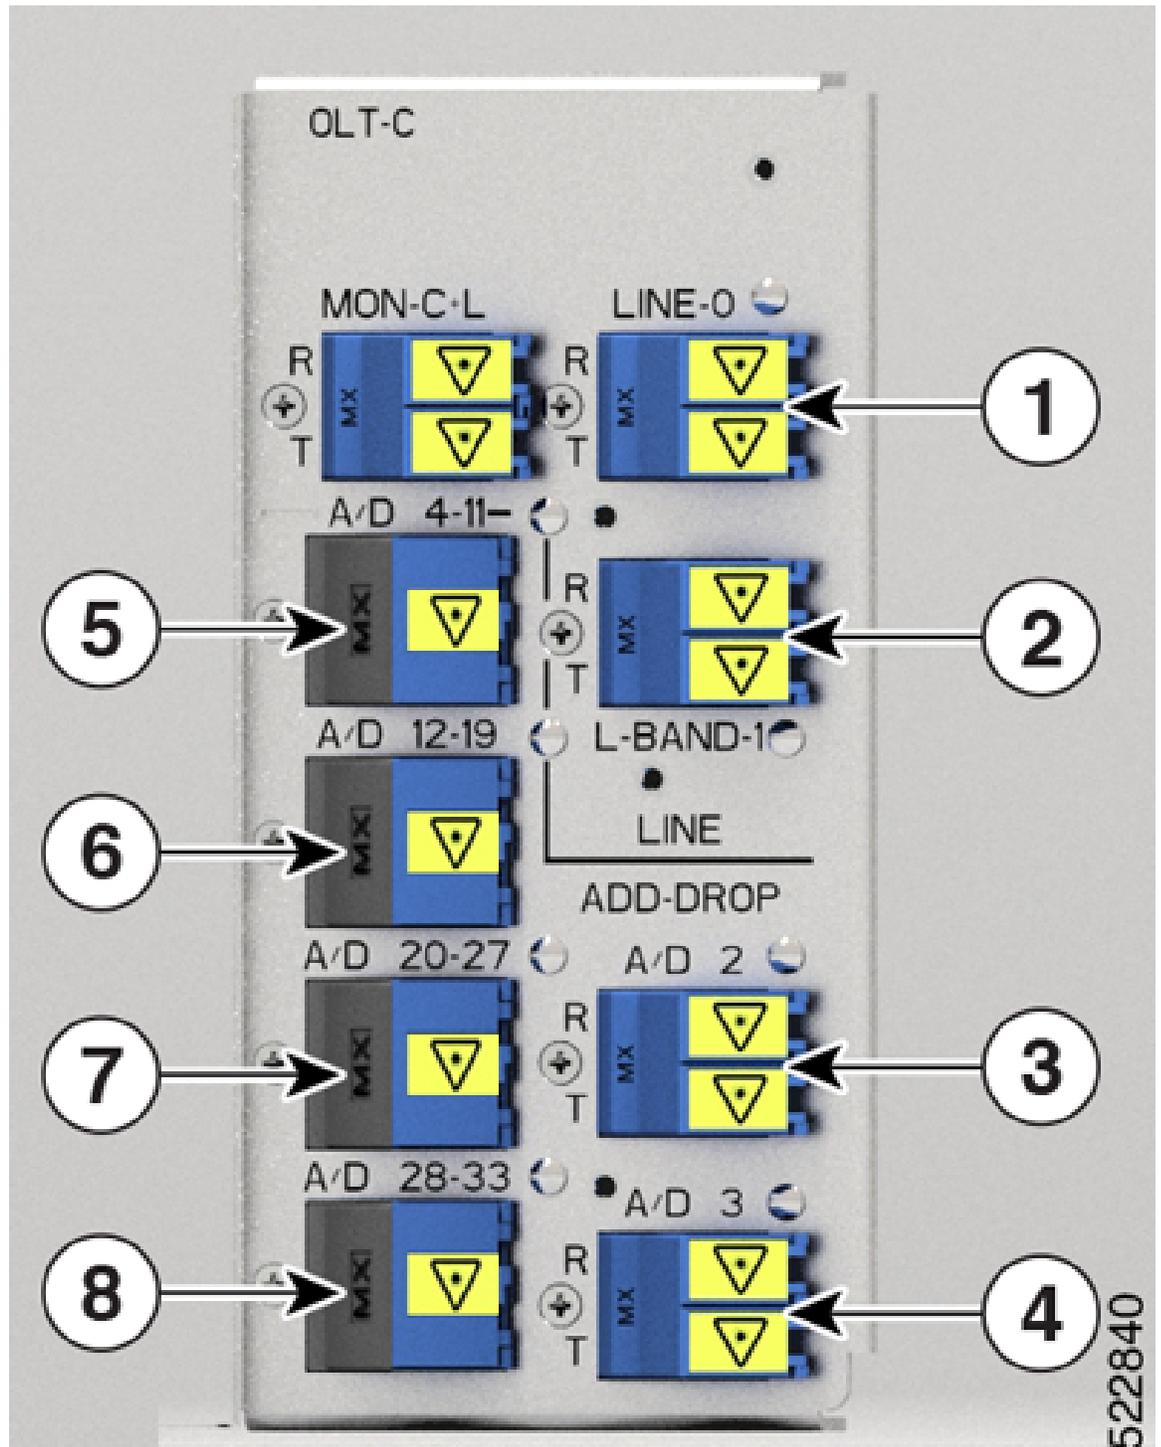


Table 24: NCS1K-OLT-C Port Mapping

1	Parent Controller: OTS0/0/0/0 Child Controller: OSC0/0/0/0, Line OTS-OCH 0/0/0/0/x
2	Parent Controller: OTS0/0/0/1
3	Parent Controller: OTS0/0/0/2 Child Controller: COM OTS-OCH 0/0/0/2/x
4	Parent Controller: OTS0/0/0/3 Child Controller: COM OTS-OCH 0/0/0/3/x
5	Parent Controller: OTS0/0/0/4-11 Child Controller: COM OTS-OCH 0/0/0/4-11/x
6	Parent Controller: OTS0/0/0/12-19 Child Controller: COM OTS-OCH 0/0/0/12-19/x
7	Parent Controller: OTS0/0/0/20-27 Child Controller: COM OTS-OCH 0/0/0/20-27/x
8	Parent Controller: OTS0/0/0/28-33 Child Controller: COM OTS-OCH 0/0/0/28-33/x

Figure 23: NCS1K-OLT-L

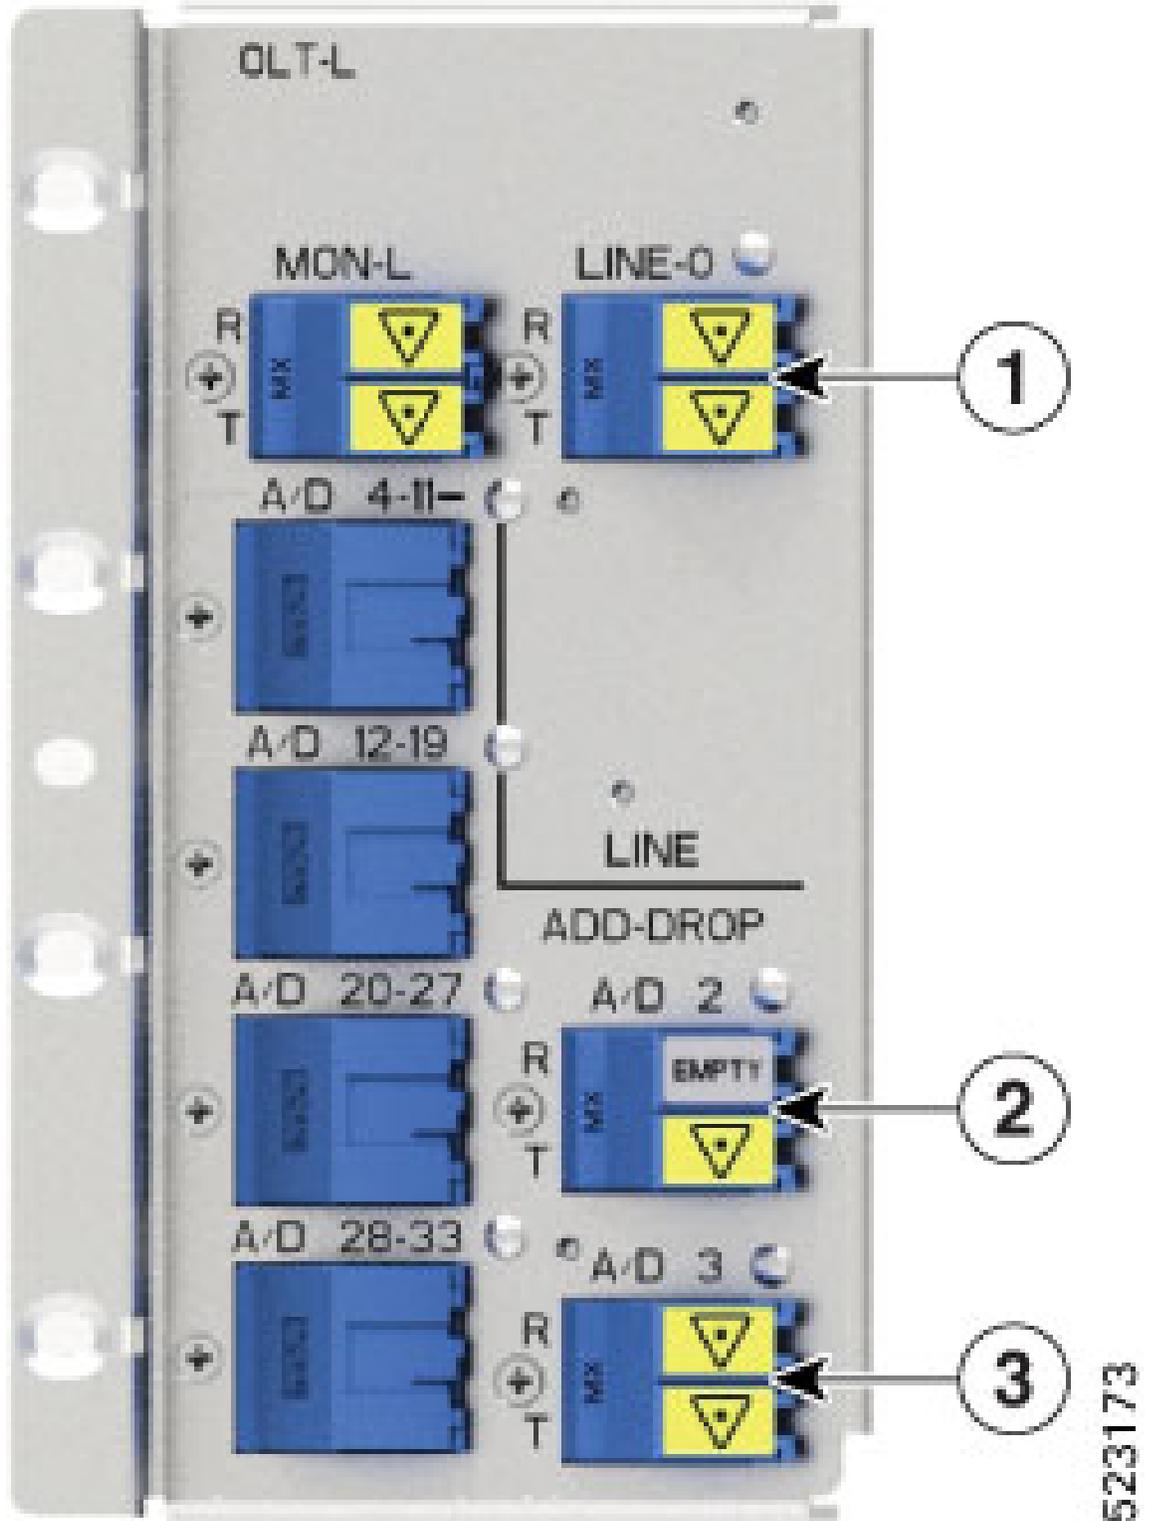


Table 25: NCS1K-OLT-L Port Mapping

1	Parent Controller: OTS0/0/0/0 Child Controller: OSC0/0/0/0, Line OTS-OCH 0/0/0/0/x
2	Parent Controller: OTS0/0/0/2 Child Controller: OSC0/0/0/2, Line OTS-OCH 0/0/0/2/x
3	Parent Controller: OTS0/0/0/3

The following figures and tables show the three OLT variants that are introduced in Release 7.10.1 and the mapping between their physical ports and controllers:

Figure 24: NCS1K-E-OLT-L

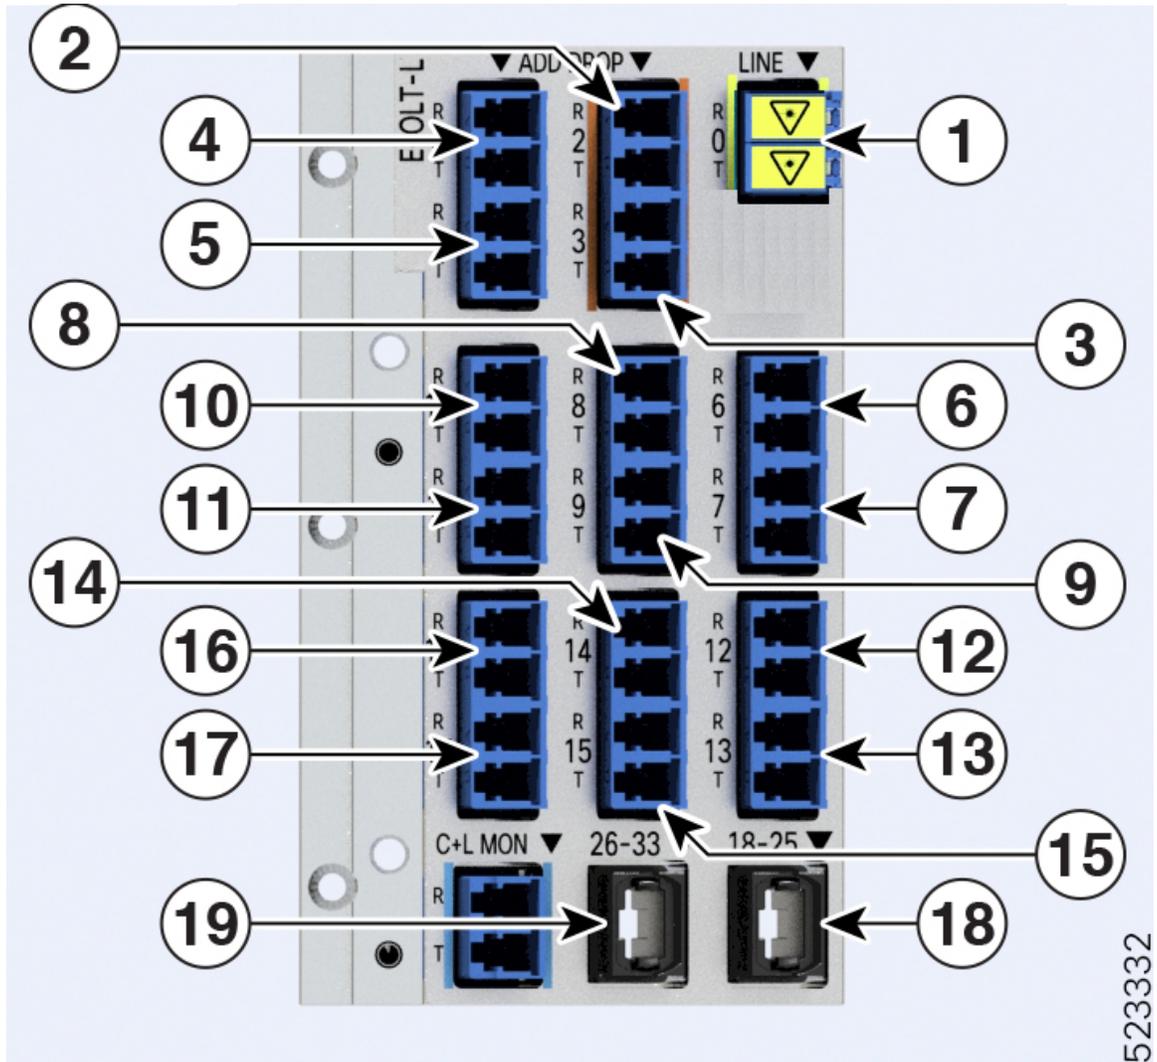


Table 26: NCS1K-E-OLT-L Port Mapping

1	Parent Controller: OTS0/0/0/0 Child Controller: OSC0/0/0/0, Line OTS-OCH 0/0/0/0/x
2	Parent Controller: OTS0/0/0/2 Child Controller: COM OTS-OCH 0/0/0/2/x
3	Parent Controller: OTS0/0/0/3 Child Controller: COM OTS-OCH 0/0/0/3/x
4	Parent Controller: OTS0/0/0/4 Child Controller: COM OTS-OCH 0/0/0/4/x
5	Parent Controller: OTS0/0/0/5 Child Controller: COM OTS-OCH 0/0/0/5/x
6	Parent Controller: OTS0/0/0/6 Child Controller: COM OTS-OCH 0/0/0/6/x
7	Parent Controller: OTS0/0/0/7 Child Controller: COM OTS-OCH 0/0/0/7/x
8	Parent Controller: OTS0/0/0/8 Child Controller: COM OTS-OCH 0/0/0/8/x
9	Parent Controller: OTS0/0/0/9 Child Controller: COM OTS-OCH 0/0/0/9/x
10	Parent Controller: OTS0/0/0/10 Child Controller: COM OTS-OCH 0/0/0/10/x
11	Parent Controller: OTS0/0/0/11 Child Controller: COM OTS-OCH 0/0/0/11/x
12	Parent Controller: OTS0/0/0/12 Child Controller: COM OTS-OCH 0/0/0/12/x
13	Parent Controller: OTS0/0/0/13 Child Controller: COM OTS-OCH 0/0/0/13/x
14	Parent Controller: OTS0/0/0/14 Child Controller: COM OTS-OCH 0/0/0/14/x
15	Parent Controller: OTS0/0/0/15 Child Controller: COM OTS-OCH 0/0/0/15/x

16	Parent Controller: OTS0/0/0/16 Child Controller: COM OTS-OCH 0/0/0/16/x
17	Parent Controller: OTS0/0/0/17 Child Controller: COM OTS-OCH 0/0/0/17/x
18	Parent Controller: OTS0/0/0/18-25 Child Controller: COM OTS-OCH 0/0/0/18-25/x
19	Parent Controller: OTS0/0/0/26-33 Child Controller: COM OTS-OCH 0/0/0/26-33/x

Figure 25: NCS1K-E-OLT-C

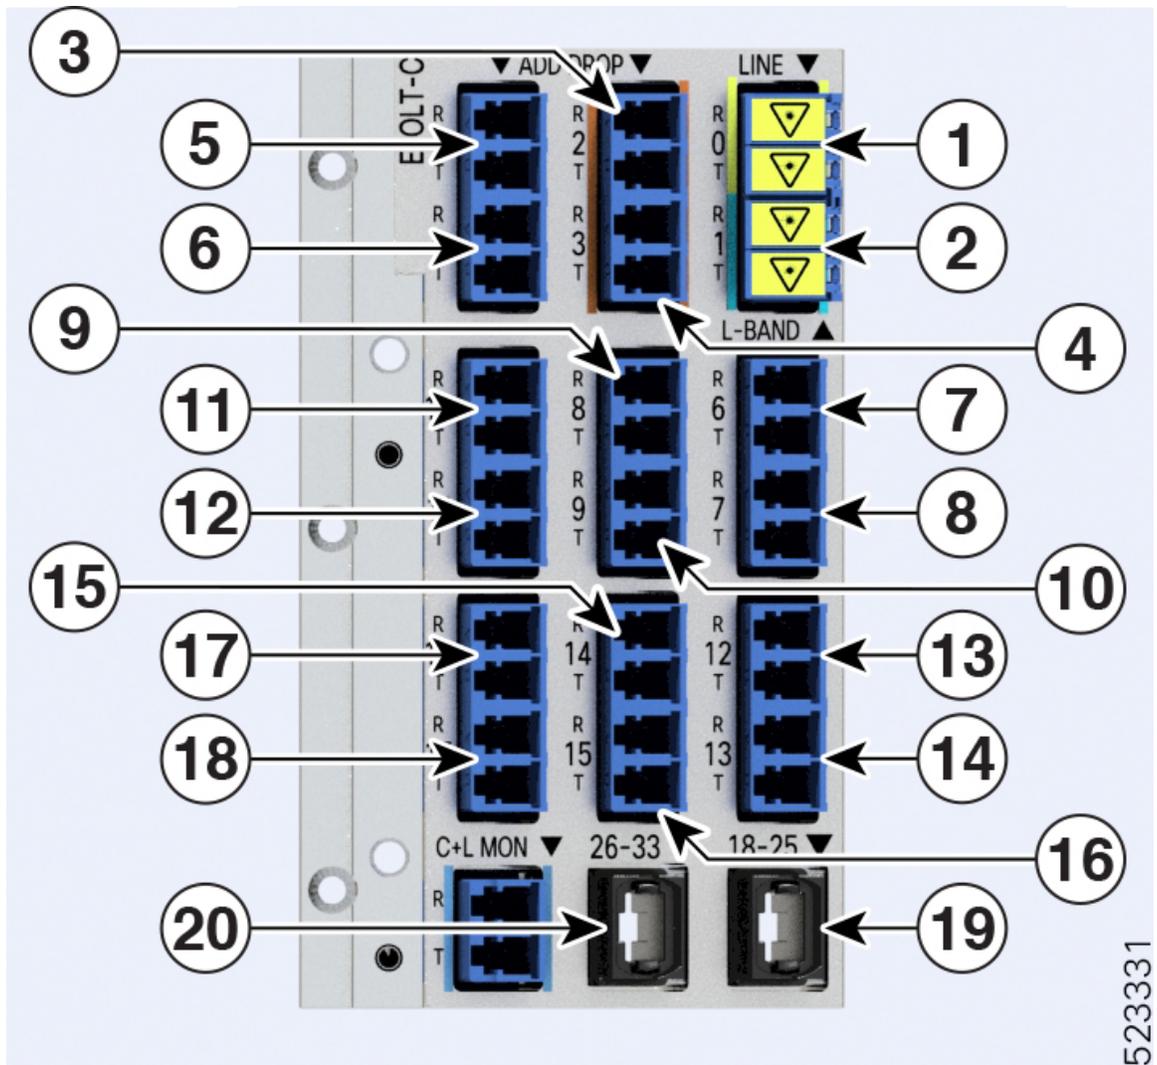


Table 27: NCS1K-E-OLT-C Port Mapping

1	Parent Controller: OTS0/0/0/0 Child Controller: OSC0/0/0/0, Line OTS-OCH 0/0/0/0/x
2	Parent Controller: OTS0/0/0/1
3	Parent Controller: OTS0/0/0/2 Child Controller: COM OTS-OCH 0/0/0/2/x
4	Parent Controller: OTS0/0/0/3 Child Controller: COM OTS-OCH 0/0/0/3/x
5	Parent Controller: OTS0/0/0/4 Child Controller: COM OTS-OCH 0/0/0/4/x
6	Parent Controller: OTS0/0/0/5 Child Controller: COM OTS-OCH 0/0/0/5/x
7	Parent Controller: OTS0/0/0/6 Child Controller: COM OTS-OCH 0/0/0/6/x
8	Parent Controller: OTS0/0/0/7 Child Controller: COM OTS-OCH 0/0/0/7/x
9	Parent Controller: OTS0/0/0/8 Child Controller: COM OTS-OCH 0/0/0/8/x
10	Parent Controller: OTS0/0/0/9 Child Controller: COM OTS-OCH 0/0/0/9/x
11	Parent Controller: OTS0/0/0/10 Child Controller: COM OTS-OCH 0/0/0/10/x
12	Parent Controller: OTS0/0/0/11 Child Controller: COM OTS-OCH 0/0/0/11/x
13	Parent Controller: OTS0/0/0/12 Child Controller: COM OTS-OCH 0/0/0/12/x
14	Parent Controller: OTS0/0/0/13 Child Controller: COM OTS-OCH 0/0/0/13/x
15	Parent Controller: OTS0/0/0/14 Child Controller: COM OTS-OCH 0/0/0/14/x

16	Parent Controller: OTS0/0/0/15 Child Controller: COM OTS-OCH 0/0/0/15/x
17	Parent Controller: OTS0/0/0/16 Child Controller: COM OTS-OCH 0/0/0/16/x
18	Parent Controller: OTS0/0/0/17 Child Controller: COM OTS-OCH 0/0/0/17/x
19	Parent Controller: OTS0/0/0/18-25 Child Controller: COM OTS-OCH 0/0/0/18-25/x
20	Parent Controller: OTS0/0/0/26-33 Child Controller: COM OTS-OCH 0/0/0/26-33/x

Figure 26: NCS1K-E-OLT-R-C



Note In the following image, the port that is highlighted in red indicate the Raman port.

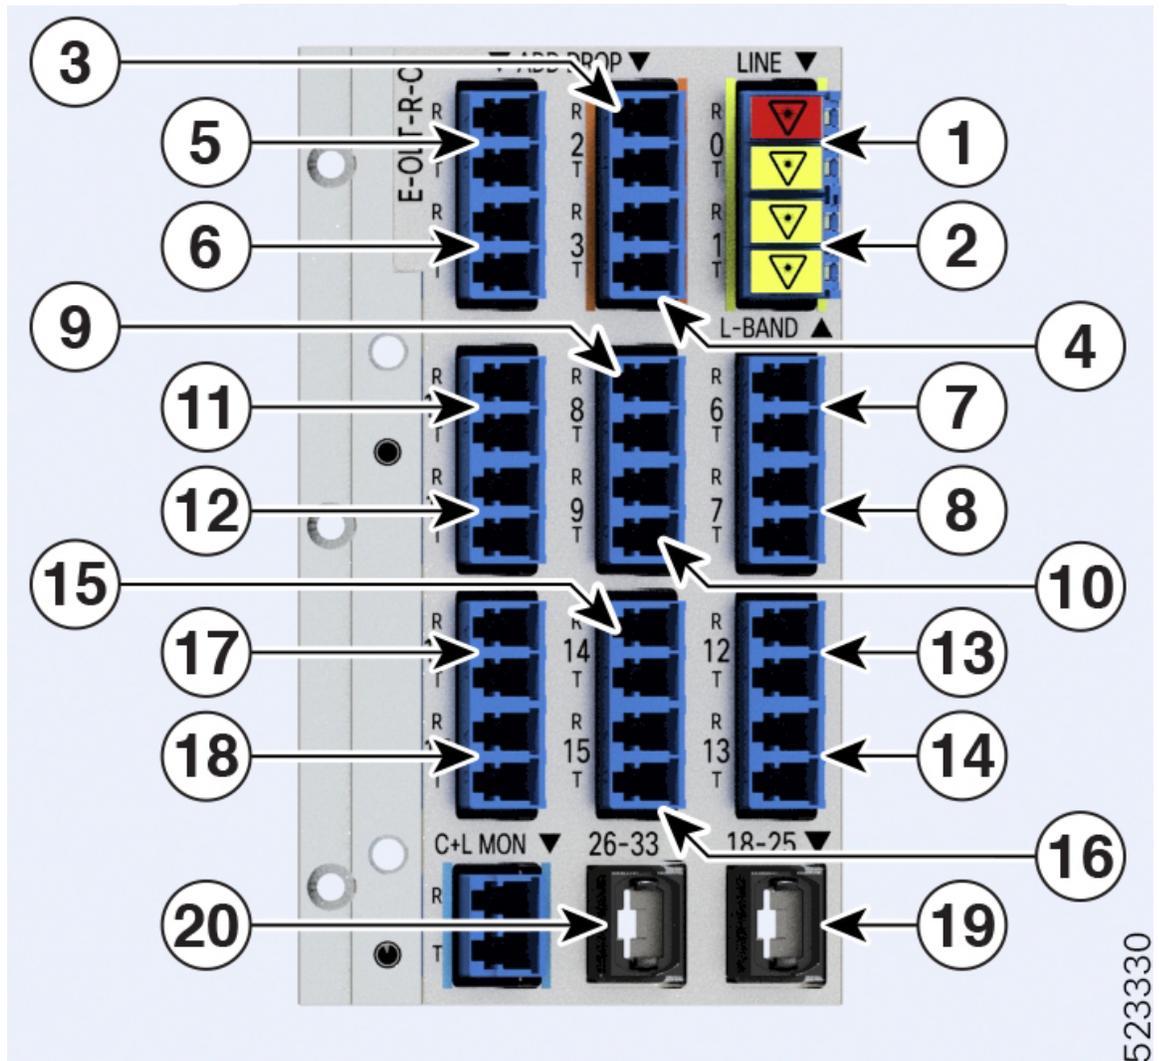


Table 28: NCS1K-E-OLT-R-C Port Mapping

1	Parent Controller: OTS0/0/0/0 Child Controller: OSC0/0/0/0, Line OTS-OCH 0/0/0/0/x
2	Parent Controller: OTS0/0/0/1
3	Parent Controller: OTS0/0/0/2 Child Controller: COM OTS-OCH 0/0/0/2/x
4	Parent Controller: OTS0/0/0/3 Child Controller: COM OTS-OCH 0/0/0/3/x
5	Parent Controller: OTS0/0/0/4 Child Controller: COM OTS-OCH 0/0/0/4/x

6	Parent Controller: OTS0/0/0/5 Child Controller: COM OTS-OCH 0/0/0/5/x
7	Parent Controller: OTS0/0/0/6 Child Controller: COM OTS-OCH 0/0/0/6/x
8	Parent Controller: OTS0/0/0/7 Child Controller: COM OTS-OCH 0/0/0/7/x
9	Parent Controller: OTS0/0/0/8 Child Controller: COM OTS-OCH 0/0/0/8/x
10	Parent Controller: OTS0/0/0/9 Child Controller: COM OTS-OCH 0/0/0/9/x
11	Parent Controller: OTS0/0/0/10 Child Controller: COM OTS-OCH 0/0/0/10/x
12	Parent Controller: OTS0/0/0/11 Child Controller: COM OTS-OCH 0/0/0/11/x
13	Parent Controller: OTS0/0/0/12 Child Controller: COM OTS-OCH 0/0/0/12/x
14	Parent Controller: OTS0/0/0/13 Child Controller: COM OTS-OCH 0/0/0/13/x
15	Parent Controller: OTS0/0/0/14 Child Controller: COM OTS-OCH 0/0/0/14/x
16	Parent Controller: OTS0/0/0/15 Child Controller: COM OTS-OCH 0/0/0/15/x
17	Parent Controller: OTS0/0/0/16 Child Controller: COM OTS-OCH 0/0/0/16/x
18	Parent Controller: OTS0/0/0/17 Child Controller: COM OTS-OCH 0/0/0/17/x
19	Parent Controller: OTS0/0/0/18-25 Child Controller: COM OTS-OCH 0/0/0/18-25/x
20	Parent Controller: OTS0/0/0/26-33 Child Controller: COM OTS-OCH 0/0/0/26-33/x

To view the platform information, use the following command:

RP/0/RP0/CPU0:ios#s

The following output highlights the *NCS1K-OLT-R-C* card type for the OLT controller model.

```
Wed Jun 29 16:00:14.373 UTC
Node                Type                State                Config state
-----
0/RP0/CPU0          NCS1010-CNTRLR-K9 (Active) IOS XR RUN           NSHUT,NMON
0/PM0                NCS1010-AC-PSU      OPERATIONAL          NSHUT,NMON
0/PM1                NCS1010-AC-PSU      OPERATIONAL          NSHUT,NMON
0/FT0                NCS1010-FAN         OPERATIONAL          NSHUT,NMON
0/FT1                NCS1010-FAN         OPERATIONAL          NSHUT,NMON
0/0/NXR0            NCS1K-OLT-R-C       OPERATIONAL          NSHUT,NMON
0/2                  NCS1K-BRK-SA        OPERATIONAL          NSHUT,NMON
0/2/0                NCS1K-BRK-8         OPERATIONAL          NSHUT,NMON
0/2/1                NCS1K-BRK-16        OPERATIONAL          NSHUT,NMON
0/2/2                NCS1K-BRK-24        OPERATIONAL          NSHUT,NMON
RP/0/RP0/CPU0:ios#
```

The following output highlights the *NCS1K-E-OLT-R-C* card type for the OLT controller model.

```
Fri Jun 9 07:04:19.710 UTC
Node                Type                State                Config state
-----
0/RP0/CPU0          NCS1010-CNTRLR-K9 (Active) IOS XR RUN           NSHUT,NMON
0/PM0                NCS1010-AC-PSU      OPERATIONAL          NSHUT,NMON
0/PM1                NCS1010-AC-PSU      OFFLINE              NSHUT,NMON
0/FT0                NCS1010-FAN         OPERATIONAL          NSHUT,NMON
0/FT1                NCS1010-FAN         OPERATIONAL          NSHUT,NMON
0/0/NXR0            NCS1K-E-OLT-R-C     OPERATIONAL          NSHUT,NMON
```

To view the OTS controller status on the NCS1K-OLT-R-C line card, use the `show controller description` command.

RP/0/RP0/CPU0:ios#**show controller description**

The following output highlights the status of the OTS controller interfaces (*ots0/0/0/0...ots0/0/0/33*) on the OLT cards

```
Wed Jun 29 16:03:59.914 UTC

Interface                Status                Description
-----
Dfb0/0/0/0                up
Osc0/0/0/0                up
Ots0/0/0/0                up
Ots0/0/0/1                up
Ots0/0/0/2                up
.
.
Output snipped
.
.
Ots0/0/0/30                up
Ots0/0/0/31                up
Ots0/0/0/32                up
Ots0/0/0/33                up
```

To view the parameters of the LINE 0 OTS controller, use the following command:

RP/0/RP0/CPU0:ios#**show controllers ots 0/0/0/0**

The following output displays the parameters of the LINE 0 OTS controller *ots 0/0/0/0*.

```
Wed Jun 29 16:07:16.771 UTC
```

Controller State: Up

Transport Admin State: In Service

LED State: Green

Alarm Status:

Detected Alarms: None

Alarm Statistics:

RX-LOS-P = 0

RX-LOC = 0

TX-POWER-FAIL-LOW = 0

INGRESS-AUTO-LASER-SHUT = 0

INGRESS-AUTO-POW-RED = 0

INGRESS-AMPLI-GAIN-LOW = 0

INGRESS-AMPLI-GAIN-HIGH = 0

EGRESS-AUTO-LASER-SHUT = 0

EGRESS-AUTO-POW-RED = 0

EGRESS-AMPLI-GAIN-LOW = 0

EGRESS-AMPLI-GAIN-HIGH = 0

HIGH-TX-BR-PWR = 0

HIGH-RX-BR-PWR = 0

SPAN-TOO-SHORT-TX = 0

SPAN-TOO-SHORT-RX = 0

Parameter Statistics:

Total RX Power(C+L) = -10.00 dBm

Total TX Power(C+L) = 20.00 dBm

Total RX Power = 20.00 dBm

Total TX Power = 20.00 dBm

RX Signal Power = 20.00 dBm

TX Signal Power = 20.00 dBm

TX Voa Attenuation = 0.0 dB

Ingress Ampli Gain = 12.0 dB

Ingress Ampli Tilt = 0.0 dB

Ingress Ampli Gain Range = Normal

Ingress Ampli Safety Control mode = auto

Ingress Ampli Osri = OFF

Ingress Ampli Force Apr = OFF

Egress Ampli Gain = 16.0 dB

Egress Ampli Tilt = 0.0 dB

Egress Ampli Safety Control mode = auto

Egress Ampli Osri = OFF

Egress Ampli Force Apr = OFF

Configured Parameters:

TX Voa Attenuation = 0.0 dB

Ingress Ampli Gain = 12.0 dB

Ingress Ampli Tilt = 0.0 dB

Ingress Ampli Gain Range = Normal

Ingress Ampli Safety Control mode = auto

Ingress Ampli Osri = OFF

Ingress Ampli Force Apr = OFF

Egress Ampli Gain = 16.0 dB

Egress Ampli Tilt = 0.0 dB

```
Egress Ampli Safety Control mode = auto
Egress Ampli Osri = OFF
Egress Ampli Force Apr = OFF
```

To view the Raman parameters of the LINE 0 OTS controller, use the following command:

```
RP/0/RP0/CPU0:ios#show controllers ots 0/0/0/0 raman-info
```

The following output displays the Raman parameters of the LINE 0 OTS controller *ots 0/0/0/0*.

```
Wed Mar 23 06:02:41.093 UTC
```

```
Alarm Status:
```

```
-----
```

```
Detected Alarms: None
```

```
Alarm Statistics:
```

```
-----
```

```
RAMAN-AUTO-POW-RED = 0
RAMAN-1-LOW-POW = 0
RAMAN-2-LOW-POW = 0
RAMAN-3-LOW-POW = 0
RAMAN-4-LOW-POW = 0
RAMAN-5-LOW-POW = 0
RAMAN-1-HIGH-POW = 0
RAMAN-2-HIGH-POW = 0
RAMAN-3-HIGH-POW = 0
RAMAN-4-HIGH-POW = 0
RAMAN-5-HIGH-POW = 0
```

```
Parameter Statistics:
```

```
-----
```

```
Raman Safety Control mode = auto
Raman Osri = OFF
Raman Force Apr = OFF
Composite Raman Power = 10.40 mW
```

```
RAMAN Pump Info:
```

```
-----
```

Instance	Wavelength(nm)	Power(mW)
1	1424.00	0.00
2	1438.00	0.10
3	1457.00	10.00
4	1470.00	0.20
5	1495.00	1.20

```
Configured Parameters:
```

```
-----
```

```
Raman Safety Control mode = auto
Raman Osri = OFF
Raman Force Apr = OFF
```

```
RAMAN Pump Info:
```

```
-----
```

Instance	Power(mW)
1	45.00
2	40.00
3	40.00
4	40.00
5	35.00

To view the parameters on OTS port 2 or 3, use the following command:

```
RP/0/RP0/CPU0:ios#show controllers ots 0/0/0/2
```

The following output displays the parameters of the OTS port 2 controller *ots 0/0/0/2*.

```
Wed Mar 23 06:14:53.465 UTC
```

```
Controller State: Down
```

```
Transport Admin State: In Service
```

```
LED State: Red
```

```
Alarm Status:
-----
Detected Alarms:
    RX-LOS-P
    TX-POWER-FAIL-LOW
```

```
Alarm Statistics:
-----
LOW-TX-PWR = 0
RX-LOS-P = 1
RX-LOC = 0
TX-POWER-FAIL-LOW = 1
INGRESS-AUTO-LASER-SHUT = 0
INGRESS-AUTO-POW-RED = 0
INGRESS-AMPLI-GAIN-LOW = 0
INGRESS-AMPLI-GAIN-HIGH = 0
EGRESS-AUTO-LASER-SHUT = 0
EGRESS-AUTO-POW-RED = 0
EGRESS-AMPLI-GAIN-LOW = 0
EGRESS-AMPLI-GAIN-HIGH = 0
HIGH-TX-BR-PWR = 0
HIGH-RX-BR-PWR = 0
SPAN-TOO-SHORT-TX = 0
SPAN-TOO-SHORT-RX = 0
```

```
Parameter Statistics:
-----
Total RX Power = -50.00 dBm
Total TX Power = -50.00 dBm
Ingress Ampli Gain = 0.0 dB
Ingress Ampli Tilt = 0.0 dB
```

```
Configured Parameters:
-----
Ingress Ampli Gain = 16.0 dB
Ingress Ampli Tilt = 0.0 dB
```

```
RP/0/RP0/CPU0:ios#show controllers ots 0/0/0/1
```

```
Wed Mar 23 06:17:57.475 UTC
```

```
Controller State: Down
```

```
Transport Admin State: In Service
```

```
LED State: Red
```

```
Alarm Status:
-----
Detected Alarms:
    RX-LOS-P
    TX-POWER-FAIL-LOW
```

Alarm Statistics:

```

-----
LOW-TX-PWR = 0
RX-LOS-P = 1
RX-LOC = 0
TX-POWER-FAIL-LOW = 1
INGRESS-AUTO-LASER-SHUT = 0
INGRESS-AUTO-POW-RED = 0
INGRESS-AMPLI-GAIN-LOW = 0
INGRESS-AMPLI-GAIN-HIGH = 0
EGRESS-AUTO-LASER-SHUT = 0
EGRESS-AUTO-POW-RED = 0
EGRESS-AMPLI-GAIN-LOW = 0
EGRESS-AMPLI-GAIN-HIGH = 0
HIGH-TX-BR-PWR = 0
HIGH-RX-BR-PWR = 0
SPAN-TOO-SHORT-TX = 0
SPAN-TOO-SHORT-RX = 0

```

Parameter Statistics:

```

-----

```

Configured Parameters:

```

-----

```

```

RP/0/RP0/CPU0:OLT-C-14#sh controllers ots 0/0/0/1
Mon Feb 27 20:34:00.257 UTC

```

Controller State: Up

Transport Admin State: In Service

LED State: Green

Alarm Status:

```

-----

```

Detected Alarms: None

Alarm Statistics:

```

-----

```

```

RX-LOS-P = 1
RX-LOC = 0
TX-POWER-FAIL-LOW = 2
INGRESS-AUTO-LASER-SHUT = 0
INGRESS-AUTO-POW-RED = 0
INGRESS-AMPLI-GAIN-LOW = 0
INGRESS-AMPLI-GAIN-HIGH = 0
EGRESS-AUTO-LASER-SHUT = 0
EGRESS-AUTO-POW-RED = 0
EGRESS-AMPLI-GAIN-LOW = 0
EGRESS-AMPLI-GAIN-HIGH = 0
HIGH-TX-BR-PWR = 0
HIGH-RX-BR-PWR = 0
SPAN-TOO-SHORT-TX = 0
SPAN-TOO-SHORT-RX = 0

```

Parameter Statistics:

```

-----

```

```

Total Rx Power = 19.39 dBm
Total Tx Power = 3.99 dBm

```

```
Configured Parameters:
```

```
-----
```

```
RP/0/RP0/CPU0:OLT-C-14#
```

To view the parameters on the MPO port, use the following command:

```
RP/0/RP0/CPU0:ios#show controllers ots 0/0/0/33
```

The following output displays the parameters for the MPO port *ots 0/0/0/33*.

```
Sun Apr 10 14:04:40.513 UTC
```

```
Controller State: Up
```

```
Transport Admin State: In Service
```

```
LED State: Green
```

```
Alarm Status:
```

```
-----
```

```
Detected Alarms: None
```

```
Alarm Statistics:
```

```
-----
```

```
RX-LOS-P = 0
```

```
RX-LOC = 0
```

```
TX-POWER-FAIL-LOW = 0
```

```
INGRESS-AUTO-LASER-SHUT = 0
```

```
INGRESS-AUTO-POW-RED = 0
```

```
INGRESS-AMPLI-GAIN-LOW = 0
```

```
INGRESS-AMPLI-GAIN-HIGH = 0
```

```
EGRESS-AUTO-LASER-SHUT = 0
```

```
EGRESS-AUTO-POW-RED = 0
```

```
EGRESS-AMPLI-GAIN-LOW = 0
```

```
EGRESS-AMPLI-GAIN-HIGH = 0
```

```
HIGH-TX-BR-PWR = 0
```

```
HIGH-RX-BR-PWR = 0
```

```
SPAN-TOO-SHORT-TX = 0
```

```
SPAN-TOO-SHORT-RX = 0
```

```
Parameter Statistics:
```

```
-----
```

```
Total RX Power = -5.00 dBm
```

```
Total TX Power = -10.50 dBm
```

```
Configured Parameters:
```

```
-----
```

Configure OTS Controllers

The Optical Transport Section (OTS) controller holds all the optical parameters for the OTS optical interfaces. The optical interface has different capabilities depending on its hardware components such as photodiode, VOA, amplifier, and OCM.

There are multiple parameters for the OTS controllers. You can configure the parameters that are required for the different configuration for an OTS controller on an ILA node by using the following commands in the Ots controller configuration mode:

- **tx-voa-attenuation** *value*
- **egress-ampli-gain-range** {normal | extended}
- **egress-ampli-gain** *value*
- **egress-ampli-tilt** *value*
- **egress-ampli-osri** {on | off}
- **egress-ampli-safety-control-mode** {auto | disabled}
- **egress-ampli-force-apr** {on | off}
- **raman-tx-power** *Raman-transmit-pump-instance* **power** *power-value*
- **raman-tx-power-disable** *Raman-transmit-pump-instance*
- **raman-force-apr** {on | off}
- **raman-osri** {on | off}
- **raman-safety-control-mode** {auto | disabled}

There are multiple parameters for the OTS controllers. You can configure the parameters that are required for the different configuration for an OTS controller on an OLT node by using the following commands in the Ots controller configuration mode:

- **tx-voa-attenuation** *value*
- **egress-ampli-gain** *value*
- **egress-ampli-tilt** *value*
- **egress-ampli-osri** {on | off}
- **egress-ampli-safety-control-mode** {auto | disabled}
- **egress-ampli-force-apr** {on | off}
- **egress-channel-slice** *channel-slice* **attn** *attenuation-value*
- **ingress-ampli-gain-range** {normal | extended}
- **ingress-ampli-gain** *value*
- **ingress-ampli-tilt** *value*
- **ingress-ampli-osri** {on | off}
- **ingress-ampli-safety-control-mode** {auto | disabled}
- **ingress-ampli-force-apr** {on | off}
- **ingress-channel-slice** *channel-slice* **attn** *attenuation-value*
- **raman-tx-power** *Raman-transmit-pump-instance* **power** *power-value*
- **raman-tx-power-disable** *Raman-transmit-pump-instance*
- **raman-force-apr** {on | off}

- raman-osri {on | off}
- raman-safety-control-mode {auto | disabled}

OTS Controller Configuration Parameters

Table 29: OTS Controller Configuration Parameters

Parameter	Description	Hardware Capability	Range	Default	Notes
tx-voa-attenuation	TX VOA attenuation set point	VOA	<ul style="list-style-type: none"> • OLT: 0–20 dB • ILA: 0–15 dB 	0.0	—
ampli-safety-control-mode (ingress/egress)	Amplifier control mode	Amplifier	auto and disabled	automatic	—

Parameter	Description	Hardware Capability	Range	Default	Notes
ampli-gain-range (ingress/egress)	Amplifier gain range	Amplifier	normal and extended	normal	

Parameter	Description	Hardware Capability	Range	Default	Notes
					<p>If you change the gain range from Normal to Extended or the opposite way, without updating the proper gain value for the new gain range, then the following may happen:</p> <ul style="list-style-type: none"> • The EDFA switches to the preconfigured or default value of the gain causing a mismatch between the operational and configured gain. • The gain configuration is lost during the reload of software or line card, as the configured gain mismatches with the latest gain-range. This may result in traffic interruption during these reload operations. <p>Hence, we recommend that you explicitly configure the gain range mode as normal or extended, and the corresponding gain values for each mode to get the expected results.</p> <p>The following are a few example scenarios that may not work as expected:</p> <ul style="list-style-type: none"> • Scenario 1: Current running config: <pre>controller Ots R/S/I/P egress-ampli-gain-range extended egress-ampli-gain <gain value in extended mode></pre> New applied config: <pre>controller Ots R/S/I/P no egress-ampli-gain-range extended commit</pre> • Scenario 2: Current running config: <pre>controller Ots R/S/I/P egress-ampli-gain-range extended egress-ampli-gain <gain value in extended mode></pre> New applied config: <pre>controller Ots R/S/I/P egress-ampli-gain-range Normal commit</pre>

Parameter	Description	Hardware Capability	Range	Default	Notes
					<ul style="list-style-type: none"> Scenario 3: Current running config: <code>controller Ots R/S/I/P</code> <code>egress-ampli-gain <gain value in normal mode></code> New applied config: <code>controller Ots R/S/I/P</code> <code>egress-ampli-gain-range extended</code> <code>commit</code> <p>The following is another example scenario that involves commit-replace command where you replace the existing gain configuration that does not have explicitly configured gain-range, with new gain-range and gain value.</p> <p>Scenario 4: Current running config: <code>controller Ots R/S/I/P</code> <code>egress-ampli-gain <gain value in normal mode></code></p> <p>New applied config: <code>controller Ots R/S/I/P</code> <code>egress-ampli-gain-range extended</code> <code>egress-ampli-gain <gain value in extended mode></code> <code>commit replace</code></p>
ampli-gain (ingress/egress)	Amplifier gain set point	Amplifier	80–380	OLT ingress: 12, egress: 16 ILA: 8	The actual range of amplifier gain set point depends on amplifier gain range. Note Gain is calibrated to line port and so the supported range varies in Raman variants (OLT-C-R, ILA-C-R, and ILA-C-2R) due to insertion loss by Raman amplifier.
ampli-tilt (ingress/egress)	Amplifier tilt	Amplifier	–5 to +5	0.0	—
osri (ingress/egress)	Optical safety remote interlock	Amplifier	on and off	off	When osri is on, the EDFA is in shut state and vice versa.

Parameter	Description	Hardware Capability	Range	Default	Notes
ampli-force-apr (ingress/egress)	—	Amplifier	on and off	off	When ampli-force-apr is set to <i>on</i> , the EDFA output power is clamped to 8 dBm.
channel-slice <i>channel-slice</i> attn <i>attenuation</i> (ingress/egress)	Channel slice attenuation set point	—	1–1548 (channel slice) OLT: 0–250 (attenuation value in 0.1 dB) ILA: 0–50 (attenuation value in 0.1 dB)	0.0	—
raman-tx-power <i>pump instance</i> value <i>value</i>	Tx power	Raman amplifier	1–5 (pump instance) The values are: • Pump 1: 45–30 • Pump 2: 40–30 • Pump 3: 40–20 • Pump 4: 40–20 • Pump 5: 35–10	—	—
raman-tx-power-disable <i>pump instance</i>	Tx power	Raman amplifier	—	—	—

Parameter	Description	Hardware Capability	Range	Default	Notes
raman-force-apr	—	Raman amplifier	on and off	off	When raman-force-apr is set to <i>on</i> , the Raman pump maximum output power is clamped to 10 mW.
raman-osri	Optical safety remote interlock	Raman amplifier	on and off	off	When raman-osri is set to <i>on</i> , the Raman pumps are switched off.

Channel Slice Attenuation

The attenuation for the channel slices is automatically configured by APC.

To view the channel slice attenuation information, use the following command:

```
RP/0/RP0/CPU0:ios#show controllers ots 0/0/0/0 channel-slice-attenuation-info
```

The following sample output shows the channel slice attenuation information:

```
Sun Mar 27 15:27:27.600 UTC

Attenuation Slices spacing      :          3.125 GHz
Attenuation Slices Range       :          1 - 1548
Slice start wavelength         :        1566.82 nm
Slice start frequency          :        191337.50 GHz

Sub Channel Attenuation information :
Ingress Channel Slice Attenuation :
-----
spectrum-slice num              Attenuation values (dB)
-----
 1 - 12      25.0  25.0  25.0  25.0  25.0  25.0  25.0  25.0  25.0  25.0  25.0  25.0
25.0
13 - 24      25.0  25.0  25.0  25.0  25.0  25.0  25.0  25.0  25.0  25.0  25.0  25.0
25.0
25 - 36      25.0  25.0  25.0  25.0  25.0  25.0  25.0  25.0  25.0  25.0  25.0  25.0
25.0
37 - 48      25.0  25.0  25.0  25.0  25.0  25.0  25.0  25.0  25.0  25.0  25.0  25.0
25.0
49 - 60      25.0  25.0  25.0  25.0  25.0  25.0  25.0  25.0  25.0  25.0  25.0  25.0
25.0
61 - 72      25.0  25.0  25.0  25.0  25.0  25.0  25.0  25.0  25.0  25.0  25.0  25.0
25.0
.
.
output snipped
.
.
1501 - 1512  25.0  25.0  25.0  25.0  25.0  25.0  25.0  25.0  25.0  25.0  25.0  25.0
25.0
1513 - 1524  25.0  25.0  25.0  25.0  25.0  25.0  25.0  25.0  25.0  25.0  25.0  25.0
25.0
1525 - 1536  25.0  25.0  25.0  25.0  25.0  25.0  25.0  25.0  25.0  25.0  25.0  25.0
25.0
1537 - 1548  25.0  25.0  25.0  25.0  25.0  25.0  25.0  25.0  25.0  25.0  25.0  25.0
25.0
-----
Egress Channel Slice Attenuation :
```

```

-----
spectrum-slice num                Attenuation values (dB)
-----
  1 - 12      25.0  25.0  25.0  25.0  25.0  25.0  25.0  25.0  25.0  25.0  25.0  25.0
25.0
 13 - 24      25.0  25.0  25.0  25.0  25.0  25.0  25.0  25.0  25.0  25.0  25.0  25.0
25.0
 25 - 36      25.0  25.0  25.0  25.0  25.0  25.0  25.0  25.0  25.0  25.0  25.0  25.0
25.0
 37 - 48      25.0  25.0  25.0  25.0  25.0  25.0  25.0  25.0  25.0  25.0  25.0  25.0
25.0
 49 - 60      25.0  25.0  25.0  25.0  25.0  25.0  25.0  25.0  25.0  25.0  25.0  25.0
25.0
 61 - 72      25.0  25.0  25.0  25.0  25.0  25.0  25.0  25.0  25.0  25.0  25.0  25.0
25.0
.
.
output snipped
.
.
1501 - 1512   25.0  25.0  25.0  25.0  25.0  25.0  25.0  25.0  25.0  25.0  25.0  25.0
25.0
1513 - 1524   25.0  25.0  25.0  25.0  25.0  25.0  25.0  25.0  25.0  25.0  25.0  25.0
25.0
1525 - 1536   25.0  25.0  25.0  25.0  25.0  25.0  25.0  25.0  25.0  25.0  25.0  25.0
25.0
1537 - 1548   25.0  25.0  25.0  25.0  25.0  25.0  25.0  25.0  25.0  25.0  25.0  25.0
25.0

```

To modify the attenuation values manually, APC must be disabled first using the following commands:

```

RP/0/RP0/CPU0:ios#config
RP/0/RP0/CPU0:ios(config)#optical-line-control controller ots 0/0/0/0 apc disable
RP/0/RP0/CPU0:ios(config)#commit

```

For more information on APC commands, see the section, "[Configure APC](#)".

To modify the attenuation value for an egress channel slice, use the following commands:



Note The OTS controller commands do not support decimal inputs. The OTS controller commands consider the inputs to one decimal place for the parameter values. In the following example, the *attn* value for the *egress-channel-slice 10* is provided as *100* to configure the *attn* value for the *egress-channel-slice 10* to *10.0 dB*.

```

RP/0/RP0/CPU0:ios(config)#controller ots 0/0/0/0 egress-channel-slice 10 attn 100
RP/0/RP0/CPU0:ios(config)#commit
Sun Apr 10 14:47:37.849 UTC
RP/0/RP0/CPU0:ios(config)#end

```

To view the modified attenuation value for egress channel slice 10, use the following command:

```

RP/0/RP0/CPU0:ios#show controllers ots 0/0/0/0 channel-slice-attenuation-info

```

The following output highlights the modified attenuation value for *egress channel slice 10* that is set to *10.0 dB*.

```

Sun Apr 10 14:47:47.050 UTC

Attenuation Slices spacing      :          3.125 GHz
Attenuation Slices Range       :          1 - 1548
Slice start wavelength         :        1566.82 nm
Slice start frequency          :       191337.50 GHz

```

Sub Channel Attenuation information :
 Ingress Channel Slice Attenuation :

```
-----
spectrum-slice num           Attenuation values (dB)
-----
  1 - 12      25.0  25.0  25.0  25.0  25.0  25.0  25.0  25.0  25.0  25.0  25.0  25.0
25.0
 13 - 24      25.0  25.0  25.0  25.0  25.0  25.0  25.0  25.0  25.0  25.0  25.0  25.0
25.0
 25 - 36      25.0  25.0  25.0  25.0  25.0  25.0  25.0  25.0  25.0  25.0  25.0  25.0
25.0
 37 - 48      25.0  25.0  25.0  25.0  25.0  25.0  25.0  25.0  25.0  25.0  25.0  25.0
25.0
 49 - 60      25.0  25.0  25.0  25.0  25.0  25.0  25.0  25.0  25.0  25.0  25.0  25.0
25.0
 61 - 72      25.0  25.0  25.0  25.0  25.0  25.0  25.0  25.0  25.0  25.0  25.0  25.0
25.0
.
.
output snipped
.
1501 - 1512   25.0  25.0  25.0  25.0  25.0  25.0  25.0  25.0  25.0  25.0  25.0  25.0
25.0
1513 - 1524   25.0  25.0  25.0  25.0  25.0  25.0  25.0  25.0  25.0  25.0  25.0  25.0
25.0
1525 - 1536   25.0  25.0  25.0  25.0  25.0  25.0  25.0  25.0  25.0  25.0  25.0  25.0
25.0
1537 - 1548   25.0  25.0  25.0  25.0  25.0  25.0  25.0  25.0  25.0  25.0  25.0  25.0
25.0
-----
```

Egress Channel Slice Attenuation :

```
-----
spectrum-slice num           Attenuation values (dB)
-----
  1 - 12      25.0  25.0  25.0  25.0  25.0  25.0  25.0  25.0  25.0  25.0  10.0  25.0
25.0
 13 - 24      25.0  25.0  25.0  25.0  25.0  25.0  25.0  25.0  25.0  25.0  25.0  25.0
25.0
 25 - 36      25.0  25.0  25.0  25.0  25.0  25.0  25.0  25.0  25.0  25.0  25.0  25.0
25.0
 37 - 48      25.0  25.0  25.0  25.0  25.0  25.0  25.0  25.0  25.0  25.0  25.0  25.0
25.0
 49 - 60      25.0  25.0  25.0  25.0  25.0  25.0  25.0  25.0  25.0  25.0  25.0  25.0
25.0
 61 - 72      25.0  25.0  25.0  25.0  25.0  25.0  25.0  25.0  25.0  25.0  25.0  25.0
25.0
.
.
output snipped
.
1501 - 1512   25.0  25.0  25.0  25.0  25.0  25.0  25.0  25.0  25.0  25.0  25.0  25.0
25.0
1513 - 1524   25.0  25.0  25.0  25.0  25.0  25.0  25.0  25.0  25.0  25.0  25.0  25.0
25.0
1525 - 1536   25.0  25.0  25.0  25.0  25.0  25.0  25.0  25.0  25.0  25.0  25.0  25.0
25.0
1537 - 1548   25.0  25.0  25.0  25.0  25.0  25.0  25.0  25.0  25.0  25.0  25.0  25.0
25.0
-----
```

RP/0/RP0/CPU0:ios#

Examples

In the following example, the tx-voa-attenuation is set to 10 dB.

```
RP/0/RP0/CPU0:ios#config
RP/0/RP0/CPU0:ios(config)#controller ots 0/0/0/0
RP/0/RP0/CPU0:ios(config-Ots)#tx-voa-attenuation 100
RP/0/RP0/CPU0:ios(config-Ots)#commit
```

In the following example, the egress-ampli-gain is set to 20 dB.

```
RP/0/RP0/CPU0:ios#config
RP/0/RP0/CPU0:ios(config)#controller ots 0/0/0/0
RP/0/RP0/CPU0:ios(config-Ots)#egress-ampli-gain 200
RP/0/RP0/CPU0:ios(config-Ots)#commit
```

In the following example, the egress-ampli-tilt is set to 2.5 dB.

```
RP/0/RP0/CPU0:ios#config
RP/0/RP0/CPU0:ios(config)#controller ots 0/0/0/0
RP/0/RP0/CPU0:ios(config-Ots)#egress-ampli-tilt 25
RP/0/RP0/CPU0:ios(config-Ots)#commit
```

In the following examples, the egress-ampli-gain-range is set to extended and Normal.

```
RP/0/RP0/CPU0:ios#config
RP/0/RP0/CPU0:ios(config)#controller ots 0/0/0/0
RP/0/RP0/CPU0:ios(config-Ots)#egress-ampli-gain-range extended
RP/0/RP0/CPU0:ios(config-Ots)#egress-ampli-gain 360
RP/0/RP0/CPU0:ios(config-Ots)#commit
```

```
RP/0/RP0/CPU0:ios#config
RP/0/RP0/CPU0:ios(config)#controller ots 0/0/0/0
RP/0/RP0/CPU0:ios(config-Ots)#egress-ampli-gain-range normal
RP/0/RP0/CPU0:ios(config-Ots)#egress-ampli-gain 150
RP/0/RP0/CPU0:ios(config-Ots)#commit
```

In the following example, the egress-ampli-safety-control-mode is set to auto.

```
RP/0/RP0/CPU0:ios#config
RP/0/RP0/CPU0:ios(config)#controller ots 0/0/0/0
RP/0/RP0/CPU0:ios(config-Ots)#egress-ampli-safety-control-mode auto
RP/0/RP0/CPU0:ios(config-Ots)#commit
```

In the following example, the egress-ampli-osri is set to on.

```
RP/0/RP0/CPU0:ios#config
RP/0/RP0/CPU0:ios(config)#controller ots 0/0/0/0
RP/0/RP0/CPU0:ios(config-Ots)#egress-ampli-osri on
RP/0/RP0/CPU0:ios(config-Ots)#commit
```

In the following example, the egress-ampli-force-apr is set to on.

```
RP/0/RP0/CPU0:ios#config
RP/0/RP0/CPU0:ios(config)#controller ots 0/0/0/0
RP/0/RP0/CPU0:ios(config-Ots)#egress-ampli-force-apr on
RP/0/RP0/CPU0:ios(config-Ots)#commit
```

In the following example, the egress-channel-slice attenuation is set to 20 dB.

```
RP/0/RP0/CPU0:ios#config
RP/0/RP0/CPU0:ios(config)#controller ots 0/0/0/0
RP/0/RP0/CPU0:ios(config-Ots)#egress-channel-slice 1 attn 200
RP/0/RP0/CPU0:ios(config-Ots)#commit
```

In the following example, to establish connection using the existing GRPC framework.

```
RP/0/RP0/CPU0:ios#config
RP/0/RP0/CPU0:ios(config)#optical-line-control
```

```
RP/0/RP0/CPU0:ios(config)#controller ots 0/0/0/0
RP/0/RP0/CPU0:ios(config-Ots)#partner-band-port ipv4 address 10.10.1.2
RP/0/RP0/CPU0:ios(config-Ots)#controller Ots0/0/0/0
RP/0/RP0/CPU0:ios(config-Ots)#commit
```

In the following example, the raman-tx-power is set to 55 mW.

```
RP/0/RP0/CPU0:ios#config
RP/0/RP0/CPU0:ios(config)#controller ots 0/0/0/0
RP/0/RP0/CPU0:ios(config-Ots)#raman-tx-power 1 value 5500
RP/0/RP0/CPU0:ios(config-Ots)#commit
```

In the following example, the raman-force-apr is set to on.

```
RP/0/RP0/CPU0:ios#config
RP/0/RP0/CPU0:ios(config)#controller ots 0/0/0/0
RP/0/RP0/CPU0:ios(config-Ots)#raman-force-apr on
RP/0/RP0/CPU0:ios(config-Ots)#commit
```

In the following example, the raman-osri is set to on.

```
RP/0/RP0/CPU0:ios#config
RP/0/RP0/CPU0:ios(config)#controller ots 0/0/0/0
RP/0/RP0/CPU0:ios(config-Ots)#raman-osri on
RP/0/RP0/CPU0:ios(config-Ots)#commit
```

Configure Partner Band IP Address

NCS1010 can be configured to operate in both C and L-band wavelengths to increase the capacity of optical fibers. This can be done by connecting the C-band OLT or ILA line cards to the L-band OLT or ILA line cards respectively.

To establish a connection between C and L-band nodes, configure the L-band peer IP on C-band node and C-band peer IP on L-band node using the following commands in the Optical Line Control configuration:

optical-line-control

controller ots *Rack/Slot/Instance/Port*

partner-band-port ipv4 address *ip-address controller ots Rack/Slot/Instance/Port*

Example

The following output displays the peer node L-band IP address 192.168.1.2 is configured on the C-band node.

```
RP/0/RP0/CPU0:ios#conf
Wed Jul 6 04:45:47.720 UTC
RP/0/RP0/CPU0:ios(config)#optical-line-control controller Ots0/0/0/0
RP/0/RP0/CPU0:ios(config)#partner-band-port ipv4 address 192.168.1.2 controller Ots0/0/0/0
```



Note The above configuration needs to be made on all the C and L-band nodes in the Optical Line Control configuration mode.

OTS-OCH Controllers

The OTS-OCH controllers are not created by default when the cards (NCS1K-ILA-2R-C, NCS1K-ILA-R-C, NCS1K-ILA-C, NCS1K-OLT-R-C, and NCS1K-OLT-C) are brought up. The LINE OTS-OCH controllers can be created using the **hw-module** command.

Optical Cross Connections

Optical Cross Connections can be configured only on OLT nodes. In these nodes, the OTS-OCH controller is not created automatically on the Add/Drop ports (COM side). The optical cross connect configuration defines the line side OTS-OCH channel as the source and creates an OTS-OCH controller on the Add/Drop port to which the cross connection is made. The channel ID must be the same for both the LINE side and COM side OTS-OCH controllers.

Flex Grid Validation

The following validations are performed before the **hw-module** configurations are committed:

- The channel ID is any value 1–194.
- The center frequency must be within the C-band spectrum, for the OLT-C cards. The frequency range is 191.3375-196.1750 THz.
- The center frequency must be within the L-band spectrum, for the OLT-L card. The frequency range is 184.6153-190.8875 THz.
- The supported channel width range is 25.000GHz to 4837.500 GHz. From Release 7.9.1, overlap of channels is permitted as Nyquist channels are supported. See [#unique_15 unique_15_Connect_42_section_a5x_y13_nwb](#).
- From Release 7.9.1, you can set the channel centre frequency and width with 1MHz resolution.

Create OTS-OCH Controllers

To create the OTS-OCH controllers on the LINE side of the ILA-C, ILA-R-C, or ILA-2R-C node, use the following commands in the configuration mode:

- **hw-module location** *location* **inline-ampli grid-mode** *mode*
- **channel-id** *channel-id* **centre-freq** *frequency* **width** *channel-width*

To create the OTS-OCH controllers on the LINE side of the ILA-C node, use the following commands:

```
RP/0/RP0/CPU0:ios#configure
Thu Apr 7 13:14:49.841 UTC
RP/0/RP0/CPU0:ios(config)#
RP/0/RP0/CPU0:ios(config)#hw-module location 0/0/NXR0 inline-ampli grid-mode flex
RP/0/RP0/CPU0:ios(config-hwmod-ila-flexi)#channel-id 1 centre-freq 196.1 width 75
RP/0/RP0/CPU0:ios(config-hwmod-ila-flexi)# commit
```

The OTS-OCH controller is created on both the LINE 0 and LINE 2 ports of the ILA-C node. To view the OTS-OCH controllers, use the following command:

```
RP/0/RP0/CPU0:ios#show controllers ots-och ?
```

The following output displays the OTS-OCH controller is created on both the LINE 0 and LINE 2 ports of the ILA-C node.

```

0/0/0/0/1          Ots-Och Interface Instance
0/0/0/2/1          Ots-Och Interface Instance
R/S/I/P/B or R/S/I/P Forward interface in Rack/Slot/Instance/Port/Breakout format or
R/S/I/P format

```

To view the parameters of the OTS-OCH controller, use the following command:

```
RP/0/RP0/CPU0:ios#show controllers ots-och 0/0/0/0/1
```

The following output displays the parameters of the OTS-OCH controller.

```

Thu Apr  7 13:22:29.125 UTC

Controller State: Up

Transport Admin State: In Service

Alarm Status:
-----
Detected Alarms: None

Alarm Statistics:
-----
RX-LOS-P = 0
TX-POWER-FAIL-LOW = 0

Parameter Statistics:
-----
Total RX Power = -10.50 dBm
Total TX Power = -10.50 dBm

```

```

Configured Parameters:
-----

```

To create the OTS-OCH controller on the LINE side of the OLT-C or OLT-R-C node, use the following commands in the configuration mode:

- **hw-module location** *location* **terminal-ampli grid-mode mode**
- **channel-id** *channel-id* **centre-freq** *frequency* **width** *channel-width*

To configure the optical cross-connect, use the following command in the configuration mode:

```
controller ots-och Rack/Slot/Instance/Port/Channel-id-number add-drop-channel ots-och
Rack/Slot/Instance/Port/Channel-id-number
```

To create the OTS-OCH controller on the LINE side of an OLT-R-C node, use the following commands:

```

RP/0/RP0/CPU0:ios#config
RP/0/RP0/CPU0:ios(config)#hw-module location 0/0/nxr0 terminal-ampli grid-mode flex
RP/0/RP0/CPU0:ios(config-hwmod-olt-flexi)#channel-id 1 centre-freq 196.1 width 75
RP/0/RP0/CPU0:ios(config-hwmod-olt-flexi)#commit

```

To view the OTS-OCH controller that is created on the LINE side, use the following command:

```
RP/0/RP0/CPU0:ios#show controllers ots-och ?
```

The following output highlights the OTS-OCH controller that is created on the LINE side.

```

0/0/0/0/1          Ots-Och Interface Instance
R/S/I/P/B or R/S/I/P Forward interface in Rack/Slot/Instance/Port/Breakout format or
R/S/I/P format

```

To configure the optical cross-connect, use the following commands:

```
RP/0/RP0/CPU0:ios#configure
Mon Apr  4 14:54:32.834 UTC
RP/0/RP0/CPU0:ios(config)#controller ots-och 0/0/0/0/1 add-drop-channel ots-och 0/0/0/33/1
RP/0/RP0/CPU0:ios(config)#commit
```

The OTS-OCH controller is created on the Add/Drop port to which the cross-connection is made on the COM side. To view the OTS-OCH controller, use the following command:

```
RP/0/RP0/CPU0:ios#show controller ots-och ?
```

The following output highlights the OTS-OCH controller that is created on the Add/Drop port to which the cross-connection is made on the COM side.

```
0/0/0/0/1          Ots-Och Interface Instance
0/0/0/33/1        Ots-Och Interface Instance
R/S/I/P/B or R/S/I/P Forward interface in Rack/Slot/Instance/Port/Breakout format or
R/S/I/P format
```

You can also use python-based configuration script to automatically create 75 or 150 GHz fixed grid channels on ports 2 and 3 using the following commands:

```
RP/0/RP0/CPU0:ios#configure
RP/0/RP0/CPU0:ios(config)#load script /pkg/script/flexgrid_config_builder.py args -w75 -c
terminal-ampli
Loading.
6839 bytes parsed in 1 sec (6835)bytes/sec
RP/0/RP0/CPU0:ios(config)#commit
RP/0/RP0/CPU0:ios(config)#end
```



Note This script can be used only for a colored solution that uses the NCS1K-MD-320/E-C patch panel with fixed channel width.

To view the OTS-OCH controllers, use the following command:

```
RP/0/RP0/CPU0:ios#show controllers ots-och ?
```

The following output displays the OTS-OCH controller interfaces:

```
0/0/0/0/1          Ots-Och Interface Instance
0/0/0/0/10         Ots-Och Interface Instance
.
.
output snipped
.
.
0/0/0/0/29         Ots-Och Interface Instance
0/0/0/0/3          Ots-Och Interface Instance
0/0/0/0/49         Ots-Och Interface Instance
0/0/0/0/5          Ots-Och Interface Instance
.
.
output snipped
.
.
0/0/0/0/64         Ots-Och Interface Instance
0/0/0/0/7          Ots-Och Interface Instance
0/0/0/0/8          Ots-Och Interface Instance
0/0/0/0/9          Ots-Och Interface Instance
R/S/I/P/B or R/S/I/P Forward interface in Rack/Slot/Instance/Port/Breakout format or
```

R/S/I/P format

To view the flex grid information on the OLT node, use the following command:

```
RP/0/RP0/CPU0:ios#show hw-module location 0/0/NXR0 terminal-ampli
```

The following output displays the flex grid information on the OLT node.

Tue Jun 28 15:46:07.026 UTC

Legend:

NXC - Channel not cross-connected
 ACTIVE - Channel cross-connected to data port
 ASE - Channel filled with ASE
 FAILED - Data channel failed, pending transition to ASE

Location: 0/0/NXR0

Status: Provisioned

Flex Grid Info

Channel Number	Centre Frequency (THz)	Channel Width (GHz)	Channel Status
1	196.100000	75.000	NXC
2	196.025000	75.000	NXC
3	195.950000	75.000	NXC
4	195.875000	75.000	NXC
5	195.800000	75.000	NXC
6	195.725000	75.000	NXC
7	195.650000	75.000	NXC
8	195.575000	75.000	NXC
9	195.500000	75.000	NXC
10	195.425000	75.000	NXC
11	195.350000	75.000	NXC
12	195.275000	75.000	NXC
13	195.200000	75.000	NXC
14	195.125000	75.000	NXC
15	195.050000	75.000	NXC
16	194.975000	75.000	NXC
17	194.900000	75.000	NXC
18	194.825000	75.000	NXC
19	194.750000	75.000	NXC
20	194.675000	75.000	NXC
21	194.600000	75.000	NXC
22	194.525000	75.000	NXC
23	194.450000	75.000	NXC
24	194.375000	75.000	NXC
25	194.300000	75.000	NXC
26	194.225000	75.000	NXC
27	194.150000	75.000	NXC
28	194.075000	75.000	NXC
29	194.000000	75.000	NXC
30	193.925000	75.000	NXC
31	193.850000	75.000	NXC
32	193.775000	75.000	NXC
33	193.700000	75.000	NXC
34	193.625000	75.000	NXC
35	193.550000	75.000	NXC
36	193.475000	75.000	NXC
37	193.400000	75.000	NXC
38	193.325000	75.000	NXC
39	193.250000	75.000	NXC
40	193.175000	75.000	NXC
41	193.100000	75.000	NXC

42	193.025000	75.000	NXC
43	192.950000	75.000	NXC
44	192.875000	75.000	NXC
45	192.800000	75.000	NXC
46	192.725000	75.000	NXC
47	192.650000	75.000	NXC
48	192.575000	75.000	NXC
49	192.500000	75.000	NXC
50	192.425000	75.000	NXC
51	192.350000	75.000	NXC
52	192.275000	75.000	NXC
53	192.200000	75.000	NXC
54	192.125000	75.000	NXC
55	192.050000	75.000	NXC
56	191.975000	75.000	NXC
57	191.900000	75.000	NXC
58	191.825000	75.000	NXC
59	191.750000	75.000	NXC
60	191.675000	75.000	NXC
61	191.600000	75.000	NXC
62	191.525000	75.000	NXC
63	191.450000	75.000	NXC
64	191.375000	75.000	NXC



Note The legend provides information about the channel's status. By default, the channels are brought up with NXC channel status.

The channel's status is preserved after HA events.

To view the flex grid information on the ILA node, use the following command:

```
RP/0/RP0/CPU0:ios#show hw-module location 0/0/nxr0 inline-ampli
```

The following output displays the flex grid information on the ILA node.

```
Sat Jul 2 02:46:33.657 UTC
Location:          0/0/NXR0
Status:            Provisioned
Flex Grid Info
Channel Number    Centre Frequency (THz)    Channel Width (GHz)
1                 191.375000                75.000
2                 191.450000                75.000
3                 191.525000                75.000
4                 191.600000                75.000
5                 191.675000                75.000
6                 191.750000                75.000
7                 191.825000                75.000
8                 191.900000                75.000
9                 191.975000                75.000
10                192.050000                75.000
11                192.125000                75.000
12                192.200000                75.000
13                192.275000                75.000
14                192.350000                75.000
15                192.425000                75.000
16                192.500000                75.000
17                192.575000                75.000
18                192.650000                75.000
19                192.725000                75.000
20                192.800000                75.000
21                192.875000                75.000
```

22	192.950000	75.000
23	193.025000	75.000
24	193.100000	75.000
25	193.175000	75.000
26	193.250000	75.000
27	193.325000	75.000
28	193.400000	75.000
29	193.475000	75.000
30	193.550000	75.000
31	193.625000	75.000
32	193.700000	75.000
33	193.775000	75.000
34	193.850000	75.000
35	193.925000	75.000
36	194.000000	75.000
37	194.075000	75.000
38	194.150000	75.000
39	194.225000	75.000
40	194.300000	75.000
41	194.375000	75.000
42	194.450000	75.000
43	194.525000	75.000
44	194.600000	75.000
45	194.675000	75.000
46	194.750000	75.000
47	194.825000	75.000
48	194.900000	75.000
49	194.975000	75.000
50	195.050000	75.000
51	195.125000	75.000
52	195.200000	75.000
53	195.275000	75.000
54	195.350000	75.000
55	195.425000	75.000
56	195.500000	75.000
57	195.575000	75.000
58	195.650000	75.000
59	195.725000	75.000
60	195.800000	75.000
61	195.875000	75.000
62	195.950000	75.000
63	196.025000	75.000
64	196.100000	75.000

To view the parameters of the OTS-OCH controller (LINE side), use the following command:

```
RP/0/RP0/CPU0:ios#show controllers ots-och 0/0/0/0/1
```

The following output displays the parameters of the OTS-OCH controller on the LINE side.

```
Tue Apr 5 06:32:29.696 UTC
```

```
Controller State: Up
```

```
Transport Admin State: In Service
```

```
Alarm Status:
```

```
-----
```

```
Detected Alarms: None
```

```
Alarm Statistics:
```

```
-----
```

```
RX-LOS-P = 0
```

```
TX-POWER-FAIL-LOW = 0
```

```
Parameter Statistics:
-----
Total RX Power = -10.50 dBm
Total TX Power = -10.50 dBm
```

```
Cross Connect Info:
-----
Add-Drop Channel = Ots-Och0/0/0/33/1
```

```
Configured Parameters:
-----
```



Note The Add/Drop channel that is cross-connected to the line port, 0/0/0/0/1 is displayed in the output.

DFB controllers

The line port in the NCS1K-E-ILA-R-C-2, NCS1K-E-OLT-R-C, NCS1K-E-ILA-R-C, NCS1K-E-ILA-2R-C, NCS1K-OLT-R-C, NCS1K-ILA-R-C, and NCS1K-ILA-2R-C line cards have a DFB (Distributed Feedback) controller in addition to the OSC controller. The DFB laser at 191.1 THz is used to perform a link continuity check on the Raman span for optical safety. The power of DFB laser can be regulated with a VOA.

To view the parameters of the LINE 0 DFB controller, use the following command:

```
RP/0/RP0/CPU0:ios#show controllers dfb 0/0/0/0
```

The following output displays the parameters of the LINE 0 DFB controller.

```
Wed Mar 23 06:05:09.074 UTC

Controller State: Up

Transport Admin State: In Service

Laser State: On

Alarm Status:
-----
Detected Alarms: None

Alarm Statistics:
-----
RX-LOS-P = 1
TX-POWER-FAIL-LOW = 106

Parameter Statistics:
-----
Total TX Power = 6.79 dBm
Total RX Power = -8.30 dBm
TX Voa Attenuation = 0.0 dB
```

```
Configured Parameters:
-----
TX Voa Attenuation = 0.0 dB
```

Configure DFB controllers

There are multiple parameters for the DFB controllers. You can configure the following parameters for a DFB controller on a NCS1K-OLT-R-C, NCS1K-ILA-R-C, or NCS1K-ILA-2R-C node by using the following commands in the configuration mode:

- **controller dfb** *Rack/Slot/Instance/Port*
- **tx-voa-attenuation** *value*
- **tx-low-threshold** *value*
- **sec-admin-state** {**normal** | **maintenance**}
- **transmit-shutdown**
- **shutdown**

Examples

In the following example, the *tx-voa-attenuation* is set to 2 dB.



Note The DFB controller commands do not support decimal inputs. The DFB controller commands consider the inputs to one decimal place for the parameter values. In this example, the *tx-voa-attenuation* value for the DFB controller *dfb 0/0/0/0* is provided as 20 to configure the *tx-voa-attenuation* value for *dfb 0/0/0/0* to 2.0 dB.

```
RP/0/RP0/CPU0:ios#configure
Thu Apr 21 17:00:57.654 UTC
RP/0/RP0/CPU0:ios(config)#
RP/0/RP0/CPU0:ios(config)#controller dfb 0/0/0/0 tx-voa-attenuation 20
RP/0/RP0/CPU0:ios(config)#commit
RP/0/RP0/CPU0:ios(config)#end
```

To view the configured *tx-voa-attenuation* value, use the following command:

```
RP/0/RP0/CPU0:ios#show controller dfb 0/0/0/0
```

The following output highlights the *tx-voa-attenuation* of the DFB controller that is set to 2.0 dB.

```
Thu Apr 21 17:02:06.316 UTC

Controller State: Up

Transport Admin State: In Service

Laser State: On

Alarm Status:
-----
Detected Alarms: None

Alarm Statistics:
```

```

-----
RX-LOS-P = 0
TX-POWER-FAIL-LOW = 0

Parameter Statistics:
-----
Total TX Power = 20.00 dBm
Total RX Power = 10.00 dBm
TX Voa Attenuation = 2.0 dB

```

```

Configured Parameters:
-----
TX Voa Attenuation = 2.0 dB

```

The DFB laser power is attenuated based on the updated value and the TX power changes accordingly.

In the following example, the *sec-admin-state* is set to *maintenance*.

```

P/0/RP0/CPU0:ios#configure
RP/0/RP0/CPU0:ios(config)#controller dfb 0/0/0/0 sec-admin-state maintenance
RP/0/RP0/CPU0:ios(config)#commit
RP/0/RP0/CPU0:ios(config)#end

```

To view the configured *sec-admin-state* value, use the following command:

```

RP/0/RP0/CPU0:ios#show controllers dfb 0/0/0/0

```

The following output highlights the *sec-admin-state* set to *maintenance*.

```

Thu Apr 21 17:05:41.311 UTC

Controller State: Up

Transport Admin State: Maintenance

Laser State: On

Alarm Status:
-----
Detected Alarms: None

Alarm Statistics:
-----
RX-LOS-P = 0
TX-POWER-FAIL-LOW = 0

Parameter Statistics:
-----
Total TX Power = 20.00 dBm
Total RX Power = 10.00 dBm
TX Voa Attenuation = 2.0 dB

Configured Parameters:
-----
TX Voa Attenuation = 2.0 dB

```

In the following example, the DFB controller is shut down.

```

RP/0/RP0/CPU0:ios#configure
RP/0/RP0/CPU0:ios(config)#controller dfb 0/0/0/0 shutdown

```

```
RP/0/RP0/CPU0:ios(config)#commit
RP/0/RP0/CPU0:ios(config)#end
```

To view the configured value, use the following command:

```
RP/0/RP0/CPU0:ios#show controllers dfb 0/0/0/0
```

The following output highlights the *Controller State*, *Transport Admin State*, and *Laser State* set to *shut down*.

```
Thu Apr 21 17:08:40.211 UTC
```

```
Controller State: Administratively Down
```

```
Transport Admin State: Out Of Service
```

```
Laser State: Off
```

```
Alarm Status:
-----
Detected Alarms: None
```

```
Alarm Statistics:
-----
RX-LOS-P = 0
TX-POWER-FAIL-LOW = 0
```

```
Parameter Statistics:
-----
Total TX Power = -50.00 dBm
Total RX Power = 10.00 dBm
TX Voa Attenuation = 2.0 dB
```

```
Configured Parameters:
-----
TX Voa Attenuation = 2.0 dB
```

OCH Controller

When nodes with Mux/Demux panels and breakout panels are brought up, OCH controllers are created by default. The OCH controllers for the patch panels are:

Table 30: Supported Interfaces

Patch Panel	Port Type	OCH Ports	Interfaces
NCS1K-BRK-8	LC Ports	8	och R/S/I/0 to och R/S/I/7
NCS1K-BRK-24	LC Ports	24	och R/S/I/0 to och R/S/I/23
NCS1K-MD-320/E-C	LC Ports	32	och R/S/I/0 to och R/S/I/31



Note R/S/I/P stands for Rack/Slot/Instance/Port.

The following table displays the C-band odd and even channel plans for the NCS1K-MD-320/E-C patch panel.

Table 31: NCS1K-MD-320/E-C Channel Plan

Port	Frequency (THz)	Wavelength (nm)	Frequency (THz)	Wavelength (nm)
0	196.100	1528.77	196.025	1529.36
1	195.950	1529.94	195.875	1530.53
2	195.800	1531.12	195.725	1531.70
3	195.650	1532.29	195.575	1532.88
4	195.500	1533.47	195.425	1534.05
5	195.350	1534.64	195.275	1535.23
6	195.200	1535.82	195.125	1536.41
7	195.050	1537.00	194.975	1537.59
8	194.900	1538.19	194.825	1538.78
9	194.750	1539.37	194.675	1537.59
10	194.600	1540.56	194.525	1541.15
11	194.450	1541.75	194.375	1541.34
12	194.300	1542.94	194.225	1543.53
13	194.150	1544.13	194.075	1544.72
14	194.00	1545.32	193.925	1545.92
15	193.850	1546.52	193.775	1547.12
16	193.700	1547.72	193.625	1548.31
17	193.550	1548.91	193.475	1549.52
18	193.400	1550.12	193.325	1550.72
19	193.250	1551.32	193.175	1551.92
20	193.100	1552.52	193.025	1553.13
21	192.950	1553.73	192.875	1554.34
22	192.800	1554.94	192.725	1555.55

Port	Frequency (THz)	Wavelength (nm)	Frequency (THz)	Wavelength (nm)
23	192.650	1556.15	192.575	1556.76
24	192.500	1557.36	192.425	1557.97
25	192.350	1558.58	192.275	1559.19
26	192.200	1559.79	192.125	1560.40
27	192.050	1561.01	191.975	1561.62
28	191.900	1562.23	191.825	1562.84
29	191.750	1563.45	191.675	1564.07
30	191.600	1564.68	191.525	1565.29
31	191.450	1565.90	191.375	1566.52

To view the status of the OCH controller, use the following command:

```
RP/0/RP0/CPU0:ios#show controller description
```

The following shows the status of the OCH controller.

```
Tue Apr 12 17:17:51.306 UTC
```

```
Interface                Status      Description
-----
Och0/1/0/0                up
Och0/1/0/1                up
Och0/1/0/2                up
Och0/1/0/3                up
Och0/1/0/4                up
Och0/1/0/5                up
Och0/1/0/6                up
.
.
Output snipped
.
.
Och0/1/0/28               up
Och0/1/0/29               up
Och0/1/0/30               up
Och0/1/0/31               up
Oms0/1/0/32               up
Och0/3/0/0                up
Och0/3/0/1                up
Och0/3/0/2                up
Och0/3/0/3                up
Och0/3/0/4                up
Och0/3/0/5                up
Och0/3/0/6                up
Och0/3/0/7                up
.
.
Output snipped
.
.
Och0/3/0/28               up
```

```
Och0/3/0/29          up
Och0/3/0/30          up
Och0/3/0/31          up
Oms0/3/0/32         up
```

To view the parameters of the OCH controller for the NCS1K-BRK-8 panel, use the following command:

```
RP/0/RP0/CPU0:ios#show controllers och 0/1/0/0
```

The following output shows the parameters of the OCH controller for the NCS1K-BRK-8 panel.

```
Tue May 10 11:27:31.354 UTC
```

```
Controller State: Down
```

```
LED State: Red
```

```
Alarm Status:
```

```
-----
```

```
Detected Alarms:
```

```
    RX-LOS-P
```

```
Alarm Statistics:
```

```
-----
```

```
RX-LOS-P = 1
```

```
TX-POWER-FAIL-LOW = 0
```

```
Parameter Statistics:
```

```
-----
```

```
TX Power = -50.00 dBm
```

```
RX Power = -50.00 dBm
```

To view the parameters of the OCH controller for the Mux/Demux panel, use the following command:



Note The parameters of the OCH controller for the Mux/Demux panel contain information about the Channel Width, Frequency, and Wavelength.

```
RP/0/RP0/CPU0:ios#show controllers och 0/2/0/0
```

The following output highlights the Channel Width, Frequency, and Wavelength parameters of the OCH controller for the Mux/Demux panel.

```
Wed May 25 11:50:03.481 UTC
```

```
Controller State: Down
```

```
LED State: Red
```

```
Alarm Status:
```

```
-----
```

```
Detected Alarms:
```

```
    RX-LOS-P
```

```
Alarm Statistics:
```

```
-----
```

```
RX-LOS-P = 1
```

```
TX-POWER-FAIL-LOW = 0
```

```
Parameter Statistics:
```

```
-----
```

```
TX Power = -50.00 dBm
```

```
RX Power = -50.00 dBm
```

```
channel Frequency = 196.025 THz
Maximum Channel Width = 150.0 GHz
Channel Wavelength = 1529.36 nm
```

OTS controllers

Optical Transport Section (OTS) controller is a datapath controller type for the OTS optical interfaces that

- manages and monitors all the optical interfaces,
- sets the parameters for optical signals
- supports LINE and ADD/DROP ports for C- and L-band signals.

OTS optical interfaces refers to the hardware components in the line cards such as photodiode, VOA, amplifier, and OCM.

OTS controllers for ILA and OLT cards

The OTS controller supports the

- OLT cards for NCS 1010 and NCS 1020 platforms
- ILA cards for NCS 1010 platform

This section contains the topics:

Default OTS controllers for ILA cards

When you bring up the ILA and E-ILA cards, the system creates four OTS controllers by default for line and L-band ports.

Use this table to identify the default OTS controllers assigned for each port and band type:

Degrees	Port	OTS Controller	Band type
Degree-1	LINE 0	ots 0/0/0/0	C/L
Degree-1	L-BAND-1	ots 0/0/0/1	L
Degree-2	LINE 2	ots 0/0/0/2	C/L
Degree-2	L-BAND-3	ots 0/0/0/3	L

The card types supported for this allocation are:

- NCS1K-ILA-C
- NCS1K-ILA-R-C
- NCS1K-ILA-2R-C
- NCS1K-ILA-L
- NCS1K-E-ILA-R-C

- NCS1K-E-ILA-2R-C
- NCS1K-E-ILA-R-C-2

Verify the OTS controllers for ILA cards

Verify the status of the OTS controllers and their values for each port in the ILA card.

By default, when the ILA cards boot, the OTS controllers become activated with default values.

To modify the OTS controllers values, see *Command Reference Guide for NCS 1010*.

Follow these steps to verify the OTS controllers for the ILA and E-ILA cards.

Procedure

Step 1 Verify the OTS controller status on the card.

Run the **show controller description** command.

Example:

```
RP/0/RP0/CPU0:ios#show controller description
```

This output highlights the status of the OTS controller interfaces (*ots0/0/0/0...ots0/0/0/3*) on the ILA cards.

```
Fri Mar 25 09:24:53.386 UTC
```

Interface	Status	Description
Osc0/0/0/0	up	
Osc0/0/0/2	up	
Ots0/0/0/0	up	
Ots0/0/0/1	up	
Ots0/0/0/2	up	
Ots0/0/0/3	up	

```
RP/0/RP0/CPU0:ios#
```

Step 2 Use the **show controllers ots 0/0/0/<port>** command to verify the OTS controller values.

Example:

This command displays the LINE-0 OTS controller values.

```
RP/0/RP0/CPU0:ios#show controllers ots 0/0/0/0
```

If you want OTS controller status for	then run
LINE-0	show controllers ots 0/0/0/0
L-BAND-2	show controllers ots 0/0/0/1
LINE-1	show controllers ots 0/0/0/2
L-BAND-2	show controllers ots 0/0/0/3

Example:

This output highlights the parameters that indicate the OTS controller is in operation.

Fri Mar 25 09:27:44.146 UTC

Controller State: Up

Transport Admin State: In Service

LED State: Green

Alarm Status:

Detected Alarms: None

Alarm Statistics:

LOW-TX-PWR = 0

RX-LOS-P = 0

RX-LOC = 0

TX-POWER-FAIL-LOW = 0

INGRESS-AUTO-LASER-SHUT = 0

INGRESS-AUTO-POW-RED = 0

INGRESS-AMPLI-GAIN-LOW = 0

INGRESS-AMPLI-GAIN-HIGH = 0

EGRESS-AUTO-LASER-SHUT = 0

EGRESS-AUTO-POW-RED = 0

EGRESS-AMPLI-GAIN-LOW = 0

EGRESS-AMPLI-GAIN-HIGH = 0

HIGH-TX-BR-PWR = 0

HIGH-RX-BR-PWR = 0

SPAN-TOO-SHORT-TX = 0

SPAN-TOO-SHORT-RX = 0

Parameter Statistics:

Total RX Power(C+L) = 20.00 dBm

Total TX Power(C+L) = 20.00 dBm

Total RX Power = 20.00 dBm

Total TX Power = 23.01 dBm

RX Signal Power = -30.00 dBm

TX Signal Power = 20.00 dBm

TX Voa Attenuation = 0.0 dB

Egress Ampli Gain = 8.0 dB

Egress Ampli Tilt = 0.0 dB

Egress Ampli Gain Range = Normal

Egress Ampli Safety Control mode = auto

Egress Ampli Osri = OFF

Egress Ampli Force Apr = OFF

Configured Parameters:

TX Voa Attenuation = 0.0 dB

Egress Ampli Gain = 8.0 dB

Egress Ampli Tilt = 0.0 dB

Egress Ampli Gain Range = Normal

Egress Ampli Safety Control mode = auto

Egress Ampli Osri = OFF

Egress Ampli Force Apr = OFF

You have verified the status and values of the OTS controller interfaces on the ILA card.

Default OTS controllers for OLT cards

When you bring up the OLT and E-OLT cards, the system creates 34 OTS controllers by default for line and L-band ports.

Use this table to identify the default OTS controllers assigned for each port and band type:

Table 32: Line side OTS controllers for C-band OLT and E-OLT cards

Card type	Port	Connector type	OTS Controller
C-band OLT and E-OLT	LINE 0	LC	ots 0/0/0/0
C-band OLT and E-OLT	L-BAND-1	LC	ots 0/0/0/1
L-band OLT and E-OLT	LINE 0	LC	ots 0/0/0/0

Table 33: Add/Drop side OTS controllers for C-band and L-band OLT and E-OLT cards

Card type	Port	Connector type	OTS Controller
C- and L-band OLT	A/D2...3	LC	ots 0/0/0/2...3
	A/D4-11	MPO	ots 0/0/0/4 to ots 0/0/0/11
	A/D12-19	MPO	ots 0/0/0/12 to ots 0/0/0/19
	A/D20-27	MPO	ots 0/0/0/20 to ots 0/0/0/27
OLT	A/D28-33	MPO	ots 0/0/0/28 to ots 0/0/0/33
C- and L-band E-OLT	A/D2...17	LC	ots 0/0/0/2...17
	A/D18-25	MPO	ots 0/0/0/18 to ots 0/0/0/25
E-OLT	A/D26-33	MPO	ots 0/0/0/26 to ots 0/0/0/33

The card types supported for this allocation are:

- NCS1K-OLT-C
- NCS1K-OLT-R-C
- NCS1K-OLT-L

- NCS1K-E-OLT-L
- NCS1K-E-OLT-C
- NCS1K-E-OLT-R-C

Verify the OTS controllers for OLT cards

Verify the status of the OTS controllers and their values for each port in the OLT card. By default, when the OLT cards boot, the OTS controllers become activated with default values. To modify the OTS controllers values, see *Command Reference Guide for NCS 1010 and NCS 1020*. Follow these steps to verify the OTS controllers for the OLT and E-OLT cards.

Procedure

Step 1 Verify the OTS controller status on the card.

Run the **show controller description** command.

Example:

```
RP/0/RP0/CPU0:ios#show controller description
```

This output highlights the status of the OTS controller interfaces (*ots0/0/0/0...ots0/0/0/33*) on the OLT cards.

Wed Jun 29 16:03:59.914 UTC

Interface	Status	Description
Dfb0/0/0/0	up	
Osc0/0/0/0	up	
Ots0/0/0/0	up	
Ots0/0/0/1	up	
Ots0/0/0/2	up	
.		
.		
Output snipped		
.		
.		
Ots0/0/0/30	up	
Ots0/0/0/31	up	
Ots0/0/0/32	up	
Ots0/0/0/33	up	

Step 2 Use the **show controllers ots 0/0/0/<port>** command to verify the OTS controller values.

Example:

This command displays the LINE-0 OTS controller values.

```
RP/0/RP0/CPU0:ios#show controllers ots 0/0/0/0
```

If you want OTS controller status for	then run
LINE-0	show controllers ots 0/0/0/0

If you want OTS controller status for	then run
L-BAND-1	show controllers ots 0/0/0/1
A/D2...33	show controllers ots 0/0/0/2...33

Example:

This output highlights the parameters that indicate the OTS controller is in operation.

Wed Jun 29 16:07:16.771 UTC

Controller State: Up

Transport Admin State: In Service

LED State: Green

```
Alarm Status:
-----
Detected Alarms: None
```

```
Alarm Statistics:
-----
RX-LOS-P = 0
RX-LOC = 0
TX-POWER-FAIL-LOW = 0
INGRESS-AUTO-LASER-SHUT = 0
INGRESS-AUTO-POW-RED = 0
INGRESS-AMPLI-GAIN-LOW = 0
INGRESS-AMPLI-GAIN-HIGH = 0
EGRESS-AUTO-LASER-SHUT = 0
EGRESS-AUTO-POW-RED = 0
EGRESS-AMPLI-GAIN-LOW = 0
EGRESS-AMPLI-GAIN-HIGH = 0
HIGH-TX-BR-PWR = 0
HIGH-RX-BR-PWR = 0
SPAN-TOO-SHORT-TX = 0
SPAN-TOO-SHORT-RX = 0
```

```
Parameter Statistics:
-----
Total RX Power(C+L) = -10.00 dBm
Total TX Power(C+L) = 20.00 dBm
Total RX Power = 20.00 dBm
Total TX Power = 20.00 dBm
RX Signal Power = 20.00 dBm
TX Signal Power = 20.00 dBm
TX Voa Attenuation = 0.0 dB
Ingress Ampli Gain = 12.0 dB
Ingress Ampli Tilt = 0.0 dB
Ingress Ampli Gain Range = Normal
Ingress Ampli Safety Control mode = auto
Ingress Ampli Osri = OFF
Ingress Ampli Force Apr = OFF
Egress Ampli Gain = 16.0 dB
Egress Ampli Tilt = 0.0 dB
Egress Ampli Safety Control mode = auto
Egress Ampli Osri = OFF
Egress Ampli Force Apr = OFF
```

Configured Parameters:

```

-----
TX Voa Attenuation = 0.0 dB
Ingress Ampli Gain = 12.0 dB
Ingress Ampli Tilt = 0.0 dB
Ingress Ampli Gain Range = Normal
Ingress Ampli Safety Control mode = auto
Ingress Ampli Osri = OFF
Ingress Ampli Force Apr = OFF
Egress Ampli Gain = 16.0 dB
Egress Ampli Tilt = 0.0 dB
Egress Ampli Safety Control mode = auto
Egress Ampli Osri = OFF
Egress Ampli Force Apr = OFF
    
```

You have verified the status and values of the OTS controller interfaces on the OLT card.

Comparison of configuration commands for OTS controller parameters for OLT and ILA nodes

This table summarizes the configuration commands used to set OTS controller parameters for OLT and ILA nodes. Use the appropriate command depending on the node type and required parameter.

Table 34: Commands to configure OTS controller parameters for OLT and ILA nodes

Command purpose	ILA	OLT
	<code>tx-voa-attenuation</code> <i>value</i>	<code>tx-voa-attenuation</code> <i>value</i>
	<code>egress-ampli-gain-range</code> [normal extended]	NA
	<code>egress-ampli-gain</code> <i>value</i>	<code>egress-ampli-gain</code> <i>value</i>
	<code>egress-ampli-tilt</code> <i>value</i>	<code>egress-ampli-tilt</code> <i>value</i>
	<code>egress-ampli-osri</code> [on off]	<code>egress-ampli-osri</code> [on off]
	<code>egress-ampli-safety-control-mode</code> [auto disabled]	<code>egress-ampli-safety-control-mode</code> [auto disabled]
	<code>egress-ampli-force-apr</code> [on off]	<code>egress-ampli-force-apr</code> [on off]
	<code>raman-power-enabled</code> [on off]	<code>raman-power-enabled</code> [on off]
	<code>raman-power-disabled</code> [on off]	<code>raman-power-disabled</code> [on off]
	<code>raman-force-apr</code> [on off]	<code>raman-force-apr</code> [on off]
	<code>raman-osri</code> [on off]	<code>raman-osri</code> [on off]
	<code>raman-safety-control-mode</code> [auto disabled]	<code>raman-safety-control-mode</code> [auto disabled]

Command purpose	ILA	OLT
	NA	ingress-ampli-gain-range {normal extended}
	NA	ingress-ampli-gain value
	NA	ingress-ampli-tilt value
	NA	ingress-ampli-osri {on off}
	NA	ingress-ampli-safety-control-mode {auto disabled}
	NA	ingress-ampli-force-apr {on off}
	NA	ingress-channel-slice channel-slice attn attenuation-value

For more information on the commands, see *Cisco NCS 1010 Command Reference Guide*.

OTS Controller Configuration Parameters

This table describes the optical parameter values for the OTS controller configuration.

Table 35: OTS Controller Configuration Parameters

Parameter	Description	Hardware Capability	Range	Default
tx-voa-attenuation	TX VOA attenuation set point	VOA	<ul style="list-style-type: none"> • OLT: 0–20 dB • ILA: 0–15 dB 	0.0
ampli-safety-control-mode (ingress/egress)	Amplifier control mode	Amplifier	auto and disabled	automatic

Parameter	Description	Hardware Capability	Range	Default
ampli-gain-range (ingress/egress)		Amplifier	normal and extended	normal

Parameter	Description	Hardware Capability	Range	Default
	<p>Amplifier gain range</p> <p>If you change the gain range from Normal to Extended or the opposite way, without updating the proper gain value for the new gain range, then the following may happen:</p> <ul style="list-style-type: none"> • The EDFA switches to the preconfigured or default value of the gain causing a mismatch between the operational and configured gain. • The gain configuration is lost during the reload of software or line card, as the configured gain mismatches with the latest gain-range. This may result in traffic interruption during these reload operations. <p>Hence, we recommend that you explicitly configure the gain range mode as normal or extended, and the corresponding gain values for each mode to get the expected results.</p> <p>The following are a few example scenarios that may not work as expected:</p> <ul style="list-style-type: none"> • Scenario 1: Current running config: <pre>controller Ots R/S/I/P egress-ampli-gain-range extended egress-ampli-gain <gain value in extended mode></pre> New applied config: <pre>controller Ots R/S/I/P no egress-ampli-gain-range extended commit</pre> • Scenario 2: Current running config: <pre>controller Ots R/S/I/P egress-ampli-gain-range extended egress-ampli-gain <gain value in extended mode></pre> New applied config: <pre>controller Ots R/S/I/P egress-ampli-gain-range Normal commit</pre> 			

Parameter	Description	Hardware Capability	Range	Default
	<p>• Scenario 3:</p> <p>Current running config:</p> <pre>controller Ots R/S/I/P egress-ampli-gain <gain value in normal mode></pre> <p>New applied config:</p> <pre>controller Ots R/S/I/P egress-ampli-gain-range extended commit</pre> <p>Another example is a scenario that involves commit-replace command where you replace the existing gain configuration that does not have explicitly configured gain-range, with new gain-range and gain value.</p> <p>Scenario 4:</p> <p>Current running config:</p> <pre>controller Ots R/S/I/P egress-ampli-gain <gain value in normal mode></pre> <p>New applied config:</p> <pre>..... controller Ots R/S/I/P egress-ampli-gain-range extended egress-ampli-gain <gain value in extended mode> commit replace</pre>			
ampli-gain (ingress/egress)	<p>Amplifier gain set point</p> <p>The actual range of amplifier gain set point depends on amplifier gain range.</p> <p>Note Gain is calibrated to line port and so the supported range varies in Raman variants (OLT-C-R, ILA-C-R, and ILA-C-2R) due to insertion loss by Raman amplifier.</p>	Amplifier	80–380	OLT ingress: 12, egress: 16 ILA: 8
ampli-tilt (ingress/egress)	Amplifier tilt	Amplifier	–5 to +5	0.0
osri (ingress/egress)	<p>Optical safety remote interlock</p> <p>When osri is on, the EDFA is in shut state and vice versa.</p>	Amplifier	on and off	off

Parameter	Description	Hardware Capability	Range	Default
ampli-force-apr (ingress/egress)	— When ampli-force-apr is set to <i>on</i> , the EDFA output power is clamped to 8 dBm.	Amplifier	on and off	off
channel-slice <i>channel-slice</i> attn <i>attenuation</i> (ingress/egress)	Channel slice attenuation set point	—	1–1548 (channel slice) OLT: 0–250 (attenuation value in 0.1 dB) ILA: 0–50 (attenuation value in 0.1 dB)	0.0
raman-tx-power <i>pump instance</i> value <i>value</i>	Tx power	Raman amplifier	1–5 (pump instance) The values are: <ul style="list-style-type: none"> • Pump 1: 45–390 • Pump 2: 40–390 • Pump 3: 40–220 • Pump 4: 40–220 • Pump 5: 35–190 	—
raman-tx-power-disable <i>pump instance</i>	Tx power	Raman amplifier	—	—
raman-force-apr	Force automatic power reduction When raman-force-apr is set to <i>on</i> , the Raman pump maximum output power is clamped to 10 mW.	Raman amplifier	on and off	off
raman-osri	Optical safety remote interlock When raman-osri is set to <i>on</i> , the Raman pumps are switched off.	Raman amplifier	on and off	off

Configuration examples for OTS controllers

Use the CLI examples to configure key attributes for OTS controllers.



Important

The OTS controller commands do not support decimal inputs. The OTS controller commands consider the inputs to one decimal place for the parameter values. For example, if you provided 100 to configure the attenuation value for the egress-channel-slice 10, then the system takes the value as 10.0 dB.

- This example sets the **tx-voa-attenuation** to 10 dB.

```
RP/0/RP0/CPU0:ios#config
RP/0/RP0/CPU0:ios(config)#controller ots 0/0/0/0
RP/0/RP0/CPU0:ios(config-Ots)#tx-voa-attenuation 100
RP/0/RP0/CPU0:ios(config-Ots)#commit
```

- In the following example, the egress-ampli-gain is set to 20 dB.

```
RP/0/RP0/CPU0:ios#config
RP/0/RP0/CPU0:ios(config)#controller ots 0/0/0/0
RP/0/RP0/CPU0:ios(config-Ots)#egress-ampli-gain 200
RP/0/RP0/CPU0:ios(config-Ots)#commit
```

- In the following example, the egress-ampli-tilt is set to 2.5 dB.

```
RP/0/RP0/CPU0:ios#config
RP/0/RP0/CPU0:ios(config)#controller ots 0/0/0/0
RP/0/RP0/CPU0:ios(config-Ots)#egress-ampli-tilt 25
RP/0/RP0/CPU0:ios(config-Ots)#commit
```

- In the following examples, the egress-ampli-gain-range is set to extended and Normal.

```
RP/0/RP0/CPU0:ios#config
RP/0/RP0/CPU0:ios(config)#controller ots 0/0/0/0
RP/0/RP0/CPU0:ios(config-Ots)#egress-ampli-gain-range extended
RP/0/RP0/CPU0:ios(config-Ots)#egress-ampli-gain 360
RP/0/RP0/CPU0:ios(config-Ots)#commit
```

```
RP/0/RP0/CPU0:ios#config
RP/0/RP0/CPU0:ios(config)#controller ots 0/0/0/0
RP/0/RP0/CPU0:ios(config-Ots)#egress-ampli-gain-range normal
RP/0/RP0/CPU0:ios(config-Ots)#egress-ampli-gain 150
RP/0/RP0/CPU0:ios(config-Ots)#commit
```

- In the following example, the egress-ampli-safety-control-mode is set to auto.

```
RP/0/RP0/CPU0:ios#config
RP/0/RP0/CPU0:ios(config)#controller ots 0/0/0/0
RP/0/RP0/CPU0:ios(config-Ots)#egress-ampli-safety-control-mode auto
RP/0/RP0/CPU0:ios(config-Ots)#commit
```

- In the following example, the egress-ampli-osri is set to on.

```
RP/0/RP0/CPU0:ios#config
RP/0/RP0/CPU0:ios(config)#controller ots 0/0/0/0
RP/0/RP0/CPU0:ios(config-Ots)#egress-ampli-osri on
RP/0/RP0/CPU0:ios(config-Ots)#commit
```

- In the following example, the egress-ampli-force-apr is set to on.

```
RP/0/RP0/CPU0:ios#config
RP/0/RP0/CPU0:ios(config)#controller ots 0/0/0/0
```

```
RP/0/RP0/CPU0:ios(config-Ots)#egress-ampli-force-apr on
RP/0/RP0/CPU0:ios(config-Ots)#commit
```

- In the following example, the egress-channel-slice attenuation is set to 20 dB.

```
RP/0/RP0/CPU0:ios#config
RP/0/RP0/CPU0:ios(config)#controller ots 0/0/0/0
RP/0/RP0/CPU0:ios(config-Ots)#egress-channel-slice 1 attn 200
RP/0/RP0/CPU0:ios(config-Ots)#commit
```

- In the following example, to establish connection using the existing GRPC framework.

```
RP/0/RP0/CPU0:ios#config
RP/0/RP0/CPU0:ios(config)#optical-line-control
RP/0/RP0/CPU0:ios(config)#controller ots 0/0/0/0
RP/0/RP0/CPU0:ios(config-Ots)#partner-band-port ipv4 address 10.10.1.2
RP/0/RP0/CPU0:ios(config-Ots)#controller Ots0/0/0/0
RP/0/RP0/CPU0:ios(config-Ots)#commit
```

- In the following example, the raman-tx-power is set to 55 mW.

```
RP/0/RP0/CPU0:ios#config
RP/0/RP0/CPU0:ios(config)#controller ots 0/0/0/0
RP/0/RP0/CPU0:ios(config-Ots)#raman-tx-power 1 value 5500
RP/0/RP0/CPU0:ios(config-Ots)#commit
```

- This example sets the raman-force-apr to on.

```
RP/0/RP0/CPU0:ios#config
RP/0/RP0/CPU0:ios(config)#controller ots 0/0/0/0
RP/0/RP0/CPU0:ios(config-Ots)#raman-force-apr on
RP/0/RP0/CPU0:ios(config-Ots)#commit
```

- In the following example, the raman-osri is set to on.

```
RP/0/RP0/CPU0:ios#config
RP/0/RP0/CPU0:ios(config)#controller ots 0/0/0/0
RP/0/RP0/CPU0:ios(config-Ots)#raman-osri on
RP/0/RP0/CPU0:ios(config-Ots)#commit
```

Modify channel slice attenuation for OLT cards

Manually set the channel slice attenuation values for OLT cards.

The Automatic Power Control (APC) automatically configures the attenuation for the channel slices.

Follow these steps to modify channel slice attenuation:

Before you begin

Ensure APC is disabled. If not, run the commands:

```
RP/0/RP0/CPU0:ios#config
RP/0/RP0/CPU0:ios(config)#optical-line-control controller ots 0/0/0/0 apc disable
RP/0/RP0/CPU0:ios(config)#commit
```

For more information on APC commands, see [Configure APC](#)".

Procedure

Step 1 Use the **show controllers ots R/S/I/P channel-slice-attenuation-info** command to view the existing channel slice information.

Example:

This command displays the channel slice attenuation details for LINE-0 port.

```
RP/0/RP0/CPU0:ios#show controllers ots 0/0/0/0 channel-slice-attenuation-info
```

Example:

This output shows the existing channel slice attenuation information for both egress and ingress channels.

Sun Mar 27 15:27:27.600 UTC

```
Attenuation Slices spacing      :      3.125 GHz
Attenuation Slices Range       :      1 - 1548
Slice start wavelength         :      1566.82 nm
Slice start frequency          :      191337.50 GHz
```

```
Sub Channel Attenuation information :
Ingress Channel Slice Attenuation :
```

```
-----
spectrum-slice num              Attenuation values (dB)
-----
```

1 - 12	25.0	25.0	25.0	25.0	25.0	25.0	25.0	25.0	25.0	25.0	25.0	25.0	25.0
13 - 24	25.0	25.0	25.0	25.0	25.0	25.0	25.0	25.0	25.0	25.0	25.0	25.0	25.0
25 - 36	25.0	25.0	25.0	25.0	25.0	25.0	25.0	25.0	25.0	25.0	25.0	25.0	25.0
37 - 48	25.0	25.0	25.0	25.0	25.0	25.0	25.0	25.0	25.0	25.0	25.0	25.0	25.0
49 - 60	25.0	25.0	25.0	25.0	25.0	25.0	25.0	25.0	25.0	25.0	25.0	25.0	25.0
61 - 72	25.0	25.0	25.0	25.0	25.0	25.0	25.0	25.0	25.0	25.0	25.0	25.0	25.0
.													
.													
output snipped													
.													
.													
1501 - 1512	25.0	25.0	25.0	25.0	25.0	25.0	25.0	25.0	25.0	25.0	25.0	25.0	25.0
1513 - 1524	25.0	25.0	25.0	25.0	25.0	25.0	25.0	25.0	25.0	25.0	25.0	25.0	25.0
1525 - 1536	25.0	25.0	25.0	25.0	25.0	25.0	25.0	25.0	25.0	25.0	25.0	25.0	25.0
1537 - 1548	25.0	25.0	25.0	25.0	25.0	25.0	25.0	25.0	25.0	25.0	25.0	25.0	25.0

```
-----
Egress Channel Slice Attenuation :
```

```
-----
spectrum-slice num              Attenuation values (dB)
-----
```

1 - 12	25.0	25.0	25.0	25.0	25.0	25.0	25.0	25.0	25.0	25.0	25.0	25.0	25.0
13 - 24	25.0	25.0	25.0	25.0	25.0	25.0	25.0	25.0	25.0	25.0	25.0	25.0	25.0
25 - 36	25.0	25.0	25.0	25.0	25.0	25.0	25.0	25.0	25.0	25.0	25.0	25.0	25.0
37 - 48	25.0	25.0	25.0	25.0	25.0	25.0	25.0	25.0	25.0	25.0	25.0	25.0	25.0
49 - 60	25.0	25.0	25.0	25.0	25.0	25.0	25.0	25.0	25.0	25.0	25.0	25.0	25.0
61 - 72	25.0	25.0	25.0	25.0	25.0	25.0	25.0	25.0	25.0	25.0	25.0	25.0	25.0
.													
.													
output snipped													
.													
.													
1501 - 1512	25.0	25.0	25.0	25.0	25.0	25.0	25.0	25.0	25.0	25.0	25.0	25.0	25.0
1513 - 1524	25.0	25.0	25.0	25.0	25.0	25.0	25.0	25.0	25.0	25.0	25.0	25.0	25.0
1525 - 1536	25.0	25.0	25.0	25.0	25.0	25.0	25.0	25.0	25.0	25.0	25.0	25.0	25.0
1537 - 1548	25.0	25.0	25.0	25.0	25.0	25.0	25.0	25.0	25.0	25.0	25.0	25.0	25.0

Step 2 Set the attenuation value for an egress channel slice.

Example:

This command sets the attenuation for an egress channel slice 10 to *10.0 dB* through LINE-0 port ots 0/0/0/0 controller.

```
RP/0/RP0/CPU0:ios#config
RP/0/RP0/CPU0:ios(config)#controller ots 0/0/0/0 egress-channel-slice 10 attn 100
RP/0/RP0/CPU0:ios(config)#commit
Sun Apr 10 14:47:37.849 UTC
RP/0/RP0/CPU0:ios(config)#end
```

Step 3 Verify the modified channel slice information for LINE-0 port.

Example:

This command displays the channel slice attenuation information for LINE-0 port.

```
RP/0/RP0/CPU0:ios#show controllers ots 0/0/0/0 channel-slice-attenuation-info
```

Example:

This output highlights the modified attenuation value for **egress channel slice 10** that is set to *10.0 dB*. Each column represents the attenuation for each channel slice.

```
Sun Apr 10 14:47:47.050 UTC
```

```
Attenuation Slices spacing      :          3.125 GHz
Attenuation Slices Range       :          1 - 1548
Slice start wavelength         :        1566.82 nm
Slice start frequency          :        191337.50 GHz
```

```
Sub Channel Attenuation information :
Ingress Channel Slice Attenuation :
```

```
-----
spectrum-slice num              Attenuation values (dB)
-----
  1 - 12      25.0  25.0  25.0  25.0  25.0  25.0  25.0  25.0  25.0  25.0  25.0  25.0  25.0
 13 - 24      25.0  25.0  25.0  25.0  25.0  25.0  25.0  25.0  25.0  25.0  25.0  25.0  25.0
 25 - 36      25.0  25.0  25.0  25.0  25.0  25.0  25.0  25.0  25.0  25.0  25.0  25.0  25.0
 37 - 48      25.0  25.0  25.0  25.0  25.0  25.0  25.0  25.0  25.0  25.0  25.0  25.0  25.0
 49 - 60      25.0  25.0  25.0  25.0  25.0  25.0  25.0  25.0  25.0  25.0  25.0  25.0  25.0
 61 - 72      25.0  25.0  25.0  25.0  25.0  25.0  25.0  25.0  25.0  25.0  25.0  25.0  25.0
.
.
output snipped
.
.
1501 - 1512   25.0  25.0  25.0  25.0  25.0  25.0  25.0  25.0  25.0  25.0  25.0  25.0  25.0
1513 - 1524   25.0  25.0  25.0  25.0  25.0  25.0  25.0  25.0  25.0  25.0  25.0  25.0  25.0
1525 - 1536   25.0  25.0  25.0  25.0  25.0  25.0  25.0  25.0  25.0  25.0  25.0  25.0  25.0
1537 - 1548   25.0  25.0  25.0  25.0  25.0  25.0  25.0  25.0  25.0  25.0  25.0  25.0  25.0
-----
```

```
Egress Channel Slice Attenuation :
```

```
-----
spectrum-slice num              Attenuation values (dB)
-----
  1 - 12     25.0  25.0  25.0  25.0  25.0  25.0  25.0  25.0  25.0  25.0  10.0  25.0  25.0
 13 - 24      25.0  25.0  25.0  25.0  25.0  25.0  25.0  25.0  25.0  25.0  25.0  25.0  25.0
 25 - 36      25.0  25.0  25.0  25.0  25.0  25.0  25.0  25.0  25.0  25.0  25.0  25.0  25.0
 37 - 48      25.0  25.0  25.0  25.0  25.0  25.0  25.0  25.0  25.0  25.0  25.0  25.0  25.0
 49 - 60      25.0  25.0  25.0  25.0  25.0  25.0  25.0  25.0  25.0  25.0  25.0  25.0  25.0
 61 - 72      25.0  25.0  25.0  25.0  25.0  25.0  25.0  25.0  25.0  25.0  25.0  25.0  25.0
.
.
output snipped
```

```

.
.
1501 - 1512  25.0  25.0  25.0  25.0  25.0  25.0  25.0  25.0  25.0  25.0  25.0  25.0
1513 - 1524  25.0  25.0  25.0  25.0  25.0  25.0  25.0  25.0  25.0  25.0  25.0  25.0
1525 - 1536  25.0  25.0  25.0  25.0  25.0  25.0  25.0  25.0  25.0  25.0  25.0  25.0
1537 - 1548  25.0  25.0  25.0  25.0  25.0  25.0  25.0  25.0  25.0  25.0  25.0  25.0
RP/0/RP0/CPU0:ios#

```

The selected egress channel slice attenuation value is updated and the change is confirmed.

Configure the partner band IP address

Configure the peer IP addresses on C-band and L-band nodes for inter-band connection to increase optical fiber capacity.

NCS1010 devices support both C and L-band wavelengths. Establishing a connection between C- and L-band nodes requires configuring the peer IP addresses so each node can communicate with its counterpart.

Follow these steps to configure the partner band IP address between C- and L-band nodes:

Before you begin

Identify the rack, slot, instance, and port details for both C-band and L-band nodes.

Procedure

Step 1 Enter Optical Line Control configuration mode.

Example:

```

RP/0/RP0/CPU0:ios(config)# optical-line-control controller Ots0/0/0/0
RP/0/RP0/CPU0:ios(config-olc-ots)#

```

The terminal is in optical line control configuration mode.

Step 2 Configure the IP address on the peer nodes.

Option	Description
For the C-band node	configure the L-band peer IP address using: <pre> optical-line-control controller ots <Rack/Slot/Instance/Port> partner-band-port ipv4 address <L-band IP-address> controller ots <Rack/Slot/Instance/Port> </pre>
For the L-band node	configure the C-band peer IP address using: <pre> optical-line-control controller ots <Rack/Slot/Instance/Port> partner-band-port ipv4 address <C-band IP-address> controller ots <Rack/Slot/Instance/Port> </pre>

Note

This configuration should be applied on all C and L-band nodes.

Example:

```
RP/0/RP0/CPU0:ios#conf
RP/0/RP0/CPU0:ios(config)#optical-line-control controller Ots0/0/0/0
RP/0/RP0/CPU0:ios(config)#partner-band-port ipv4 address 192.168.1.2 controller Ots0/0/0/0
```

The C-band and L-band nodes are successfully interconnected, providing expanded fiber capacity across both bands.

OTS-OCH controllers

Optical Transport Section and Optical Channel (OTS-OCH) controller is a datapath controller type that

- is created on the LINE side of the OLT and ILA nodes using the **hw-module** command in Flex-Grid configuration, and
- supports optical cross-connection between the LINE side and COM side (Add/Drop ports) of the OLT nodes only.

Optical Cross Connection is a type of configuration that

- operates only in OLT nodes,
- defines the line side OTS-OCH channel as the source, and
- creates an OTS-OCH controller on the Add/Drop port (COM side) to which the cross connection is made.

OTS-OCH controllers for ILA and OLT cards

The OTS-OCH controller supports the

Table 36: OTS-OCH configurations

Configurations	OLT	ILA
Optical cross connections	NCS 1010 NCS 1020	NA
Flex grid	NCS 1010	NCS 1010



Note

Validation rules for Flex Grid channel configuration

The following table summarizes the validation rules for configuring Flex Grid channels on OLT and ILA nodes in NCS 1010 and NCS 1020 platforms before committing **hw-module** configurations.

Parameter	Validation rule	Supported platform for OLT	Supported platform for ILA
Channel ID	1 to 194.	NCS 1010, NCS 1020	NCS 1010
Center frequency	OLT-C: 191.3375 to 196.1750 THz OLT-L: 184.6153 to 190.8875 THz	NCS 1010, NCS 1020	NCS 1010
Channel width	25.000 GHz to 4837.500 GHz.	NCS 1010, NCS 1020	NCS 1010
Channel overlap	From R7.9.1, permitted as Nyquist channels are supported. See #unique_15_unique_15_Connect_42_section_a5x_yl3_nwb .	NCS 1010, NCS 1020	NCS 1010
Configuration precision	From R7.9.1, you can set channel center frequency and width with 1 MHz resolution.	NCS 1010, NCS 1020	NCS 1010



Optional: Python scripting for Fixed Grid mode setup

The system configures the OLT and ILA nodes for OTS-OCH controllers as complete Flex Grid mode configuration. However, for ease of Fixed Grid Mode setup, there is a configuration script to create 75 or 150 Ghz or appropriate fixed grid channels using the Flex Grid configuration model.



Usage example

Use the python-based configuration script to automatically create 75 or 150 GHz fixed grid channels on ports 2 and 3 using the commands:



Requirement

Use this script only for a colored solution that uses the NCS1K-MD-320/E-C patch panel with fixed channel width.

Create OTS-OCH controllers on ILA cards

Create OTS-OCH controllers on ILA cards in NCS 1010 using the commands in configuration mode.

- **hw-module location** *locationinline-ampli grid-modemode*
- **channel-id** *channel-idcentre-freqfrequencywidthchannel-width*

When the ILA cards boot up, the OTS-OCH controllers are not created by default. The LINE OTS-OCH controllers can be created using the **hw-module** command.

The supported ILA and OLT cards are:

- NCS1K-ILA-2R-C
- NCS1K-ILA-R-C
- NCS1K-ILA-C
- NCS1K-OLT-R-C
- NCS1K-OLT-C

Before you begin

Enter the configuration mode using the **configure** command.

Procedure

Step 1 Create the OTS-OCH controllers on the LINE side of the ILA-C node.

Example:

```
RP/0/RP0/CPU0:ios(config)#hw-module location 0/0/NXR0 inline-ampli grid-mode flex
RP/0/RP0/CPU0:ios(config-hwmod-ila-flexi)#channel-id 1 centre-freq 196.1 width 75
RP/0/RP0/CPU0:ios(config-hwmod-ila-flexi)# commit
```

The OTS-OCH controller is created for *channel 1 on LINE 0 and LINE 2 ports* of the ILA-C node.

Step 2 View the OTS-OCH controllers.

Run `show controllers ots-och`.

Example:

```
RP/0/RP0/CPU0:ios#show controllers ots-och ?
```

Example:

This output displays the OTS-OCH controller that is created on both LINE 0 and LINE 2 ports of the ILA-C node.

```
0/0/0/0/1          Ots-Och Interface Instance
0/0/0/2/1          Ots-Och Interface Instance
R/S/I/P/B or R/S/I/P Forward interface in Rack/Slot/Instance/Port/Breakout format or R/S/I/P format
```

Step 3 Use the `show controllers ots-och 0/0/0/0/*` command to view the parameters of the OTS-OCH controller.

Example:

This command displays the LINE-0 OTS-OCH controller values for channel ID 1.

```
RP/0/RP0/CPU0:ios#show controllers ots-och 0/0/0/0/1
```

If you want OTS-OCH controller status for	then run
LINE-0	show controllers ots-och 0/0/0/0/1
LINE-2	show controllers ots-och 0/0/0/2/1

Example:

This output displays the parameters of the OTS-OCH controller.

Thu Apr 7 13:22:29.125 UTC

Controller State: Up

Transport Admin State: In Service

Alarm Status:

Detected Alarms: None

Alarm Statistics:

RX-LOS-P = 0

TX-POWER-FAIL-LOW = 0

Parameter Statistics:

Total RX Power = -10.50 dBm

Total TX Power = -10.50 dBm

Configured Parameters:

Step 4 View the flex grid information on the ILA node

Example:

This command provides the flex grid information on the ILA node.

```
RP/0/RP0/CPU0:ios#show hw-module location 0/0/NXR0 inline-ampli
```

Example:

This output displays the flex grid information on the ILA node.

Sat Jul 2 02:46:33.657 UTC

Location: 0/0/NXR0

Status: Provisioned

Flex Grid Info

Channel Number	Centre Frequency (THz)	Channel Width (GHz)
1	191.375000	75.000
2	191.450000	75.000
3	191.525000	75.000
4	191.600000	75.000
5	191.675000	75.000
6	191.750000	75.000
7	191.825000	75.000
8	191.900000	75.000
9	191.975000	75.000
10	192.050000	75.000
11	192.125000	75.000
12	192.200000	75.000
13	192.275000	75.000
14	192.350000	75.000
15	192.425000	75.000
16	192.500000	75.000
17	192.575000	75.000
18	192.650000	75.000
19	192.725000	75.000
20	192.800000	75.000
21	192.875000	75.000
22	192.950000	75.000
23	193.025000	75.000

24	193.100000	75.000
25	193.175000	75.000
26	193.250000	75.000
27	193.325000	75.000
28	193.400000	75.000
29	193.475000	75.000
30	193.550000	75.000
31	193.625000	75.000
32	193.700000	75.000
33	193.775000	75.000
34	193.850000	75.000
35	193.925000	75.000
36	194.000000	75.000
37	194.075000	75.000
38	194.150000	75.000
39	194.225000	75.000
40	194.300000	75.000
41	194.375000	75.000
42	194.450000	75.000
43	194.525000	75.000
44	194.600000	75.000
45	194.675000	75.000
46	194.750000	75.000
47	194.825000	75.000
48	194.900000	75.000
49	194.975000	75.000
50	195.050000	75.000
51	195.125000	75.000
52	195.200000	75.000
53	195.275000	75.000
54	195.350000	75.000
55	195.425000	75.000
56	195.500000	75.000
57	195.575000	75.000
58	195.650000	75.000
59	195.725000	75.000
60	195.800000	75.000
61	195.875000	75.000
62	195.950000	75.000
63	196.025000	75.000
64	196.100000	75.000

The OTS-OCH controllers on the ILA cards are created.

What to do next

Create OTS-OCH controllers on OLT cards.

Create OTS-OCH controllers on OLT cards

Create OTS-OCH controllers on OLT cards in NCS 1010 and NCS 1020 using the commands in configuration mode.

- **hw-module location** *locationterminal-ampli grid-modemode*
- **channel-id***channel-idcentre-freqfrequencywidthchannel-width*

When the OLT cards boot up, the OTS-OCH controllers are not created by default. The LINE OTS-OCH controllers can be created using the **hw-module** command.

Before you begin

Enter the configuration mode using the **configure** command.

Procedure

Step 1 Create the OTS-OCH controllers on the LINE side of the OLT-C node.

Example:

```
RP/0/RP0/CPU0:ios(config)#hw-module location 0/0/nxr0 terminal-ampli grid-mode flex
RP/0/RP0/CPU0:ios(config-hwmod-olt-flexi)#channel-id 1 centre-freq 196.1 width 75
RP/0/RP0/CPU0:ios(config-hwmod-olt-flexi)#commit
```

The OTS-OCH controller is created for *channel 1 on LINE port* in the OLT-C node.

Step 2 View the OTS-OCH controllers.

Run `show controllers ots-och`.

Example:

```
RP/0/RP0/CPU0:ios#show controllers ots-och ?
```

Example:

This output displays the OTS-OCH controller that is created on the LINE port of the OLT-C node.

```
0/0/0/0/1          Ots-Och Interface Instance
R/S/I/P/B or R/S/I/P Forward interface in Rack/Slot/Instance/Port/Breakout format or R/S/I/P format
```

Step 3 Use the **show controllers ots-och 0/0/0/0/1** command to view the parameters of the OTS-OCH controller.

Example:

This command displays the LINE-0 OTS-OCH controller values for channel ID 1.

```
RP/0/RP0/CPU0:ios#show controllers ots-och 0/0/0/0/1
```

Example:

This output displays the parameters of the OTS-OCH controller.

```
Thu Apr 7 13:22:29.125 UTC
```

Controller State: Up

Transport Admin State: In Service

```
Alarm Status:
-----
Detected Alarms: None
```

```
Alarm Statistics:
-----
RX-LOS-P = 0
TX-POWER-FAIL-LOW = 0
```

```
Parameter Statistics:
-----
Total RX Power = -10.50 dBm
Total TX Power = -10.50 dBm
```

```
Configured Parameters:
-----
```

Step 4 View the flex grid information on the OLT node

Example:

This command provides the flex grid information on the OLT node.

```
RP/0/RP0/CPU0:ios#show hw-module location 0/0/NXR0 terminal-ampli
```

Example:

This output displays the flex grid information on the OLT node.

```
Tue Jun 28 15:46:07.026 UTC
```

Legend:

```
NXC - Channel not cross-connected
ACTIVE - Channel cross-connected to data port
ASE - Channel filled with ASE
FAILED - Data channel failed, pending transition to ASE
```

```
Location:          0/0/NXR0
```

```
Status:           Provisioned
```

Flex Grid Info

Channel Number	Centre Frequency (THz)	Channel Width (GHz)	Channel Status
1	196.100000	75.000	NXC
2	196.025000	75.000	NXC
3	195.950000	75.000	NXC
4	195.875000	75.000	NXC
5	195.800000	75.000	NXC
6	195.725000	75.000	NXC
7	195.650000	75.000	NXC
8	195.575000	75.000	NXC
9	195.500000	75.000	NXC
10	195.425000	75.000	NXC
11	195.350000	75.000	NXC
12	195.275000	75.000	NXC
13	195.200000	75.000	NXC
14	195.125000	75.000	NXC
15	195.050000	75.000	NXC
16	194.975000	75.000	NXC
17	194.900000	75.000	NXC
18	194.825000	75.000	NXC
19	194.750000	75.000	NXC
20	194.675000	75.000	NXC
21	194.600000	75.000	NXC
22	194.525000	75.000	NXC
23	194.450000	75.000	NXC
24	194.375000	75.000	NXC
25	194.300000	75.000	NXC
26	194.225000	75.000	NXC
27	194.150000	75.000	NXC
28	194.075000	75.000	NXC
29	194.000000	75.000	NXC
30	193.925000	75.000	NXC
31	193.850000	75.000	NXC
32	193.775000	75.000	NXC
33	193.700000	75.000	NXC
34	193.625000	75.000	NXC

35	193.550000	75.000	NXC
36	193.475000	75.000	NXC
37	193.400000	75.000	NXC
38	193.325000	75.000	NXC
39	193.250000	75.000	NXC
40	193.175000	75.000	NXC
41	193.100000	75.000	NXC
42	193.025000	75.000	NXC
43	192.950000	75.000	NXC
44	192.875000	75.000	NXC
45	192.800000	75.000	NXC
46	192.725000	75.000	NXC
47	192.650000	75.000	NXC
48	192.575000	75.000	NXC
49	192.500000	75.000	NXC
50	192.425000	75.000	NXC
51	192.350000	75.000	NXC
52	192.275000	75.000	NXC
53	192.200000	75.000	NXC
54	192.125000	75.000	NXC
55	192.050000	75.000	NXC
56	191.975000	75.000	NXC
57	191.900000	75.000	NXC
58	191.825000	75.000	NXC
59	191.750000	75.000	NXC
60	191.675000	75.000	NXC
61	191.600000	75.000	NXC
62	191.525000	75.000	NXC
63	191.450000	75.000	NXC
64	191.375000	75.000	NXC

The OTS-OCH controllers on the ILA cards are created.

What to do next

Create OTS-OCH controllers on OLT cards.

Create optical cross connection on OLT nodes

Create Optical Cross Connection (OXC) between Line and Add/Drop ports in OLT nodes in NCS 1010 and NCS 1020.

•

By default, all the channels remain blocked in both Add and Drop directions. The OXC configuration unblocks the Add-Drop port channel mentioned as add-drop-channel.

Before you begin

Enter the configuration mode using the **configure** command.

Procedure

- Step 1** Use the **controller ots-ochRack/Slot/Instance/Port/Channel-id-numberadd-drop-channel ots-ochRack/Slot/Instance/Port/Channel-id-number** command to configure the optical cross-connect.

Example:

```
RP/0/RP0/CPU0:ios(config)#controller ots-och 0/0/0/0/1 add-drop-channel ots-och 0/0/0/33/1
RP/0/RP0/CPU0:ios(config)#commit
```

Line port and add/drop port channel IDs must be the same.

The OTS-OCH controller is created on the Add/Drop port to which the cross-connection is made on the COM side.

Step 2 Use the **show controller ots-och ?** command view the OTS-OCH controller.

Example:

```
RP/0/RP0/CPU0:ios#show controller ots-och ?
```

Example:

This output highlights the OTS-OCH controller that is created on the Add/Drop port to which the cross-connection is made on the COM side.

```
0/0/0/0/1          Ots-Och Interface Instance
0/0/0/33/1        Ots-Och Interface Instance
R/S/I/P/B or R/S/I/P Forward interface in Rack/Slot/Instance/Port/Breakout format or R/S/I/P format
```

Step 3 Use the **show controllers ots-och 0/0/0/0/*** command to view the parameters of the OTS-OCH controller.

Example:

This command displays the LINE-0 OTS-OCH controller values for channel ID 1.

```
RP/0/RP0/CPU0:ios#show controllers ots-och 0/0/0/0/1
```

If you want OTS-OCH controller status for	then run
LINE-0	show controllers ots-och 0/0/0/0/1
A/D2...33	show controllers ots-och 0/0/0/2...33/1

Example:

This output displays the parameters of the OTS-OCH controller on the LINE side.

```
Tue Apr 5 06:32:29.696 UTC
```

```
Controller State: Up
```

```
Transport Admin State: In Service
```

```
Alarm Status:
-----
Detected Alarms: None
```

```
Alarm Statistics:
-----
RX-LOS-P = 0
TX-POWER-FAIL-LOW = 0
```

```
Parameter Statistics:
-----
Total RX Power = -10.50 dBm
Total TX Power = -10.50 dBm
```

```
Cross Connect Info:
```

```
-----
Add-Drop Channel = Ots-Och0/0/0/33/1
```

```
Configured Parameters:
-----
```

Note

The Add/Drop channel that is cross-connected to the line port 0/0/0/0/1 is displayed in the output.

Step 4 View the created OTS-OCH controller.

Example:

To view the OTS-OCH controllers, use the following command:

```
RP/0/RP0/CPU0:ios#show controllers ots-och ?
```

Example:

This output displays the OTS-OCH controller interfaces.

```
0/0/0/0/1          Ots-Och Interface Instance
0/0/0/0/10         Ots-Och Interface Instance
.
.
output snipped
.
.
0/0/0/0/29         Ots-Och Interface Instance
0/0/0/0/3          Ots-Och Interface Instance
0/0/0/0/49         Ots-Och Interface Instance
0/0/0/0/5          Ots-Och Interface Instance
.
.
output snipped
.
.
0/0/0/0/64         Ots-Och Interface Instance
0/0/0/0/7          Ots-Och Interface Instance
0/0/0/0/8          Ots-Och Interface Instance
0/0/0/0/9          Ots-Och Interface Instance
R/S/I/P/B or R/S/I/P Forward interface in Rack/Slot/Instance/Port/Breakout format or R/S/I/P format
```

DFB controllers

A distributed feedback (DFB) controller is a datapath controller type for the RAMAN probe that

- represents the optical layer of a DFB channel alongside the OSC controller,
- regulates DFB probe power through a variable optical attenuator (VOA) within the range of -14 to +5 dBm, and
- combines the dedicated DFB probe with other signals at the LINE-TX port in Raman-amplified NCS 1010 nodes.

A DFB probe, also known as a RAMAN probe, is a tuning mechanism that

- operates at the LINE port of ILA and OLT nodes equipped with RAMAN amplifiers,
- generates a dedicated DFB laser at 191.1THz (1568.77nm) to perform a link continuity check for optical safety at LINE-TX port, and
- enables RAMAN tuning to check span loss.

View the parameters of the LINE 0 DFB controller.

Command

```
RP/0/RP0/CPU0:ios#show controllers dfb 0/0/0/0
```

This output displays the parameters of the LINE 0 DFB controller.

Example

```
Wed Mar 23 06:05:09.074 UTC
```

```
Controller State: Up
```

```
Transport Admin State: In Service
```

```
Laser State: On
```

```
Alarm Status:
-----
Detected Alarms: None
```

```
Alarm Statistics:
-----
RX-LOS-P = 1
TX-POWER-FAIL-LOW = 106
```

```
Parameter Statistics:
-----
Total TX Power = 6.79 dBm
Total RX Power = -8.30 dBm
TX Voa Attenuation = 0.0 dB
```

```
Configured Parameters:
-----
TX Voa Attenuation = 0.0 dB
```

Default DFB controllers for OLT cards

When you bring up the OLT and ILA cards, the system automatically creates a DFB controller for each Raman-enabled line port.



Note DFB controller is supported only in C-band nodes.

Table 37: Default DFB controllers for OLT and ILA cards

Card type	Port	OTS Controller
ILA and E-ILA	LINE-0 (LINE-RX)	dfb 0/0/0/0
ILA and E-ILA	LINE-2 (LINE-RX)	dfb 0/0/0/2
OLT	LINE-0 (LINE-RX)	dfb 0/0/0/0
E-OLT	LINE R-0-T (LINE-R)	dfb 0/0/0/0

The OLT card types supported for this allocation are:

- NCS1K-OLT-R-C
- NCS1K-E-OLT-R-C
- NCS1K-E2-OLT-R-C
- NCS1K-E2-OLT-RE-C

The ILA card types supported for this allocation are:

- NCS1K-ILA-R-C
- NCS1K-ILA-2R-C
- NCS1K-E-ILA-R-C
- NCS1K-E-ILA-2R-C
- NCS1K-E-ILA-R-C-2
- NCS1K-E-ILA-RE-C
- NCS1K-E-ILA-RE-C-2
- NCS1K-E-ILA-2RE-C

Modify the DFB parameters for OLT and ILA cards

Modify the DFB parameters (such as attenuation, admin state, and shutdown) for OLT and ILA cards.

- **controller** *dfbRack/Slot/Instance/Port*
- **tx-voa-attenuation***value*
- **tx-low-threshold***value*
- **sec-admin-state** [*normal* | *maintenance*]
- **transmit-shutdown**

- **shutdown**

DFB controllers support multiple parameter adjustments on OLT and ILA nodes.

Follow these steps to configure the DFB parameters for OLT and ILA cards.



Note The DFB controller commands do not support decimal inputs. The DFB controller commands consider the inputs to one decimal place for the parameter values. For example, to configure the *tx-voa-attenuation* value for *dfb 0/0/0/0* to *2.0 dB*, provide the *tx-voa-attenuation* value for the DFB controller *dfb 0/0/0/0* as *20*.

Before you begin

Enter the configuration mode using the **configure** command.

Procedure

Step 1 Set the *tx-voa-attenuation* value.

Example:

This example sets the *tx-voa-attenuation* value to *2.0dB* for LINE-0-RX port.

```
RP/0/RP0/CPU0:ios (config) #controller dfb 0/0/0/0
RP/0/RP0/CPU0:ios (config-Dfb) #tx-voa-attenuation 20
RP/0/RP0/CPU0:ios (config-Dfb) #commit
RP/0/RP0/CPU0:ios (config-Dfb) #end
```

The DFB laser power is attenuated based on the updated value and the TX power changes accordingly.

Step 2 Set *sec-admin-state*.

Example:

This example sets the *sec-admin-state* to *maintenance* for LINE-0-RX port.

```
RP/0/RP0/CPU0:ios (config) #controller dfb 0/0/0/0
RP/0/RP0/CPU0:ios (config-Dfb) #sec-admin-state maintenance
RP/0/RP0/CPU0:ios (config-Dfb) #commit
RP/0/RP0/CPU0:ios (config-Dfb) #end
```

Step 3 Shutdown the DFB controller.

Example:

This example shuts down the DFB controller for LINE-0-RX port.

```
RP/0/RP0/CPU0:ios (config) #controller dfb 0/0/0/0
RP/0/RP0/CPU0:ios (config-Dfb) #shutdown
RP/0/RP0/CPU0:ios (config-Dfb) #commit
RP/0/RP0/CPU0:ios (config-Dfb) #end
```

The DFB controller on LINE-0-RX port is shut down.

Step 4 (Optional) Check the configured value for the DFB controller.

Use the **show controllers dfb<R/S/I/P>** command to confirm the settings applied.

Example:

```
RP/0/RP0/CPU0:ios #show controllers dfb 0/0/0/0
```

Example:

This output highlights the *tx-voa-attenuation* is set to *2.0 dB* and the *sec-admin-state* set to *maintenance*.

```
Thu Apr 21 17:05:41.311 UTC

Controller State: Up

Transport Admin State: Maintenance

Laser State: On

Alarm Status:
-----
Detected Alarms: None

Alarm Statistics:
-----
RX-LOS-P = 0
TX-POWER-FAIL-LOW = 0

Parameter Statistics:
-----
Total TX Power = 20.00 dBm
Total RX Power = 10.00 dBm
TX Voa Attenuation = 2.0 dB

Configured Parameters:
-----
TX Voa Attenuation = 2.0 dB
```

Example:

This output highlights the *Controller State*, *Transport Admin State*, and *Laser State* set to *shut down*.

```
Thu Apr 21 17:08:40.211 UTC

Controller State: Administratively Down

Transport Admin State: Out Of Service

Laser State: Off

Alarm Status:
-----
Detected Alarms: None

Alarm Statistics:
-----
RX-LOS-P = 0
TX-POWER-FAIL-LOW = 0

Parameter Statistics:
-----
Total TX Power = -50.00 dBm
Total RX Power = 10.00 dBm
TX Voa Attenuation = 2.0 dB

Configured Parameters:
```

TX Voa Attenuation = 2.0 dB

DFB parameters for the selected OLT or ILA card are configured as specified.

What to do next

Verify system alarms or operational impacts using monitoring commands as appropriate.

OCH controllers

An optical channel (OCH) controller is a datapath controller type that

- manages the optical channel ports on NCS 1010 passive modules and CCMD-16 cards,
- enables mapping and identification of OCH interfaces, and
- supports optical cross-connection functions for network operations.

Default OCH controllers for NCs 1010 passive devices and CCMD-16 cards

Passive modules/line cards	Port type	Total channel ports	Port labels	OCH controllers
NCS1K-BRK-8	LC Ports	8	TX-0-RX...TX-7-RX	och R/S/I/0 to och R/S/I/7
NCS1K-BRK-24	LC Ports	24	TX-0-RX...TX-23-RX	och R/S/I/0 to och R/S/I/23
NCS1K-MD-32O/E-C	LC Ports	32	0...31-TX/RX	och R/S/I/0 to och R/S/I/31
NCS1K14-CCMD-16-C	LC Ports	16	A/D1...16	och R/S/I/1 to och R/S/I/16



Note R/S/I/P stands for Rack/Slot/Instance/Port.

Verify the OCH controller parameters

Verify the status of the OCH controllers and their values for each port in these modules.

- NCS1K-BRK-8
- NCS1K-BRK-24
- NCS1K-MD-32O-C
- NCS1K-MD-32E-C

- NCS1K14-CCMD-16-C
- NCS1K14-CCMD-16-L

By default, when the passive modules and the CCMD-16 modules boot, the OCH controllers become activated with default values.

Follow these steps to verify the OCH controllers for the passive modules and CCMD-16 module.

Procedure

Step 1 View the status of the OCH controllers.

Example:

```
RP/0/RP0/CPU0:ios#show controller description
```

Example:

This output highlights the list of activated OCH controllers

```
Tue Apr 12 17:17:51.306 UTC
```

Interface	Status	Description
Och0/1/0/0	up	
Och0/1/0/1	up	
Och0/1/0/2	up	
Och0/1/0/3	up	
Och0/1/0/4	up	
Och0/1/0/5	up	
Och0/1/0/6	up	
.		
.		
Output snipped		
.		
.		
Och0/1/0/28	up	
Och0/1/0/29	up	
Och0/1/0/30	up	
Och0/1/0/31	up	
Oms0/1/0/32	up	

Step 2 View the parameters of the OCH controller.

Use the **show controllers och R/S/I/P** command to view the OCH controller parameters.

Example:

This output displays the OCH controller parameters for BRK-8 breakout module.

```
Tue May 10 11:27:31.354 UTC
```

```
Controller State: Down
```

```
LED State: Red
```

```
Alarm Status:
-----
Detected Alarms:
    RX-LOS-P
```

```
Alarm Statistics:
-----
RX-LOS-P = 1
TX-POWER-FAIL-LOW = 0

Parameter Statistics:
-----
TX Power = -50.00 dBm
RX Power = -50.00 dBm
```

Example:

This output shows the OCH parameters for mux/demux patch panel.

Note

The parameters of the OCH controller for the Mux/Demux panel contain information about the Channel Width, Frequency, and Wavelength.

Wed May 25 11:50:03.481 UTC

Controller State: Down

LED State: Red

```
Alarm Status:
-----
Detected Alarms:
    RX-LOS-P

Alarm Statistics:
-----
RX-LOS-P = 1
TX-POWER-FAIL-LOW = 0

Parameter Statistics:
-----
TX Power = -50.00 dBm
RX Power = -50.00 dBm
channel Frequency = 196.025 THz
Maximum Channel Width = 150.0 GHz
Channel Wavelength = 1529.36 nm
```

You have verified the operational status and parameter values for all OCH controllers in the specified modules.

OMS Controller

When nodes with Mux/Demux panels and breakout panels are brought up, OMS controllers are created by default. The OMS controllers for the patch panels are:

Table 38: Supported Interfaces

Patch Panel	Port Type	OMS Ports	Interfaces
NCS1K-BRK-8	MPO Ports	8	oms R/S/I/8 to oms R/S/I/15
NCS1K-BRK-24	MPO Ports	8	oms R/S/I/24 to oms R/S/I/31

Patch Panel	Port Type	OMS Ports	Interfaces
NCS1K-MD-320/E-C	LC Ports	1	oms R/S/I/32



Note R/S/I/P stands for Rack/Slot/Instance/Port.

To view the status of the OMS controller, use the following command:

```
RP/0/RP0/CPU0:ios#show controller description
```

The following output shows the status of the OMS controller.

```
Tue Apr 12 17:17:51.306 UTC
```

```
Interface                Status      Description
-----
Och0/1/0/0                up
Och0/1/0/1                up
Och0/1/0/2                up
.
.
Output snipped
.
.
Och0/1/0/29               up
Och0/1/0/30               up
Och0/1/0/31               up
Oms0/1/0/32              up
Och0/3/0/0                up
Och0/3/0/1                up
.
.
Output snipped
.
.
Och0/3/0/29               up
Och0/3/0/30               up
Och0/3/0/31               up
Oms0/3/0/32              up
```

To view the parameters of the OMS controller for the BRK-24 panel, use the following command:

```
RP/0/RP0/CPU0:ios#show controllers oms 0/1/0/25
```

The following output shows the parameters of the OMS controller for the BRK-24 panel.

```
Thu Jul 14 11:05:50.419 UTC
```

```
Controller State: Down

Transport Admin State: Automatic In Service

LED State: Red

Alarm Status:
-----
Detected Alarms:
    RX-LOS-P

Alarm Statistics:
-----
```

```

RX-LOS-P = 1
TX-POWER-FAIL-LOW = 0

Parameter Statistics:
-----
TX Power = -7.40 dBm
RX Power = -50.00 dBm

```

To view the parameters of the OMS controller for the Mux/Demux panel, use the following command:

```
RP/0/RP0/CPU0:ios#show controllers oms 0/3/0/32
```

The following output shows the parameters of the OMS controller for the Mux/Demux panel.

```

Tue May 10 11:28:02.856 UTC

Controller State: Down

LED State: Red

Alarm Status:
-----
Detected Alarms:
    RX-LOS-P

Alarm Statistics:
-----
RX-LOS-P = 1
TX-POWER-FAIL-LOW = 0

Parameter Statistics:
-----
TX Power = -50.00 dBm
RX Power = -50.00 dBm

```

Insertion loss for each port is calculated and the power values are displayed on the OMS controller for NCS1K-BRK-8 and OCH controller for NCS1K-BRK-24. Insertion loss per port for NCS1K-BRK-24 is 5.9 dBm and NCS1K-BRK-8 is 0.6 dBm. The NCS1K-MD-320/E-C panels have a maximum insertion loss of 6.2 dBm for the respective Mux and Demux sections.

OSC Controllers

The Optical Service Channel (OSC) controller is used to represent the optical capabilities, configuration, and monitoring of the OSC laser. The corresponding Gigabit Ethernet interface is the child interface that represents Ethernet capabilities, configuration, and monitoring.

OSC provides a communication channel for traffic coming from a UDC port. OSC serves as a channel probe to check fiber continuity between two nodes. OSC provides remote node management functionality. OSC is generated and terminated on each line side. OSC-C operates at a frequency of 198.50 THz and OSC-L operates at a frequency of 184.450 THz.

Nodes with NCS1K-OLT-R-C or NCS1K-OLT-C, NCS1K-OLT-L cards have one OSC controller. To view the status of the OSC controller, use the following command:

```
RP/0/RP0/CPU0:ios#show controller description
```

The following output highlights the status of the OSC controller for the NCS1K-OLT-R-C or NCS1K-OLT-C, NCS1K-OLT-L or NCS1K-ILA-L cards.

```
Tue Apr 12 17:17:51.306 UTC
```

Interface	Status	Description
Osc0/0/0/0	up	
Ots0/0/0/0	up	
Ots0/0/0/1	up	
Ots0/0/0/2	up	
.		
.		
output snipped		
.		
.		
Ots0/0/0/31	up	
Ots0/0/0/32	up	
Ots0/0/0/33	up	

Nodes with NCS1K-ILA-2R-C, NCS1K-ILA-R-C, NCS1K-ILA-L or NCS1K-ILA-C card have two OSC controllers. To view the OSC controllers, use the following command:

```
RP/0/RP0/CPU0:ios#show controllers description
```

The following output highlights the status of the OSC controller for the NCS1K-ILA-2R-C, NCS1K-ILA-R-C, NCS1K-ILA-L or NCS1K-ILA-C card.

Tue Apr 12 17:20:20.667 UTC

Interface	Status	Description
Osc0/0/0/0	up	
Osc0/0/0/2	up	
Ots0/0/0/0	up	
Ots0/0/0/1	up	
Ots0/0/0/2	up	
Ots0/0/0/3	up	

To view the parameters of the LINE 0 OSC controller, use the following command:

```
RP/0/RP0/CPU0:ios#show controllers osc 0/0/0/0
```

The following output shows the parameters of the LINE 0 OSC controller.

Wed Mar 23 06:04:18.565 UTC

```
Controller State: Down

Transport Admin State: In Service

Laser State: Off

Alarm Status:
-----
Detected Alarms:
    RX-LOS-P

Alarm Statistics:
-----
RX-LOS-P = 369
TX-POWER-FAIL-LOW = 0

Parameter Statistics:
-----
Total TX Power = -50.00 dBm
Total RX Power = -50.00 dBm
```

```
Configured Parameters:
-----
```

Configure OSC Controllers

There are multiple parameters for the OSC controllers. You can configure the parameters that are required for the different configuration for an OSC controller on an ILA or OLT node by using the following commands in the configuration mode:

- **transmit-power** *value*
- **sec-admin-state** {**normal** | **maintenance**}
- **tx-low-threshold**
- **shutdown**

Examples

In the following example, the transmit-power is set to 2 dBm. The OSC Tx power can be changed by configuring the OSC transmit power attribute. This attribute internally regulates the OSC Tx VOA.



Note The OSC controller commands do not support decimal inputs. The OSC controller commands consider the inputs to one decimal place for the parameter values. In this example, the transmit-power parameter is provided as *20* to configure the transmit-power parameter to *2 dBm*.

```
RP/0/RP0/CPU0:ios(config)#controller osc 0/0/0/0 transmit-power 20
Fri May 13 11:26:53.445 UTC
WARNING! Changing TX power can impact traffic
RP/0/RP0/CPU0:ios(config)#commit
Fri May 13 11:26:55.127 UTC
RP/0/RP0/CPU0:ios(config)#end
```

To view the parameters of the OSC controller, use the following command:

```
RP/0/RP0/CPU0:ios#show controllers osc 0/0/0/0
```

The following output shows the parameters of the OSC controller.

```
Fri May 13 11:26:59.542 UTC

Controller State: Up

Transport Admin State: In Service

Laser State: On

Alarm Status:
-----
Detected Alarms: None

Alarm Statistics:
-----
RX-LOS-P = 0
TX-POWER-FAIL-LOW = 0

Parameter Statistics:
```

```
-----
Total TX Power = 1.89 dBm
Total RX Power = -17.30 dBm
```

```
Configured Parameters:
-----
```

In the following example, the *sec-admin-state* is set to *maintenance*.

```
RP/0/RP0/CPU0:ios#config
RP/0/RP0/CPU0:ios(config)#controller osc 0/0/0/0 sec-admin-state maintenance
RP/0/RP0/CPU0:ios(config)#commit
RP/0/RP0/CPU0:ios(config)#end
```

To view the parameters of the OSC controller, use the following command:

```
RP/0/RP0/CPU0:ios#show controllers osc 0/0/0/0
```

The following output highlights the *Transport Admin State* of the OSC controller that is set to *Maintenance*.

```
Fri Apr 22 15:55:36.324 UTC

Controller State: Up

Transport Admin State: Maintenance

Laser State: On

Alarm Status:
-----
Detected Alarms: None

Alarm Statistics:
-----
RX-LOS-P = 0
TX-POWER-FAIL-LOW = 0

Parameter Statistics:
-----
Total TX Power = -10.00 dBm
Total RX Power = -30.00 dBm

Configured Parameters:
-----
```

In the following example, the OSC controller is *shut down*.

```
P/0/RP0/CPU0:ios#config
RP/0/RP0/CPU0:ios(config)#controller osc 0/0/0/0 shutdown
RP/0/RP0/CPU0:ios(config)#commit
RP/0/RP0/CPU0:ios(config)#end
```

To view the parameters of the OSC controller that is *shut down*, use the following command:

```
RP/0/RP0/CPU0:ios#show controllers osc 0/0/0/0
```

The following output highlights the *Controller State*, *Transport Admin State*, and *Laser State* of the OSC controller that is *shut down*.

```
Tue Apr 12 17:33:12.998 UTC

Controller State: Administratively Down
```

```
Transport Admin State: Out Of Service
```

```
Laser State: Off
```

```
Alarm Status:  
-----  
Detected Alarms: None
```

```
Alarm Statistics:  
-----  
RX-LOS-P = 0  
TX-POWER-FAIL-LOW = 0
```

```
Parameter Statistics:  
-----  
Total TX Power = -50.00 dBm  
Total RX Power = -30.00 dBm
```

```
Configured Parameters:  
-----
```

View the Gigabit Ethernet interfaces

Display operational and configuration details for a Gigabit Ethernet interface.

A Gigabit Ethernet interface represents the packet layer of an OSC channel and is used for high-speed data transmission between optical nodes.

Table 39: Feature History

Feature Name	Release Information	Feature Description
1G Speed support on OSC Gigabit Ethernet	Cisco IOS XR Release 25.4.1	<p>The Gigabit Ethernet interface on the OSC now supports data rates up to 1 Gbps, in addition to the existing 100 Mbps.</p> <p>This enhancement allows you to configure the interface speed to 1 Gbps, enabling the use of UDC ports to extend your Data Communication Network (DCN) for monitoring remote NCS 1010 and NCS 1020 sites.</p> <p>To enable 1 Gbps throughput for the Gigabit Ethernet interface, use the command <code>interface gigabitEthernet R/S/I/P</code> and set the speed to 1000.</p> <p>IP based Packet forwarding Throughput on OSC Gigabit is maximum 200Mbps and UDC Traffic Over OSC Gigabit is maximum upto 880Mbps.</p> <p>For speed configuration options:</p> <ul style="list-style-type: none"> • The 100 Mbps speed can be configured using the command <code>speed 100</code>. • If the speed configuration is removed using the command <code>no speed</code>, the default speed will revert to 100 Mbps. • Configuring a 10 Mbps speed is not supported and will result in failure.

Before you begin

Ensure that the node is operational at the intended speed.



Note Zero Touch Provisioning (ZTP) is not supported on a 1 GE interface. You must bring up the node at the default 100 Mbps speed, and then change the interface to 1GE.

Follow these steps to view a Gigabit Ethernet interface:

Procedure

Step 1 Run the **show interfaces gigabitEthernet 0/0/0/0** command to view the parameters and status of a Gigabit Ethernet interface.

Note

From R24.4.15, the output for this command is enhanced to include the packet counter information.

Example:

```
RP/0/RP0/CPU0:ios#show run int gigabitEthernet 0/0/0/0
Fri Nov 21 16:00:55.645 IST
interface GigabitEthernet0/0/0/0
  description noshut-interface
  ipv4 address 7.1.11.1 255.255.255.0
  ipv6 enable
  lldp
    enable
  !
  speed 1000
!
```

```
RP/0/RP0/CPU0:ios#show int gigabitEthernet 0/0/0/0
Fri Nov 21 16:01:03.275 IST
GigabitEthernet0/0/0/0 is up, line protocol is up
  Interface state transitions: 1
  Hardware is GigabitEthernet, address is 38fd.f866.0693 (bia 38fd.f866.0693)
  Description: noshut-interface
  Internet address is 7.1.11.1/24
  MTU 1514 bytes, BW 1000000 Kbit (Max: 1000000 Kbit)
  reliability 255/255, txload 0/255, rxload 0/255
  Encapsulation ARPA,
  Full-duplex, 1000Mb/s, unknown, link type is force-up
  output flow control is off, input flow control is off
  loopback not set,
  Last link flapped 20:52:33
  ARP type ARPA, ARP timeout 04:00:00
  Last input 00:00:00, output 00:00:00
  Last clearing of "show interface" counters never
  5 minute input rate 403000 bits/sec, 45 packets/sec
  5 minute output rate 402000 bits/sec, 45 packets/sec
    73461739725 packets input, 4998891729534 bytes, Unknown total input drops
    Unknown drops for unrecognized upper-level protocol
    Received 0 broadcast packets, 48192 multicast packets
      0 runts, 0 giants, 0 throttles, 0 parity
    Unknown input errors, 0 CRC, Unknown frame, Unknown overrun, 0 ignored, 0 abort
    73461747443 packets output, 4998883259525 bytes, Unknown total output drops
    Output 2 broadcast packets, 33519 multicast packets
    Unknown output errors, Unknown underruns, 0 applique, Unknown resets
    0 output buffer failures, 0 output buffers swapped out
    0 carrier transitions
```

Step 2 Run the **show ipv4 interface brief** command to view the IPv4 address, status, operational state, and VRF name.

This output highlights the interface, IPv4 address (*IP-Address*), status, operational status of the routing protocol (*Protocol*), VPN routing and forwarding (VRF) instance name (*Vrf-Name*) of the Gigabit Ethernet interface.

Example:

```
Tue Apr 19 10:58:02.951 UTC
Interface                IP-Address      Status          Protocol Vrf-Name
Loopback0                 10.3.3.11       Up              Up        default
Loopback3                 10.1.1.1        Up              Up        default
GigabitEthernet0/0/0/0 10.7.1.1       Up             Up       default
MgmtEth0/RP0/CPU0/0      10.33.0.61      Up              Up        default
PTP0/RP0/CPU0/0          unassigned      Shutdown        Down      default
MgmtEth0/RP0/CPU0/1      unassigned      Shutdown        Down      default
PTP0/RP0/CPU0/1          unassigned      Shutdown        Down      default
MgmtEth0/RP0/CPU0/2      unassigned      Shutdown        Down      default
```

The Gigabit Ethernet interface must be in *Up* state for the OSC laser to become active. When the node starts, the Gigabit Ethernet interface changes to *Down* state.

Step 3 Run the **no interface gigabitEthernet** command on the Gigabit Ethernet interface to bring it up.

The Gigabit Ethernet interface must be in *Up* state for the OSC laser to turn up. When the node comes up, the Gigabit Ethernet interface turns to *Down* state.

Example:

```
RP/0/RP0/CPU0:ios#config
RP/0/RP0/CPU0:ios(config)#interface gigabitEthernet 0/0/0/0
RP/0/RP0/CPU0:ios(config)#no shutdown
```

Step 4 Run the **no speed 1000** command to remove the speed configuration from the interface.

Example:

```
RP/0/RP0/CPU0:ios(config)#interface gigabitEthernet 0/0/0/0
RP/0/RP0/CPU0:ios(config)#no speed 1000
RP/0/RP0/CPU0:ios(config)#commit
```

You successfully display operational and configuration details of the Gigabit Ethernet interface, including speed, status, counters, and port parameters.

Best practice for downgrading from OSC 1G

Remove the 1G OSC speed configuration from OLT and ILA nodes before downgrading from Release 25.4.1 or a later version to a software version that does not support the OSC 1G feature.

- Once you delete the OSC 1G speed configuration, the OSC port operates at 100 Mbps.
- If you remove the 1G setting before downgrading, you do not need to reload any rack after the downgrade.

Release 25.4.1 and later versions support 1 GE OSC speed.

View GE interface statistics

Table 40: Feature History

Feature Name	Release Information	Feature Description
Enhanced Ethernet Statistics Support for GE Interfaces	Cisco IOS XR Release 26.1.1	<p>This feature provides a comprehensive support for the Ethernet Statistics on GE Interfaces through the Command Line Interface (CLI). It allows you to access real-time data on various Ethernet statistics, providing network administrators with essential data for performance monitoring and troubleshooting.</p> <p>The CLI command introduced is:</p> <ul style="list-style-type: none"> • show controllers gigabitEthernet R/S/I/P stats <p>The CLI command output modified to include packet counters information is:</p> <ul style="list-style-type: none"> • show interfaces GigabitEthernet R/S/I/P

The GE interface supports a list of current statistics.

Table 41: Supported list of statistics on GE interface

show interface GE	show controller GE
--------------------------	---------------------------

input_pkts	rx_good_bytes
input_bytes	rx_ucast
input_mcast_pkts	rx_bcast
input_bcast_pkts	rx_mcast
input_crc	rx_undersize
output_pkts	rx_fragments
output_bytes	rx_oversize
output_total_errors	rx_jabber
output_mcast_pkts	rx_fcs
output_bcast_pkts	rx_total_pkts
	rx_total_bytes
	rx_good_pkts
	tx_good_bytes
	tx_ucast
	tx_mcast
	tx_bcast
	tx_total_pkts
	tx_total_bytes
	tx_good_pkts

View the current statistics of the GE interface.

Example

```
show controllers gigabitEthernet r/s/i/p stats
```

The output shows the current statistics of the GE interface.

Example

```
RP/0/RP0/CPU0:ios#show controllers gigabitEthernet 0/0/0/0 stats
```

```
Tue Feb 18 04:17:18.023 UTC
```

```
Statistics for interface GigabitEthernet0/0/0/0 (cached values):
```

Ingress:

```

Input total bytes           = 153417           Valid = True           Start time =
11:24:13 Mon Feb 17 2025
Input good bytes           = 152339           Valid = True           Start time =
11:24:13 Mon Feb 17 2025

Input total packets        = 1533             Valid = True           Start time =
11:24:13 Mon Feb 17 2025
Input 802.1Q frames        = 0                Valid = False          Start time =
11:24:13 Mon Feb 17 2025
Input pause frames         = 0                Valid = False          Start time =
11:24:13 Mon Feb 17 2025
Input pkts 64 bytes        = 0                Valid = False          Start time =
11:24:13 Mon Feb 17 2025
    
```

View GE interface statistics

Input pkts 65-127 bytes	= 0	Valid = False	Start time =
11:24:13 Mon Feb 17 2025			
Input pkts 128-255 bytes	= 0	Valid = False	Start time =
11:24:13 Mon Feb 17 2025			
Input pkts 256-511 bytes	= 0	Valid = False	Start time =
11:24:13 Mon Feb 17 2025			
Input pkts 512-1023 bytes	= 0	Valid = False	Start time =
11:24:13 Mon Feb 17 2025			
Input pkts 1024-1518 bytes	= 0	Valid = False	Start time =
11:24:13 Mon Feb 17 2025			
Input pkts 1519-Max bytes	= 0	Valid = False	Start time =
11:24:13 Mon Feb 17 2025			
Input good pkts	= 1533	Valid = True	Start time =
11:24:13 Mon Feb 17 2025			
Input unicast pkts	= 0	Valid = True	Start time =
11:24:13 Mon Feb 17 2025			
Input multicast pkts	= 1529	Valid = True	Start time =
11:24:13 Mon Feb 17 2025			
Input broadcast pkts	= 4	Valid = True	Start time =
11:24:13 Mon Feb 17 2025			
Input drop overrun	= 0	Valid = False	Start time =
11:24:13 Mon Feb 17 2025			
Input drop abort	= 0	Valid = False	Start time =
11:24:13 Mon Feb 17 2025			
Input drop invalid VLAN	= 0	Valid = False	Start time =
11:24:13 Mon Feb 17 2025			
Input drop invalid DMAC	= 0	Valid = False	Start time =
11:24:13 Mon Feb 17 2025			
Input drop invalid encap	= 0	Valid = False	Start time =
11:24:13 Mon Feb 17 2025			
Input drop other	= 0	Valid = False	Start time =
11:24:13 Mon Feb 17 2025			
Input error giant	= 0	Valid = False	Start time =
11:24:13 Mon Feb 17 2025			
Input error runt	= 0	Valid = True	Start time =
11:24:13 Mon Feb 17 2025			
Input error jabbers	= 0	Valid = True	Start time =
11:24:13 Mon Feb 17 2025			
Input error fragments	= 0	Valid = True	Start time =
11:24:13 Mon Feb 17 2025			
Input error CRC	= 0	Valid = True	Start time =
11:24:13 Mon Feb 17 2025			
Input error collisions	= 0	Valid = False	Start time =
11:24:13 Mon Feb 17 2025			
Input error symbol	= 0	Valid = False	Start time =
11:24:13 Mon Feb 17 2025			
Input error other	= 0	Valid = False	Start time =
11:24:13 Mon Feb 17 2025			
Input MIB giant	= 0	Valid = False	Start time =
11:24:13 Mon Feb 17 2025			
Input MIB jabber	= 0	Valid = False	Start time =
11:24:13 Mon Feb 17 2025			
Input MIB CRC	= 0	Valid = False	Start time =
11:24:13 Mon Feb 17 2025			
Egress:			
Output total bytes	= 1291235	Valid = True	Start time =
11:24:13 Mon Feb 17 2025			
Output good bytes	= 1291235	Valid = True	Start time =
11:24:13 Mon Feb 17 2025			
Output total packets	= 12721	Valid = True	Start time =

11:24:13 Mon Feb 17 2025	Output 802.1Q frames	= 0	Valid = False	Start time =
11:24:13 Mon Feb 17 2025	Output pause frames	= 0	Valid = False	Start time =
11:24:13 Mon Feb 17 2025	Output pkts 64 bytes	= 0	Valid = False	Start time =
11:24:13 Mon Feb 17 2025	Output pkts 65-127 bytes	= 0	Valid = False	Start time =
11:24:13 Mon Feb 17 2025	Output pkts 128-255 bytes	= 0	Valid = False	Start time =
11:24:13 Mon Feb 17 2025	Output pkts 256-511 bytes	= 0	Valid = False	Start time =
11:24:13 Mon Feb 17 2025	Output pkts 512-1023 bytes	= 0	Valid = False	Start time =
11:24:13 Mon Feb 17 2025	Output pkts 1024-1518 bytes	= 0	Valid = False	Start time =
11:24:13 Mon Feb 17 2025	Output pkts 1519-Max bytes	= 0	Valid = False	Start time =
11:24:13 Mon Feb 17 2025	Output good pkts	= 12721	Valid = True	Start time =
11:24:13 Mon Feb 17 2025	Output unicast pkts	= 0	Valid = True	Start time =
11:24:13 Mon Feb 17 2025	Output multicast pkts	= 12719	Valid = True	Start time =
11:24:13 Mon Feb 17 2025	Output broadcast pkts	= 2	Valid = True	Start time =
11:24:13 Mon Feb 17 2025	Output drop underrun	= 0	Valid = False	Start time =
11:24:13 Mon Feb 17 2025	Output drop abort	= 0	Valid = False	Start time =
11:24:13 Mon Feb 17 2025	Output drop other	= 0	Valid = False	Start time =
11:24:13 Mon Feb 17 2025	Output error other	= 0	Valid = True	Start time =

OSC link speed specifications

These tables provide key technical specifications for the OSC link speeds, including file transfer rates, UDC throughput, and management traffic performance.



Note Speed 1000 Mbps and Speed 100 Mbps are supported. Speed 10 Mbps is not supported.

Table 42: File transfer speed through OSC link

OSC link speed	Transfer rate at first hop	Transfer rate at second hop
100 Mbps (default speed)	87 Mbps	87 Mbps
1 GE (new speed)	232 Mbps	176 Mbps

Table 43: UDC throughput with IPv4 traffic

OSC link speed	UDC throughput (64 packets)	UDC throughput (256 - 1000 packets)	UDC throughput (1514 packets)
100 Mbps (default speed)	68 Mbps	83 Mbps	88 Mbps
1 GE (new speed)	680 Mbps	830 Mbps	880 Mbps

Table 44: Management traffic through OSC link

OSC link speed	IMIX	Packet size 95	Packet size 500	Packet size 1000	Packet size 1500
1000 Mbps	50 Mbps	14 Mbps	60 Mbps	150 Mbps	200 Mbps
100 Mbps	50 Mbps	14 Mbps	60 Mbps	90 Mbps	90 Mbps

AINS

The Automatic-In-Service (AINS) feature allows the OTS, OMS and OCH controllers to automatically move to the automatic-in-service state after the system boots up. A soak time period is associated with the AINS state. By default, the soak time period is one minute. The controllers automatically moves to the In-Service state after the soak time period is completed. During the AINS maintenance window, alarms are not propagated to the EMS/NMS monitoring system.

Soak Time Period

Soak time period for the controllers to move from AINS to In-Service state is 1 minute. You cannot configure the soak time.

The AINS soak time period restarts when there are line card cold reloads or power cycles.

All alarms are suppressed during the AINS state. When the optical and ethernet alarms are raised on the port during the soak time period, the port remains in the AINS state. These alarms are not displayed in the output of the **show alarms brief system active** command but these alarms are displayed in the output of the **show alarms brief system conditions** command. When all the alarms clear, the port moves to IS state.

Displaying the AINS Configuration

AINS is supported for the COM side controllers on the OTS port. It is not supported for the line side OTS-OCH controllers on OLT and ILA cards. After the optical cross connections are configured, the COM side OTS-OCH controller boot ups in AINS state.

This example displays the OTS controller statistics with AINS Soak time running.

```
RP/0/RP0/CPU0:ios#show controllers ots 0/0/0/2
Wed Jun 22 09:43:04.356 UTC

Controller State: Down

Transport Admin State: Automatic In Service

LED State: Red
```

```

Alarm Status:
-----
Detected Alarms:
RX-LOS-P
TX-POWER-FAIL-LOW

Alarm Statistics:
-----
RX-LOS-P = 1
RX-LOC = 0
TX-POWER-FAIL-LOW = 1
INGRESS-AUTO-LASER-SHUT = 0
INGRESS-AUTO-POW-RED = 0
INGRESS-AMPLI-GAIN-LOW = 0
INGRESS-AMPLI-GAIN-HIGH = 0
EGRESS-AUTO-LASER-SHUT = 0
EGRESS-AUTO-POW-RED = 0
EGRESS-AMPLI-GAIN-LOW = 0
EGRESS-AMPLI-GAIN-HIGH = 0
HIGH-TX-BR-PWR = 0
HIGH-RX-BR-PWR = 0
SPAN-TOO-SHORT-TX = 0
SPAN-TOO-SHORT-RX = 0

Parameter Statistics:
-----
Total RX Power = -50.00 dBm
Total TX Power = -50.00 dBm
Ingress Ampli Gain = 0.0 dB
Ingress Ampli Tilt = 0.0 dB

```

```

Configured Parameters:
-----
Ingress Ampli Gain = 16.0 dB
Ingress Ampli Tilt = 0.0 dB

```

The following example displays the OTS-OCH cross-connect controller statistics with AINS Soak time running.

```
RP/0/RP0/CPU0:ios#show controllers ots-och 0/0/0/13/20
```

```
Tue Jul 12 10:19:48.838 UTC
```

```
Controller State: Down
```

```
Transport Admin State: Automatic In Service
```

```

Alarm Status:
-----
Detected Alarms:
    RX-LOS-P
    TX-POWER-FAIL-LOW

Alarm Statistics:
-----
RX-LOS-P = 1
TX-POWER-FAIL-LOW = 1

Parameter Statistics:
-----
Total RX Power = -50.00 dBm

```

```

Total TX Power = -50.00 dBm

Cross Connect Info:
-----
line Channel   = Ots-Och0/0/0/0/20

Configured Parameters:
-----
Rx Low Threshold = -50.0 dBm
Tx Low Threshold = -50.0 dBm

```

The following example displays the OCH controller statistics in AINS state.

```

RP/0/RP0/CPU0:ios#show controllers och 0/1/0/0
Wed Jul 6 14:28:12.500 UTC

Controller State: Down

Transport Admin State: Automatic In Service

LED State: Red

Alarm Status:
-----
Detected Alarms:
RX-LOS-P

Alarm Statistics:
-----
RX-LOS-P = 1
TX-POWER-FAIL-LOW = 0

Parameter Statistics:
-----
TX Power = -50.00 dBm
RX Power = -20.72 dBm

```

The following example displays the OCH controller statistics after AINS Soak time expiry. When the soak time expires, the Transport Admin State of OCH controller changes from *Automatic In Service* to *In Service*.

```

RP/0/RP0/CPU0:ios#show controllers och 0/1/0/0
Wed Jul 6 14:29:59.242 UTC

Controller State: Up

Transport Admin State: In Service

LED State: Off

Alarm Status:
-----
Detected Alarms: None

Alarm Statistics:
-----
RX-LOS-P = 1
TX-POWER-FAIL-LOW = 0

Parameter Statistics:

```

```
-----
TX Power = -50.00 dBm
RX Power = 2.79 dBm
```

The following example displays the OMS controller statistics in *AINS state*.

```
RP/0/RP0/CPU0:ios#show controllers oms 0/1/0/25
```

```
Tue Jul 12 10:32:05.258 UTC
```

```
Controller State: Down
```

```
Transport Admin State: Automatic In Service
```

```
LED State: Red
```

```
Alarm Status:
```

```
-----
Detected Alarms:
RX-LOS-P
```

```
Alarm Statistics:
```

```
-----
RX-LOS-P = 1
TX-POWER-FAIL-LOW = 0
```

```
Parameter Statistics:
```

```
-----
TX Power = -7.40 dBm
RX Power = -19.91 dBm
```

All the alarms reported for the controllers in AINS state are displayed in the output of the **show alarms brief system conditions** command.

The following example displays the controller alarms in *AINS state*.

```
RP/0/RP0/CPU0:ios#show alarms brief system conditions
```

```
Mon Jul 25 05:43:50.073 UTC
```

```
-----
Conditions
```

Location	Severity	Group	Set Time	Description
0/1 of Signal - Payload	Critical	Controller	07/21/2022 11:11:54 UTC	Och0/1/0/1 - Loss
0/1 of Signal - Payload	Critical	Controller	07/21/2022 11:11:54 UTC	Och0/1/0/2 - Loss
0/1 of Signal - Payload	Critical	Controller	07/21/2022 11:11:54 UTC	Och0/1/0/4 - Loss
0/1 of Signal - Payload	Critical	Controller	07/21/2022 11:11:54 UTC	Och0/1/0/5 - Loss
0/1 of Signal - Payload	Critical	Controller	07/21/2022 11:11:54 UTC	Och0/1/0/6 - Loss
0/1 of Signal - Payload	Critical	Controller	07/21/2022 11:11:54 UTC	Och0/1/0/7 - Loss
0/1 of Signal - Payload	Critical	Controller	07/21/2022 11:11:54 UTC	Och0/1/0/8 - Loss
0/1 of Signal - Payload	Critical	Controller	07/21/2022 11:11:54 UTC	Och0/1/0/9 - Loss
0/1 of Signal - Payload	Critical	Controller	07/21/2022 11:11:54 UTC	Och0/1/0/10 - Loss

Displaying the AINS Configuration

of Signal - Payload					
0/1	Critical	Controller	07/21/2022 11:11:54 UTC	Och0/1/0/11 - Loss	
of Signal - Payload					
0/1	Critical	Controller	07/21/2022 11:11:54 UTC	Och0/1/0/12 - Loss	
of Signal - Payload					
0/1	Critical	Controller	07/21/2022 11:11:54 UTC	Och0/1/0/13 - Loss	
of Signal - Payload					
0/1	Critical	Controller	07/21/2022 11:11:54 UTC	Och0/1/0/14 - Loss	
of Signal - Payload					
0/1	Critical	Controller	07/21/2022 11:11:54 UTC	Och0/1/0/15 - Loss	
of Signal - Payload					
0/1	Critical	Controller	07/21/2022 11:11:54 UTC	Och0/1/0/16 - Loss	
of Signal - Payload					
0/1	Critical	Controller	07/21/2022 11:11:54 UTC	Och0/1/0/17 - Loss	
of Signal - Payload					
0/1	Critical	Controller	07/21/2022 11:11:54 UTC	Och0/1/0/18 - Loss	
of Signal - Payload					
0/1	Critical	Controller	07/21/2022 11:11:54 UTC	Och0/1/0/19 - Loss	
of Signal - Payload					
0/1	Critical	Controller	07/21/2022 11:11:54 UTC	Och0/1/0/21 - Loss	
of Signal - Payload					
0/1	Critical	Controller	07/21/2022 11:11:54 UTC	Och0/1/0/22 - Loss	
of Signal - Payload					
0/1	Critical	Controller	07/21/2022 11:11:54 UTC	Oms0/1/0/31 - Loss	
of Signal - Payload					
0/1	Critical	Controller	07/21/2022 11:11:54 UTC	Oms0/1/0/26 - Loss	
of Signal - Payload					
0/1	Critical	Controller	07/21/2022 11:11:54 UTC	Oms0/1/0/27 - Loss	
of Signal - Payload					
0/1	Critical	Controller	07/21/2022 11:11:54 UTC	Oms0/1/0/28 - Loss	
of Signal - Payload					
0/1	Critical	Controller	07/21/2022 11:11:54 UTC	Oms0/1/0/29 - Loss	
of Signal - Payload					
0/1	Critical	Controller	07/21/2022 11:11:54 UTC	Oms0/1/0/30 - Loss	
of Signal - Payload					
0/0	Critical	Controller	07/21/2022 11:12:00 UTC	Ots0/0/0/33 -	
Output OTS Power Reading Below The Fail-Low Threshold					
0/0	Critical	Controller	07/21/2022 11:12:00 UTC	Ots0/0/0/33 - Loss	
of Signal - Payload					
0/0	Critical	Controller	07/21/2022 11:12:00 UTC	Ots0/0/0/9 - Output	
OTS Power Reading Below The Fail-Low Threshold					
0/0	Critical	Controller	07/21/2022 11:12:00 UTC	Ots0/0/0/9 - Loss	
of Signal - Payload					
0/0	Critical	Controller	07/21/2022 11:12:00 UTC	Ots0/0/0/8 - Output	
OTS Power Reading Below The Fail-Low Threshold					
0/0	Critical	Controller	07/21/2022 11:12:00 UTC	Ots0/0/0/8 - Loss	
of Signal - Payload					
0/0	Critical	Controller	07/21/2022 11:12:00 UTC	Ots0/0/0/7 - Output	
OTS Power Reading Below The Fail-Low Threshold					
0/0	Critical	Controller	07/21/2022 11:12:00 UTC	Ots0/0/0/7 - Loss	
of Signal - Payload					
0/0	Critical	Controller	07/21/2022 11:12:00 UTC	Ots0/0/0/6 - Output	
OTS Power Reading Below The Fail-Low Threshold					
0/0	Critical	Controller	07/21/2022 11:12:00 UTC	Ots0/0/0/6 - Loss	
of Signal - Payload					
0/0	Critical	Controller	07/21/2022 11:12:00 UTC	Ots0/0/0/5 - Output	
OTS Power Reading Below The Fail-Low Threshold					
0/0	Critical	Controller	07/21/2022 11:12:00 UTC	Ots0/0/0/5 - Loss	
of Signal - Payload					
0/0	Critical	Controller	07/21/2022 11:12:00 UTC	Ots0/0/0/4 - Output	
OTS Power Reading Below The Fail-Low Threshold					
0/0	Critical	Controller	07/21/2022 11:12:00 UTC	Ots0/0/0/4 - Loss	
of Signal - Payload					
0/0	Critical	Controller	07/21/2022 11:12:00 UTC	Ots0/0/0/3 - Output	

```

OTS Power Reading Below The Fail-Low Threshold
0/0 Critical Controller 07/21/2022 11:12:00 UTC Ots0/0/0/3 - Loss
of Signal - Payload
0/0 Critical Controller 07/21/2022 11:12:00 UTC Ots0/0/0/2 - Output
OTS Power Reading Below The Fail-Low Threshold
0/0 Critical Controller 07/21/2022 11:12:00 UTC Ots0/0/0/2 - Loss
of Signal - Payload
0/0 Critical Controller 07/21/2022 11:12:00 UTC Ots0/0/0/32 -
Output OTS Power Reading Below The Fail-Low Threshold
0/0 Critical Controller 07/21/2022 11:12:00 UTC Ots0/0/0/32 - Loss
of Signal - Payload
0/0 Critical Controller 07/21/2022 11:12:00 UTC Ots0/0/0/31 -
Output OTS Power Reading Below The Fail-Low Threshold
0/0 Critical Controller 07/21/2022 11:12:00 UTC Ots0/0/0/31 - Loss
of Signal - Payload
0/0 Critical Controller 07/21/2022 11:12:00 UTC Ots0/0/0/30 -
Output OTS Power Reading Below The Fail-Low Threshold
0/0 Critical Controller 07/21/2022 11:12:00 UTC Ots0/0/0/30 - Loss
of Signal - Payload
0/0 Critical Controller 07/21/2022 11:12:00 UTC Ots0/0/0/29 -
Output OTS Power Reading Below The Fail-Low Threshold
0/0 Critical Controller 07/21/2022 11:12:00 UTC Ots0/0/0/29 - Loss
of Signal - Payload
0/0 Critical Controller 07/21/2022 11:12:00 UTC Ots0/0/0/28 -
Output OTS Power Reading Below The Fail-Low Threshold
0/0 Critical Controller 07/21/2022 11:12:00 UTC Ots0/0/0/28 - Loss
of Signal - Payload
0/0 Critical Controller 07/21/2022 11:12:00 UTC Ots0/0/0/25 -
Output OTS Power Reading Below The Fail-Low Threshold
0/0 Critical Controller 07/21/2022 11:12:00 UTC Ots0/0/0/25 - Loss
of Signal - Payload
0/0 Critical Controller 07/21/2022 11:12:00 UTC Ots0/0/0/10 -
Output OTS Power Reading Below The Fail-Low Threshold
0/0 Critical Controller 07/21/2022 11:12:00 UTC Ots0/0/0/10 - Loss
of Signal - Payload
0/0 Critical Controller 07/21/2022 11:12:00 UTC Ots0/0/0/11 -
Output OTS Power Reading Below The Fail-Low Threshold
0/0 Critical Controller 07/21/2022 11:12:00 UTC Ots0/0/0/11 - Loss
of Signal - Payload
0/0 Critical Controller 07/21/2022 11:12:00 UTC Ots0/0/0/12 -
Output OTS Power Reading Below The Fail-Low Threshold

```

Headless mode

The headless mode of operation allows Cisco NCS 1010 to operate errorless during software upgrades and when the controller card is either physically absent or in a failed state. For example, NCS 1010 operates in headless mode for up to 72 hours, during process restarts, controller reload, line card warm reload, line card FPD upgrade, or removal of the controller (Online Insertion and Removal (OIR)). During this time, traffic is not impacted, although the control plane is not up and running. However, you cannot provision anything nor view operational data with a nonfunctional controller. Performance monitoring data based on 15 minutes and 24-hour intervals are not supported with a nonfunctional controller.

OIR is done during the upgrade or replacement of controller cards. When you initiate an OIR, you cannot reach the NCS 1010 through any medium. When the OIR completes, the NCS 1010 becomes reachable.

You can initiate OIR on the controller unit for the following scenarios:

- FPD upgrade failure
- Software image update failure

- Bootup failure

Headless mode

A headless mode is a system operation mode that

- enables Cisco NCS 1010 to continue forwarding traffic when the controller card is absent, failed, or being restarted
- maintains errorless operation for up to 72 hours during software upgrades, controller reload, online insertion and removal (OIR), or process restarts, and
- restricts provisioning and viewing operational data, until the controller is restored.

During headless mode, NCS 1010 ensures ongoing traffic forwarding without interruption, even when the controller card is physically missing, in a failed state, or undergoing upgrades or reloads. While the control plane is unavailable, users cannot provision, view operational data, or perform performance monitoring based on 15-minute and 24-hour intervals without a functional controller. After restoration, normal management access and monitoring resume.

OIR is a hardware maintenance procedure performed during controller card upgrade or replacement. During OIR, Cisco NCS 1010 is temporarily unreachable, but returns to normal operation upon completion.

Examples of scenarios that require OIR

- FPD (Field Programmable Device) upgrade failure
- Software image update failure
- Bootup failure

ASE loading

The OLT card (both OLT-C and OLT-L) includes a Noise Loader (NL) EDFA, which acts as an Amplified Spontaneous Emission (ASE) or noise source. The NL connected to the 2x33 ports Wavelength Selective Switch (WSS) loads optical noise. The optical noise fills the Line-TX optical spectrum, when the provisioned optical channels are not available on the ADD- 1 RX, ADD- 2 RX, or COM (OTS0/0/0/2 - OTS0/0/0/33) ports. For more details about the ports, see [OLT Functional Layout](#).

The CHANNEL-NOISE-LOADED alarm is raised when an OTS-OCH controller channel fails and the missing carrier power in the channel is replaced with internally generated ASE noise. The alarm is cleared automatically when the original traffic channel is restored and the temporary ASE noise is removed. For more details about the alarm, see [CHANNEL-NOISE-LOADED](#).

Benefits of ASE loading:

- Completely populates the transmission spectrum at LINE-TX independent of the actual system traffic load, thereby easing the system regulation starting from the Day-1 of the installation.
- The same channel load is maintained during channel failures or channel deletion, which makes the system tolerant to power transients.

- System performances can be verified efficiently because the ASE pattern emulates the full spectrum load also for the nonlinear interaction in the fibers, such as Four Wave Mixing (FWM), Cross Phase Modulations (XPM), and Stimulated Raman Scattering (SRS). Also, gradual fiber degradation that affects utilization of full-fiber capacity can be tracked.
- Keeps the system running the full-channel configuration, which makes the system be intrinsically stable and provide optimal performance.

How ASE operates

The following is the list of operations that are performed as part of the ASE loading:

1. The NL emits a total power of 16 dBm, and generates a power-spectral density (PSD) that is approximately equal to -10 dBm/12.5 GHz at the WSS input port. The OCM7 port monitors profile of the generated ASE channel. A Variable Optical Attenuator (VOA) available between the NL and the WSS input port regulates the ASE channel level properly.
2. The controller sets a predefined value for the VOA so that the ASE channels that are obtained at the COM TX-1 port are equalized to the actual traffic channels to fill out the spectrum at the input of the fixed gain amplifier.
3. When the controller detects a missing channel, for example any failure on the ADD/ EXP ports, it sends an updated attenuation value to the OLT. The OLT applies this value as a new attenuation setpoint and executes the transition from ADDs/EXPs path to ASE in the impacted wavelengths, thus ensuring fast recovery of the initial total optical power on the LINE-TX port.
4. When the optical power is restored, the controller sends a restoration command to the OLT. The OLT executes the transition from ASE to ADDs/EXPs in the impacted wavelengths ensuring minimal total optical power disturbance on the LINE-TX port, thus allowing a smooth fade-out of the ASE.

How ASE Is managed

The default target ASE Load Spectral Density (AL_SD) is set to 81% for the OLT-C card and 78% for the OLT-L card. This default AL_SD is defined based on the frequency grid at 75 GHz with the first channel centered at 191.375 THz for OLT-C card and 186.125 THz for the OLT-L card. The spectrum is allocated through logical bins with 3.125-GHz width such that each physical slice is associated to two bins. Based on the above, the first ASE channel for the OLT-C card has:

- Bins 1 and 2 blocked (frequency range 191.33750 – 191.34375 THz)
- Bins 3–22 opened (frequency range 191.34375 to 191.40625 THz)
- Bins 23 and 24 blocked (frequency range 191.40625 – 191.4125 THz)

The first ASE channel for the OLT-L card has:

- Bins 13 and 14 blocked (frequency range 186.0875 – 186.09375 THz)
- Bins 15–34 opened (frequency range 186.09375 to 186.15625 THz)
- Bins 35 and 36 blocked (frequency range 186.15625 – 186.1625 THz)


All the other ASE channels are defined similarly by shifting all the settings by 75 GHz (24 bins).



Note The ASE channels on the bins 1537–1548 and 1-12 are retained as blocked for Automatic VOA Shutdown (AVS) for the OLT-C and OLT-L cards respectively. In this AVS mode, the VOA is set at maximum attenuation value, when the channel is not provisioned to ensure the system reliability in case power is accidentally inserted.

Static ASE—At the system startup, without any channel provisioned, the complete ASE Load pattern is forwarded to the OLT LINE-TX port.

Figure 27: Static ASE

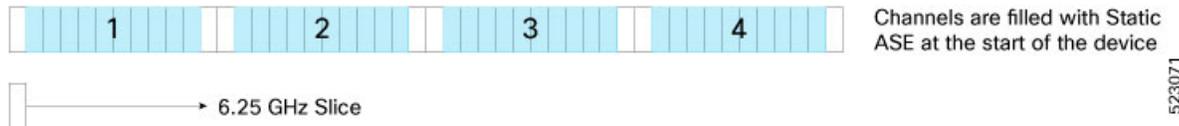


523071

Dynamic ASE—When a traffic channel fails (for example, the PSD within the set of slices that are dedicated to the traffic channel is below a given threshold) an equivalent temporary ASE channel is inserted to maintain the spectral density on the line port. This dynamic ASE channel fills the original traffic channel with only a single slice guard band, at the beginning and the end. When the original traffic channel is restored, the temporary ASE channel is removed, and the original routing on the WSS is reestablished.

Dynamic ASE—With the Nyquist channels, dynamic ASE has the following behavior changes:

- A minimum guard band of 6.25GHz is maintained between the active channel and the dynamic ASE, so the guard band of dynamic ASE will be 6.25 GHz + unused portion of the next user channel.
- When there are two channels, and if channel 1 has failed and channel 2 overlaps channel 1, the dynamic ASE is filled in the slices other than the overlapping slices while leaving at least one slice as guard band.
- If both channel 1 and channel 2 are overlapping and both have failed, dynamic ASE fills both the channels without leaving any guardband.
- Static ASE and Dynamic ASE cannot overlap.

Figure 28: Dynamic ASE with Nyquist Channels

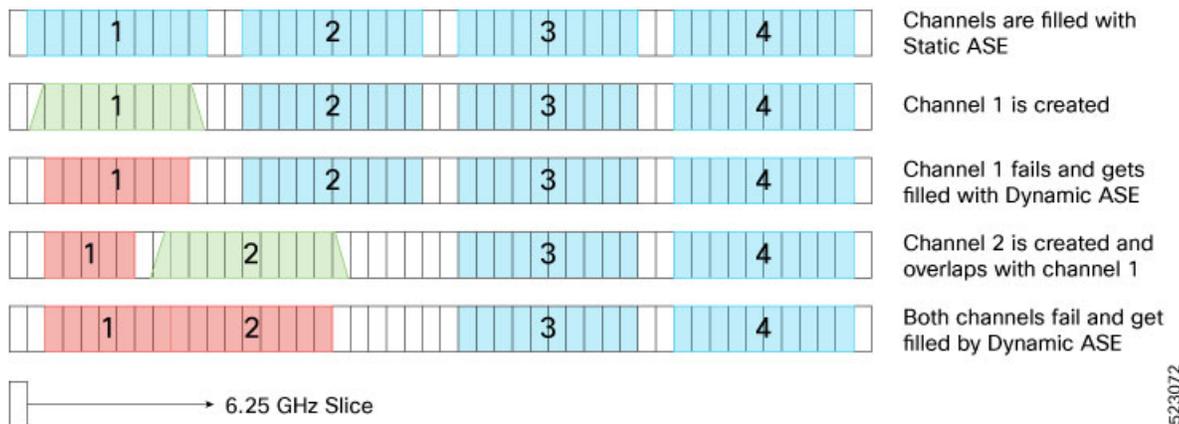

523072

ASE loading disable

Table 45: Feature History

Feature Name	Release Information	Description
ASE Loading Disable	Cisco IOS XR Release 26.1.1	<p>ASE loading can be disabled at both the channel and module levels to improve troubleshooting capabilities. The "ASE Loading Disabled" alarm has been introduced for this feature.</p> <p>Commands modified:</p> <p>The keyword ase-loading disable has been added to these commands:</p> <ul style="list-style-type: none"> • hw-module location <i>location</i> terminal-ampli • hw-module location <i>location</i> terminal-ampli grid-mode flex channel id <id>

You can now disable ASE loading for improved troubleshooting. Disabling ASE loading at the channel level raises an 'ASE Loading Disabled' alarm on the OTS-OCH interface. Disabling ASE loading at the spectrum level raises the 'ASE Loading Disabled' alarm on the OTS interface.

If both channel-level and spectrum-level configurations are present to disable ASE loading, only the spectrum-level alarm raises.



Note ASE Loading Disable is not supported on ILA Node.

Configuring ASE Loading Disable at Spectrum Level

Use this sample to configure ASE loading disable feature and verify the configuraiton at spectrum level.

Before you begin

- Before disabling ASE loading, APC must be paused on all the nodes.

Procedure

Use this sample configuration to enable ASE loading disable feature at spectrum level.

Example:

```
RP/0/RP0/CPU0:ios#config
RP/0/RP0/CPU0:ios(config)#hw-module location 0/0/NXRO terminal-ampli
```

```
RP/0/RP0/CPU0:ios(config)#ase-loading disable
RP/0/RP0/CPU0:ios(config)#commit
RP/0/RP0/CPU0:ios(config)#end
```

Use this configuration to verify whether ASE loading is disabled at spectrem level.

```
show running-config hw-module location 0/0/NXR0 terminal-ampli
ase-loading disable
```

Remove ASE Loading Disable at Spectrum Level

Procedure

Use this sample configuration to remove ASE loading disable feature at spectrum level.

Example:

```
RP/0/RP0/CPU0:ios#config
RP/0/RP0/CPU0:ios(config)#hw-module location 0/0/NXR0 terminal-ampli
RP/0/RP0/CPU0:ios(config)#no ase-loading disable
RP/0/RP0/CPU0:ios(config)#commit
RP/0/RP0/CPU0:ios(config)#end
```

Configuring ASE Loading Disable at Channel Level

Configure ASE loading disable and verify the configuraiton at channel level.

Before you begin

Before disabling ASE loading, APC must be paused on all the nodes.

Procedure

Use this sample configuration to remove the ASE loading disable feature at the channel level.

Example:

```
RP/0/RP0/CPU0:ios#config
RP/0/RP0/CPU0:ios(config)#hw-module location 0/0/NXR0 terminal-ampli
RP/0/RP0/CPU0:ios(config)#grid-mode flex
RP/0/RP0/CPU0:ios(config)#channel-id 1 ase-loading disable
RP/0/RP0/CPU0:ios(config)#channel-id 1 centre-freq 193.123 width 75
RP/0/RP0/CPU0:ios(config)#commit
RP/0/RP0/CPU0:ios(config)#end
```

Use this configuration to verify wheter ASE loading is disabled at channel level.

```
show running-config hw-module location 0/0/NXR0 terminal-ampli grid-mode flex channel-id
```

Remove ASE Loading Disable at Channel Level

Remove ASE loading disable at channel level.

Procedure

Use this sample configuration to disable the ASE loading disable feature at the channel level.

Example:

```
RP/0/RP0/CPU0:ios#config
RP/0/RP0/CPU0:ios(config)#hw-module location 0/0/NXR0 terminal-ampli
RP/0/RP0/CPU0:ios(config)#grid-mode flex
RP/0/RP0/CPU0:ios(config)#no channel-id 1 ase-loading disable
RP/0/RP0/CPU0:ios(config)#commit
RP/0/RP0/CPU0:ios(config)#end
```

Optical channel monitoring

The Optical Channel Monitor (OCM) blocks in the OLT and ILA cards provide perchannel optical power monitoring.

Each OCM refreshes approximately every 200ms. The device reports the channel power based on the OCM power. If the channel power is above the threshold (TH), the channel is declared as Active. If the channel power is below the threshold (TH), the channel is declared as Failed. The dynamic OCM scheduling algorithm creates a list of OCM ports based on the used and unused add/drop ports. Each add/drop port is connected to an OCM port. When creating a cross-connect, the used add/drop port is considered as a used OCM port, and the rest of the ports are considered as unused. Based on the used add/drop ports, the device creates a sequence of used and unused OCM ports. This allows the used OCM ports to refresh the maximum number of times. This approach ensures faster channel recovery.

OCM in OLT-C

The OLT-C card has a single OCM device with 37 OCM measuring points (OCM1 - OCM37). You can read the OCM data for all the OCM blocks through the IOS-XR commands, except OCM1, OCM4, and OCM7.

The measuring points in the OLT-C card are:

- LINE-TX
- LINE-RX
- 2x33 ports of WSS in the multiplexer section of the OLT-C card

See [OLT Functional Layout](#) for details of the ports.

Table 46: Optical specifications for OCM in OLT-C

Parameter	Unit	Minimum	Typical	Maximum	Note
Dynamic ranges	dBm/12.5GHz	-10		10	Ports: LINE-TX, COM-RX-1 and internal Noise Loader port
		-30		0	Port LINE-RX
		-35		0	Ports: ADD-RX-1 and ADD-RX-2
		-35		5	Ports ADD/DROP-i (i=3..32) (on DROP ports OCM is virtual)
Accuracy	dB	± 0.5		± 2	Depending on the adjacent channel relative power
Frequency range	THz	191.175 191.150		196.175	Out-of-band channel frequency 191.150 - 191.3375 THz are available only as row-data values.
Frequency accuracy (absolute)	GHz			± 5	
Frequency accuracy (relative)	GHz			+/-3	
Resolution Bandwidth	GHz		12.5		
Frequency step	GHz	3.125			
Scan Time	ms			250	Single port

OCM in ILA-C

The ILA-C card has a single OCM device with 4 OCM measuring points.

The measuring points in the ILA-C card are:

- Input port of EDFA1
- Input port of EDFA2
- Output port of EDFA1
- Output port of EDFA2

See [ILA Functional Layout](#) for details of the ports.

Table 47: Optical specifications for OCM in ILA-C

Parameter	Unit	Min.	Typical	Max	Note
Dynamic ranges	dBm/12.5GHz	-30		0	LINE-RX ports
		-10		10	LINE-TX ports
Accuracy	dB	± 0.5		± 2	Depending on the adjacent channel relative power

Parameter	Unit	Min.	Typical	Max	Note
Frequency range	THz	191.175		196.175	
Frequency accuracy (absolute)	GHz			± 5	
Frequency accuracy (relative)	GHz			± 3	
Resolution Bandwidth	GHz		12.5		
Frequency step	GHz	3.125			
Scan Time	ms			250	Single port

OCM in OLT-L

The measuring points in the OLT-L card are:

- Input and output of preamplifier
- ADD-i-RX ports
- COM1-TX ports
- Output of booster amplifier and noise loader

All OCM specs like accuracy, resolution, and more in L-band are the same as those in C band.

Table 48: Optical specifications for OCM in OLT-L

Parameter	Unit	Minimum	Typical	Maximum	Note
Frequency range	THz	186.05		191.125	Out-of-band channel frequency 190.8875 - 191.125 THz are available only as row-data values.

OCM in ILA-L

The ILA-L card has a single OCM device with 4 OCM measuring points.

The measuring points in the ILA-L card are:

- Input port of EDFA1
- Output port of EDFA2

All OCM specs like accuracy, resolution, and more in L-band are the same as those in C band.

Table 49: Optical specifications for OCM in ILA-L

Parameter	Unit	Minimum	Typical	Maximum	Note
Frequency range	THz	186.05		191.125	Out-of-band channel frequency 190.8875 - 191.125 THz are available only as row-data values.

View OCM Data

You can view the raw OCM data (slice level channel power) using the following commands:

```
RP/0/RP0/CPU0:ios#sh controllers ots 0/0/0/0 spectrum-info
Fri Feb 4 13:12:49.841UTC
Spectrum Slices spacing      :          3.125 GHz
Spectrum Slices Range       :          1 - 1548
Slice start wavelength      :          1566.82 nm
Slice start frequency       :          191337.50 GHz
Spectrum power information :
Rx power :
-----
spectrum-slice num          Rx-power values (dBm)
-----
  1 - 12                    -88.8 -88.8 -88.8 -88.8 -88.8 -88.8 -88.8 -88.8
-88.8 -88.8 -88.8 -88.8
 13 - 24                    -88.8 -88.8 -88.8 -88.8 -88.8 -88.8 -88.8 -88.8
-88.8 -88.8 -88.8 -88.8
.....
.....
.....
1537 - 1548                 -88.8 -88.8 -88.8 -88.8 -88.8 -88.8 -88.8 -88.8
-88.8 -88.8 -88.8 -88.8
-----
Tx power :
-----
spectrum-slice num          Tx-power values (dBm)
-----
 1 - 12                    -9.5 -7.3 -6.0 -5.2 -4.9 -4.8 -4.6 -4.4 -4.4
-4.4 -4.4 -4.4
 13 - 24                    -4.4 -4.5 -4.6 -4.8 -5.1 -5.5 -6.4 -7.7 -9.6
-12.0 -13.2 -11.4
 25 - 36                    -9.2 -7.7 -6.7 -6.2 -6.0 -5.9 -5.7 -5.6 -5.6
-5.5 -5.4 -5.4
 37 - 48                    -5.3 -5.3 -5.4 -5.5 -5.8 -6.1 -6.6 -7.3 -8.6
-10.4 -12.2 -11.8
.....
.....
.....
1525 - 1536                 -2.4 -2.4 -2.4 -2.4 -2.4 -2.3 -2.3 -3.0
-4.2 -6.5 -10.3 -14.9
1537 - 1548                 -19.3 -22.6 -24.3 -25.3 -26.1 -26.6 -27.1 -27.6
-27.9 -28.2 -28.4 -28.6
```

The preceding sample displays the Rx-power values (OCM3 raw data) and Tx-power values (OCM2 raw data) at the line sides. Similarly, you can view the OCM raw data for the COM side controllers OTS0/0/0/2 to 0/0/0/33.

You can also view the grid OCM data (per channel power level) for a particular channel in the ILA-C and OLT-C cards. By default, the channels are not created. Create a channel using the following commands:

configure

hw-module location *location* **terminal-ampli grid-mode** *mode*

channel-id *channel id* **centre-freq** *frequency* **width** *channel-width*

commit

The following is a sample to configure the channel on an OLT-C card:

```
RP/0/RP0/CPU0:ios#config
Fri Feb 4 13:14:49.841 UTC
```

```
RP/0/RP0/CPU0:ios(config)#
RP/0/RP0/CPU0:ios(config)#hw-module location 0/0/NXR0 terminal-ampli grid-mode flex
RP/0/RP0/CPU0:ios(config-hwmod-olt-flexi)#channel-id 1 centre-freq 196.1 width 75
RP/0/RP0/CPU0:ios(config-hwmod-olt-flexi)# commit
Fri Feb 4 13:15:12.841 UTC
```

```
RP/0/RP0/CPU0:ios(config-hwmod-olt-flexi)#end
```

The following sample shows the OTS OCH controller channel parameters such as Total Rx power and Total Tx power.

```
RP/0/RP0/CPU0:ios#sh controllers ots-och 0/0/0/0/1
Fri Feb 4 13:15:59.125 UTC
Controller State: Up
Transport Admin State: In Service
LED State: Yellow
Parameter Statistics:
-----
Total RX Power = -10.50 dBm
Total TX Power = -10.50 dBm
Configured Parameters:
-----
RP/0/RP0/CPU0:ios#
```

To view the grid OCM data for a particular channel in the ILA-C card, create a channel using the following commands:

configure

hw-module location *location* **inline-ampli grid-mode mode**

channel-id *channel id* **centre-freq** *frequency* **width** *channel-width*

commit

The following is a sample to a configure the OTS-OCH controller on an ILA-C card:

```
RP/0/RP0/CPU0:ios#config
Fri Feb 4 13:15:49.841 UTC
RP/0/RP0/CPU0:ios(config)#
RP/0/RP0/CPU0:ios(config)#hw-module location 0/0/NXR0 inline-ampli grid-mode flex
RP/0/RP0/CPU0:ios(config-hwmod-ila-flexi)#channel-id 1 centre-freq 196.1 width 75
RP/0/RP0/CPU0:ios(config-hwmod-ila-flexi)# commit
Fri Feb 4 13:15:12.841 UTC
```

```
RP/0/RP0/CPU0:ios(config-hwmod-olt-flexi)#end
```

The following sample shows the OTS OCH controller channel parameters such as Total Rx power and Total Tx power.

```
RP/0/RP0/CPU0:ios#sh controllers ots-och 0/0/0/2/1
Fri Feb 4 13:15:59.125 UTC
Controller State: Up
Transport Admin State: In Service
Alarm Status:
-----
Detected Alarms: None
Alarm Statistics:
-----
RX-LOS-P = 0
TX-POWER-FAIL-LOW = 0
Parameter Statistics:
-----
Total RX Power = -10.50 dBm
Total TX Power = -10.50 dBm
Configured Parameters:
```

```
-----
RP/0/RP0/CPU0:ios#
```

Dynamic OCM scheduler

Table 50: Feature History

Feature name	Release information	Feature description
Dynamic OCM Scheduler	Cisco IOS XR Release 24.4.15	Introducing the Dynamic OCM Scheduler, an enhanced OCM scheduler that is designed to optimize optical channel monitoring by replacing static scheduling with a dynamic algorithm. This accelerates the refresh rate of OCM points on the cross-connect ports, significantly boosting power monitoring and failure detection capabilities. By prioritizing cross-connected ports, the dynamic scheduler reduces polling times, effectively capturing micro flaps and alarm fluctuations.

Dynamic OCM scheduler optimizes the refresh rate of OCM points on the cross-connect ports and nonconfigured ports within OLT nodes. It refreshes the monitoring rate of the OCM points on the cross-connect ports at a higher frequency. This enhancement improves monitoring of channel power, failure detection, alarm fluctuations, and micro flaps.

How the dynamic OCM schedule works

Dynamic OCM scheduler treats cross-connect ports as medium priority and nonconfigured ports as low priority.

If you configure **port 1** as a cross-connect port, the OCM scheduler treats the remaining 33 ports as low priority. In this combination, the polling time for OCM points on **port 1** takes approximately one second to complete two OCM refreshments. When you increase the number of cross-connect ports, the refresh rate of the OCM points changes accordingly.

Automatic-In-Service (AINS) state

The AINS state is an administrative state that

- allows the OTS, OMS, and OCH datapath controllers to automatically move to the *Automatic In Service* state after a system bootup,
- prevents alarms reporting to the EMS/NMS monitoring system during the soak time period, and
- helps the affected ports to transition to the *In-Service* state after the soak time period expires.

In NCS 1010, AINS state affects the

- OTS controllers on the COM ports for the OLT and E-OLT cards. See
- OTS-OCH controllers after the optical cross connections are configured on the OLT and E-OLT cards. See

- OMS and OCH controllers for the passive devices. See

AINS does not affect for the line side OTS-OCH controllers on OLT, E-OLT, ILA and E-ILA cards. Line side OTS-OCH controllers are labeled as OTS-OCH 0/0/0/0/x.

AINS soak time period

Soak time period is a timed delay that

- keeps the affected NCS 1010 ports in the AINS state for defined duration after system boot,
- suppress active alarms until the ports transition to the *In-Service* state, and
- lasts for one minute by default.

Characteristics of soak time period

The characteristics of soak timer period are:

- The soak time period for the AINS state is fixed and not configurable.
- The soak timer restarts automatically during line card cold reloads or power cycles.
- During the soak time period, any alarms are suppressed and can be viewed using the `show alarms brief system conditions` command.
- When all alarms are resolved, the system transitions the affected ports to the *In-Service* state.

After an NCS 1010 chassis boots up, its COM ports for OLT and E-OLT cards enter the AINS state. The soak time period begins, lasting one minute. During this time, alarms are suppressed. When the soak time ends, if there are no outstanding alarms, the ports move into In-Service.

- The soak time period is a predefined value.
- If an active alarm persists after the soak time, the affected port will not transition to In-Service.

A soak time period acts like a 'buffer zone' that delays action, ensuring that transient issues do not trigger alarms during initial startup or recovery.

Verify the AINS state and the suppressed alarms

Follow the steps to verify the administrative state of the affected controller types that are in AINS state.

- OLT and E-OLT cards: OTS and OTS-OCH controllers
- Passive modules: OCH and OMS controllers

When add/drop COM ports enter the AINS state, the alarms reported on those ports are suppressed during the soak time period. Use the steps in this task to check the administrative state of those ports and their alarms.

Procedure

Step 1 Use the **show controllers ots R/S/I/P** command to check the administrative status of the OTS controller.

Example:

This command displays the OTS controller statistics for Add/Drop 2 port in OLT and E-OLT cards.

```
RP/0/RP0/CPU0:ios#show controllers ots 0/0/0/2
```

This output displays the OTS controller statistics highlighting the administrative state as *Automatic In Service*.

```
Wed Jun 22 09:43:04.356 UTC
```

```
Controller State: Down
```

```
Transport Admin State: Automatic In Service
```

```
LED State: Red
```

```
Alarm Status:
```

```
-----
```

```
Detected Alarms:
```

```
RX-LOS-P
```

```
TX-POWER-FAIL-LOW
```

```
Alarm Statistics:
```

```
-----
```

```
RX-LOS-P = 1
```

```
RX-LOC = 0
```

```
TX-POWER-FAIL-LOW = 1
```

```
INGRESS-AUTO-LASER-SHUT = 0
```

```
INGRESS-AUTO-POW-RED = 0
```

```
INGRESS-AMPLI-GAIN-LOW = 0
```

```
INGRESS-AMPLI-GAIN-HIGH = 0
```

```
EGRESS-AUTO-LASER-SHUT = 0
```

```
EGRESS-AUTO-POW-RED = 0
```

```
EGRESS-AMPLI-GAIN-LOW = 0
```

```
EGRESS-AMPLI-GAIN-HIGH = 0
```

```
HIGH-TX-BR-PWR = 0
```

```
HIGH-RX-BR-PWR = 0
```

```
SPAN-TOO-SHORT-TX = 0
```

```
SPAN-TOO-SHORT-RX = 0
```

```
Parameter Statistics:
```

```
-----
```

```
Total RX Power = -50.00 dBm
```

```
Total TX Power = -50.00 dBm
```

```
Ingress Ampli Gain = 0.0 dB
```

```
Ingress Ampli Tilt = 0.0 dB
```

```
Configured Parameters:
```

```
-----
```

```
Ingress Ampli Gain = 16.0 dB
```

```
Ingress Ampli Tilt = 0.0 dB
```

Step 2 Use the **show controllers ots-och R/S/I/P/x** command to check the administrative status of the OTS-OCH controller.

Example:

This command displays the OTS-OCH cross-connect controller statistics for Add/Drop 13 port in E-OLT cards.

```
RP/0/RP0/CPU0:ios#show controllers ots-och 0/0/0/13/20
```

This output displays the OTS-OCH controller statistics highlighting the administrative state as *Automatic In Service*.

```
Tue Jul 12 10:19:48.838 UTC
```

```
Controller State: Down
```

```
Transport Admin State: Automatic In Service
```

```
Alarm Status:
```

```
-----
```

```
Detected Alarms:
```

```
    RX-LOS-P
```

```
    TX-POWER-FAIL-LOW
```

```
Alarm Statistics:
```

```
-----
```

```
RX-LOS-P = 1
```

```
TX-POWER-FAIL-LOW = 1
```

```
Parameter Statistics:
```

```
-----
```

```
Total RX Power = -50.00 dBm
```

```
Total TX Power = -50.00 dBm
```

```
Cross Connect Info:
```

```
-----
```

```
line Channel = Ots-Och0/0/0/0/20
```

```
Configured Parameters:
```

```
-----
```

```
Rx Low Threshold = -50.0 dBm
```

```
Tx Low Threshold = -50.0 dBm
```

Step 3 Use the **show controllers och R/S/I/P** command to check the administrative status of the OCH controller in passive modules.

Example:

This command displays the OCH controller statistics for port 0 in passive modules.

```
RP/0/RP0/CPU0:ios#show controllers och 0/1/0/0
```

This output displays the OCH controller statistics highlighting the administrative state as *Automatic In Service*.

```
Wed Jul 6 14:28:12.500 UTC
```

```
Controller State: Down
```

```
Transport Admin State: Automatic In Service
```

```
LED State: Red
```

```
Alarm Status:
```

```
-----
```

```
Detected Alarms:
```

```
RX-LOS-P
```

```
Alarm Statistics:
-----
RX-LOS-P = 1
TX-POWER-FAIL-LOW = 0

Parameter Statistics:
-----
TX Power = -50.00 dBm
RX Power = -20.72 dBm
```

This example displays the OCH controller statistics after AINS Soak time expiry. When the soak time expires, the Transport Admin State of OCH controller changes from *Automatic In Service* to *In Service*.

```
Wed Jul 6 14:29:59.242 UTC
```

```
Controller State: Up
```

```
Transport Admin State: In Service
```

```
LED State: Off
```

```
Alarm Status:
-----
Detected Alarms: None
```

```
Alarm Statistics:
-----
RX-LOS-P = 1
TX-POWER-FAIL-LOW = 0

Parameter Statistics:
-----
TX Power = -50.00 dBm
RX Power = 2.79 dBm
```

Step 4 Use the **show controllers oms R/S/I/P** command to check the administrative status of the OMS controller in passive modules.

Example:

This command displays the OMS controller statistics for port 25 in NCS1K-MD-320/E-C passive module.

```
RP/0/RP0/CPU0:ios#show controllers oms 0/1/0/25
```

This output displays the OMS controller statistics highlighting the administrative state as *Automatic In Service*.

```
Tue Jul 12 10:32:05.258 UTC
```

```
Controller State: Down
```

```
Transport Admin State: Automatic In Service
```

```
LED State: Red
```

```
Alarm Status:
-----
Detected Alarms:
    RX-LOS-P

Alarm Statistics:
-----
RX-LOS-P = 1
TX-POWER-FAIL-LOW = 0
```

```
Parameter Statistics:
-----
TX Power = -7.40 dBm
RX Power = -19.91 dBm
```

Step 5 (Optional) Use the **show alarms brief system conditions** command to check the alarms suppressed for the controllers in AINS state.

Example:

This command displays the suppressed alarms in AINS state.

```
RP/0/RP0/CPU0:ios#show alarms brief system conditions
```

This output displays the alarms reported for the affected controller types in AINS state.

```
Mon Jul 25 05:43:50.073 UTC
```

```
-----
Conditions
-----
```

Location	Severity	Group	Set Time	Description
0/1 - Payload	Critical	Controller	07/21/2022 11:11:54 UTC	Och0/1/0/1 - Loss of Signal
0/1 - Payload	Critical	Controller	07/21/2022 11:11:54 UTC	Och0/1/0/2 - Loss of Signal
0/1 - Payload	Critical	Controller	07/21/2022 11:11:54 UTC	Och0/1/0/4 - Loss of Signal
0/1 - Payload	Critical	Controller	07/21/2022 11:11:54 UTC	Och0/1/0/5 - Loss of Signal
0/1 - Payload	Critical	Controller	07/21/2022 11:11:54 UTC	Och0/1/0/6 - Loss of Signal
0/1 - Payload	Critical	Controller	07/21/2022 11:11:54 UTC	Och0/1/0/7 - Loss of Signal
0/1 - Payload	Critical	Controller	07/21/2022 11:11:54 UTC	Och0/1/0/8 - Loss of Signal
0/1 - Payload	Critical	Controller	07/21/2022 11:11:54 UTC	Och0/1/0/9 - Loss of Signal
0/1 - Payload	Critical	Controller	07/21/2022 11:11:54 UTC	Och0/1/0/10 - Loss of Signal
0/1 - Payload	Critical	Controller	07/21/2022 11:11:54 UTC	Och0/1/0/11 - Loss of Signal
0/1 - Payload	Critical	Controller	07/21/2022 11:11:54 UTC	Och0/1/0/12 - Loss of Signal
0/1 - Payload	Critical	Controller	07/21/2022 11:11:54 UTC	Och0/1/0/13 - Loss of Signal
0/1 - Payload	Critical	Controller	07/21/2022 11:11:54 UTC	Och0/1/0/14 - Loss of Signal
0/1 - Payload	Critical	Controller	07/21/2022 11:11:54 UTC	Och0/1/0/15 - Loss of Signal
0/1 - Payload	Critical	Controller	07/21/2022 11:11:54 UTC	Och0/1/0/16 - Loss of Signal
0/1 - Payload	Critical	Controller	07/21/2022 11:11:54 UTC	Och0/1/0/17 - Loss of Signal
0/1 - Payload	Critical	Controller	07/21/2022 11:11:54 UTC	Och0/1/0/18 - Loss of Signal
0/1 - Payload	Critical	Controller	07/21/2022 11:11:54 UTC	Och0/1/0/19 - Loss of Signal
0/1 - Payload	Critical	Controller	07/21/2022 11:11:54 UTC	Och0/1/0/21 - Loss of Signal

Verify the AINS state and the suppressed alarms

0/1	Critical	Controller	07/21/2022 11:11:54 UTC	Och0/1/0/22 - Loss of Signal
- Payload				
0/1	Critical	Controller	07/21/2022 11:11:54 UTC	Oms0/1/0/31 - Loss of Signal
- Payload				
0/1	Critical	Controller	07/21/2022 11:11:54 UTC	Oms0/1/0/26 - Loss of Signal
- Payload				
0/1	Critical	Controller	07/21/2022 11:11:54 UTC	Oms0/1/0/27 - Loss of Signal
- Payload				
0/1	Critical	Controller	07/21/2022 11:11:54 UTC	Oms0/1/0/28 - Loss of Signal
- Payload				
0/1	Critical	Controller	07/21/2022 11:11:54 UTC	Oms0/1/0/29 - Loss of Signal
- Payload				
0/1	Critical	Controller	07/21/2022 11:11:54 UTC	Oms0/1/0/30 - Loss of Signal
- Payload				
0/0	Critical	Controller	07/21/2022 11:12:00 UTC	Ots0/0/0/33 - Output OTS
Power Reading Below The Fail-Low Threshold				
0/0	Critical	Controller	07/21/2022 11:12:00 UTC	Ots0/0/0/33 - Loss of Signal
- Payload				
0/0	Critical	Controller	07/21/2022 11:12:00 UTC	Ots0/0/0/9 - Output OTS
Power Reading Below The Fail-Low Threshold				
0/0	Critical	Controller	07/21/2022 11:12:00 UTC	Ots0/0/0/9 - Loss of Signal
- Payload				
0/0	Critical	Controller	07/21/2022 11:12:00 UTC	Ots0/0/0/8 - Output OTS
Power Reading Below The Fail-Low Threshold				
0/0	Critical	Controller	07/21/2022 11:12:00 UTC	Ots0/0/0/8 - Loss of Signal
- Payload				
0/0	Critical	Controller	07/21/2022 11:12:00 UTC	Ots0/0/0/7 - Output OTS
Power Reading Below The Fail-Low Threshold				
0/0	Critical	Controller	07/21/2022 11:12:00 UTC	Ots0/0/0/7 - Loss of Signal
- Payload				
0/0	Critical	Controller	07/21/2022 11:12:00 UTC	Ots0/0/0/6 - Output OTS
Power Reading Below The Fail-Low Threshold				
0/0	Critical	Controller	07/21/2022 11:12:00 UTC	Ots0/0/0/6 - Loss of Signal
- Payload				
0/0	Critical	Controller	07/21/2022 11:12:00 UTC	Ots0/0/0/5 - Output OTS
Power Reading Below The Fail-Low Threshold				
0/0	Critical	Controller	07/21/2022 11:12:00 UTC	Ots0/0/0/5 - Loss of Signal
- Payload				
0/0	Critical	Controller	07/21/2022 11:12:00 UTC	Ots0/0/0/4 - Output OTS
Power Reading Below The Fail-Low Threshold				
0/0	Critical	Controller	07/21/2022 11:12:00 UTC	Ots0/0/0/4 - Loss of Signal
- Payload				
0/0	Critical	Controller	07/21/2022 11:12:00 UTC	Ots0/0/0/3 - Output OTS
Power Reading Below The Fail-Low Threshold				
0/0	Critical	Controller	07/21/2022 11:12:00 UTC	Ots0/0/0/3 - Loss of Signal
- Payload				
0/0	Critical	Controller	07/21/2022 11:12:00 UTC	Ots0/0/0/2 - Output OTS
Power Reading Below The Fail-Low Threshold				
0/0	Critical	Controller	07/21/2022 11:12:00 UTC	Ots0/0/0/2 - Loss of Signal
- Payload				
0/0	Critical	Controller	07/21/2022 11:12:00 UTC	Ots0/0/0/32 - Output OTS
Power Reading Below The Fail-Low Threshold				
0/0	Critical	Controller	07/21/2022 11:12:00 UTC	Ots0/0/0/32 - Loss of Signal
- Payload				
0/0	Critical	Controller	07/21/2022 11:12:00 UTC	Ots0/0/0/31 - Output OTS
Power Reading Below The Fail-Low Threshold				
0/0	Critical	Controller	07/21/2022 11:12:00 UTC	Ots0/0/0/31 - Loss of Signal
- Payload				
0/0	Critical	Controller	07/21/2022 11:12:00 UTC	Ots0/0/0/30 - Output OTS
Power Reading Below The Fail-Low Threshold				
0/0	Critical	Controller	07/21/2022 11:12:00 UTC	Ots0/0/0/30 - Loss of Signal
- Payload				
0/0	Critical	Controller	07/21/2022 11:12:00 UTC	Ots0/0/0/29 - Output OTS
Power Reading Below The Fail-Low Threshold				

0/0 - Payload	Critical	Controller	07/21/2022 11:12:00 UTC	Ots0/0/0/29 - Loss of Signal
0/0 Power Reading Below The Fail-Low Threshold	Critical	Controller	07/21/2022 11:12:00 UTC	Ots0/0/0/28 - Output OTS
0/0 - Payload	Critical	Controller	07/21/2022 11:12:00 UTC	Ots0/0/0/28 - Loss of Signal
0/0 Power Reading Below The Fail-Low Threshold	Critical	Controller	07/21/2022 11:12:00 UTC	Ots0/0/0/25 - Output OTS
0/0 - Payload	Critical	Controller	07/21/2022 11:12:00 UTC	Ots0/0/0/25 - Loss of Signal
0/0 Power Reading Below The Fail-Low Threshold	Critical	Controller	07/21/2022 11:12:00 UTC	Ots0/0/0/10 - Output OTS
0/0 - Payload	Critical	Controller	07/21/2022 11:12:00 UTC	Ots0/0/0/10 - Loss of Signal
0/0 Power Reading Below The Fail-Low Threshold	Critical	Controller	07/21/2022 11:12:00 UTC	Ots0/0/0/11 - Output OTS
0/0 - Payload	Critical	Controller	07/21/2022 11:12:00 UTC	Ots0/0/0/11 - Loss of Signal
0/0 Power Reading Below The Fail-Low Threshold	Critical	Controller	07/21/2022 11:12:00 UTC	Ots0/0/0/12 - Output OTS
