



Fan Tray Reference

Product Number: CSS8-BLOWER-4FAN=
CSS8-BLOWER-6FAN=

The CSS 11800 contains a fan unit that connects into the chassis backplane. The fan unit contains either a 4-fan or 6-fan tray. Ensure you replace the fan unit in your CSS 11800 with a fan tray that holds the same number of fans (a 4-fan tray or a 6-fan tray) as the unit previously removed.


Each fan in the fan unit:

- Is wired individually for power and incorporates a rotation sensor to detect a failed fan
- Has individual fuses to protect the CSS against a single fan bringing down the 12V supply
- Provides a status signal to the SCM

Removing a Fan Unit

To remove a fan unit:

1. Use a flathead screwdriver to loosen the two captive panel fasteners on the fan unit front panel

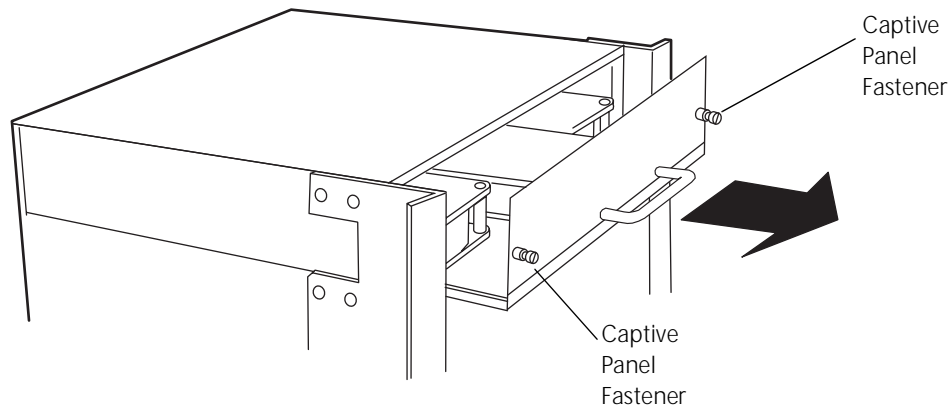

2. Grasp the handle located on the bottom of the front panel and slide the fan unit out of the chassis.

Installing a Fan Unit

To install a fan unit:

1. Align the fan unit with the guides in the chassis and carefully slide the fan unit into the chassis.
2. Use a flat-head screwdriver to tighten the two captive panel fasteners on the fan unit front panel.