


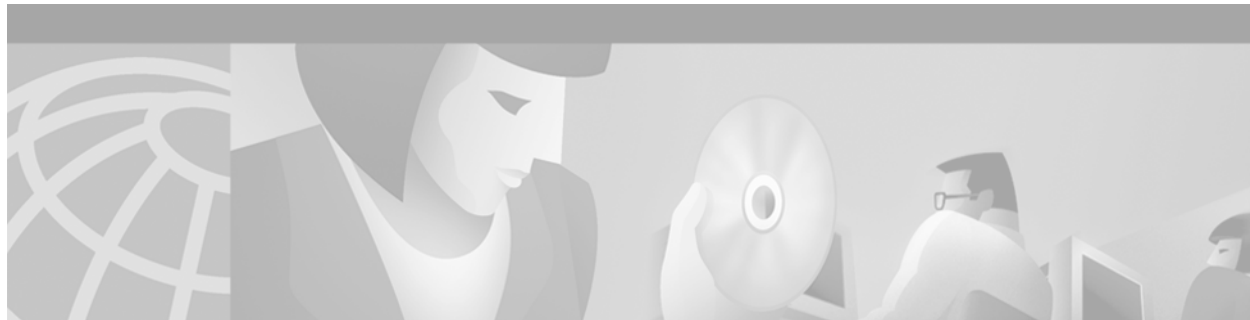

Release Notes for Cisco 3600 Series for Cisco IOS Release 12.2 XK

June 13, 2002

Cisco IOS Release 12.2(2) XK3

OL-1906-01 Rev. C2

These release notes for the Cisco 3600 series describe the enhancements provided in Cisco IOS Release 12.2(2) XK3. These release notes are updated as needed.

For a list of the software caveats that apply to Cisco IOS Release 12.2(2) XK3, see the [“Caveats for Cisco IOS Release 12.2 XK” section on page 13](#) and *Caveats for Cisco IOS Release 12.2 T*. This caveats document is updated for every maintenance release and is also located on Cisco.com and the Documentation CD-ROM.

Use these release notes with *Cross-Platform Release Notes for Cisco IOS Release 12.2 T* located on Cisco.com and the Documentation CD-ROM.

Cisco recommends that you view the Field Notices for this release to see if your software or hardware platforms are affected. If you have an account with Cisco.com, you can find Field Notices at http://www.cisco.com/warp/public/tech_tips/index/fn.html. If you do not have a Cisco.com login account, you can find Field Notices at http://www.cisco.com/warp/public/tech_tips/index/fn.html.

Contents

These release notes describe the following topics:

- [Introduction, page 2](#)
- [System Requirements, page 2](#)
- [New and Changed Information, page 9](#)
- [MIBs, page 11](#)
- [Important Notes, page 12](#)
- [Caveats for Cisco IOS Release 12.2 XK, page 13](#)



Corporate Headquarters:

Cisco Systems, Inc., 170 West Tasman Drive, San Jose, CA 95134-1706 USA

Copyright © 2002. Cisco Systems, Inc. All rights reserved.

- [Related Documentation, page 14](#)
- [Obtaining Documentation, page 20](#)
- [Obtaining Technical Assistance, page 21](#)

Introduction

The Cisco 3600 series includes the Cisco 3620, Cisco 3640, and Cisco 3660 routers. As modular solutions, the Cisco 3600 series routers enable corporations to increase dial-up density and take advantage of current and emerging WAN technologies and networking capabilities. The Cisco 3600 series routers are fully supported by Cisco IOS software, which includes dial-up connectivity, LAN-to-LAN routing, data and access security, WAN optimization, and multimedia features.

For information on new features and Cisco IOS commands supported by Cisco IOS Release 12.2(2) XK3, see the [“New and Changed Information” section on page 9](#) and the [“Obtaining Documentation” section on page 20](#).

System Requirements

This section describes the system requirements for Cisco IOS Release 12.2(2) XK3 and includes the following sections:

- [Memory Recommendations, page 2](#)
- [Supported Hardware, page 3](#)
- [Determining the Software Version, page 8](#)
- [Upgrading to a New Software Release, page 8](#)
- [Features, page 8](#)

Memory Recommendations

Table 1 *Memory Recommendations for the Cisco 3600 Series*

Platforms	Image Name	Software Image	Flash Memory Recommended	DRAM Memory Recommended	Runs From
Cisco 3620	IP/IPX/AT/DEC PLUS	c3620-ds-mz	16 MB Flash	64 MB DRAM	RAM
	IP/FW/IDS PLUS IPSEC 3DES	c3620-ik9o3s-mz	16 MB Flash	64 MB DRAM	RAM
	IP PLUS IPSEC 3DES	c3620-ik9s-mz	16 MB Flash	64 MB DRAM	RAM
	IP PLUS	c3620-is-mz	16 MB Flash	64 MB DRAM	RAM
	ENTERPRISE/FW/IDS PLUS IPSEC 3DES	c3620-jk9o3s-mz	32 MB Flash	96 MB DRAM	RAM
	ENTERPRISE PLUS IPSEC 3DES	c3620-jk9s-mz	32 MB Flash	96MB DRAM	RAM
	ENTERPRISE PLUS	c3620-js-mz	32 MB Flash	96 MB DRAM	RAM
	ENTERPRISE PLUS/H323 MCM	c3620-jsx-mz	32 MB Flash	96 MB DRAM	RAM

Table 1 *Memory Recommendations for the Cisco 3600 Series (continued)*

Platforms	Image Name	Software Image	Flash Memory Recommended	DRAM Memory Recommended	Runs From
Cisco 3640	IP/IPX/AT/DEC PLUS	c3640-ds-mz	16 MB Flash	64 MB DRAM	RAM
	IP/FW/IDS PLUS IPSEC 3DES	c3640-ik9o3s-mz	16 MB Flash	64 MB DRAM	RAM
	IP PLUS IPSEC 3DES	c3640-ik9s-mz	16 MB Flash	64 MB DRAM	RAM
	IP PLUS	c3640-is-mz	16 MB Flash	64 MB DRAM	RAM
	ENTERPRISE/FW/IDS PLUS IPSEC 3DES	c3640-jk9o3s-mz	32 MB Flash	96 MB DRAM	RAM
	ENTERPRISE PLUS IPSEC 3DES	c3640-jk9s-mz	32 MB Flash	96 MB DRAM	RAM
	ENTERPRISE PLUS	c3640-js-mz	32 MB Flash	96 MB DRAM	RAM
	ENTERPRISE PLUS/H323 MCM	c3640-jsx-mz	32 MB Flash	96 MB DRAM	RAM
Cisco 3660	IP/IPX/AT/DEC PLUS	c3660-ds-mz	16 MB Flash	64 MB DRAM	RAM
	IP/FW/IDS PLUS IPSEC 3DES	c3660-ik9o3s-mz	32 MB Flash	64 MB DRAM	RAM
	IP PLUS IPSEC 3DES	c3660-ik9s-mz	32 MB Flash	64 MB DRAM	RAM
	IP PLUS	c3660-is-mz	16 MB Flash	64 MB DRAM	RAM
	ENTERPRISE/FW/IDS PLUS IPSEC 3DES	c3660-jk9o3s-mz	32 MB Flash	96 MB DRAM	RAM
	ENTERPRISE PLUS IPSEC 3DES	c3660-jk9s-mz	32 MB Flash	96 MB DRAM	RAM
	ENTERPRISE PLUS	c3660-js-mz	32 MB Flash	96 MB DRAM	RAM
	ENTERPRISE PLUS/H323 MCM	c3660-jsx-mz	32 MB Flash	96 MB DRAM	RAM

Supported Hardware

Cisco IOS Release 12.2 supports the following routers in the Cisco 3600 series:

- Cisco 3620
- Cisco 3640
- Cisco 3660 (3661 and 3662)

For detailed descriptions of the new hardware features, see the [“New and Changed Information” section on page 9](#).

For additional information about supported hardware for this platform and release, please refer to the Hardware/Software Compatibility Matrix in the Cisco Software Advisor at the following location:

<http://www.cisco.com/cgi-bin/front.x/Support/HWSWmatrix/hwswmatrix.cgi>

Table 2 *Supported Interfaces for the Cisco 3600 Series Routers*

Interface, Network Module, or Data Rate		Platforms Supported
Dial Access Network Modules	16- and 32-port asynchronous (NM-16A and NM-32A)	All Cisco 3600 series platforms
	6- to 30-port integrated digital modems network modules (NM-6DM, NM-12-DM, NM-18DM, NM-24DM, NM-40DM)	All Cisco 3600 series platforms
	6 digital modem upgrade (MICA-6MOD)	All Cisco 3600 series platforms
	8- or 16-port integrated analog network modules (NM-8AM and NM16AM)	All Cisco 3600 series platforms
LAN Interfaces	1- and 4-port Ethernet (AUI and 10BASE-T, NM-1E and NM-4E)	All Cisco 3600 series platforms
	1-port Fast Ethernet (100BASE-TX and 100BASE-FX, NM-1FE-TX and NM-1FE-FX)	All Cisco 3600 series platforms
Mixed Media Network Modules	1-port 10/100BASE-TX with 1-port channelized/PRI/E1 balanced mode (NM-1FE1CE1B)	All Cisco 3600 series platforms
	1-port 10/100BASE-TX with 1-port channelized/PRI/E1 unbalanced mode (NM-1FE1CE1U)	All Cisco 3600 series platforms
	1-port 10/100BASE-TX with 1-port channelized/PRI/T1 (NM-1FE1CT1)	All Cisco 3600 series platforms
	1-port 10/100BASE-TX with 1-port channelized/PRI/T1 with CSU (NM-1FE1CT1-CSU)	All Cisco 3600 series platforms
	1-port 10/100BASE-TX with 2-port channelized/PRI/E1 balanced mode (NM-1FE2CE1B)	All Cisco 3600 series platforms
	1-port 10/100BASE-TX with 2-port channelized/PRI/E1 unbalanced mode (NM-1FE2CE1U)	All Cisco 3600 series platforms
	1-port 10/100BASE-TX with 2-port channelized/PRI/T1 (NM-1FE2CT1)	All Cisco 3600 series platforms
	1-port 10/100BASE-TX with 2-port channelized/PRI/T1 with CSU (NM-1FE2CT1-CSU)	All Cisco 3600 series platforms
	1 Ethernet and 2 WAN card slots (NM-1E2W)	All Cisco 3600 series platforms
	1 Ethernet, 1 Token Ring, and 2 WAN card slots (NM-1E1R2W)	All Cisco 3600 series platforms
	2 Ethernet and 2 WAN card slots (NM-2E2W)	All Cisco 3600 series platforms
	1-port fast Ethernet, 1-port Token Ring with 2 WAN card slots (NM-1FE1R2W[=])	All Cisco 3600 series platforms
	1-port Fast Ethernet with 2 WAN card slots (NM-1FE2W[=])	All Cisco 3600 series platforms
	2-port Fast Ethernet with 2 WAN card slots (NM-2FE2W[=])	All Cisco 3600 series platforms
	2 WAN card slots (NM-2W[=])	All Cisco 3600 series platforms
Multiport T1/E1 ATM Network Modules with Inverse Multiplexing over ATM (IMA)¹	4-port T1 ATM network module with IMA (NM-4T1-IMA)	All Cisco 3600 series platforms
	4-port E1 ATM network module with IMA (NM-4E1-IMA)	All Cisco 3600 series platforms
	8-port T1 ATM network module with IMA (NM-8T1-IMA)	All Cisco 3600 series platforms
	8-port E1 ATM network module with IMA (NM-8E1-IMA)	All Cisco 3600 series platforms

Table 2 *Supported Interfaces for the Cisco 3600 Series Routers (continued)*

Interface, Network Module, or Data Rate	Platforms Supported
Digital T1/E1 Packet Voice Trunk Network Modules and Spare Components 1-port, 24-channel T1 voice/fax module supports 24 channels of medium-complexity codecs: G.729a/b, G.726, G.711, and fax or 12 channels of G.726, G.729, G.723.1, G.728, G.729a/b, G.711, and fax. Consists of one NM-HDV, two PVDM-12s, and one VWIC-1MFT-T1. ² Part number: NM-HDV-1T1-24.	All Cisco 3600 series platforms
1-port, enhanced 24-channel T1 voice/fax module, supports 24 channels of high- and medium-complexity codecs: G.729a/b, G.726, G.729, G.728, G.723.1, G.711, and fax. Consists of one NM-HDV, four PVDM-12s, and one VWIC-1MFT-T1. ² Part number: NM-HDV-1T1-24E.	All Cisco 3600 series platforms
2-port, 48-channel T1 voice/fax module supports add/drop multiplexing (drop and insert); 48 channels of medium-complexity codecs: G.729a/b, G.726, G.711, and fax; or 24 channels of G.726, G.729, G.723.1, G.728, G.729a/b, G.711, and fax. Consists of one NM-HDV, four PVDM-12, and one VWIC-2MFT-T1-DI. ² Part number: NM-HDV-2T1-48.	All Cisco 3600 series platforms
1-port, 30-channel E1 voice/fax module, supports 30 channels of G.729a/b, G.726, G.711 and fax or 18 channels of G.726, G.729, G.723.1, G.728, G.729a/b, G.711, and fax. Consists of one NM-HDV, three PVDM-12s, and one VWIC-1MFT-E1. ² (NM-HDV-1E1-30(=))	All Cisco 3600 series platforms
1-port, enhanced 30-channel E1 voice/fax module supports 30 channels of G.729a/b, G.726, G.729, G.728, G.723.1, G.711, and fax. Consists of one NM-HDV, five PVDM-12s, and one VWIC-1MFT-E1. ² (NM-HDV-1E1-30E(=)).	All Cisco 3600 series platforms
2-port, 60-channel E1 voice/fax module supports add/drop multiplexing (drop and insert); 60 channels of G.729a/b, G.726, G.711, and fax or 30 channels of G.726, G.729, G.723.1, G.728, G.729a/b, G.711, and fax. Consists of one NM-HDV, five PVDM-12s, and one VWIC-2MFT-E1-D1. ² (NM-HDV-2E1-60(=))	All Cisco 3600 series platforms
High-density voice/fax network module spare (NM-HDV).	Digital T1 Packet Voice Trunk Network Modules spare component
12-channel packet voice DSP module upgrade spare (PVDM-12=).	Digital T1 Packet Voice Trunk Network Modules spare component

Table 2 Supported Interfaces for the Cisco 3600 Series Routers (continued)

Interface, Network Module, or Data Rate		Platforms Supported
Digital T1/E1 Packet Voice Trunk Network Modules and Spare Components (Continued)	1-port RJ-48 multiflex trunk—T1 (VWIC-1MFT-T1) ²	Digital T1 Packet Voice Trunk Network Modules spare component
	2-port RJ-48 multiflex trunk—T1 (VWIC-2MFT-T1) ²	Digital T1 Packet Voice Trunk Network Modules spare component
	2-port RJ-48 multiflex trunk with drop and insert—T1 (VWIC-2MFT-T1-DI(=)) ²	Digital T1 Packet Voice Trunk Network Modules spare component
T1/E1 Multiflex Voice/WAN Interface Cards	1-port T1 multiflex trunk interface (VWIC-1MFT-T1)	All Cisco 3600 series platforms
	1-port E1 multiflex trunk interface (VWIC-1MFT-E1)	All Cisco 3600 series platforms
	2-port T1 multiflex trunk interface (VWIC-2MFT-T1)	All Cisco 3600 series platforms
	2-port T1 multiflex trunk interface with drop and insert (VWIC-2MFT-T1-DI) ³	All Cisco 3600 series platforms
	2-port E1 multiflex trunk interface with drop and insert (VWIC-2MFT-E1-DI)	All Cisco 3600 series platforms
Voice/Fax Interfaces and Network Modules¹	1- and 2-port voice/fax network module (NM-1V and NM-2V)	All Cisco 3600 series platforms
	2-port E&M voice interface card (VIC-2E/M)	All Cisco 3600 series platforms with Voice/Fax network module
	2-port FXO voice interface card (VIC-2FXO, VIC-2FXO-M3, and VIC-2FXO-EU)	All Cisco 3600 series platforms with Voice/Fax network module
	2-port FXS voice interface card	All Cisco 3600 series platforms with Voice/Fax network module
	2-port BRI voice interface card (VIC-2BRI-S/T-TE)	Cisco 3620 and 3640 platforms with Voice/Fax network module
WAN Data Rates	48/56/64 kbps	All Cisco 3600 series platforms
	1.544/2.048 Mbps	All Cisco 3600 series platforms
	Up to 8 Mbps on 4-port serial network module	All Cisco 3600 series platforms
	52 Mbps max using HSSI network module	All Cisco 3600 series platforms
	Up to 100 Mbps on ATM OC3 network modules	All Cisco 3600 series platforms
Network Modules	1- and 2-port channelized T1 modules without CSUs (NM-1CT1 and NM-1CT1)	All Cisco 3600 series platforms
	1- and 2-port channelized T1 network modules with CSUs (NM-1CT1-CSU and NM-2CT1-CSU)	All Cisco 3600 series platforms
	1- and 2-port E1 network modules unbalanced mode (NM-1CE1U and NM-2CE1U)	All Cisco 3600 series platforms
	1- and 2-port E1 network modules balanced mode (NM-1CE1B and NM-2CE1B)	All Cisco 3600 series platforms
	1-port ATM-25 network modules (NM-1ATM-25) ¹	All Cisco 3600 series platforms
	1-port ATM T3 network module (NM-1A-T3) ¹	All Cisco 3600 series platforms

Table 2 *Supported Interfaces for the Cisco 3600 Series Routers (continued)*

Interface, Network Module, or Data Rate		Platforms Supported
Network Modules (Continued)	1-port ATM E3 network module (NM-1A-E3) ¹	All Cisco 3600 series platforms
	1-port high-speed serial interface (HSSI) network module	All Cisco 3600 series platforms
	4- and 8-port BRI network module with NT1 (NM-4B-U and NM-8B-U)	All Cisco 3600 series platforms
	4- and 8-port BRI network module with S/T interface (NM-4B-S/T and NM-8B-S/T)	All Cisco 3600 series platforms
	4- and 8-port synchronous/asynchronous (NM-4A/S and NM-8A/S)	All Cisco 3600 series platforms
	16- and 32-port asynchronous (NM-16A and NM-32A)	All Cisco 3600 series platforms
	4-port serial (NM-4T)	All Cisco 3600 series platforms
	1-port ATM OC-3 network module with multimode fiber (NM-1A-OC3MM)	All Cisco 3600 series platforms
	1-port ATM OC-3 network module with single-mode intermediate reach fiber (NM-1A-OC3SMI)	All Cisco 3600 series platforms
	1-port ATM OC-3 network module with single-mode long reach fiber (NM-1A-OC3SML)	All Cisco 3600 series platforms
	1-port ATM OC-3 multimode network module and circuit emulation service (NM-1A-OC3MM-1V) ⁴	All Cisco 3600 series platforms
	1-port ATM OC-3 single-mode, intermediate reach network module and circuit emulation service (NM-1A-OC3SMI-1V) ⁴	All Cisco 3600 series platforms
	1-port ATM OC-3 single-mode, long reach network module and circuit emulation service (NM-1A-OC3SML-1V) ⁴	All Cisco 3600 series platforms
Other Network Modules	Compression network module (NM-COMPR)	All Cisco 3600 series platforms
	4 E1 data compression Advanced Integration Module (AIM-COMPR4)	All Cisco 3600 series platforms
	Hardware Encryption Network Module	All Cisco 3620 and 3640 series platforms
	Hardware Encryption Advanced Integration Module (AIM)	All Cisco 3660 series platforms

Table 2 Supported Interfaces for the Cisco 3600 Series Routers (continued)

Interface, Network Module, or Data Rate		Platforms Supported
WAN Interface Cards	1-Port ADSL WAN Interface Card (WIC)	All Cisco 3600 series platforms
	1-port T1/Fractional T1/DSU/CSU WAN interface card (WIC-1DSU-T1)	All Cisco 3600 series platforms
	1-port T1/Fractional T1 56/64-kbps DSU/CSU WAN interface card (WIC-1DSU-56K4)	All Cisco 3600 series platforms
	1-port ISDN with NT1 WAN interface card (WIC-1B-U)	All Cisco 3600 series platforms
	1-port ISDN WAN interface card (WIC-1B-S/T)	All Cisco 3600 series platforms
	1-port serial WAN interface card (WIC-1T)	All Cisco 3600 series platforms
	2-port serial (WIC-2T[=]) ⁵	All Cisco 3600 series platforms
	2-port asynchronous/synchronous (WIC-2A/S[=])	All Cisco 3600 series platforms

1. Requires the Cisco IOS Plus feature sets.
2. See T1/E1 Multiflex Voice/WAN Interface Cards in this table.
3. For Cisco 3660 series, only supported in T1/E1 digital packet voice trunk network modules and new Fast Ethernet mixed media network modules: NM-1FE2W, NM-2FE2W, NM-1FE1R2W, NM-2W. For Cisco 3620 and 3640, supported in T1/E1 digital packet voice trunk network modules or in 1- or 2-port Ethernet and Fast Ethernet network modules (NM-1E2W, NM-2E2W, NM-1E1R2W, NM-1FE2W, NM-2FE2W, NM-1FE1R2W, NM-2W).
4. For the Cisco 3660 series only, online insertion and removal (OIR) is now supported in Cisco IOS Release 12.2.
5. Supported in Fast Ethernet mixed media network modules: NM-1FE2W, NM-2FE2W, NM-1FE1R2W, NM-2W.

Determining the Software Version

To determine the version of Cisco IOS software running on your Cisco 3600 series, log in to the Cisco 3600 series and enter the **show version EXEC** command:

```
Router> show version
Cisco Internetwork Operating System Software
IOS (tm) 12.2 XK Software c3640-js-mz, Version 12.2(2) XK3, RELEASE SOFTWARE
```

Upgrading to a New Software Release

For general information about upgrading to a new software release, refer to *Upgrading the Cisco IOS Software Release in Cisco Routers and Modems* located at:

http://www.cisco.com/warp/public/130/upgrade_index.shtml

Features

The Cisco IOS software is packaged in feature sets consisting of software images—depending on the platform. Each feature set contains a specific set of Cisco IOS features.

Cisco IOS Release 12.2(2) XK3 supports the same feature sets as Cisco IOS Release 12.2(2) T, but Cisco IOS Release 12.2(2) XK3 can include new features supported by the Cisco 3600 series.

Cisco IOS Release 12.2(2) XK3 supports one new feature: Enhanced Quality of Service Features for ADSL on Cisco 2600 and 3600 Series Routers. This feature is described in the “[New and Changed Information](#)” section below and is included in all of the images listed in [Table 1 on page 2](#).

**Caution**

Cisco IOS images with strong encryption (including, but not limited to, 168-bit Triple Data Encryption Standard [3DES] data encryption feature sets) are subject to United States government export controls and have limited distribution. Strong encryption images to be installed outside the United States are likely to require an export license. Customer orders may be denied or subject to delay because of United States government regulations. When applicable, purchaser and user must obtain local import and use authorizations for all encryption strengths. Please contact your sales representative or distributor for more information, or send an e-mail to export@cisco.com.

**Note**

These release notes are not cumulative and only list features that are new to Cisco IOS Release 12.2(2) XK3. The parent release for Cisco IOS Release 12.2(2) XK3 is Cisco IOS Release 12.2(2) T. To find information about inherited features, refer to Cisco.com or Feature Navigator. For Cisco.com, go to <http://www.cisco.com/univercd/home/index.htm>, select the appropriate software release under **Cisco IOS Software**, and click **Release Notes**. If you have a Cisco.com login account, you can use the Feature Navigator tool at <http://www.cisco.com/go/fn>.

New and Changed Information

New Hardware and Software Features from Cisco IOS Release 12.2(2) XK1 to Cisco IOS Release 12.2(2) XK3

No new hardware or software features are supported by the Cisco 3600 series from Cisco IOS Release 12.2(2) XK1 to Cisco IOS Release 12.2(2) XK3.

New Hardware Features in Cisco IOS Release 12.2(2) XK

No new hardware features are supported by the Cisco 3600 series for Cisco IOS Release 12.2(2) XK.

New Software Features in Cisco IOS Release 12.2(2) XK

The following new software feature is supported by the Cisco 3600 series for Cisco IOS Release 12.2(2) XK:

Voice and Quality of Service Features for ADSL on Cisco 2600 and 3600 Series Routers

The Cisco 2600 and 3600 series routers with ADSL WAN interface card support the integration of voice and data over the same ADSL circuit using Voice over IP (VoIP) and Voice over ATM (VoATM). QoS features make it possible to effectively combine voice and data traffic in the same WAN connection without sacrificing quality and reliability. Service providers can increase revenue by building differentiated service options based on premium, standard, or best-effort service classes.

The following voice and QoS features are supported in the 12.2(2)XK release:

- Classification and marking
 - Class-based packet marking with DSCP
 - Committed access rate
 - Dial-peer DSCP and IP precedence marking
- Queuing and scheduling
 - Class-based weighted fair queuing
 - Low latency queuing
 - Driver per-VC queuing
- Congestion avoidance
 - Class-based WRED and DSCP (egress)
- Policing and traffic shaping
 - Class-based policing
 - Per-ATM VC shaping for VBR-nrt
- Link latency
 - Selectable transmit ring
- Other (IP QoS)
 - IP QoS map to ATM CoS
- Additional features
 - Multiple PVC support
 - RFC1483 routing
 - Local policy routing
 - Policy-based routing
 - Access lists
 - H.323 VoIP

Refer to the following document for additional information:

<http://www.cisco.com/univercd/cc/td/doc/product/software/ios122/122newft/122limit/122x/122xk/122xk2/qsadsl.htm>

MIBs

Current MIBs

To obtain lists of supported MIBs by platform and Cisco IOS release, and to download MIB modules, go to the Cisco MIB website on Cisco.com at <http://www.cisco.com/public/sw-center/netmgmt/cmtk/mibs.shtml>.

Deprecated and Replacement MIBs

Old Cisco MIBs will be replaced in a future release. Currently, OLD-CISCO-* MIBs are being converted into more scalable MIBs without affecting existing Cisco IOS products or network management system (NMS) applications. You can update from deprecated MIBs to the replacement MIBs as shown in [Table 3](#).

Table 3 *Deprecated and Replacement MIBs*

Deprecated MIB	Replacement
OLD-CISCO-APPLETALK-MIB	RFC1243-MIB
OLD-CISCO-CHASSIS-MIB	ENTITY-MIB
OLD-CISCO-CPUK-MIB	To be determined
OLD-CISCO-DECNET-MIB	To be determined
OLD-CISCO-ENV-MIB	CISCO-ENVMON-MIB
OLD-CISCO-FLASH-MIB	CISCO-FLASH-MIB
OLD-CISCO-INTERFACES-MIB	IF-MIB CISCO-QUEUE-MIB
OLD-CISCO-IP-MIB	To be determined
OLD-CISCO-MEMORY-MIB	CISCO-MEMORY-POOL-MIB
OLD-CISCO-NOVELL-MIB	NOVELL-IPX-MIB
OLD-CISCO-SYS-MIB	(Compilation of other OLD* MIBs)
OLD-CISCO-SYSTEM-MIB	CISCO-CONFIG-COPY-MIB
OLD-CISCO-TCP-MIB	CISCO-TCP-MIB
OLD-CISCO-TS-MIB	To be determined
OLD-CISCO-VINES-MIB	CISCO-VINES-MIB
OLD-CISCO-XNS-MIB	To be determined

Important Notes

The following sections contain important notes about Cisco IOS Release 12.2(2) XK3 that can apply to the Cisco 3600 series.

Addition of squeeze Command for Cisco 2600 and Cisco 3600 Series Routers

The **squeeze** command, which is used to erase all files marked for deletion on a Flash file system, is now available on Cisco 2600 and Cisco 3600 series routers.

Changes to output attenuation Command

In Cisco IOS Release 12.2(2), the range of the **output attenuation** command for voice ports has changed from 0-14 to -6-14.

Field Notices and Bulletins

- **Field Notices**—Cisco recommends that you view the Field Notices for this release to see if your software or hardware platforms are affected. If you have an account with Cisco.com, you can find Field Notices at: <http://www.cisco.com/warp/customer/770/index.shtml>. If you do not have a Cisco.com login account, you can find Field Notices at <http://www.cisco.com/warp/public/770/index.shtml>.
- **Product Bulletins**—If you have an account with Cisco.com, you can find Product Bulletins at <http://www.cisco.com/warp/customer/cc/general/bulletin/index.shtml>. If you do not have a Cisco.com login account, you can find Product Bulletins at <http://www.cisco.com/warp/public/cc/general/bulletin/iosw/index.shtml>.
- *What's Hot for IOS Releases: Cisco IOS 12.2*—*What's Hot for IOS Releases: Cisco IOS 12.2* provides information about caveats that are related to deferred software images for Cisco IOS Release 12.2. If you have an account with Cisco.com, you can access *What's Hot for IOS Releases: Cisco IOS 12.2* at <http://www.cisco.com/kobayashi/sw-center/sw-ios.shtml> or by logging in and selecting **Software Center: Cisco IOS Software**.
- *What's New for IOS* — *What's New for IOS* lists recently posted Cisco IOS software releases and software releases that have been removed from Cisco.com. If you have an account with Cisco.com you can access *What's New for IOS* at <http://www.cisco.com/kobayashi/sw-center/sw-ios.shtml> or by logging in and selecting **Software Center: Cisco IOS Software**.

Caveats for Cisco IOS Release 12.2 XK

Caveats describe unexpected behavior in Cisco IOS software releases. Severity 1 caveats are the most serious caveats; severity 2 caveats are less serious. Severity 3 caveats are moderate caveats, and only select severity 3 caveats are included in the caveats document.

This section contains only open and resolved caveats for the current Cisco IOS maintenance release.

All caveats in Cisco IOS Release 12.2 and Cisco IOS Release 12.2 T are also in Cisco IOS Release 12.2(2) XK3.

For information on caveats in Cisco IOS Release 12.2, see *Caveats for Cisco IOS Release 12.2*.

For information on caveats in Cisco IOS Release 12.2 T, see *Caveats for Cisco IOS Release 12.2 T*, which lists severity 1 and 2 caveats and select severity 3 caveats and is located on Cisco.com and the Documentation CD-ROM.



Note

If you have an account with Cisco.com, you can also use the Bug Toolkit to find select caveats of any severity. To reach the Bug Toolkit, **log in** to Cisco.com and click **Service & Support: Software Center: Cisco IOS Software: BUG TOOLKIT**. Another option is to go to http://www.cisco.com/cgi-bin/Support/Bugtool/launch_bugtool.pl.

Open and Resolved Caveats—Cisco IOS Release 12.2(2) XK3

There are no open or resolved caveats specific to Cisco IOS Release 12.2(2) XK3 that require documentation in the release notes.

Open Caveats—Cisco IOS Release 12.2(2) XK2

There are no open caveats specific to Cisco IOS Release 12.2(2) XK2 that require documentation in the release notes.

Resolved Caveats—Cisco IOS Release 12.2(2) XK2

All the caveats listed in this section are resolved in Cisco IOS Release 12.2(2) XK2. This section describes only severity 1 and 2 caveats and select severity 3 caveats.

- CSCdw65903

An error can occur with management protocol processing. Please use the following URL for further information:

<http://www.cisco.com/cgi-bin/bugtool/onebug.pl?bugid=CSCdw65903>

Open and Resolved Caveats—Cisco IOS Release 12.2(2) XK1

Cisco IOS Release 12.2(2) XK1 does not support the Cisco 3600 series.

Open Caveats—Cisco IOS Release 12.2(2) XK

- CSCdv73212

When UBR pvcs are configured on the ADSL wic sitting on a FE Combo Network Module WIC slot, the packets are not transmitted out because of lock up that happens with scheduling of cells. There is no work around. It affects only UBR pvcs on ADSL on the FE Combo Network Module.

- CSCdv53506

When initially loaded up with configuration, 3620 and 3640 show ATM PVCs as INACTIVE and traffic will not go through.

Workaround: shut/no shut on ATM interface.

- CSCdv45229

AALS does not work on Voice and Quality of Service Features for ADSL on Cisco 2600 and 3600 Series Routers.

There is no work-around for this problem

Resolved Caveats—Cisco IOS Release 12.2(2) XK

There are no resolved caveats specific to Cisco IOS Release 12.2(2) XR that require documentation in the release notes.

Related Documentation

The following sections describe the documentation available for the Cisco 3600 series. These documents consist of hardware and software installation guides, Cisco IOS configuration guides and command references, system error messages, feature modules, and other documents.

Documentation is available as printed manuals or electronic documents, except for feature modules, which are available online on Cisco.com and the Documentation CD-ROM.

Use these release notes with these documents:

- [Release-Specific Documents, page 14](#)
- [Platform-Specific Documents, page 15](#)
- [Feature Modules, page 15](#)
- [Cisco IOS Software Documentation Set, page 16](#)

Release-Specific Documents

- *Cross-Platform Release Notes for Cisco IOS Release 12.2 T*

On Cisco.com at:

Technical Documents: Cisco IOS Software: Cisco IOS Release 12.2: Release Notes: Cross-Platform Release Notes

On the Documentation CD-ROM at:

Cisco Product Documentation: Cisco IOS Software Configuration: Cisco IOS Release 12.2: Release Notes: Cross-Platform Release Notes

- Product bulletins, field notices, and other release-specific documents on Cisco.com at:

Technical Documents

- The “[Caveats for Cisco IOS Release 12.2 XK](#)” section on page 13

As a supplement to the caveats listed in “[Caveats for Cisco IOS Release 12.2 XK](#)” in these release notes, see *Caveats for Cisco IOS Release 12.2* and *Caveats for Cisco IOS Release 12.2 T*, which contain caveats applicable to all platforms for all maintenance releases of Cisco IOS Release 12.2 and Cisco IOS Release 12.2 T.

On Cisco.com at:

Technical Documents: Cisco IOS Software: Cisco IOS Release 12.2: Release Notes: Caveats

On the Documentation CD-ROM at:

Cisco Product Documentation: Cisco IOS Software Configuration: Cisco IOS Release 12.2: Caveats



Note

If you have an account with Cisco.com, you can also use the Bug Toolkit to find select caveats of any severity. To reach the Bug Toolkit, **log in** to Cisco.com and click **Service & Support: Software Center: Cisco IOS Software: BUG TOOLKIT**. Another option is to go to http://www.cisco.com/cgi-bin/Support/Bugtool/launch_bugtool.pl.

Platform-Specific Documents

These documents are available for the Cisco 3600 series on Cisco.com and the Documentation CD-ROM:

- *Quick Start Guide Cisco 3600 Series Routers*
- Hardware Installation Documents for Cisco 3600 Series
- Software Configuration Documents for Cisco 3600 Series
- Regulatory Compliance and Safety Documents for Cisco 3600 Series

On Cisco.com at:

Technical Documents: Cisco Product Documentation: Access Servers and Access Routers: Modular Access Routers: Cisco 3600 Series Routers

On the Documentation CD-ROM at:

Cisco Product Documentation: Access Servers and Access Routers: Modular Access Routers: Cisco 3600 Series Routers

Feature Modules

Feature modules describe new features supported by Cisco IOS Release 12.2(2) XK3 and are updates to the Cisco IOS documentation set. A feature module consists of a brief overview of the feature, benefits, configuration tasks, and a command reference. As updates, the feature modules are available online only. Feature module information is incorporated in the next printing of the Cisco IOS documentation set.

On Cisco.com at:

Technical Documents: Cisco IOS Software: Cisco IOS Release 12.2: New Feature Documentation

On the Documentation CD-ROM at:

Cisco Product Documentation: Cisco IOS Software Configuration: Cisco IOS Release 12.2: New Feature Documentation

Feature Navigator

Cisco Feature Navigator is a web-based tool that enables you to quickly determine which Cisco IOS software images support a specific set of features and which features are supported in a specific Cisco IOS image. You can search by feature or release. Under the release section, you can compare releases side by side to display both the features unique to each software release and the features in common.

Cisco Feature Navigator is available 24 hours a day, 7 days a week. To access Cisco Feature Navigator, you must have an account on Cisco.com. If you have forgotten or lost your account information, send a blank e-mail to cco-locksmith@cisco.com. An automatic check will verify that your e-mail address is registered with Cisco.com. If the check is successful, account details with a new random password will be e-mailed to you. Qualified users can establish an account on Cisco.com by following the directions at <http://www.cisco.com/register>.

Cisco Feature Navigator is updated regularly when major Cisco IOS software releases and technology releases occur. For the most current information, go to the Cisco Feature Navigator home page at the following URL:

<http://www.cisco.com/go/fn>

Cisco IOS Software Documentation Set

The Cisco IOS software documentation set consists of the Cisco IOS configuration guides, Cisco IOS command references, and several other supporting documents. The Cisco IOS software documentation set is shipped with your order in electronic form on the Documentation CD-ROM—unless you specifically ordered the printed versions.

Documentation Modules (Required)

Each module in the Cisco IOS documentation set consists of one or more configuration guides and one or more corresponding command references. Chapters in a configuration guide describe protocols, configuration tasks, and Cisco IOS software functionality, and contain comprehensive configuration examples. Chapters in a command reference provide complete command syntax information. Use each configuration guide with its corresponding command reference.

On Cisco.com at:

Technical Documents: Cisco IOS Software: Cisco IOS Release 12.2: Configuration Guides and Command References

On the Documentation CD-ROM at:

Cisco Product Documentation: Cisco IOS Software Configuration: Cisco IOS Release 12.2: Configuration Guides and Command References

Cisco IOS Release 12.2 Documentation Set Contents

Table 4 lists the contents of the Cisco IOS Release 12.2 software documentation set, which is available in electronic form and in printed form if ordered.



Note

You can find the most current Cisco IOS documentation on Cisco.com and the Documentation CD-ROM. These electronic documents may contain updates and modifications made after the hard-copy documents were printed.

On Cisco.com at:

Technical Documents: Cisco IOS Software: Cisco IOS Release 12.2

On the Documentation CD-ROM at:

Cisco Product Documentation: Cisco IOS Software Configuration: Cisco IOS Release 12.2

Table 4 Cisco IOS Release 12.2 Documentation Set

Books	Major Topics
• <i>Cisco IOS Configuration Fundamentals Configuration Guide</i> • <i>Cisco IOS Configuration Fundamentals Command Reference</i>	Cisco IOS User Interfaces File Management System Management
• <i>Cisco IOS Bridging and IBM Networking Configuration Guide</i> • <i>Cisco IOS Bridging and IBM Networking Command Reference, Volume 1 of 2</i> • <i>Cisco IOS Bridging and IBM Networking Command Reference, Volume 2 of 2</i>	Transparent Bridging SRB Token Ring Inter-Switch Link Token Ring Route Switch Module RSRB DLSW+ Serial Tunnel and Block Serial Tunnel LLC2 and SDLC IBM Network Media Translation SNA Frame Relay Access NCIA Client/Server Airline Product Set DSPU and SNA Service Point SNA Switching Services Cisco Transaction Connection Cisco Mainframe Channel Connection CLAW and TCP/IP Offload CSNA, CMPC, and CMPC+ TN3270 Server

Table 4 Cisco IOS Release 12.2 Documentation Set (continued)

Books	Major Topics
<i>Cisco IOS Dial Technologies Configuration Guide: Dial Access</i> <i>Cisco IOS Dial Technologies Configuration Guide: Large-Scale Dial Applications</i> <i>Cisco IOS Dial Technologies Command Reference, Volume 1 of 2</i> <i>Cisco IOS Dial Technologies Command Reference, Volume 2 of 2</i>	Dial Access Modem and Dial Shelf Configuration and Management ISDN Configuration Signaling Configuration Point-to-Point Protocols Dial-on-Demand Routing Dial Backup Dial Related Addressing Service Network Access Solutions Large-Scale Dial Solutions Cost-Control Solutions Internetworking Dial Access Scenarios
<i>Cisco IOS Interface Configuration Guide</i> <i>Cisco IOS Interface Command Reference</i>	LAN Interfaces Serial Interfaces Logical Interfaces
<i>Cisco IOS IP Configuration Guide</i> <i>Cisco IOS IP Command Reference, Volume 1 of 3: Addressing and Services</i> <i>Cisco IOS IP Command Reference, Volume 2 of 3: Routing Protocols</i> <i>Cisco IOS IP Command Reference, Volume 3 of 3: Multicast</i>	IP Addressing IP Services IP Routing Protocols IP Multicast
<i>Cisco IOS AppleTalk and Novell IPX Configuration Guide</i> <i>Cisco IOS AppleTalk and Novell IPX Command Reference</i>	AppleTalk Novell IPX
<i>Cisco IOS Apollo Domain, Banyan VINES, DECnet, ISO CLNS, and XNS Configuration Guide</i> <i>Cisco IOS Apollo Domain, Banyan VINES, DECnet, ISO CLNS, and XNS Command Reference</i>	Apollo Domain Banyan VINES DECnet ISO CLNS XNS
<i>Cisco IOS Voice, Video, and Fax Configuration Guide</i> <i>Cisco IOS Voice, Video, and Fax Command Reference</i>	Voice over IP Call Control Signaling Voice over Frame Relay Voice over ATM Telephony Applications Trunk Management Fax, Video, and Modem Support
<i>Cisco IOS Quality of Service Solutions Configuration Guide</i> <i>Cisco IOS Quality of Service Solutions Command Reference</i>	Packet Classification Congestion Management Congestion Avoidance Policing and Shaping Signaling Link Efficiency Mechanisms

Table 4 Cisco IOS Release 12.2 Documentation Set (continued)

Books	Major Topics
• <i>Cisco IOS Security Configuration Guide</i> • <i>Cisco IOS Security Command Reference</i>	AAA Security Services Security Server Protocols Traffic Filtering and Firewalls IP Security and Encryption Passwords and Privileges Neighbor Router Authentication IP Security Options Supported AV Pairs
• <i>Cisco IOS Switching Services Configuration Guide</i> • <i>Cisco IOS Switching Services Command Reference</i>	Cisco IOS Switching Paths NetFlow Switching Multiprotocol Label Switching Multilayer Switching Multicast Distributed Switching Virtual LANs LAN Emulation
• <i>Cisco IOS Wide-Area Networking Configuration Guide</i> • <i>Cisco IOS Wide-Area Networking Command Reference</i>	ATM Frame Relay SMDS X.25 and LAPB
• <i>Cisco IOS Mobile Wireless Configuration Guide</i> • <i>Cisco IOS Mobile Wireless Command Reference</i>	General Packet Radio Service
• <i>Cisco IOS Terminal Services Configuration Guide</i> • <i>Cisco IOS Terminal Services Command Reference</i>	ARA LAT NAS1 Telnet TN3270 XRemote X.28 PAD Protocol Translation
• <i>Cisco IOS Configuration Guide Master Index</i> • <i>Cisco IOS Command Reference Master Index</i> • <i>Cisco IOS Debug Command Reference</i> • <i>Cisco IOS Software System Error Messages</i> • <i>New Features in 12.2-Based Limited Lifetime Releases</i> • <i>New Features in Release 12.2 T</i> • <i>Release Notes</i> (Release note and caveat documentation for 12.2-based releases and various platforms)	

Obtaining Documentation

The following sections explain how to obtain documentation from Cisco Systems.

World Wide Web

You can access the most current Cisco documentation on the World Wide Web at the following URL:

<http://www.cisco.com>

Translated documentation is available at the following URL:

http://www.cisco.com/public/countries_languages.shtml

Documentation CD-ROM

Cisco documentation and additional literature are available in a Cisco Documentation CD-ROM package, which is shipped with your product. The Documentation CD-ROM is updated monthly and may be more current than printed documentation. The CD-ROM package is available as a single unit or through an annual subscription.

Ordering Documentation

Cisco documentation is available in the following ways:

- Registered Cisco Direct Customers can order Cisco product documentation from the Networking Products MarketPlace:
http://www.cisco.com/cgi-bin/order/order_root.pl
- Registered Cisco.com users can order the Documentation CD-ROM through the online Subscription Store:
<http://www.cisco.com/go/subscription>
- Nonregistered Cisco.com users can order documentation through a local account representative by calling Cisco corporate headquarters (California, USA) at 408 526-7208 or, elsewhere in North America, by calling 800 553-NETS (6387).

Documentation Feedback

If you are reading Cisco product documentation on Cisco.com, you can submit technical comments electronically. Click **Leave Feedback** at the bottom of the Cisco Documentation home page. After you complete the form, print it out and fax it to Cisco at 408 527-0730.

You can e-mail your comments to bug-doc@cisco.com.

To submit your comments by mail, use the response card behind the front cover of your document, or write to the following address:

Cisco Systems
Attn: Document Resource Connection
170 West Tasman Drive
San Jose, CA 95134-9883

We appreciate your comments.

Obtaining Technical Assistance

Cisco provides Cisco.com as a starting point for all technical assistance. Customers and partners can obtain documentation, troubleshooting tips, and sample configurations from online tools by using the Cisco Technical Assistance Center (TAC) Web Site. Cisco.com registered users have complete access to the technical support resources on the Cisco TAC Web Site.

Cisco.com

Cisco.com is the foundation of a suite of interactive, networked services that provides immediate, open access to Cisco information, networking solutions, services, programs, and resources at any time, from anywhere in the world.

Cisco.com is a highly integrated Internet application and a powerful, easy-to-use tool that provides a broad range of features and services to help you to

- Streamline business processes and improve productivity
- Resolve technical issues with online support
- Download and test software packages
- Order Cisco learning materials and merchandise
- Register for online skill assessment, training, and certification programs

You can self-register on Cisco.com to obtain customized information and service. To access Cisco.com, go to the following URL:

<http://www.cisco.com>

Technical Assistance Center

The Cisco TAC is available to all customers who need technical assistance with a Cisco product, technology, or solution. Two types of support are available through the Cisco TAC: the Cisco TAC Web Site and the Cisco TAC Escalation Center.

Inquiries to Cisco TAC are categorized according to the urgency of the issue:

- Priority level 4 (P4)—You need information or assistance concerning Cisco product capabilities, product installation, or basic product configuration.
- Priority level 3 (P3)—Your network performance is degraded. Network functionality is noticeably impaired, but most business operations continue.

- Priority level 2 (P2)—Your production network is severely degraded, affecting significant aspects of business operations. No workaround is available.
- Priority level 1 (P1)—Your production network is down, and a critical impact to business operations will occur if service is not restored quickly. No workaround is available.

Which Cisco TAC resource you choose is based on the priority of the problem and the conditions of service contracts, when applicable.

Cisco TAC Web Site

The Cisco TAC Web Site allows you to resolve P3 and P4 issues yourself, saving both cost and time. The site provides around-the-clock access to online tools, knowledge bases, and software. To access the Cisco TAC Web Site, go to the following URL:

<http://www.cisco.com/tac>

All customers, partners, and resellers who have a valid Cisco services contract have complete access to the technical support resources on the Cisco TAC Web Site. The Cisco TAC Web Site requires a Cisco.com login ID and password. If you have a valid service contract but do not have a login ID or password, go to the following URL to register:

<http://www.cisco.com/register/>

If you cannot resolve your technical issues by using the Cisco TAC Web Site, and you are a Cisco.com registered user, you can open a case online by using the TAC Case Open tool at the following URL:

<http://www.cisco.com/tac/caseopen>

If you have Internet access, it is recommended that you open P3 and P4 cases through the Cisco TAC Web Site.

Cisco TAC Escalation Center

The Cisco TAC Escalation Center addresses issues that are classified as priority level 1 or priority level 2; these classifications are assigned when severe network degradation significantly impacts business operations. When you contact the TAC Escalation Center with a P1 or P2 problem, a Cisco TAC engineer will automatically open a case.

To obtain a directory of toll-free Cisco TAC telephone numbers for your country, go to the following URL:

<http://www.cisco.com/warp/public/687/Directory/DirTAC.shtml>

Before calling, please check with your network operations center to determine the level of Cisco support services to which your company is entitled; for example, SMARTnet, SMARTnet Onsite, or Network Supported Accounts (NSA). In addition, please have available your service agreement number and your product serial number.

This document is to be used in conjunction with the documents listed in the [“Obtaining Documentation”](#) section on page 20.

CCIP, the Cisco *Powered* Network mark, the Cisco Systems Verified logo, Cisco Unity, Follow Me Browsing, FormShare, Internet Quotient, iQ Breakthrough, iQ Expertise, iQ FastTrack, the iQ Logo, iQ Net Readiness Scorecard, Networking Academy, ScriptShare, SMARTnet, TransPath, and Voice LAN are trademarks of Cisco Systems, Inc.; Changing the Way We Work, Live, Play, and Learn, Discover All That’s Possible, The Fastest Way to Increase Your Internet Quotient, and iQuick Study are service marks of Cisco Systems, Inc.; and Aironet, ASIST, BPX, Catalyst, CCDA, CCDP, CCIE, CCNA, CCNP, Cisco, the Cisco Certified Internetwork Expert logo, Cisco IOS, the Cisco IOS logo, Cisco Press, Cisco Systems, Cisco Systems Capital, the Cisco Systems logo, Empowering the Internet Generation, Enterprise/Solver, EtherChannel, EtherSwitch, Fast Step, GigaStack, IOS, IP/TV, LightStream, MGX, MICA, the Networkers logo, Network Registrar, *Packet*, PIX, Post-Routing, Pre-Routing, RateMUX, Registrar, SlideCast, StrataView Plus, Stratum, SwitchProbe, TeleRouter, and VCO are registered trademarks of Cisco Systems, Inc. and/or its affiliates in the U.S. and certain other countries.

All other trademarks mentioned in this document or Web site are the property of their respective owners. The use of the word partner does not imply a partnership relationship between Cisco and any other company. (0203R)

Copyright © 2001–2002
Cisco Systems, Inc.
All rights reserved.