



Overview of Supplementary Services Features for FXS Ports on Cisco Voice Gateways

First Published: June 27, 2005

Last Updated: November 19, 2010

This guide contains information and tasks for configuring supplementary service feature capabilities for analog phones connected to Foreign Exchange Station (FXS) ports on Cisco Integrated Services Routers (ISRs) or Cisco VG224 Analog Phone Gateways, including call transfer and forward, conferencing, caller ID, speed dial and redial, and more.

Finding Support Information for Platforms and Cisco IOS Software Images

Use Cisco Feature Navigator to find information about platform support and Cisco IOS and Catalyst OS software image support. To access Cisco Feature Navigator, go to <http://www.cisco.com/go/cfn>. An account on Cisco.com is not required.

Contents

- [Notices, page 9](#)
- [Information About Supplementary Services Features for FXS Ports on Cisco Voice Gateways, page 11](#)
- [Additional References, page 14](#)
- [Obtaining Documentation, Obtaining Support, and Security Guidelines, page 15](#)

Notices

The following notices pertain to this software license.

OpenSSL/Open SSL Project

This product includes software developed by the OpenSSL Project for use in the OpenSSL Toolkit (<http://www.openssl.org/>).

This product includes cryptographic software written by Eric Young (eay@cryptsoft.com).

This product includes software written by Tim Hudson (tjh@cryptsoft.com).

License Issues

The OpenSSL toolkit stays under a dual license, i.e. both the conditions of the OpenSSL License and the original SSLeay license apply to the toolkit. See below for the actual license texts. Actually both licenses are BSD-style Open Source licenses. In case of any license issues related to OpenSSL please contact openssl-core@openssl.org.

OpenSSL License:

Copyright © 1998-2007 The OpenSSL Project. All rights reserved.

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

1. Redistributions of source code must retain the copyright notice, this list of conditions and the following disclaimer.
2. Redistributions in binary form must reproduce the above copyright notice, this list of conditions, and the following disclaimer in the documentation and/or other materials provided with the distribution.
3. All advertising materials mentioning features or use of this software must display the following acknowledgment: “This product includes software developed by the OpenSSL Project for use in the OpenSSL Toolkit (<http://www.openssl.org/>)”.
4. The names “OpenSSL Toolkit” and “OpenSSL Project” must not be used to endorse or promote products derived from this software without prior written permission. For written permission, please contact openssl-core@openssl.org.
5. Products derived from this software may not be called “OpenSSL” nor may “OpenSSL” appear in their names without prior written permission of the OpenSSL Project.
6. Redistributions of any form whatsoever must retain the following acknowledgment:
 “This product includes software developed by the OpenSSL Project for use in the OpenSSL Toolkit (<http://www.openssl.org/>)”.

THIS SOFTWARE IS PROVIDED BY THE OpenSSL PROJECT “AS IS” AND ANY EXPRESSED OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE OpenSSL PROJECT OR ITS CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

This product includes cryptographic software written by Eric Young (eay@cryptsoft.com). This product includes software written by Tim Hudson (tjh@cryptsoft.com).

Original SSLeay License:

Copyright © 1995-1998 Eric Young (eay@cryptsoft.com). All rights reserved.

This package is an SSL implementation written by Eric Young (eay@cryptsoft.com).

The implementation was written so as to conform with Netscapes SSL.

This library is free for commercial and non-commercial use as long as the following conditions are adhered to. The following conditions apply to all code found in this distribution, be it the RC4, RSA, lhash, DES, etc., code; not just the SSL code. The SSL documentation included with this distribution is covered by the same copyright terms except that the holder is Tim Hudson (tjh@cryptsoft.com).

Copyright remains Eric Young's, and as such any Copyright notices in the code are not to be removed. If this package is used in a product, Eric Young should be given attribution as the author of the parts of the library used. This can be in the form of a textual message at program startup or in documentation (online or textual) provided with the package.

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

1. Redistributions of source code must retain the copyright notice, this list of conditions and the following disclaimer.
2. Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.
3. All advertising materials mentioning features or use of this software must display the following acknowledgement:

“This product includes cryptographic software written by Eric Young (eay@cryptsoft.com)”.

The word ‘cryptographic’ can be left out if the routines from the library being used are not cryptography-related.

4. If you include any Windows specific code (or a derivative thereof) from the apps directory (application code) you must include an acknowledgement: “This product includes software written by Tim Hudson (tjh@cryptsoft.com)”.

THIS SOFTWARE IS PROVIDED BY ERIC YOUNG “AS IS” AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE AUTHOR OR CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

The license and distribution terms for any publicly available version or derivative of this code cannot be changed. i.e. this code cannot simply be copied and put under another distribution license [including the GNU Public License].

Information About Supplementary Services Features for FXS Ports on Cisco Voice Gateways

To enable supplementary services feature capabilities for analog phones connected to FXS ports on Cisco voice gateways, you should understand the following concepts:

- [Cisco Voice Gateway Interoperability with Cisco Unified Communications Manager or Cisco Unified CME, page 12](#)
- [Supported Gateways, Modules, and Voice Interface Cards, page 13](#)

Cisco Voice Gateway Interoperability with Cisco Unified Communications Manager or Cisco Unified CME


A standard telephone can be directly connected to an FXS port, which supplies the ring feature, voltage, and the dial tone. Cisco IOS Release 12.4(2)T and later releases provide supplementary feature capabilities for analog phones connected to FXS ports on a Cisco ISR or Cisco VG224.

Calls through analog FXS ports are controlled by a Cisco call-control system, such as Cisco Unified Communications Manager or Cisco Unified CME. The SCCP telephony control (STC) application on the Cisco voice gateway functions as a proxy to translate call-control messages between the Cisco call-control system and the Cisco voice gateway.

The STC application identifies locally attached analog telephones as individual endpoints to the call-control system, which allows the analog phones to be controlled in the same way as IP phones. With this capability, organizations such as retailers are able to connect traditional analog telephones to a Cisco voice gateway and share the same telephony features that are available on IP phones directly connected to Cisco Unified CME.


Figure 1 shows analog phones connected through the Cisco voice gateway to a remote Cisco Unified Communications Manager system. Figure 2 shows analog phones connected through the voice gateway to a local Cisco Unified CME router.

Figure 1 Analog Endpoints Managed by Cisco Unified Communications Manager

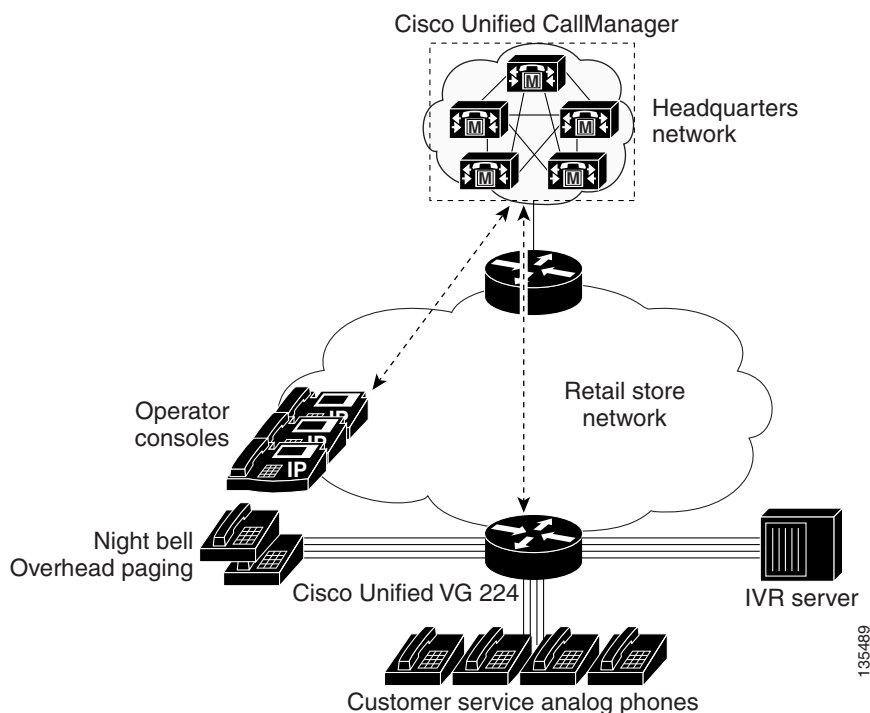

135489

Figure 2 Analog Endpoints Managed by Cisco Unified CME

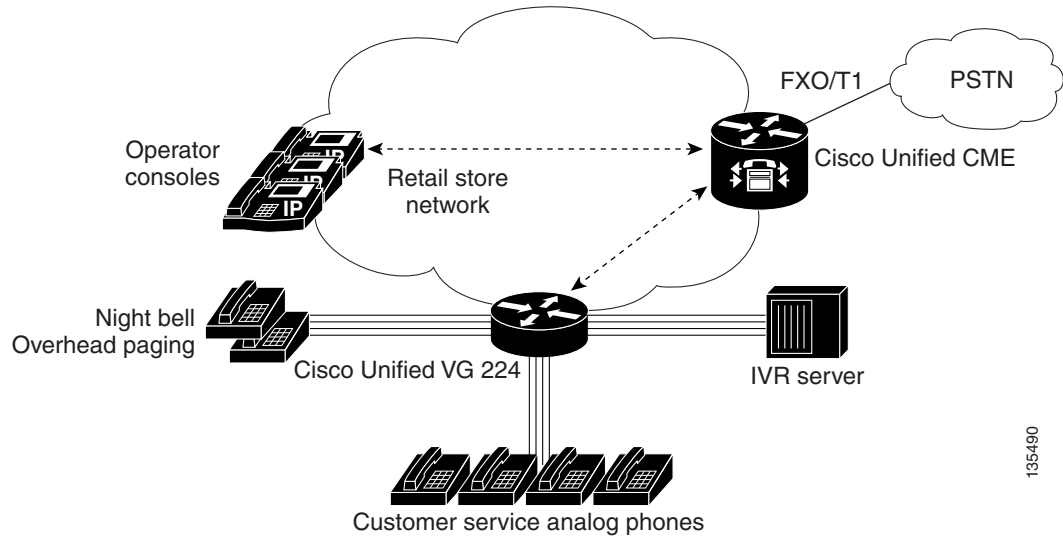

135490

Supported Gateways, Modules, and Voice Interface Cards

Table 1 lists Cisco voice gateways, modules, and voice interface cards (VICs) on which supplementary services for FXS ports are supported.



Note

Not all supplementary feature capabilities for FXS ports are supported on all gateways, modules, and VICs. If a feature is not supported on a certain hardware configuration, it is specified in the module for that feature.

Table 1 Supported Gateways, Modules, and VICs

Supported Gateways	Supported Extension Modules	Supported Network Modules and Expansion Modules	Supported VICs
<ul style="list-style-type: none"> • Cisco 1861 	—	<ul style="list-style-type: none"> • HWIC-1T1/E1 	—
<ul style="list-style-type: none"> • Cisco 2801 • Cisco 2811 • Cisco 2821 • Cisco 2851 • Cisco 3825 • Cisco 3845 	—	<ul style="list-style-type: none"> • NM-HD-1V • NM-HD-2V • NM-HD-2VE 	<ul style="list-style-type: none"> • VIC2-2FXS • VIC-4FXS/DID • VIC2-2BRI-NT/TE

Table 1 Supported Gateways, Modules, and VICs

Supported Gateways	Supported Extension Modules	Supported Network Modules and Expansion Modules	Supported VICs
<ul style="list-style-type: none"> • Cisco 2801 • Cisco 2821 • Cisco 2851 • Cisco 3825 • Cisco 3845 	<ul style="list-style-type: none"> • EVM-HD 	<ul style="list-style-type: none"> • EVM-HD-8FXS/DID • EM-3FXS/4FXO • EM-HDA-8FXS • EM-4BRI-NT/TE 	—
<ul style="list-style-type: none"> • Cisco 2801 • Cisco 2811 • Cisco 2821 • Cisco 2851 • Cisco 3825 • Cisco 3845 	—	<ul style="list-style-type: none"> • NM-HDV2 • NM-HDV2-1T1/E1 • NM-HDV2-2T1/E1 	<ul style="list-style-type: none"> • VIC2-2FXS • VIC-4FXS/DID • VIC2-2BRI-NT/TE
<ul style="list-style-type: none"> • Cisco Unified 500 Series 	—	—	<ul style="list-style-type: none"> • VIC3-2FXS/DID* • VIC-4FXS/DID* • VIC3-4FXS/DID* • VIC2-2BRI-NT/TE*
<ul style="list-style-type: none"> • Cisco VG202 • Cisco VG204 • Cisco VG224 	—	—	—

* Factory option. Only one optional VIC can be factory-installed in a Cisco Unified 500 Series.

Additional References

The following sections provide references related to support for supplementary services on FXS ports on the Cisco voice gateway.

Related Documents

Related Topic	Document Title
Cisco Unified Communications Manager	Cisco Unified Communications Manager
Cisco Unified Communications Manager Express	Cisco Unified Communications Manager Express
Cisco IOS debugging	Cisco IOS Debug Command Reference
Cisco IOS voice commands	Cisco IOS Voice Command Reference
Cisco IOS voice configuration	Cisco IOS Voice Configuration Library

Related Topic	Document Title
Cisco voice gateway	<ul style="list-style-type: none"> • Cisco VG200 Series Gateways • Cisco 1800 Series Integrated Services Routers • Cisco 2800 Integrated Services Routers • Cisco 3800 Series Integrated Services Routers • Cisco Unified 500 Series for Small Business
Conferencing and transcoding resources	<ul style="list-style-type: none"> • “Configuring Enhanced Conferencing and Transcoding for Voice Gateway Routers” chapter in the Cisco Unified CallManager and Cisco IOS Interoperability Guide. • Cisco CallManager and IOS Gateway DSP Farm Configuration Example

Technical Assistance

Description	Link
<p>The Cisco Support website provides extensive online resources, including documentation and tools for troubleshooting and resolving technical issues with Cisco products and technologies.</p> <p>To receive security and technical information about your products, you can subscribe to various services, such as the Product Alert Tool (accessed from Field Notices), the Cisco Technical Services Newsletter, and Really Simple Syndication (RSS) Feeds.</p> <p>Access to most tools on the Cisco Support website requires a Cisco.com user ID and password.</p>	http://www.cisco.com/techsupport

Obtaining Documentation, Obtaining Support, and Security Guidelines

For information on obtaining documentation, obtaining support, providing documentation feedback, security guidelines, and also recommended aliases and general Cisco documents, see the monthly What's New in Cisco Product Documentation, which also lists all new and revised Cisco technical documentation, at:

<http://www.cisco.com/en/US/docs/general/whatsnew/whatsnew.html>.

