



## Cisco Virtualized Multi-Tenant Data Center, Version 2.x


Last Updated: November 3, 2011



Cisco  
Validated  
Design



Building Architectures to Solve Business Problems





# Cisco Virtualized Multi-Tenant Data Center, Version 2.x

---

## Introduction

The Cisco Virtualized Multi-Tenant Data Center (VMDC) solution 2.x provides design and implementation guidance for enterprises planning to deploy private cloud services and service providers building virtual private and public cloud services. The Cisco VMDC 2.x solution integrates various Cisco and third-party products that are part of the cloud computing ecosystem.

This document includes the following topics:

- [Architecture Overview, page 4](#)
- [Compact and Large PoD Details, page 9](#)
- [Solution Validation, page 11](#)
- [Further Reading, page 12](#)
- [About Cisco Validated Design \(CVD\) Program, page 13](#)

## Solution Overview

Cisco VMDC 2.x is a validated architecture that delivers a highly available, secure, flexible, and efficient data center infrastructure. It provides the following benefits:

- **Reduced time to deployment**—Provides a fully tested and validated architecture that accelerates technology adoption and rapid deployment.
- **Reduce risk**—Enables enterprises and service providers to deploy new architectures and technologies with confidence.
- **Increased flexibility**—Rapid, on-demand, workload deployment in a multi-tenant environment due to a comprehensive automation framework with portal-based resource provisioning and management capabilities
- **Improved operational efficiency**—Integrates automation with multi-tenant resource pool (compute, network, and storage), improves asset use, reduces operational overhead, and mitigates operational configuration errors.



---

**Corporate Headquarters:**  
**Cisco Systems, Inc., 170 West Tasman Drive, San Jose, CA 95134-1706 USA**

Copyright © 2010 Cisco

## Differences between Cisco VMDC 2.x and VMDC 1.1

Cisco VMDC 2.x is the second phase of Cisco's Virtualized Multi-Tenant Data Center solution. The details of the first phase of the solution (VMDC 1.1) are described at:

[http://www.cisco.com/en/US/solutions/ns340/ns414/ns742/ns743/ns1050/landing\\_vmdc.html](http://www.cisco.com/en/US/solutions/ns340/ns414/ns742/ns743/ns1050/landing_vmdc.html)

Table 1 summarizes the high level differences:

**Table 1**      *Comparison of VMDC 1.1 and 2.x*

| <b>VMDC 1.1</b>                                                                          | <b>VMDC 2.x</b>                                                                                           |
|------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------|
| Generic virtualized multi-tenant data center architecture                                | Standardized data center architecture employing pre-integrated compute stacks, such as Vblock and FlexPod |
| Focus on design for infrastructure components of data center (compute, storage, network) | Focus on infrastructure components and automation (including service orchestration)                       |
| Single design applicable for various data center sizes                                   | Two standardized designs based on data center size (compact and large)                                    |

## Architecture Overview

### Modular Design

Cisco VMDC 2.x provides a scalable solution that can address the needs of smaller, as well as larger, enterprise and service provider data centers. This architectural consistency enables providers to select the design that best suits their immediate needs, while providing a solution that can scale to meet future needs without re-tooling or re-training staff. This scalability with a hierarchical design based on two modular building blocks: PoD and ICS.

### Point of Delivery (PoD)

The modular design starts with a basic infrastructure module called a PoD. A PoD allows providers to add network, compute, and storage resources incrementally. The Cisco VMDC 2.x architecture specifies two PoD designs: Compact and Large.

The PoD concept offers a number of benefits:

- Predefined logical units
- Simplified capacity planning
- Ease of new technology adoption
- Fault isolation
- Consistent and efficient operation

## Integrated Compute Stack (ICS)

The second building block in Cisco VMDC 2.x is a generic Integrated Compute Stack (network, storage, and compute) based on existing models, such as the VCE Vblock and Cisco-NetApp FlexPod offerings. The VMDC 2.x architecture is not limited to a specific ICS definition but can be extended to include other compute and storage stacks. Both enterprises and service providers can build and deploy their ideal cloud platform using the ICS design, implementation, and operational best practices described in the Cisco VMDC 2.x documentation.

The ICS benefits include the following:

- Pre-validated physical units
- Simplified capacity planning
- Ease of new technology adoption
- Fault isolation
- Consistent build out and operation
- Flexible and efficient resource allocation

## Multi-Tenant Support, Separation, and Security

Multi-tenancy refers to the virtualization of network, storage, and compute resources across the data center for each tenant. In VMDC 2.x, logical separation is used instead of requiring dedicated physical resources for each tenant. This separation is a critical attribute of any cloud deployment, as it differentiates cloud computing from co-location and dedicated infrastructure for each application.

Some of the virtualization technologies are Multi-VRF, multi-context Cisco Application Control Engine (ACE) and Cisco Catalyst 6500 Series Firewall Service Module (FWSM), and the Nexus 1000V. [Table 2](#) presents the features and technologies that enable a layered security strategy in Cisco VMDC.

**Table 2**      **Layered Security Strategy**

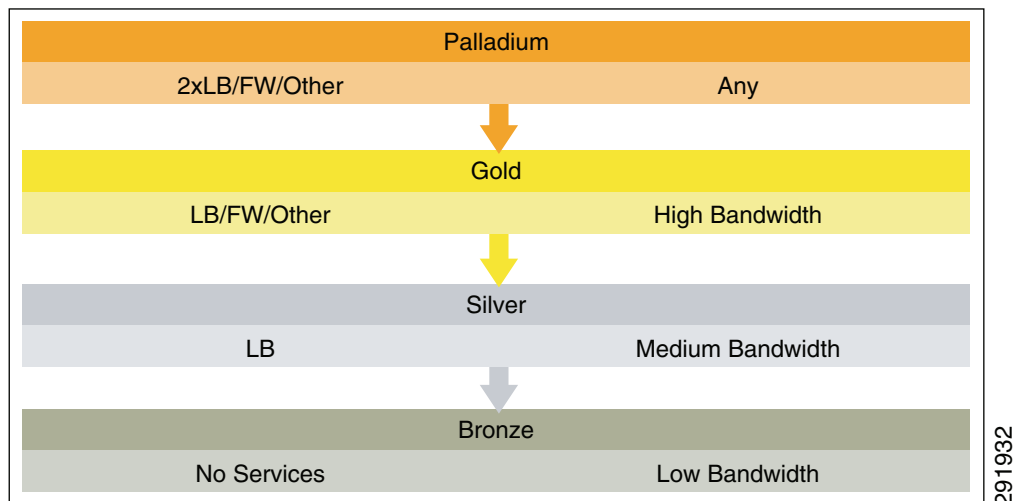
| Layer                | Security Options                                                                                                                                                                                                                                                                                |
|----------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Data Center Edge     | <ul style="list-style-type: none"> <li>• Secured access and perimeter firewall</li> <li>• Multiprotocol Label Switching (MPLS) Layer 2 and 3 VPNs</li> <li>• SSL and IP Security (IPsec) VPNs</li> <li>• Infrastructure security to protect device, traffic plane, and control plane</li> </ul> |
| Core and Aggregation | <ul style="list-style-type: none"> <li>• Device virtualization for control-, data-, and management-plane segmentation</li> <li>• Infrastructure security to protect device, traffic plane, and control plane</li> </ul>                                                                         |
| Services             | <ul style="list-style-type: none"> <li>• Server load balancing to mask servers and applications</li> <li>• Infrastructure security to protect device, traffic plane, and control plane</li> </ul>                                                                                               |

**Table 2**      **Layered Security Strategy (continued)**


| Layer                           | Security Options                                                                                                                                                                                                                                                                                                                                                                                                                        |
|---------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Aggregation and Access          | <ul style="list-style-type: none"> <li>Secure, authenticated connections</li> <li>Dynamic Address Resolution Protocol (ARP) inspection</li> <li>Dynamic Host Configuration Protocol (DHCP) snooping</li> <li>IP source guard</li> <li>Zone security (private VLANs, port switching, and port profiles with access control lists [ACLs])</li> <li>Infrastructure security to protect device, traffic plane, and control plane</li> </ul> |
| Virtual Access                  | <ul style="list-style-type: none"> <li>Policy-based virtual machine connectivity</li> <li>Mobile virtual machine security and network policies</li> <li>Virtual firewall integration with Cisco Nexus 1000V Switch</li> </ul>                                                                                                                                                                                                           |
| Compute                         | <ul style="list-style-type: none"> <li>Application security</li> </ul>                                                                                                                                                                                                                                                                                                                                                                  |
| Storage and storage aggregation | <ul style="list-style-type: none"> <li>Virtual service domains plus NetApp vFilers (NAS)</li> <li>Zoning</li> </ul>                                                                                                                                                                                                                                                                                                                     |

## Differentiated Services

The Cisco VMDC architecture allows providers to build service level agreements (SLAs) that support their tenant or application requirements. [Figure 1](#) is not meant to be a strict definition of resource allocation, but to demonstrate how differentiated service tiers could be built.

**Figure 1**      **Example VMDC Service Tiers**

VMDC extends service policies across the data center infrastructure allowing cloud administrators to create virtual data center addressing the specific business and application requirements of each tenant. [Figure 2](#) is an example of two tenant virtual data centers and the possible combination of infrastructure services.

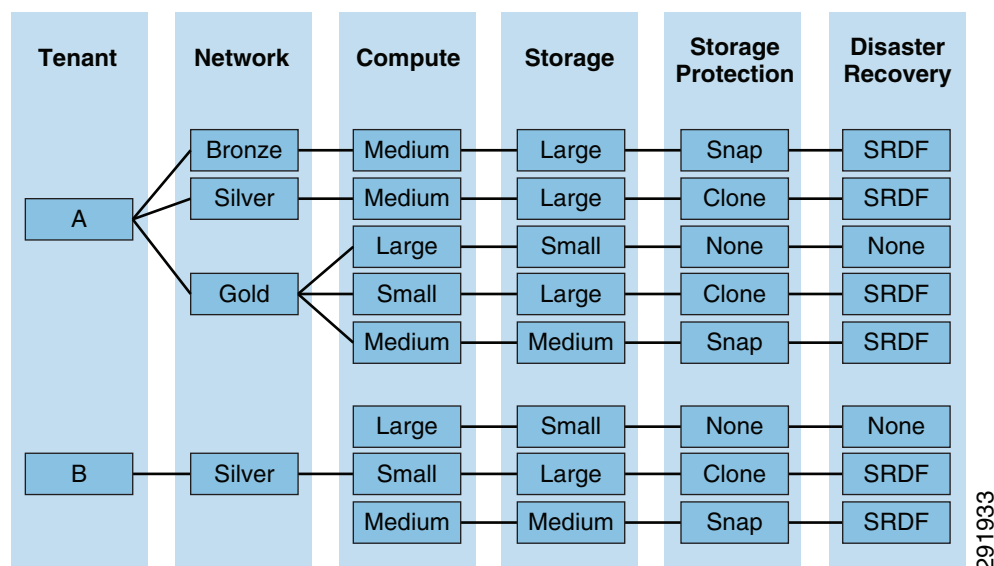**Figure 2** Example Virtual Data Center Service Policies

## Service Orchestration Integration

The Cisco VMDC 2.x architecture includes an open management framework that enables provisioning of resources through service orchestration. A provider can deploy orchestration tools that provide a portal-based configuration model where a tenant can select from a defined number of service options.

Service orchestration offers a number of benefits:

- Significantly reduces the OpEx associated with administering and monitoring virtualized resources
- Decrease provisioning time
- Provides an audit trail for fulfillment assurance and billing
- Connects and automates work flows when applicable to deliver a defined service

The service orchestrator used in the Cisco VMDC 2.x architecture is BMC Atrium Orchestrator. The overall components that enable orchestration in Cisco VMDC version 2.0 are listed in [Table 3](#).

**Table 3** Example Service Orchestration Components

| Layer                     | Functional Element | Description                                                           |
|---------------------------|--------------------|-----------------------------------------------------------------------|
| <b>Orchestration</b>      |                    |                                                                       |
|                           | BMC AO             | End-to-end service provisioning                                       |
| <b>Resource</b>           |                    |                                                                       |
|                           | BMC Atrium         | Central repository for all inventory and resource details             |
| <b>Element management</b> |                    |                                                                       |
|                           | UCS Manager        | Configuration/monitoring tool for USC components and service profiles |
|                           | BMC BBSA           | Server provisioning tool                                              |

**Table 3** *Example Service Orchestration Components (continued)*

| Layer                     | Functional Element  | Description                                                  |
|---------------------------|---------------------|--------------------------------------------------------------|
|                           | VMware vCenter      | Virtual server provisioning tool                             |
| <b>Network Management</b> |                     |                                                              |
|                           | CA NetQoS           | Performance management                                       |
|                           | CIC(NetCool)        | Fault management and service visibility                      |
|                           | NaviSphere          | Storage management                                           |
| <b>Service Management</b> |                     |                                                              |
|                           | CIC(NetCool)        | Service impact and root cause determination                  |
|                           | BMC BBNA            | Network change management and compliance                     |
|                           | NetQoS              | Service performance                                          |
|                           | P-NET/SLM           | Monitoring                                                   |
|                           | API                 | Integration through multiple APIs                            |
|                           | BMC Remedy          | Service Desk Function                                        |
|                           | BMC Service Catalog | Central repository for all service definitions and instances |
|                           | BMC Service Portal  | The user portal for ordering and administering services      |
|                           | BMC Atrium CMDB     | Atrium Configuration Management Database                     |
| <b>Security</b>           |                     |                                                              |
|                           | Cisco ACS           | Authentication, authentication, and accounting               |
| <b>Identity</b>           |                     |                                                              |
|                           | Active Directory    | Identity repository                                          |

Cisco VMDC 2.1 uses the BMC Cloud Lifecycle Management (CLM) solution to provide a comprehensive set of capabilities for orchestrating and managing cloud environments. [Table 4](#) describes the BMC components validated with the VMDC 2.1 architecture.

**Table 4** *VMDC 2.1 Validated BMC CLM Components*

| CLM Component                     |
|-----------------------------------|
| BMC Cloud Lifecycle Management    |
| BMC Remedy Action Request System  |
| BMC Atrium CMDB                   |
| BMC Atrium Core                   |
| BMC Bladelogic Server Automation  |
| BMC Bladelogic Network Automation |



## Workload Mobility and Disaster Recovery Capability

The VMDC architecture facilitates movement of workloads from ICS to ICS within a PoD, from ICS to ICS in different PoDs, and to an ICS in a different data center. VMware Site Recovery Manager provides disaster recovery by enabling movement of workloads from one data center site to another. On the storage side, different service tiers are provided disaster recovery and data protection with customized remote replication, such as recovery-point objective (RPO) or recovery-time objective (RTO).

## Compact and Large PoD Details

VMDC 2.x provides two PoD design models: Compact and Large PoDs. Each model addresses different scale, growth, and cost points. The Compact PoD targets small to medium data centers and Large PoD targets data centers with higher scale requirements. In each of the designs, multiple ICSs scale the PoDs. The data center can scale to a larger number of tenants, applications, or workloads by adding PoDs.

[Table 5](#) highlights differences between the PoD designs.

**Table 5** *Differences Between Compact and Large PoD Designs*

| Compact PoD                                                                                                                                                                                                                                                 | Large PoD                                                                                                                                                         |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <ul style="list-style-type: none"> <li>• Applicable for small to medium data centers</li> <li>• Top of Rack (ToR) access design</li> <li>• Split VDC design (VMDC 2.0)</li> <li>• Single VDC design (VMDC 2.1)</li> <li>• 10-Gbps and 1-Gbps ICS</li> </ul> | <ul style="list-style-type: none"> <li>• Applicable for medium to larger data centers</li> <li>• End of Row (EoR) access design</li> <li>• 10-Gbps ICS</li> </ul> |

## Components

[Table 6](#) lists the components of the Cisco VDMC architecture.

**Table 6** *Components of the Cisco VDMC 2.x Architecture*

| Features       | Compact PoD                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        | Large PoD                                                                                                                                                                                                                                                                                                                                                                                            |
|----------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Network        | <ul style="list-style-type: none"> <li>• Cisco Nexus 5020, and 7010 Switches</li> <li>• Cisco Catalyst 6500 Series Switches and Catalyst 6509-E (WAN edge)</li> <li>• Data center services node: Cisco Catalyst 6509-E Switch (Virtual Switching System [VSS])</li> <li>• Cisco Nexus 2148T Fabric Extender</li> </ul>                                                                                                                                                                                                                             | <ul style="list-style-type: none"> <li>• Cisco Nexus 7010 , and 7018 Switches</li> <li>• Cisco Catalyst 6500 Series Switches and Cisco CRS-1 Modules (WAN edge)</li> <li>• Data center services node: Cisco Catalyst 6509-E Switch (Virtual Switching System [VSS])</li> </ul>                                                                                                                       |
| Compute        | <ul style="list-style-type: none"> <li>• Cisco Unified Computing System</li> <li>• Cisco UCS 5108 Blade Server Chassis</li> <li>• Cisco UCS B200 M1 Blade Server</li> <li>• Cisco UCS M71KR-E Emulex Converged Network Adapter</li> <li>• Cisco UCS M81KR Virtual Interface Card</li> <li>• Cisco UCS 6120XP 20-Port Fabric                             <ul style="list-style-type: none"> <li>– Cisco UCS C200-M1</li> <li>– Cisco UCS 6120XP 20-Port Fabric Interconnect and Cisco UCS 6140XP 40-Port Fabric Interconnect</li> </ul> </li> </ul> | <ul style="list-style-type: none"> <li>• Cisco Unified Computing System</li> <li>• Cisco UCS 5108 Blade Server Chassis</li> <li>• Cisco UCS B200 M1 Blade Server</li> <li>• Cisco UCS M71KR-E Emulex Converged Network Adapter</li> <li>• Cisco UCS M81KR Virtual Interface Card</li> <li>• Cisco UCS 6120XP 20-Port Fabric Interconnect and Cisco UCS 6140XP 40-Port Fabric Interconnect</li> </ul> |
| Virtualization | <ul style="list-style-type: none"> <li>• VMware vSphere</li> <li>• VMware ESXi 4.x Hypervisor</li> <li>• Cisco Nexus 1000V (virtual access switch)</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                      | <ul style="list-style-type: none"> <li>• VMware vSphere</li> <li>• VMware ESXi 4.x Hypervisor</li> <li>• Cisco Nexus 1000V (virtual access switch)</li> </ul>                                                                                                                                                                                                                                        |
| Security       | <ul style="list-style-type: none"> <li>• Cisco Catalyst 6500 Series FWSM and Cisco ACE</li> <li>• VMware vShield</li> <li>• NetApp vFiler and Virtual Service Domains</li> <li>• Cisco Nexus 1000V Switch</li> </ul>                                                                                                                                                                                                                                                                                                                               | <ul style="list-style-type: none"> <li>• Cisco Catalyst 6500 Series FWSM and Cisco ACE</li> <li>• Cisco ASA 5580-40</li> <li>• VMware vShield</li> <li>• NetApp vFiler and Virtual Service Domains</li> <li>• Cisco Nexus 1000V Switch</li> </ul>                                                                                                                                                    |

**Table 6** *Components of the Cisco VDMC 2.x Architecture (continued)*

| Features                     | Compact PoD                                                                                                                                                                                                                                                       | Large PoD                                                                                                                                                                                                                             |
|------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Storage fabric and arrays    | <ul style="list-style-type: none"> <li>• Cisco MDS 9506 and MDS 9513 Multilayer Directors and Cisco MDS 9148 and 9134 Multilayer Fabric Switches</li> <li>• EMC Symmetrix V-Max with virtual provisioning</li> <li>• NetApp FAS3170 and NetApp FAS6080</li> </ul> | <ul style="list-style-type: none"> <li>• Cisco MDS 9506 and MDS 9513 Multilayer Directors</li> <li>• EMC Symmetrix V-Max with virtual provisioning</li> <li>• NetApp FAS3170 and NetApp FAS6080</li> </ul>                            |
| Orchestration and management | <ul style="list-style-type: none"> <li>• BMC Atrium Orchestrator</li> <li>• VMware vCenter</li> <li>• Cisco UCS Manager</li> <li>• BMC BladeLogic for server and network</li> <li>• BMC Remedy IT Service Management Suite</li> </ul>                             | <ul style="list-style-type: none"> <li>• BMC Atrium Orchestrator</li> <li>• VMware vCenter</li> <li>• Cisco UCS Manager</li> <li>• BMC BladeLogic for server and network</li> <li>• BMC Remedy IT Service Management Suite</li> </ul> |

## Solution Validation

### Testing Scope

**Table 7** *Solution Validation Scope*

| Use Case                                                                  | Details                                                                                                                                                                                                                            |
|---------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Data center end-to-end functionality verification for SAN and NAS designs | End-to-end feature/integration validation including QoS for all data center network layers from access to WAN edge on all platforms. ESX/VM provisioning, boot up and maintenance, as well as SAN/NAS storage design verification. |
| Disaster recovery scenario validation                                     | Transparent movement of data center workloads for business continuance (active-backup scenario).                                                                                                                                   |
| Automation validation                                                     | Validation of service orchestration, portal, service catalog validation with element manager integration for compute and network.                                                                                                  |
| Data center services functionality validation                             | Validation of Service Tier offerings with Data Center Services Node (firewall, load balancing)                                                                                                                                     |
| Failover scenario validation                                              | Validation of redundancy designs (with Baseline Steady State traffic)—Routing, vPC/MEC, ECMP, VSS, HSRP, Active-Active service modules, Clustering.                                                                                |
| Security validation                                                       | End-to-end security validation on various components                                                                                                                                                                               |
| Scalability verification                                                  | Multi-dimensional scalability (VLAN, MAC, HSRP, routes, contexts, VM) within scope of architecture                                                                                                                                 |

## Compact and Large PoD Scale

**Table 8**      **Validated Scalability**

| Feature                   | Compact PoD        | Large PoD     |
|---------------------------|--------------------|---------------|
| Tenants                   | 32                 | 152           |
| Servers per PoD           | 64                 | 512           |
| Virtual machines per PoD  | 1,440              | 11,520        |
| VLANs per PoD             | 180                | 520           |
| Virtual firewall contexts | 6                  | 8             |
| Virtual load balancers    | 16                 | 24            |
| Server VLANs              | 180                | 200           |
| MAC addresses             | 12,000             | 24,000        |
| HSRP gateway instances    | 196                | 504           |
| Routing protocol scale    | 256 OSPF neighbors | 480 BGP peers |

## Further Reading

This document introduces the VMDC 2.02.x design. For the detailed design and implementation guides for this solution, please visit:

**Cisco Virtualized Multi-Tenant Data Center, Version 2.1 Design Guide**

[http://www.cisco.com/en/US/docs/solutions/Enterprise/Data\\_Center/VMDC/2.1/design\\_guide/vmdc21DesignGuide.html](http://www.cisco.com/en/US/docs/solutions/Enterprise/Data_Center/VMDC/2.1/design_guide/vmdc21DesignGuide.html)

**Cisco Virtualized Multi-Tenant Data Center, Version 2.1 Implementation Guide**

[http://www.cisco.com/en/US/docs/solutions/Enterprise/Data\\_Center/VMDC/2.1/implementation\\_guide/vmdc21ImplementationGuide.html](http://www.cisco.com/en/US/docs/solutions/Enterprise/Data_Center/VMDC/2.1/implementation_guide/vmdc21ImplementationGuide.html)

**Cisco Virtualized Multi-Tenant Data Center, Version 2.0, Large Pod Design Guide**

[http://www.cisco.com/en/US/docs/solutions/Enterprise/Data\\_Center/VMDC/2.0/large\\_pod\\_design\\_guide/Large\\_Pod\\_Design\\_Guide.pdf](http://www.cisco.com/en/US/docs/solutions/Enterprise/Data_Center/VMDC/2.0/large_pod_design_guide/Large_Pod_Design_Guide.pdf)

**Cisco Virtualized Multi-Tenant Data Center, Version 2.0, Compact Pod Design Guide**

[http://www.cisco.com/en/US/docs/solutions/Enterprise/Data\\_Center/VMDC/2.0/design\\_guide/vmdcDesignGuideCompactPod20.html](http://www.cisco.com/en/US/docs/solutions/Enterprise/Data_Center/VMDC/2.0/design_guide/vmdcDesignGuideCompactPod20.html)

**Cisco Virtualized Multi-Tenant Data Center, Version 2.0, Compact Pod Implementation Guide (Login Required)**

[http://www.cisco.com/en/US/partner/docs/solutions/Enterprise/Data\\_Center/VMDC/2.0/implementation\\_guide/vmdcImplementationGuideCompactPod20.html](http://www.cisco.com/en/US/partner/docs/solutions/Enterprise/Data_Center/VMDC/2.0/implementation_guide/vmdcImplementationGuideCompactPod20.html)

**Cisco Virtualized Multi-Tenant Data Center, Version 1.1**

[http://www.cisco.com/en/US/docs/solutions/Enterprise/Data\\_Center/VMDC/1.1/vmdcDg11.html](http://www.cisco.com/en/US/docs/solutions/Enterprise/Data_Center/VMDC/1.1/vmdcDg11.html)

# About Cisco Validated Design (CVD) Program

The CVD program consists of systems and solutions designed, tested, and documented to facilitate faster, more reliable, and more predictable customer deployments. For more information, visit [www.cisco.com/go/designzone](http://www.cisco.com/go/designzone).

ALL DESIGNS, SPECIFICATIONS, STATEMENTS, INFORMATION, AND RECOMMENDATIONS (COLLECTIVELY, "DESIGNS") IN THIS MANUAL ARE PRESENTED "AS IS," WITH ALL FAULTS. CISCO AND ITS SUPPLIERS DISCLAIM ALL WARRANTIES, INCLUDING, WITHOUT LIMITATION, THE WARRANTY OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT OR ARISING FROM A COURSE OF DEALING, USAGE, OR TRADE PRACTICE. IN NO EVENT SHALL CISCO OR ITS SUPPLIERS BE LIABLE FOR ANY INDIRECT, SPECIAL, CONSEQUENTIAL, OR INCIDENTAL DAMAGES, INCLUDING, WITHOUT LIMITATION, LOST PROFITS OR LOSS OR DAMAGE TO DATA ARISING OUT OF THE USE OR INABILITY TO USE THE DESIGNS, EVEN IF CISCO OR ITS SUPPLIERS HAVE BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGES.

THE DESIGNS ARE SUBJECT TO CHANGE WITHOUT NOTICE. USERS ARE SOLELY RESPONSIBLE FOR THEIR APPLICATION OF THE DESIGNS. THE DESIGNS DO NOT CONSTITUTE THE TECHNICAL OR OTHER PROFESSIONAL ADVICE OF CISCO, ITS SUPPLIERS OR PARTNERS. USERS SHOULD CONSULT THEIR OWN TECHNICAL ADVISORS BEFORE IMPLEMENTING THE DESIGNS. RESULTS MAY VARY DEPENDING ON FACTORS NOT TESTED BY CISCO.

NetApp, the NetApp logo, Go further, faster, Data ONTAP, FilerView, FlexClone, FlexShare, FlexVol, MultiStore, NearStore, NetApp Data Motion, RAID-DP, SANscreen, SnapDrive, SnapManager, SnapMirror, SnapRestore, Snapshot, SnapVault, vFiler, and WAFL are trademarks or registered trademarks of NetApp, Inc. in the United States and/or other countries. All other brands or products are trademarks or registered trademarks of their respective holders and should be treated as such.

CCDE, CCENT, Cisco Eos, Cisco Lumin, Cisco Nexus, Cisco StadiumVision, Cisco TelePresence, Cisco WebEx, the Cisco logo, DCE, and Welcome to the Human Network are trademarks; Changing the Way We Work, Live, Play, and Learn and Cisco Store are service marks; and Access Registrar, Aironet, AsyncOS, Bringing the Meeting To You, Catalyst, CCDA, CCDP, CCIE, CCIP, CCNA, CCNP, CCSP, CCVP, Cisco, the Cisco Certified Internetwork Expert logo, Cisco IOS, Cisco Press, Cisco Systems, Cisco Systems Capital, the Cisco Systems logo, Cisco Unity, Collaboration Without Limitation, EtherFast, EtherSwitch, Event Center, Fast Step, Follow Me Browsing, FormShare, GigaDrive, HomeLink, Internet Quotient, IOS, iPhone, iQuick Study, IronPort, the IronPort logo, LightStream, Linksys, MediaTone, MeetingPlace, MeetingPlace Chime Sound, MGX, Networkers, Networking Academy, Network Registrar, PCNow, PIX, PowerPanels, ProConnect, ScriptShare, SenderBase, SMARTnet, Spectrum Expert, StackWise, The Fastest Way to Increase Your Internet Quotient, TransPath, WebEx, and the WebEx logo are registered trademarks of Cisco Systems, Inc. and/or its affiliates in the United States and certain other countries.

All other trademarks mentioned in this document or website are the property of their respective owners. The use of the word partner does not imply a partnership relationship between Cisco and any other company. (0809R)

© 2010 Cisco Systems, Inc. All rights reserved