



Creating Performance Graphs and Link Reports

You can use the Cluster Management Suite to display real-time graphs that help you analyze traffic patterns and identify problems with individual links. You can also create a link report for each link in the cluster. The link report contains information about the two ports in the link, their configuration, and the devices that are connected to them. This chapter describes how to generate these graphs and reports and how to understand the information they contain.

Displaying Link Graphs

To display a link graph, one end of the link must be connected to a port on a cluster member that is a Catalyst 2950, 2900 XL, and 3500 XL switch. The Simple Network Management Program (SNMP) must be enabled to generate graphs.

To display a link graph in Cluster Builder or Cluster View, right-click a link, and select **Link Graph** from the pop-up menu. To display a link graph in Cluster Manager, right-click a port that has a green status LED, and select **Link Graph** from the pop-up menu.

The graph runs as a separate browser session and can run in the background without interrupting the original session. The host name of the switch is displayed in the browser window title bar, and the link port number is displayed above the graph.

When the graph window is displayed ([Figure 6-1](#)), use the drop-down list in the upper-right corner to select the data you want to present.

Select one of the following graphs from the drop-down list:

- Percent utilization ([Figure 6-1](#))
- Total number of bytes sent and received
- Packets sent and received, including broadcast and multicast packets
- Total errors, including error packets and dropped packets


Displaying the Percent Utilization

The graph shown in [Figure 6-1](#) displays the percentage of the maximum bandwidth in use by the port displayed on the graph.

Displaying the Bandwidth Utilization Graph

On Catalyst 2950, 2900 XL, and 3500 XL switches, you can generate a graph of the switch bandwidth by selecting **Bandwidth Graph** from the device pop-up menu in Cluster Manager. The graph is an estimate of the traffic flowing through the switch.

Figure 6-1 Link Graph (Percent Utilization)

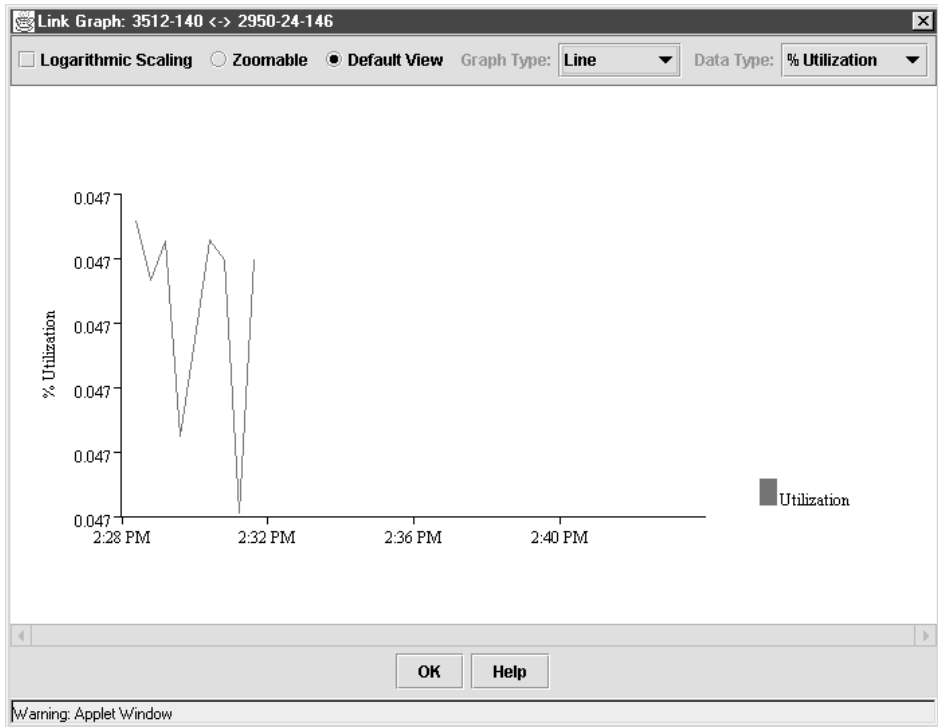

Displaying the Link Report

Figure 6-2 shows the link report you can display by right-clicking on a link in Cluster Builder or Cluster View and selecting **Link Report** from the pop-up menu. The information on this report can be generated for any Catalyst 2900 XL, 2950, or 3500 XL switch.

■ Displaying the Link Report

Figure 6-2 Link Report

