

VG248错误消息 : Registration failed:Error:DB Config

目录

[简介](#)

[先决条件](#)

[要求](#)

[使用的组件](#)

[规则](#)

[问题](#)

[解决方案](#)

[相关信息](#)

简介

此文档描述每两秒就出现一次的:Registration failed: Error:DB Config VG248错误消息，并提供必要的故障排除步骤。

先决条件

要求

Cisco 建议您了解以下主题：

- Cisco Unified Communications Manager (CallManager)
- Cisco VG248

使用的组件

本文档中的信息是基于Cisco Unified通信经理(CallManager) 4.x的。

本文档中的信息都是基于特定实验室环境中的设备编写的。本文档中使用的所有设备最初均采用原始（默认）配置。如果您使用的是真实网络，请确保您已经了解所有命令的潜在影响。

规则

有关文档规则的详细信息，请参阅 [Cisco 技术提示规则](#)。

问题

Cisco VG248显示此错误消息：

```
WARNING: SCCP:Registration failed: Error: DB Config.
```

```
| Cisco VG248 (VGC0653D6B507)
```

```
-----  
-----  
-----  
Telephony
```

```
CallManager TFTP server (10.110.0.20)  
CallManager device name (VGC0653D6B507)  
Allow last good configuration (yes)  
Call control mode (standard)  
Feature codes  
Country (North America)  
Hook flash timer (1000ms <default>)  
Port enable policy (auto)  
Port specific parameters  
Advanced settings
```


```
-----  
WARNING: SCCP 44: Registration failed: Error: DB Config
```

在Cisco Unified Communications Manager (CallManager)，应用事件日志显示此错误消息：

```
Event Type:Error  
Event Source:Cisco CallManager  
Event Category:None  
Event ID:3  
Date:3/30/2006  
Time:8:39:17 PM  
User:N/A  
Computer:Cisco-CCM1  
Description:  
Error: DeviceTransientConnection - Transient connection attempt.  
Connecting Port: 2000  
Device name [Optional].:  
Device IP address.: 10.26.1.7  
Device type. [Optional]: 255  
Reason Code [Optional].: 6  
App ID: Cisco CallManager  
Cluster ID: Cisco-CCM1-Cluster  
Node ID: Cisco-CCM1
```

Explanation: A connection was established and immediately dropped before completing registration. Incomplete registration may indicate a device is rehomeing in the middle of registration. The alarm could also indicate a device misconfiguration,database error, or an illegal/unknown device trying to attempt a connection.

Recommended Action: No action is required if this event was issued as a result of a normal device rehome..

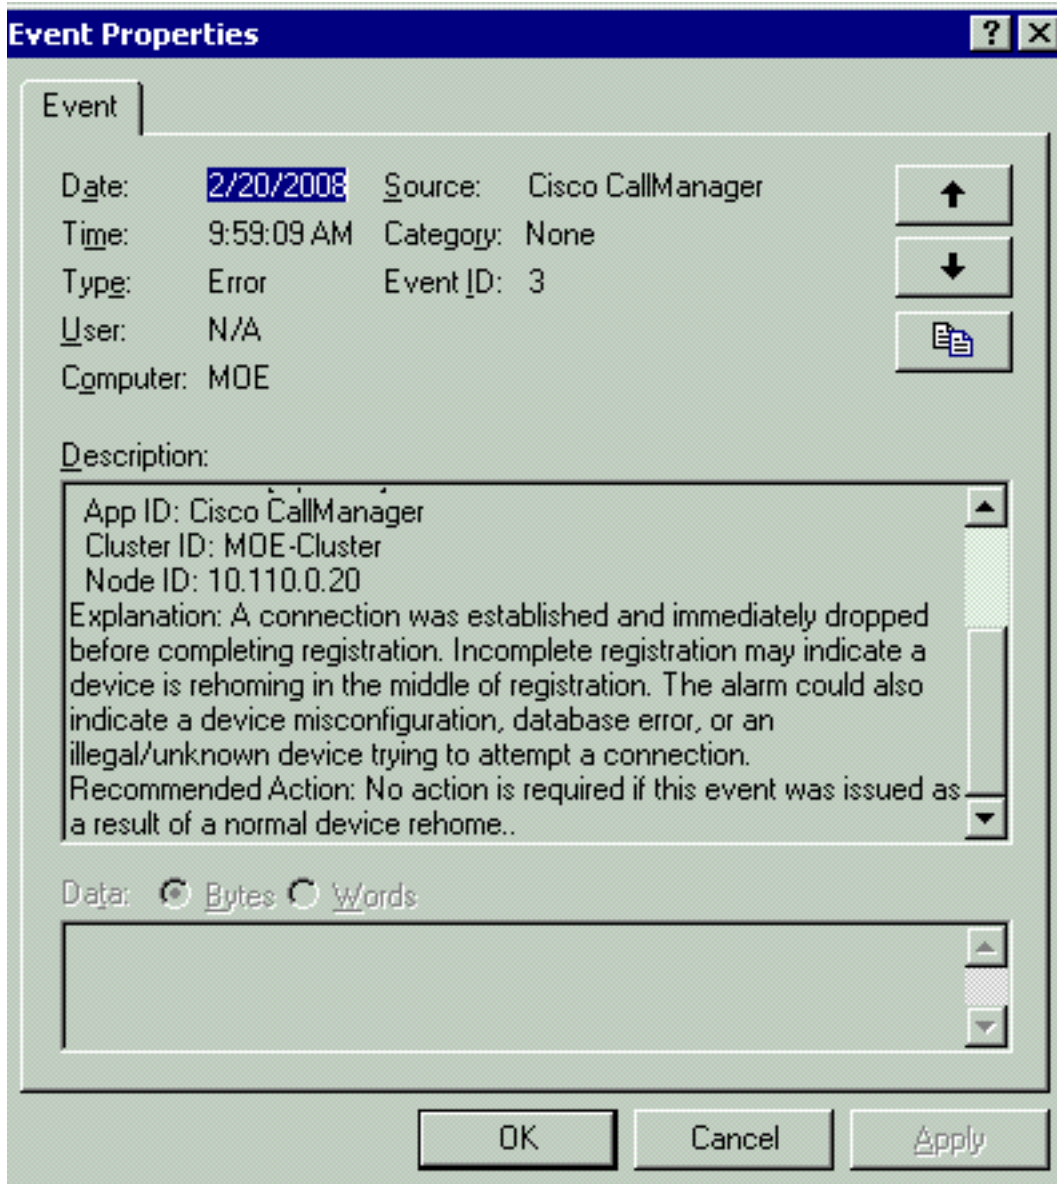

解决方案

这些错误消息显示，当VG248的一个或多个端口在Cisco Communications Manager时 (CallManager)启用，但是没有配置。

要克服此问题，找出是否有在VG248上启用的但是在Cisco Communications Manager (CallManager)上没有配置的端口。如果那样，在VG248禁用这些特定端口。

相关信息

- [配置传真转接用Cisco VG248](#)
- [语音技术支持](#)
- [语音和统一通信产品支持](#)
- [Cisco IP 电话故障排除](#)
- [技术支持和文档 - Cisco Systems](#)