

CISCO 1-PORT OC-48C/STM-16 ATM SHARED PORT ADAPTER

The Cisco® Interface Flexibility (I-Flex) design combines shared port adapters (SPAs) and SPA interface processors (SIPs), taking advantage of an extensible design that helps enable service prioritization for voice, video, and data services. Enterprise and service provider customers can take advantage of improved slot economics resulting from modular port adapters that are interchangeable across Cisco Systems® routing platforms. The Cisco I-Flex design maximizes connectivity options and offers superior service intelligence through programmable interface processors that deliver line-rate performance. Cisco I-Flex enhances speed-to-service revenue and provides a rich set of quality-of-service (QoS) features for premium service delivery while effectively reducing the overall cost of ownership. This data sheet contains the specifications for the Cisco 1-Port OC-48c/STM-16 ATM Shared Port Adapter (1-Port OC-48c ATM SPA; refer to Figure 1).

Figure 1. Cisco 1-Port OC-48c ATM SPA



PRODUCT OVERVIEW

This data sheet details the features of the new modular OC-48c/STM-16 ATM SPA for Cisco 7600 Series routers. The Cisco 1-Port OC-48c/STM-16 ATM SPA, in conjunction with other SPAs implementing various types of network technologies, allows users to flexibly build cost-effective routing solutions that focus on point-of-presence (POP) and service provider core applications targeted for all telcos and Internet service providers (ISPs), for worldwide use. This SPA includes a comprehensive ATM feature set, including per-virtual circuit and per-virtual path traffic shaping; ATM service classes, including constant bit rate (CBR), non-real time variable bit rate (VBR-nrt), real-time variable bit rate (VBR-rt), unspecified bit rate (UBR), Layer 3 QoS, a high-performance segmentation-and-reassembly (SAR) architecture, and support for a large number of ATM virtual connections. All these features are based on industry specifications and standards.

The Cisco 1-Port OC-48c/STM-16 ATM SPA along with other ATM SPAs address the growing demand for improved ATM QoS features, combined with the advanced Layer 3 class-of-service (CoS) capabilities provided by various Cisco routers. Users now can provide robust QoS mechanisms for prioritization of traffic from traditional and high-speed LANs over an ATM network.

The Cisco 1-Port OC-48c/STM-16 ATM SPA can be inserted in the Cisco 7600 platform that supports various services such as:

- IPv4, IPv6, and Multiprotocol Label Switching (MPLS) hardware-assisted forwarding
- Enhanced security features such as extended access control lists (ACLs), Unicast Return Path Forwarding (uRPF), Internet Control Message Protocol (ICMP) rate limiting, and others

- Extensive QoS implementation based on either “classical” QoS (three type-of-service [ToS] bits), Differentiated Services (DiffServ [six differentiated services code point (DSCP) bits]), or MPLS (3 bits Experimental [EXP])
- Enhanced NetFlow, statistics, and billing data to allow service providers to generate different billing profiles for their customers
- MPLS VPN support that allows for Layer 3 VPN deployments and various related applications

The Cisco 1-Port OC-48c/STM-16 ATM SPA uses replaceable Small Form-Factor Pluggable (SFP) optical modules that allow customer flexibility in using different optical interfaces on the same SPA. It is hot-swappable and supports service-transparent online insertion and removal (OIR), allowing removal of the SPA without impacting the interface processor and other SPAs.

APPLICATIONS


The Cisco ATM SPAs are designed for a wide range of network applications. The specific combination of ATM features and standards makes these SPAs ideal for service provider infrastructures.

Service Provider Infrastructures

The Cisco 1-Port OC-48c/STM-16 ATM SPA can be used in multiple applications, including (Figure 2):

- WAN core links
- Internet peering

Figure 2. ATM Applications

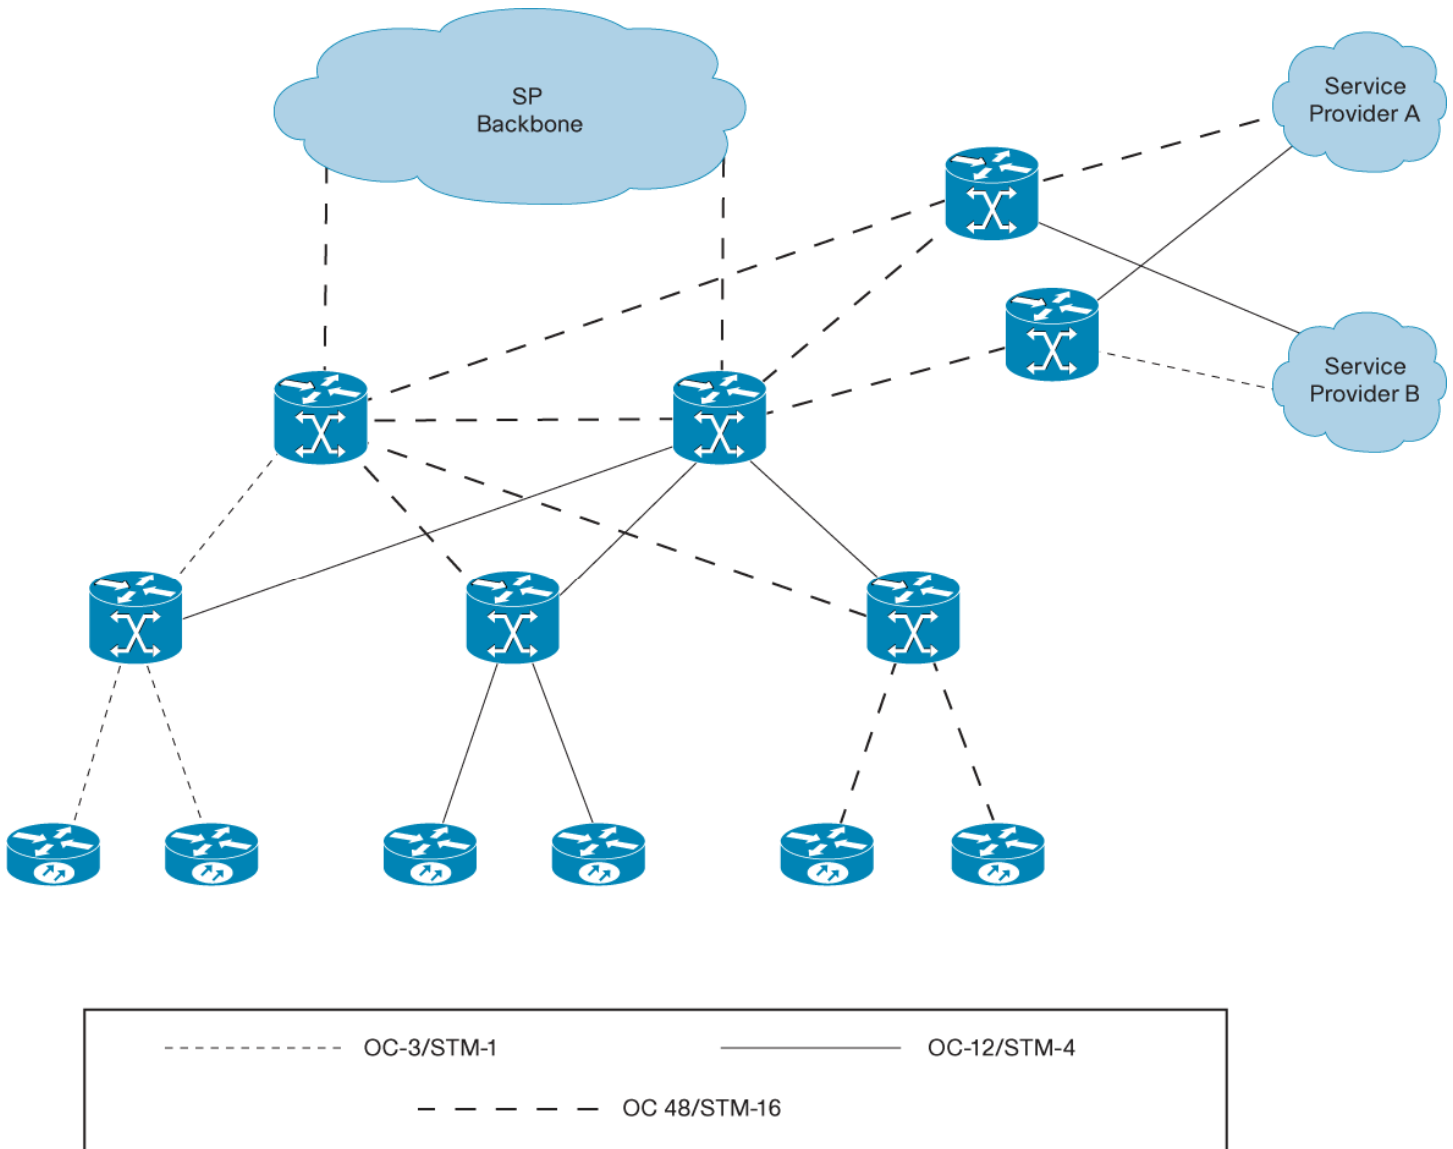

ATM deployment in service provider infrastructures has seen tremendous growth in recent years as well. This growth has been spurred for several reasons:

- ATM provides highly scalable bandwidth within SONET/SDH infrastructures.
- ATM is inherently a multiservice (data, voice, and video) technology.
- ATM is based on international standards.

The Cisco 1-Port OC-48c/STM-16 ATM SPA provides high-performance interconnectivity, metropolitan (metro), and intra-POP applications between service provider POPs for IP transport. This includes interconnecting multiservice edge to ATM core as well as ISP peering points. Through the support of ATM Forum specifications and IETF and ITU standards, the Cisco ATM SPAs can be deployed with any standards-based ATM switch, including the Cisco MGX[®] 8800 Series, Cisco MGX 8900 Series, Cisco BPX[®] 8600 Series, and Cisco IGX 8400 Series products.

The Cisco ATM SPAs in conjunction with the Cisco SIPs allow service providers to effectively manage the bandwidth at the edges and core of the network while implementing value-added Layer 3 QoS services such as Weighted Random Early Detection (WRED), policing, Low-Latency Queuing (LLQ), and Class-Based Weighted Fair Queuing (CBWFQ).

KEY FEATURES AND BENEFITS

The ATM SPAs offer many advantages, including support for the following features:

- The Cisco ATM SPAs support per-virtual circuit and per-virtual path shaping, including industry-leading minimum 1-kbps granularity, allowing flexibility and control over every virtual circuit and virtual path configured.
- IP QoS and Layer 3 QoS features—The Cisco SIPs and ATM SPAs support per-virtual circuit IP QoS features that allow customers to apply advanced-queuing and bandwidth-management functions, including LLQ, WRED, and policing to individual virtual circuits to avoid congestion and delay. In addition, extended ACLs and distributed traffic shaping (dTS) are supported on a per-virtual circuit basis on both ingress and egress.
- IP/MPLS-to-ATM QoS mapping—Also supported is IP-to-ATM QoS matching and setting of cell loss priority (CLP) bit and virtual circuit bundling, which allows customers to divide traffic on different virtual circuits, depending on the desired CoS.

PRODUCT SPECIFICATIONS

Table 1 gives specifications of the Cisco 1-Port OC-48c ATM SPA.

Table 1. Product Specifications

Feature	Description
Product Compatibility	Cisco 7600 Series
Maximum Number of SPAs per Carrier Card	7600-SIP-400: 1
Port Density per SPA	One port
Physical Interface	OC-48c/STM-16 Small Form-Factor Pluggable (SFP) optics module (refer to optical parameters that follow) Visual status indicators (LEDs): <ul style="list-style-type: none"> • SPA status LED • Per-port LEDs
Protocols	<ul style="list-style-type: none"> • IETF RFC 2684 (updated RFC 1483) support for multiple protocol encapsulations over ATM • ATM Forum User-Network Interface (UNI) 3.0, 3.1, and 4.0
Features and Functions	<ul style="list-style-type: none"> • CBR • VBR-nrt • VBR-rt • UBR • ATM and IP CoS • Per-virtual circuit and per-virtual path traffic shaping • Per-virtual circuit and per-virtual path statistics • F4 and F5 operation, administration, and maintenance (OAM) cell support • Integrated Local Management Interface (ILMI) 1.0 • Layer 3 QoS—Policing, Class-Based Weighted Fair Queuing (CBWFQ), WRED, and LLQ • Per-virtual circuit Layer 3 queuing • 1 + 1 automatic protection switching (APS) (K1/K2 bytes) <p>Check the software releases for support.</p>

Feature	Description
SONET Errors, Alarms, and Performance Monitoring	<ul style="list-style-type: none"> • Signal failure bit error rate (SF-BER) • Signal degrade bit error rate (SD-BER) • Signal label payload construction (C2) • Path trace byte (J1) • Section <ul style="list-style-type: none"> – Loss of signal (LOS) – Loss of frame (LOF) – Error counts for B1 – Threshold crossing alarms (TCA) for B1 • Line <ul style="list-style-type: none"> – Line alarm indication signal (LAIS) – Line remote defect indication (LRDI) – Line remote error indication (LREI) – Error counts for B2 – TCA for B2 • Path <ul style="list-style-type: none"> – Path alarm indication signal (PAIS) – Path remote defect indication (PRDI) – Path remote error indication (PREI) – Error counts for B3 – TCA for B3 – Loss of pointer (LOP) – New pointer events (NEWPTR) – Positive stuffing event (PSE) – Negative stuffing event (NSE) – Path unequipped indication signal (PUNEQ) – Path payload mismatch indication signal (PPLM)
SONET Synchronization	<ul style="list-style-type: none"> • Local (internal) timing (for inter-router connections over dark fiber or wavelength-division multiplexing [WDM] equipment) • Loop (line) timing (for connection to SONET/SDH equipment)
MIBs	<ul style="list-style-type: none"> • RFC 2558 MIB (SONET/SDH) • RFC 2515 MIB (ATM) • SONET-MIB • CISCO-SONET-MIB (rfc 2558) • ATM-MIB (RFC2515) • ATM-EXT-MIB • CISCO-AAL5-MIB • ATM-SOFT-PVC-MIB • CCBQ (CISCO-Class-Based-QOS-MIB) MIB support

Feature	Description
Network Management	Simple Network Management Protocol (SNMP)
Reliability and Availability	<ul style="list-style-type: none"> • Online insertion and removal (OIR) • Field-replaceable SFP optical modules • 1 + 1 SONET APS and SDH Linear Multiplexer Section Protection (MSP) protocols • Single SPA software reset
Physical Specifications	<ul style="list-style-type: none"> • Weight: 1.27 lb (0.57 kg) • Height: 1.56 in. (3.96 cm) (double height) • Width: 6.75 in. (17.15 cm) • Depth: 7.28 in. (18.49 cm)
Power (without Optics)	1 port = 37.1 watts maximum
Environmental Specifications	<ul style="list-style-type: none"> • Operating temperature: 41 to 104°F or 5 to 40°C • Storage temperature: -38 to 150°F or -40 to 70°C • Operating humidity: 5 to 85% relative humidity • Storage humidity: 5 to 95% relative humidity
Compliance and Agency Approvals	<p>Safety</p> <ul style="list-style-type: none"> • UL 60950 • CSA 22.2-No.60950 • EN60950 • IEC 60950 CB Scheme • ACA TS001 • AS/NZS 3260 • EN60825\IEC60825 laser safety (SR, IR-Class 1) (VSR-Class 1M)1 • 21CFR1040 –FDA Code of Federal Regulations (USA) laser safety (SR, IR-Class 1) (VSR-Class 1M)1 <p>EMC</p> <ul style="list-style-type: none"> • FCC Part 15 (CFR 47) • ICES 003 • EN55022 • CISPR 22 • AS/NZS CISPR • VCCI • EN55024 • EN50082-1 • EN61000-6-1 • EN61000-3-2 • EN61000-3-3 <p>SONET/SDH</p> <ul style="list-style-type: none"> • Telcordia (Bellcore GR-253 as applicable) • ITU-T G.957 as applicable

Feature	Description
	<ul style="list-style-type: none"> ITU-T G.958 as applicable ANSI T1.105 as applicable <p>Network Equipment Building System (NEBS):</p> <p>This product is designed to meet the following requirements (official qualification may be in progress):</p> <ul style="list-style-type: none"> SR-3580—NEBS: criteria levels (Level 3 compliant) GR-63-Core—NEBS: physical protection GR-1089-Core—NEBS: EMC and safety <p>European Telecommunications Standard Institute (ETSI):</p> <ul style="list-style-type: none"> EN300 386 ETS 300 019 Storage Class 1.1 ETS 300 019 Transportation Class 2.3 ETS 300 019 Stationary Use Class 3.1

Table 2. Optical Specifications

SFP Optics	Transmit Power	Maximum Power to Receiver, dBm	Receiver Sensitivity, dBm	Power Budget, dB	Receiver Operating Wavelength	Nominal Distance Between Stations
Single-Mode Short Reach (SR)	-10 dBm minimum to -3 dBm maximum at 1310 nm	-3	-18	7	1290–1565 nm	Up to 1.2 mi (2 km)
Single-Mode Intermediate Reach (IR1)	-5 dBm minimum to 0 dBm maximum at 1310 nm	0	-18	12	1290–1565 nm	Up to 9 mi (15 km)

ORDERING INFORMATION

To place an order, visit the [Cisco Ordering Home Page](#) or refer to Table 3.

Table 3. Ordering Information

Part Number	Product Name
SPA-1XOC48-ATM	Cisco 1-Port OC-48c/STM-16 ATM Shared Port Adapter
SPA-1XOC48-ATM=	Cisco 1-Port OC-48c/STM-16 ATM Shared Port Adapter, spare
SFP-OC48-SR	OC48c/STM-16 SFP, SR
SFP-OC48-IR1	OC48c/STM-16 SFP, IR1

SERVICE AND SUPPORT

Cisco offers a wide range of services programs to accelerate customer success. These innovative services programs are delivered through a unique combination of people, processes, tools, and partners, resulting in high levels of customer satisfaction. Cisco services help you protect your network investment, optimize network operations, and prepare your network for new applications to extend network intelligence and the power of your business. For more information about Cisco services, refer to [Cisco Technical Support Services](#) or [Cisco Advanced Services](#).

FOR MORE INFORMATION

For more information about the Cisco SPA/SIP portfolio, visit <http://www.cisco.com/go/spa> or contact your local Cisco account representative.

**Corporate Headquarters**

Cisco Systems, Inc.
170 West Tasman Drive
San Jose, CA 95134-1706
USA
www.cisco.com
Tel: 408 526-4000
800 553-NETS (6387)
Fax: 408 526-4100

European Headquarters

Cisco Systems International BV
Haarlerbergpark
Haarlerbergweg 13-19
1101 CH Amsterdam
The Netherlands
www-europe.cisco.com
Tel: 31 0 20 357 1000
Fax: 31 0 20 357 1100

Americas Headquarters

Cisco Systems, Inc.
170 West Tasman Drive
San Jose, CA 95134-1706
USA
www.cisco.com
Tel: 408 526-7660
Fax: 408 527-0883

Asia Pacific Headquarters

Cisco Systems, Inc.
168 Robinson Road
#28-01 Capital Tower
Singapore 068912
www.cisco.com
Tel: +65 6317 7777
Fax: +65 6317 7799

Cisco Systems has more than 200 offices in the following countries and regions. Addresses, phone numbers, and fax numbers are listed on **the Cisco Website at www.cisco.com/go/offices.**

Argentina • Australia • Austria • Belgium • Brazil • Bulgaria • Canada • Chile • China PRC • Colombia • Costa Rica • Croatia • Cyprus
Czech Republic • Denmark • Dubai, UAE • Finland • France • Germany • Greece • Hong Kong SAR • Hungary • India • Indonesia • Ireland • Israel
Italy • Japan • Korea • Luxembourg • Malaysia • Mexico • The Netherlands • New Zealand • Norway • Peru • Philippines • Poland • Portugal
Puerto Rico • Romania • Russia • Saudi Arabia • Scotland • Singapore • Slovakia • Slovenia • South Africa • Spain • Sweden • Switzerland • Taiwan
Thailand • Turkey • Ukraine • United Kingdom • United States • Venezuela • Vietnam • Zimbabwe

Copyright © 2005 Cisco Systems, Inc. All rights reserved. CCSP, CCVP, the Cisco Square Bridge logo, Follow Me Browsing, and StackWise are trademarks of Cisco Systems, Inc.; Changing the Way We Work, Live, Play, and Learn, and iQuick Study are service marks of Cisco Systems, Inc.; and Access Registrar, Aironet, ASIST, BPX, Catalyst, CCDA, CCDP, CCIE, CCIP, CCNA, CCNP, Cisco, the Cisco Certified Internetwork Expert logo, Cisco IOS, Cisco Press, Cisco Systems, Cisco Systems Capital, the Cisco Systems logo, Cisco Unity, Empowering the Internet Generation, Enterprise/Solver, EtherChannel, EtherFast, EtherSwitch, Fast Step, FormShare, GigaDrive, GigaStack, HomeLink, Internet Quotient, IOS, IP/TV, iQ Expertise, the iQ logo, iQ Net Readiness Scorecard, LightStream, Linksys, MeetingPlace, MGX, the Networkers logo, Networking Academy, Network Registrar, Packet, PIX, Post-Routing, Pre-Routing, ProConnect, RateMUX, ScriptShare, SlideCast, SMARTnet, StrataView Plus, TeleRouter, The Fastest Way to Increase Your Internet Quotient, and TransPath are registered trademarks of Cisco Systems, Inc. and/or its affiliates in the United States and certain other countries.

All other trademarks mentioned in this document or Website are the property of their respective owners. The use of the word partner does not imply a partnership relationship between Cisco and any other company. (0502R) 205258.E_ETMG_SP_9.05

