

SPEC[®] CFP2006 Result

Copyright 2006-2008 Standard Performance Evaluation Corporation

Cisco Systems, Inc.

SPECfp[®]_rate2006 = 256

Cisco UCS B200 M2 (Intel Xeon X5680, 3.33 GHz)

SPECfp_rate_base2006 = 248

CPU2006 license: 9019


Test date: Feb-2010

Test sponsor: Cisco Systems, Inc.

Hardware Availability: Mar-2010

Tested by: Cisco Systems, Inc.

Software Availability: Jan-2010

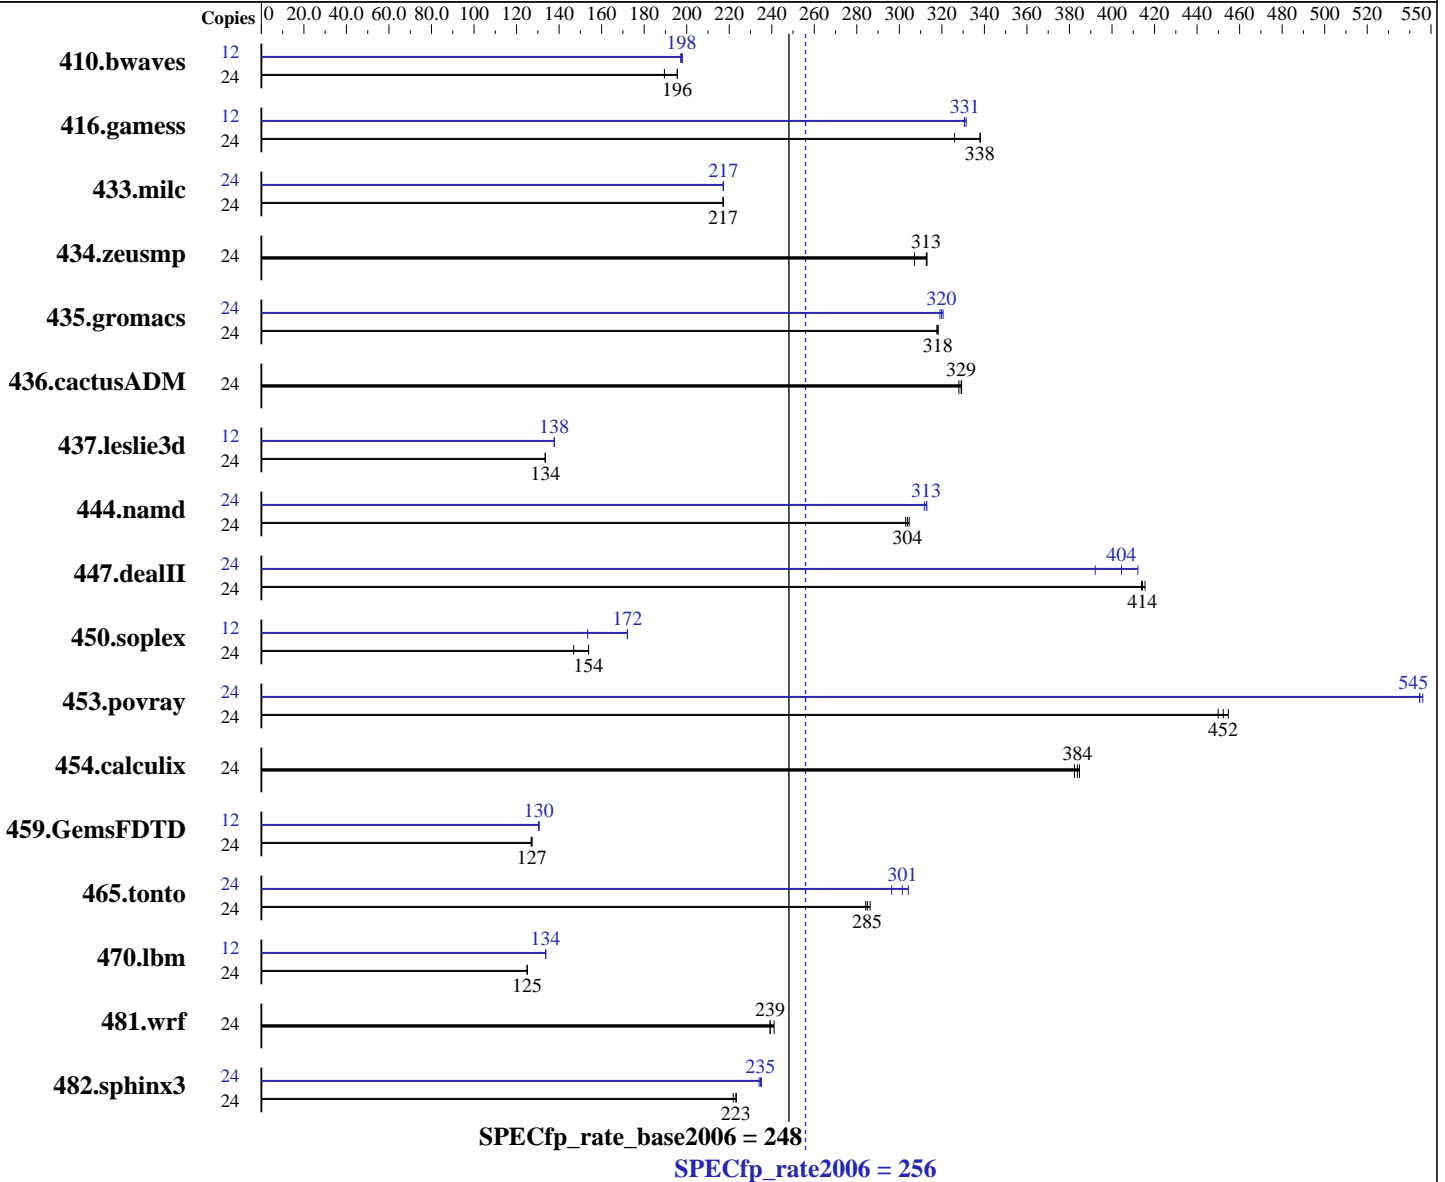

Hardware

CPU Name: Intel Xeon X5680
 CPU Characteristics: Intel Turbo Boost Technology up to 3.60 GHz
 CPU MHz: 3333
 FPU: Integrated
 CPU(s) enabled: 12 cores, 2 chips, 6 cores/chip, 2 threads/core
 CPU(s) orderable: 1, 2 chips
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

Software

Operating System: SuSe Linux Enterprise Server 11 (x86_64), Kernel 2.6.27-15-2-default, RC4
 Compiler: Intel(R) C++ and Fortran Compiler 11.1 IA32 and Intel 64, Version 11.1 Build 20091130 Package ID: l_cproc_p_11.1.064 L_cprof_p_11.1.064
 Auto Parallel: No
 File System: ext3
 System State: Run level 3 (multi-user)

Continued on next page

SPEC CFP2006 Result

Copyright 2006-2008 Standard Performance Evaluation Corporation

Cisco Systems, Inc.

SPECfp_rate2006 = 256

Cisco UCS B200 M2 (Intel Xeon X5680, 3.33 GHz)

SPECfp_rate_base2006 = 248

CPU2006 license: 9019

Test date: Feb-2010

Test sponsor: Cisco Systems, Inc.

Hardware Availability: Mar-2010

Tested by: Cisco Systems, Inc.

Software Availability: Jan-2010

Hardware (Continued)

L3 Cache: 12 MB I+D on chip per chip
Other Cache: None
Memory: 48 GB (12 * 4GB DDR3-1333 MHz)
Disk Subsystem: 146 GB SAS, 10K RPM
Other Hardware: None

Software (Continued)

Base Pointers: 64-bit
Peak Pointers: 32/64-bit
Other Software: Binutils 2.16.91.0.7

Results Table

Benchmark	Base								Peak							
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio		
410.bwaves	24	1721	190	1668	196	1668	196	12	827	197	824	198	826	198		
416.gamess	24	1391	338	1442	326	1390	338	12	709	331	710	331	711	331		
433.milc	24	1015	217	1015	217	1014	217	24	1014	217	1014	217	1014	217		
434.zeusmp	24	711	307	699	313	698	313	24	711	307	699	313	698	313		
435.gromacs	24	539	318	538	318	539	318	24	536	320	535	321	537	319		
436.cactusADM	24	874	328	871	329	872	329	24	874	328	871	329	872	329		
437.leslie3d	24	1688	134	1691	133	1689	134	12	819	138	819	138	819	138		
444.namd	24	635	303	632	305	634	304	24	617	312	616	313	615	313		
447.dealII	24	661	416	663	414	663	414	24	679	404	666	412	700	392		
450.soplex	24	1363	147	1301	154	1301	154	12	652	153	581	172	582	172		
453.povray	24	282	452	284	450	281	455	24	234	545	234	545	234	546		
454.calculix	24	515	385	516	384	518	382	24	515	385	516	384	518	382		
459.GemsFDTD	24	2008	127	2001	127	2002	127	12	976	130	976	130	975	131		
465.tonto	24	825	286	831	284	829	285	24	797	296	784	301	776	304		
470.lbm	24	2640	125	2636	125	2637	125	12	1232	134	1234	134	1234	134		
481.wrf	24	1112	241	1120	239	1121	239	24	1112	241	1120	239	1121	239		
482.sphinx3	24	2108	222	2096	223	2094	223	24	1999	234	1993	235	1989	235		

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The config file option 'submit' was used.
numactl was used to bind copies to the cores

Operating System Notes

ulimit -s unlimited was used to set the stacksize to unlimited prior to run

Platform Notes

BIOS Configuration : Data Reuse Optimization = Disabled

SPEC CFP2006 Result

Copyright 2006-2008 Standard Performance Evaluation Corporation

Cisco Systems, Inc.

SPECfp_rate2006 = 256

Cisco UCS B200 M2 (Intel Xeon X5680, 3.33 GHz)

SPECfp_rate_base2006 = 248

CPU2006 license: 9019

Test date: Feb-2010

Test sponsor: Cisco Systems, Inc.

Hardware Availability: Mar-2010

Tested by: Cisco Systems, Inc.

Software Availability: Jan-2010

Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.lelie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -static

C++ benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -static

Fortran benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -static

Benchmarks using both Fortran and C:

-xSSE4.2 -ipo -O3 -no-prec-div -static

SPEC CFP2006 Result

Copyright 2006-2008 Standard Performance Evaluation Corporation

Cisco Systems, Inc.

SPECfp_rate2006 = 256

Cisco UCS B200 M2 (Intel Xeon X5680, 3.33 GHz)

SPECfp_rate_base2006 = 248

CPU2006 license: 9019

Test date: Feb-2010

Test sponsor: Cisco Systems, Inc.

Hardware Availability: Mar-2010

Tested by: Cisco Systems, Inc.

Software Availability: Jan-2010

Peak Compiler Invocation

C benchmarks (except as noted below):

icc -m64

482.sphinx3: icc -m32

C++ benchmarks (except as noted below):

icpc -m64

450.soplex: icpc -m32

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

Peak Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

433.milc: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-fno-alias -opt-prefetch

470.lbm: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-opt-malloc-options=3 -ansi-alias -auto-ilp32

Continued on next page

SPEC CFP2006 Result

Copyright 2006-2008 Standard Performance Evaluation Corporation

Cisco Systems, Inc.

SPECfp_rate2006 = 256

Cisco UCS B200 M2 (Intel Xeon X5680, 3.33 GHz)

SPECfp_rate_base2006 = 248

CPU2006 license: 9019

Test date: Feb-2010

Test sponsor: Cisco Systems, Inc.

Hardware Availability: Mar-2010

Tested by: Cisco Systems, Inc.

Software Availability: Jan-2010

Peak Optimization Flags (Continued)

482.sphinx3: -xSSE4.2 -ipo -O3 -no-prec-div -static -unroll2

C++ benchmarks:

444.namd: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-fno-alias -auto-ilp32

447.dealII: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-unroll2 -ansi-alias -scalar-rep-

450.soplex: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-opt-malloc-options=3

453.povray: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-unroll4 -ansi-alias

Fortran benchmarks:

410.bwaves: -xSSE4.2 -ipo -O3 -no-prec-div -static -opt-prefetch

416.gamess: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-unroll2 -Ob0 -ansi-alias -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: -xSSE4.2 -ipo -O3 -no-prec-div -static

459.GemsFDTD: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-unroll2 -Ob0

465.tonto: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-unroll4 -auto -inline-calloc -opt-malloc-options=3

Benchmarks using both Fortran and C:

435.gromacs: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-opt-prefetch -auto-ilp32

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

Continued on next page

SPEC CFP2006 Result

Copyright 2006-2008 Standard Performance Evaluation Corporation

Cisco Systems, Inc.

SPECfp_rate2006 = 256

Cisco UCS B200 M2 (Intel Xeon X5680, 3.33 GHz)

SPECfp_rate_base2006 = 248

CPU2006 license: 9019

Test date: Feb-2010

Test sponsor: Cisco Systems, Inc.

Hardware Availability: Mar-2010

Tested by: Cisco Systems, Inc.

Software Availability: Jan-2010

Peak Optimization Flags (Continued)

481.wrf: basepeak = yes

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.
Report generated on Fri Mar 12 00:19:01 2010 by SPEC CPU2006 PS/PDF formatter v6128.