


## CISCO CRS-1 SPA INTERFACE PROCESSOR-800

The Cisco® CRS-1 Carrier Routing System is the industry's first carrier router offering continuous system operation, unprecedented service flexibility, and system longevity. The Cisco CRS-1 is powered by Cisco IOS® XR Software---a unique self-healing, distributed operating system designed for always-on operation while scaling system capacity up to 92 Tbps. The innovative system architecture combines the Cisco Silicon Packet Processor, the first programmable 40-Gbps application-specific integrated circuit (ASIC), with the Cisco Service Separation Architecture for unprecedented service flexibility and speed to service. The Cisco CRS-1 marks a new era in carrier IP Communications by powering the foundation for network and service convergence today while protecting investments for decades to come.

The Cisco® I-Flex design combines shared port adapters (SPAs) and SPA interface processors (SIPs), leveraging an extensible design that enables service prioritization for voice, video and data services. Enterprise and service provider customers can take advantage of improved slot economics resulting from modular port adapters that are interchangeable across Cisco routing platforms. The I-Flex design maximizes connectivity options and offers superior service intelligence through programmable interface processors that deliver line-rate performance.

I-Flex enhances speed-to-service revenue and provides a rich set of QoS features for premium service delivery while effectively reducing the overall cost of ownership This data sheet contains the specifications for the Cisco CRS-1 SPA Interface Processor-800 (Cisco CRS-1 SIP-800; refer to Figure 1).

**Figure 1.** Cisco CRS-1 SIP-800 with SPAs

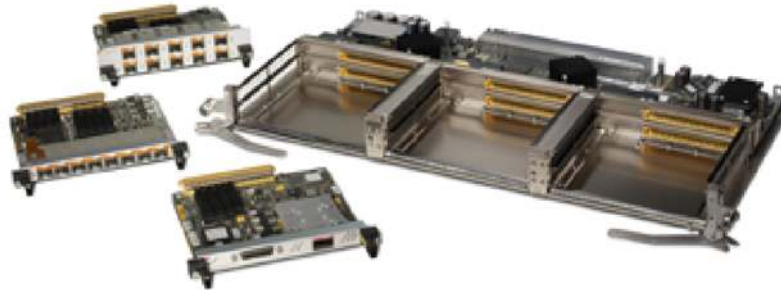

## PRODUCT SPECIFICATIONS

Table 1 gives specifications of the Cisco CRS-1 SIP-800.

**Table 1.** Product Specifications

Feature	Description
<b>Chassis Compatibility</b>	Compatible with all current Cisco CRS-1 line-card chassis
<b>Software Compatibility</b>	Cisco IOS XR Software Release 3.2 or higher
<b>Interface Types</b>	<ul style="list-style-type: none"><li>• Packet over SONET/SDH (POS)<ul style="list-style-type: none"><li>– OC-3c/STM-1c</li><li>– OC-192c/STM-64c</li></ul></li><li>• Gigabit Ethernet</li></ul>
<b>Port Density</b>	Six normal-height SPAs or three double-height SPAs or any combination in between
<b>Reliability and Availability</b>	Online insertion and removal (OIR) without affecting system traffic
<b>Network Management</b>	<ul style="list-style-type: none"><li>• Cisco IOS XR Software Command-Line Interface (CLI)</li><li>• Simple Network Management Protocol (SNMP)</li><li>• Extensible Markup Language (XML) interface</li><li>• Cisco CRS-1 Craft Works Interface (CWI)</li></ul>
<b>Physical Dimensions</b>	<ul style="list-style-type: none"><li>• Occupies one physical-layer-interface-module (PLIM) slot on Cisco CRS-1 16- and 8-slot line card chassis</li><li>• Weight: Minimum 5.8 lb (without any SPAs), Maximum 15 lb (with 6 SPAs)</li><li>• Height: 20.6 in. (52.32 cm)</li><li>• Depth: 11.2 in. (28.4 cm)</li><li>• Width: 1.8 in. (4.57 cm)</li></ul>
<b>Power</b>	<ul style="list-style-type: none"><li>• 40W without any SPAs</li><li>• 150W with maximum SPA configuration</li></ul>
<b>Environmental Conditions</b>	<ul style="list-style-type: none"><li>• Storage temperature: –40 to 70°C (–40 to 158°F)</li><li>• Operating temperature:<ul style="list-style-type: none"><li>– Normal: 5 to 40°C (41 to 104°F)</li><li>– Short term: –5 to 50°C (23 to 122°F)</li></ul></li><li>• Relative humidity:<ul style="list-style-type: none"><li>– Normal: 5 to 85%</li><li>– Short term: 5 to 90% but not to exceed 0.024 kg of water per kg of dry air</li></ul></li></ul> <p>Short term refers to a period of not more than 96 consecutive hours and a total of not more than 15 days in one year. (This refers to a total of 360 hours in any given year, but no more than 15 occurrences during that one-year period.)</p>

## APPROVALS AND COMPLIANCE

Table 2 gives compliance information for the Cisco CRS-1 SIP-800.

**Table 2.** Compliance and Agency Approvals

Feature	Description
<b>Safety Standards</b>	<ul style="list-style-type: none"><li>• UL/CSA/IEC/EN 60950-1</li><li>• AS/NZS 60950</li></ul>
<b>EMI</b>	<ul style="list-style-type: none"><li>• FCC Class A</li><li>• ICES 003 Class A</li><li>• AS/NZS 3548 Class A</li><li>• CISPR 22 (EN55022) Class A</li><li>• VCCI Class A</li></ul>
<b>Immunity (basic standards)</b>	<ul style="list-style-type: none"><li>• IEC/EN-61000-4-2: Electrostatic Discharge Immunity (8-kV Contact, 15-kV Air)</li><li>• IEC/EN-61000-4-3: Radiated Immunity (10V/m)</li></ul>
<b>ETSI and EN</b>	<ul style="list-style-type: none"><li>• EN300 386: Telecommunications Network Equipment (EMC)</li><li>• EN55022: Information Technology Equipment (Emissions)</li><li>• EN55024: Information Technology Equipment (Immunity)</li><li>• EN50082-1/EN-61000-6-1: Generic Immunity Standard</li></ul>
<b>Network Equipment Building System (NEBS)</b>	This product is designed to meet the following requirements (qualification in progress): <ul style="list-style-type: none"><li>• SR-3580: NEBS Criteria Levels (Level 3)</li><li>• GR-1089-CORE: NEBS EMC and Safety</li><li>• GR-63-CORE: NEBS Physical Protection</li></ul>

## ORDERING INFORMATION

To place an order, visit [Cisco Ordering Home Page](#) or refer to Table 3.

**Table 3.** Ordering Information

Product Part Number	Product Name
<b>CRS1-SIP-800 (=)</b>	Cisco CRS-1 SPA Interface Processor-800

## SERVICE AND SUPPORT

Cisco offers numerous innovative services programs to accelerate customer success. These programs are delivered through a unique combination of people, processes, tools, and partners, resulting in high levels of customer satisfaction. Cisco services help you protect your network investment, optimize network operations, and prepare your network for new applications to extend network intelligence and the power of your business. For more information about Cisco services, visit [Cisco Technical Support Services](#) or [Cisco Advanced Services](#).

## FOR MORE INFORMATION

For more information about the Cisco CRS-1 SIP-800, contact your local Cisco account representative or visit: <http://www.cisco.com/go/crs>

**Corporate Headquarters**

Cisco Systems, Inc.  
170 West Tasman Drive  
San Jose, CA 95134-1706  
USA  
www.cisco.com  
Tel: 408 526-4000  
800 553-NETS (6387)  
Fax: 408 526-4100

**European Headquarters**

Cisco Systems International BV  
Haarlerbergpark  
Haarlerbergweg 13-19  
1101 CH Amsterdam  
The Netherlands  
www-europe.cisco.com  
Tel: 31 0 20 357 1000  
Fax: 31 0 20 357 1100

**Americas Headquarters**

Cisco Systems, Inc.  
170 West Tasman Drive  
San Jose, CA 95134-1706  
USA  
www.cisco.com  
Tel: 408 526-7660  
Fax: 408 527-0883

**Asia Pacific Headquarters**

Cisco Systems, Inc.  
168 Robinson Road  
#28-01 Capital Tower  
Singapore 068912  
www.cisco.com  
Tel: +65 6317 7777  
Fax: +65 6317 7799

Cisco Systems has more than 200 offices in the following countries and regions. Addresses, phone numbers, and fax numbers are listed on **the Cisco Website at [www.cisco.com/go/offices](http://www.cisco.com/go/offices).**

Argentina • Australia • Austria • Belgium • Brazil • Bulgaria • Canada • Chile • China PRC • Colombia • Costa Rica • Croatia • Cyprus  
Czech Republic • Denmark • Dubai, UAE • Finland • France • Germany • Greece • Hong Kong SAR • Hungary • India • Indonesia • Ireland • Israel  
Italy • Japan • Korea • Luxembourg • Malaysia • Mexico • The Netherlands • New Zealand • Norway • Peru • Philippines • Poland • Portugal  
Puerto Rico • Romania • Russia • Saudi Arabia • Scotland • Singapore • Slovakia • Slovenia • South Africa • Spain • Sweden • Switzerland • Taiwan  
Thailand • Turkey • Ukraine • United Kingdom • United States • Venezuela • Vietnam • Zimbabwe

Copyright © 2005 Cisco Systems, Inc. All rights reserved. CCSP, CCVP, the Cisco Square Bridge logo, Follow Me Browsing, and StackWise are trademarks of Cisco Systems, Inc.; Changing the Way We Work, Live, Play, and Learn, and iQuick Study are service marks of Cisco Systems, Inc.; and Access Registrar, Aironet, ASIST, BPX, Catalyst, CCDA, CCDP, CCIE, CCIP, CCNA, CCNP, Cisco, the Cisco Certified Internetwork Expert logo, Cisco IOS, Cisco Press, Cisco Systems, Cisco Systems Capital, the Cisco Systems logo, Cisco Unity, Empowering the Internet Generation, Enterprise/Solver, EtherChannel, EtherFast, EtherSwitch, Fast Step, FormShare, GigaDrive, GigaStack, HomeLink, Internet Quotient, IOS, IP/TV, iQ Expertise, the iQ logo, iQ Net Readiness Scorecard, LightStream, Linksys, MeetingPlace, MGX, the Networkers logo, Networking Academy, Network Registrar, Packet, PIX, Post-Routing, Pre-Routing, ProConnect, RateMUX, ScriptShare, SlideCast, SMARTnet, StrataView Plus, TeleRouter, The Fastest Way to Increase Your Internet Quotient, and TransPath are registered trademarks of Cisco Systems, Inc. and/or its affiliates in the United States and certain other countries.

All other trademarks mentioned in this document or Website are the property of their respective owners. The use of the word partner does not imply a partnership relationship between Cisco and any other company. (0502R)

205239.bc\_ETMG\_RK\_4.05

