


DATA SHEET

## CISCO CRS-1 MODULAR SERVICES CARD

The Cisco® CRS-1 Carrier Routing System is the industry’s first carrier router offering continuous system operation, unprecedented service flexibility, and system longevity. The Cisco CRS-1 is powered by Cisco IOS® XR Software—a unique self-healing, distributed operating system designed for always-on operation while scaling system capacity up to 92 Tbps. The innovative system architecture combines the Cisco Silicon Packet Processor, the first programmable 40-Gbps application-specific integrated circuit (ASIC), with the Cisco Service Separation Architecture for unprecedented service flexibility and speed to service. The Cisco CRS-1 marks a new era in carrier IP Communications by powering the foundation for network and service convergence today while protecting investments for decades to come.

This data sheet provides detailed product specifications for the Cisco CRS-1 Modular Services Card. For more information about the Cisco CRS-1 or about other interfaces available for the Cisco CRS-1, visit:

<http://www.cisco.com/go/crs>

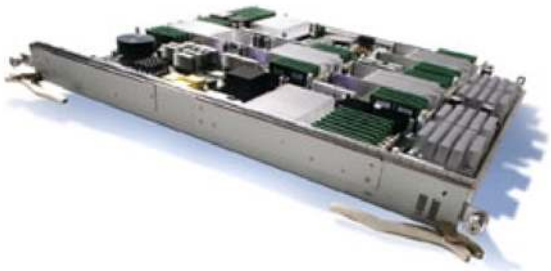

### PRODUCT SPECIFICATIONS

Table 1. Product Specifications

Feature	Description
<b>Chassis Compatibility</b>	<ul style="list-style-type: none"> <li>• Compatible with all current Cisco CRS-1 Line-Card Chassis</li> <li>• Always paired with an interface module (IM)</li> </ul>
<b>Software Compatibility</b>	Cisco IOS® XR Software Release 2.0 & 3.0 or higher
<b>Features</b>	<p><b>IP Features:</b></p> <ul style="list-style-type: none"> <li>• IPv4 unicast services</li> <li>• IPv6 unicast services</li> <li>• IPv4/IPv6 ECMP</li> <li>• IPv4/IPv6 Load Balancing</li> </ul> <p><b>Forwarding Features:</b></p> <ul style="list-style-type: none"> <li>• Access control lists (ACLs/xACLs)</li> <li>• Quality of service/class of service (QoS/CoS) using Modular QoS CLI (MQC)</li> <li>• IP packet classification/marketing</li> <li>• Queuing (both ingress and egress)</li> <li>• Policing (both ingress and egress)</li> <li>• Diagnostic and network management support</li> </ul>

Feature	Description
	<p><b>IPv4 Multicast Features:</b></p> <ul style="list-style-type: none"> <li>• Multicast Reverse Path Forwarding (RPF)</li> <li>• Multicast Nonstop Forwarding (NSF)</li> <li>• Multicast Forwarding Information Base (MFIB)</li> </ul> <p><b>MPLS Features:</b></p> <ul style="list-style-type: none"> <li>• MPLS forwarding</li> <li>• MPLS load balancing</li> <li>• UNI</li> <li>• LMP</li> </ul> <p><b>Security Features:</b></p> <ul style="list-style-type: none"> <li>• Control packet policing</li> <li>• Dynamic control plane protection</li> <li>• GTSM RFC 3682 (Formally BTSH)</li> </ul>
<b>Memory</b>	<ul style="list-style-type: none"> <li>• Configurable with 2GB of route table memory</li> <li>• 1 GB of packet buffer memory per side (2 GB total per line card [ingress and egress])</li> </ul>
<b>Performance</b>	40Gbps line rate performance
<b>Reliability and Availability</b>	<ul style="list-style-type: none"> <li>• Line-card online insertion and removal (OIR) support</li> <li>• Out of resource management</li> <li>• Process Re-startability</li> <li>• MPLS Fast Reroute (FRR)</li> </ul>
<b>MIBs</b>	<ul style="list-style-type: none"> <li>• CISCO-MEMORY-POOL-MIB</li> <li>• Cisco Process MIB</li> <li>• CISCO-CDP-MIB</li> <li>• IF-MIB (RFC 2233/RFC 2863)</li> </ul>
<b>Network Management</b>	<ul style="list-style-type: none"> <li>• Enhanced command-line interface (CLI)</li> <li>• Extensible Markup Language (XML) interface</li> <li>• XML schemas</li> <li>• Craft Works Interface (CWI)</li> <li>• Simple Network Management Protocol (SNMP) and MIB support</li> </ul>
<b>Programmatic Interfaces</b>	XML Schema support
<b>Physical Dimensions</b>	<ul style="list-style-type: none"> <li>• Occupies one slot</li> <li>• Weight: 18.7 lb (8.38 kg)</li> <li>• Height: 20.6 in. (52.2 cm)</li> <li>• Depth: 18.62 in. (47.25 cm)</li> <li>• Width: 1.8 in. (4.49 cm)</li> </ul>
<b>Power</b>	350W

Feature	Description
<b>Environmental Conditions</b>	<ul style="list-style-type: none"> <li>Storage Temperature: -40°C to 70°C (-40°F to 158°F)</li> <li>Operating Temperature: <ul style="list-style-type: none"> <li>Normal: 5°C to 40°C (41°F to 104°F)</li> <li>Short term: -5°C to 50°C (23°F to 122°F) short term</li> </ul> </li> <li>Relative Humidity: <ul style="list-style-type: none"> <li>Normal: 5% to 85%</li> <li>Short-term: 5% to 90% but not to exceed 0.024 kg water/kg of dry air</li> </ul> </li> </ul> <p>Short-term refers to a period of not more than 96 consecutive hours and a total of not more than 15 days in 1 year. (This refers to a total of 360 hours in any given year, but, no more than 15 occurrences during that 1-year period.)</p>

## APPROVALS AND COMPLIANCE

**Table 2.** Compliance and Agency Approvals

Feature	Description
<b>Safety Standards</b>	<ul style="list-style-type: none"> <li>UL/CSA/IEC/EN 60950-1</li> <li>IEC/EN 60825 Laser Safety</li> <li>ACA TS001</li> <li>AS/NZS 60950</li> <li>FDA—Code of Federal Regulations Laser Safety</li> </ul>
<b>EMI</b>	<ul style="list-style-type: none"> <li>FCC Class A</li> <li>ICES 003 Class A</li> <li>AS/NZS 3548 Class A</li> <li>CISPR 22 (EN55022) Class A</li> <li>VCCI Class A</li> <li>BSMI Class A</li> <li>IEC/EN 61000-3-2: Power Line Harmonics</li> <li>IEC/EN 61000-3-3: Voltage Fluctuations and Flicker</li> </ul>
<b>Immunity (Basic Standards)</b>	<ul style="list-style-type: none"> <li>IEC/EN-61000-4-2: Electrostatic Discharge Immunity (8kV Contact, 15kV Air)</li> <li>IEC/EN-61000-4-3: Radiated Immunity (10V/m)</li> <li>IEC/EN-61000-4-4: Electrical Fast Transient Immunity (2kV Power, 1kV Signal)</li> <li>IEC/EN-61000-4-5: Surge AC Port (4kV CM, 2kV DM)</li> <li>IEC/EN-61000-4-5: Signal Ports (1kV)</li> <li>IEC/EN-61000-4-5: Surge DC Port (1kV)</li> <li>IEC/EN-61000-4-6: Immunity to Conducted Disturbances (10Vrms)</li> <li>IEC/EN-61000-4-8: Power Frequency Magnetic Field Immunity (30A/m)</li> <li>IEC/EN-61000-4-11: Voltage DIPS, Short Interruptions, and Voltage Variations</li> </ul>
<b>ETSI and EN</b>	<ul style="list-style-type: none"> <li>EN300 386: Telecommunications Network Equipment (EMC)</li> <li>EN55022: Information Technology Equipment (Emissions)</li> <li>EN55024: Information Technology Equipment (Immunity)</li> <li>EN50082-1/EN-61000-6-1: Generic Immunity Standard</li> </ul>
<b>Network Equipment Building Systems (NEBS)</b>	<p>This product is designed to meet the following requirements (qualification in progress):</p> <ul style="list-style-type: none"> <li>SR-3580: NEBS Criteria Levels (Level 3)</li> <li>GR-1089-CORE: NEBS EMC and Safety</li> <li>GR-63-CORE: NEBS Physical Protection</li> </ul>

## ORDERING INFORMATION

To place an order, visit:

[Cisco Ordering Home Page](#)

**Table 3.** Ordering Information

Product Part Number	Product Name
CRS-MSC (=)	Cisco CRS-1 Modular Services Card

## To Download the Software

To download Cisco IOS Software, visit:

[Cisco Software Center](#)

## SERVICE AND SUPPORT

Cisco offers numerous innovative services programs to accelerate customer success. These programs are delivered through a unique combination of people, processes, tools, and partners, resulting in high levels of customer satisfaction. Cisco services help you to protect your network investment, optimize network operations, and prepare the network for new applications to extend network intelligence and the power of your business. For more information about Cisco services, visit: [Cisco Technical Support Services](#) or [Cisco Advanced Services](#)

## FOR MORE INFORMATION

For more information about the Cisco CRS-1 Modular Services Card, contact your local account representative or visit Cisco at:

<http://www.cisco.com/go/crs>



#### **Corporate Headquarters**

Cisco Systems, Inc.  
170 West Tasman Drive  
San Jose, CA 95134-1706  
USA  
www.cisco.com  
Tel: 408 526-4000  
800 553-NETS (6387)  
Fax: 408 526-4100

#### **European Headquarters**

Cisco Systems International  
BV  
Haarlerbergpark  
Haarlerbergweg 13-19  
1101 CH Amsterdam  
The Netherlands  
www-europe.cisco.com  
Tel: 31 0 20 357 1000  
Fax: 31 0 20 357 1100

#### **Americas Headquarters**

Cisco Systems, Inc.  
170 West Tasman Drive  
San Jose, CA 95134-1706  
USA  
www.cisco.com  
Tel: 408 526-7660  
Fax: 408 527-0883

#### **Asia Pacific Headquarters**

Cisco Systems, Inc.  
168 Robinson Road  
#28-01 Capital Tower  
Singapore 068912  
www.cisco.com  
Tel: +65 6317 7777  
Fax: +65 6317 7799

Cisco Systems has more than 200 offices in the following countries and regions. Addresses, phone numbers, and fax numbers are listed on **the Cisco Web site at [www.cisco.com/go/offices](http://www.cisco.com/go/offices).**

Argentina • Australia • Austria • Belgium • Brazil • Bulgaria • Canada • Chile • China PRC • Colombia • Costa Rica • Croatia • Cyprus  
Czech Republic • Denmark • Dubai, UAE • Finland • France • Germany • Greece • Hong Kong SAR • Hungary • India • Indonesia • Ireland  
Israel • Italy • Japan • Korea • Luxembourg • Malaysia • Mexico • The Netherlands • New Zealand • Norway • Peru • Philippines • Poland  
Portugal • Puerto Rico • Romania • Russia • Saudi Arabia • Scotland • Singapore • Slovakia • Slovenia • South Africa • Spain • Sweden  
Switzerland • Taiwan • Thailand • Turkey • Ukraine • United Kingdom • United States • Venezuela • Vietnam • Zimbabwe

Copyright © 2004 Cisco Systems, Inc. All rights reserved. CCIP, CCSP, the Cisco *Powered* Network mark, Cisco Unity, Follow Me Browsing, FormShare, and StackWise are trademarks of Cisco Systems, Inc.; Changing the Way We Work, Live, Play, and Learn, and iQuick Study are service marks of Cisco Systems, Inc.; and Aironet, ASIST, BPX, Catalyst, CCDA, CCDP, CCIE, CCNA, CCNP, Cisco, the Cisco Certified Internetwork Expert logo, Cisco IOS, the Cisco IOS logo, Cisco Press, Cisco Systems, Cisco Systems Capital, the Cisco Systems logo, Empowering the Internet Generation, Enterprise/Solver, EtherChannel, EtherSwitch, Fast Step, GigaStack, Internet Quotient, IOS, IP/TV, iQ Expertise, the iQ logo, iQ Net Readiness Scorecard, LightStream, Linksys, MGX, MICA, the Networkers logo, Networking Academy, Network Registrar, *Packet*, PIX, Post-Routing, Pre-Routing, RateMUX, Registrar, ScriptShare, SlideCast, SMARTnet, StrataView Plus, Stratm, SwitchProbe, TeleRouter, The Fastest Way to Increase Your Internet Quotient, TransPath, and VCO are registered trademarks of Cisco Systems, Inc. and/or its affiliates in the United States and certain other countries.

All other trademarks mentioned in this document or Web site are the property of their respective owners. The use of the word partner does not imply a partnership relationship between Cisco and any other company. (0402R) 204132\_ETMG\_AC\_11.04

