

# 5-in-1 X.21 Assembly and Pinouts

Document ID: 12225

---

## Introduction

### Prerequisites

Requirements

Components Used

Conventions

### X.21 Cable Assembly

X.21 DTE Cable Pinouts (DB-60 to DB-15)

X.21 DCE Cable Pinouts (DB-60 to DB-15)

### Related Information

---

## Introduction

This document describes the X.21 cable assembly and pinouts (Data Terminal Equipment – DTE and Data Communications – DCE).

## Prerequisites

## Requirements

There are no specific requirements for this document.

## Components Used


This document is not restricted to specific software and hardware versions.

The information in this document was created from the devices in a specific lab environment. All of the devices used in this document started with a cleared (default) configuration. If your network is live, make sure that you understand the potential impact of any command.

## Conventions

Refer to Cisco Technical Tips Conventions for more information on document conventions.

## X.21 Cable Assembly

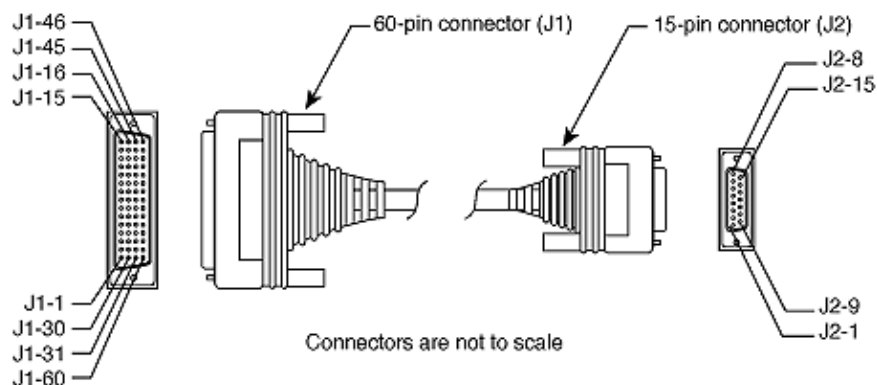

## X.21 DTE Cable Pinouts (DB-60 to DB-15)

The arrows in this table indicate signal direction:

- --> indicates DTE to DCE
- <-- indicates DCE to DTE
- --- means direction not applicable

60 Pin*1*	Signal	Description	Direction	15 Pin	Signal
J1-48					
J1-47	GND	Shorting			
J1-51	MODE_2	Group			
J1-52	GND	Shorting			
J1-46	<del>MODE_DCE</del> ---	Group Single	---	J2-1	Shield GND
J1-11					
J1-12	TxD/RxD+	Twisted	-->	J2-2	Transmit+
J1-9	TxD/RxD--	pair no. 3	-->	J2-9	Transmit--
J1-10	RTS/CTS+	Twisted	-->	J2-3	Control+
J1-28	RTS/CTS--	pair no. 2	-->	J2-10	Control--
J1-27	RxD/TxD+	Twisted	<--	J2-4	Receive+
J1-1	RxD/TxD--	pair no. 6	<--	J2-11	Receive--
J1-2	CTS/RTS+	Twisted	<--	J2-5	Indication+
J1-26	CTS/RTS--	pair no. 1	<--	J2-12	Indication--
J1-25	RxC/TxCE+	Twisted	<--	J2-6	Timing+
J1-15	RxC/TxCE--	pair no. 5	<--	J2-13	Timing--
Shield	Control_GND	Twisted pair no. 4	---	J2-8	Control GND
				Shield	---

\*1\* Any pin not referenced is not connected.

## X.21 DCE Cable Pinouts (DB-60 to DB-15)

60 Pin*1*	Signal	Description	Direction	15 Pin	Signal
J1-48					
J1-47	GND	Shorting			
	MODE_2	Group			

J1-46	Shield_GND	Single			
J1-46	Shield_GND				
	---	Single	---	J2-1	Shield GND
J1-28					
J1-27	RxD/TxD+	Twisted	<---	J2-2	Transmit+
J1-1	RxD/TxD---	pair no. 6	<---	J2-9	Transmit---
J1-2	CTS/RTS+	Twisted	<---	J2-3	Control+
J1-11	CTS/RTS---	pair no. 1	<---	J2-10	Control---
J1-12	TxD/RxD+	Twisted	-->	J2-4	Receive+
J1-9	TxD/RxD---	pair no. 3	-->	J2-11	Receive---
J1-10	RTS/CTS+	Twisted	-->	J2-5	Indication+
J1-24	RTS/CTS---	pair no. 2	-->	J2-12	Indication---
J1-23	TxC/RxC+	Twisted	-->	J2-6	Timing+
J1-15	TxC/RxC---	pair no. 4	-->	J2-13	Timing---
Shield	Control_GND	Twisted	---	J2-8	Control GND
		pair no. 5		Shield	---
*1* Any pin not referenced is not connected.					

## Related Information

- [Connecting Serial Network Modules](#)
- [Technical Support & Documentation – Cisco Systems](#)

[Contacts & Feedback](#) | [Help](#) | [Site Map](#)

© 2009 – 2010 Cisco Systems, Inc. All rights reserved. [Terms & Conditions](#) | [Privacy Statement](#) | [Cookie Policy](#) | [Trademarks of Cisco Systems, Inc.](#)

Updated: Mar 04, 2008

Document ID: 12225