

# Table of Contents

<b><u>Reset the CTC Password in ONS 15310–CL</u></b> .....	<b>1</b>
<u>Document ID: 66003</u> .....	1
<u>Introduction</u> .....	1
<u>Prerequisites</u> .....	1
<u>Requirements</u> .....	1
<u>Components Used</u> .....	1
<u>Conventions</u> .....	1
<u>Lamp Test Button</u> .....	1
<u>Reset the CTC Password</u> .....	2
<u>NetPro Discussion Forums – Featured Conversations</u> .....	2
<u>Related Information</u> .....	3

# Reset the CTC Password in ONS 15310–CL

Document ID: 66003

---

## Introduction

### Prerequisites

Requirements

Components Used

Conventions

### Lamp Test Button

### Reset the CTC Password

### NetPro Discussion Forums – Featured Conversations

### Related Information

---

## Introduction

This document describes the procedure to reset the password for the CISCO15 user name, which has **superuser** privileges in ONS 15310–CL. CISCO15 is the default user name that you can use to log into Cisco Transport Controller (CTC).

## Prerequisites

### Requirements

Cisco recommends that you have knowledge of these topics:

- Cisco ONS 15310–CL
- CTC

### Components Used

The information in this document is based on these software and hardware versions:

- Cisco ONS 15310–CL version 5.x

The information in this document was created from the devices in a specific lab environment. All of the devices used in this document started with a cleared (default) configuration. If your network is live, make sure that you understand the potential impact of any command.

### Conventions

Refer to Cisco Technical Tips Conventions for more information on document conventions.

## Lamp Test Button

You can use the Lamp Test button to test LEDs, and to reset the CTC password.

When you momentarily push the Lamp Test button, all LEDs on the ONS 15310–CL front panel light up. If an LED has more than one color, you can push the Lamp Test button to cycle all the colors.


Another use of the Lamp Test button is to reset the CTC password to the default value. The default CTC password is otbu+1.

## Reset the CTC Password

A prerequisite for this procedure is that you must be on-site. Complete these steps in order to reset the CTC password:

1. Locate the recessed Lamp Test button at the front of the ONS 15310-CL shelf (see Figure 1).

**Figure 1 Lamp Test Button**

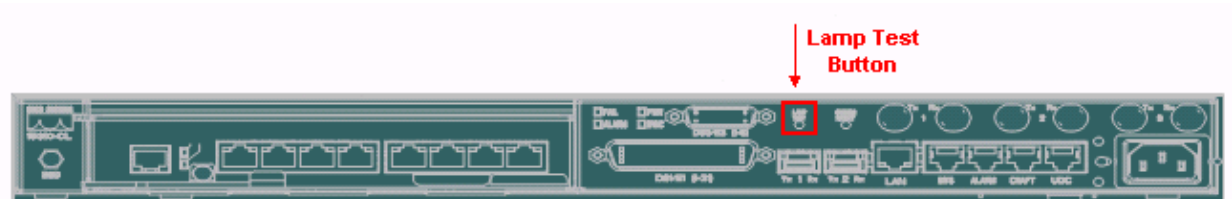

2. Use a pen tip (or something of similar size) to press in and hold down the Lamp Test button for five seconds. The Alarm LED turns red. The Fail and Sync LEDs turn orange.
3. Release the Lamp Test button for approximately two seconds.
4. Press in and hold down the Lamp Test button again for five seconds. The Sync LED first turns red, and then turns green.
5. Release the Lamp Test button.
6. The password for the CISCO15 user name is reset to otbu+1, which is the default password.

**Note:** The reset does not affect other existing user names and passwords. The superuser reset applies only to the local node where you perform the procedure.

**Note:** CISCO15 has superuser privileges, which allow you to create another user name and assign a password.

Complete these steps if you want to create a user name and password:

1. Click the **Provisioning > Security** tabs.
2. Click **Create**.
3. Fill in the fields with a new user name and password, and assign a security level.
4. Click **OK**.

## NetPro Discussion Forums – Featured Conversations

Networking Professionals Connection is a forum for networking professionals to share questions, suggestions, and information about networking solutions, products, and technologies. The featured links are some of the most recent conversations available in this technology.

NetPro Discussion Forums – Featured Conversations for Optical
Service Providers: Optical Networking
Service Providers: Metro

# Related Information

- **Technical Support & Documentation – Cisco Systems**
- 

All contents are Copyright © 1992–2006 Cisco Systems, Inc. All rights reserved. Important Notices and Privacy Statement.

---

Updated: Mar 08, 2006

Document ID: 66003

---