




RST-103
3082_05_2001_c1 © 2001, Cisco Systems, Inc. All rights reserved.

1

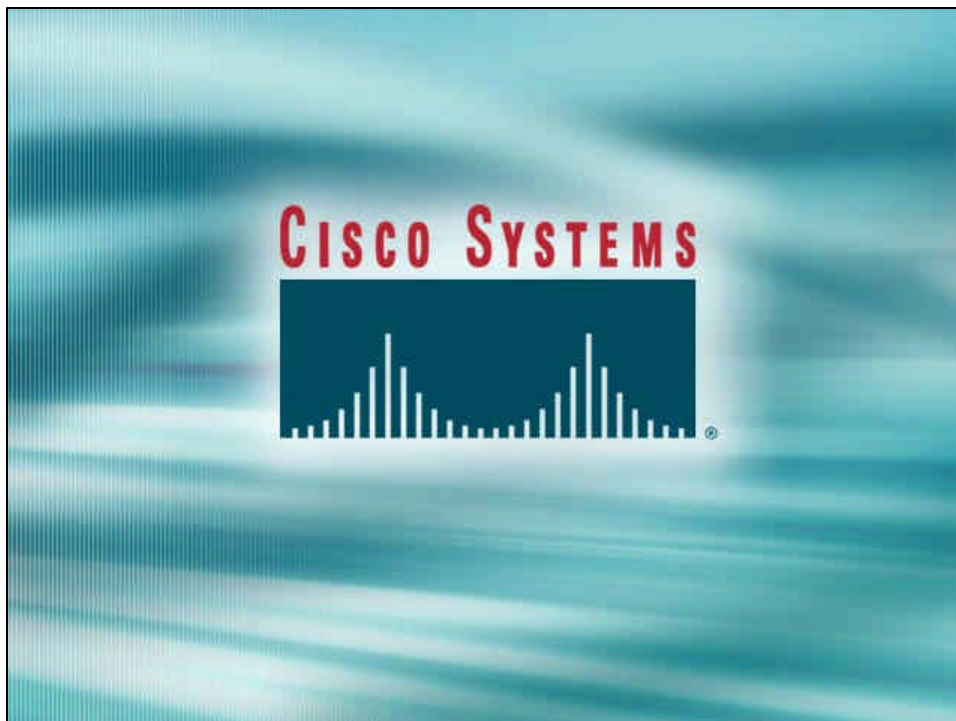

Introduction to Link State Protocols

Session RST-103

Agenda

- Overview of Link State Protocols
- Concepts in Link State Protocols
- The Dijkstra Algorithm
- IP Link State Protocols
- Choosing an IP Link State Protocol

Why Is It Called a Link State Protocol?

Cisco.com

- **Traditional distance vector protocols relay information regarding their relative distance to a destination**
- **Link State Protocols relay specific link characteristics and state information**
- **Only changes or updates are sent across the network**
- **Each router uses that information to build a routing table on it's own**

RST-103
3082_05_2001_c1 © 2001, Cisco Systems, Inc. All rights reserved.

5

Link State Protocols

Cisco.com

- **Rely on the Dijkstra shortest path first (SPF) algorithm to calculate path tree**
- **Maintain a database of network information for a complete “picture” of the network**
- **Form adjacencies between neighboring devices and flood to exchange database information**
- **Utilize a hierarchal design to enable scalability**

RST-103
3082_05_2001_c1 © 2001, Cisco Systems, Inc. All rights reserved.

6

Advantages of a Link State Protocol

Cisco.com

- **Uses metrics (costs) to calculate path**
- **Typically displays faster convergence than distance vector routing protocols**
- **Typically more scalable due to hierarchical nature**

RST-103
3082_05_2001_c1 © 2001, Cisco Systems, Inc. All rights reserved.

7

Dijkstra Protocols

Cisco.com

- **IS-IS**
- **OSPF**
- **CLNS/DECnet phase 5**
- **NLSP**

RST-103
3082_05_2001_c1 © 2001, Cisco Systems, Inc. All rights reserved.

8

Common Concepts

Metrics

- **Metric=path cost**
- **Numeric value that can be administrator assigned, or calculated using link characteristics information**
- **More flexible than hops used in DVRPs**

Topology/Link State Database

Cisco.com

- **The LSDB contains information regarding all links and routers within a logical area**
- **A router has a separate LS database for each area to which it belongs**
- **All routers belonging to the same area have identical database**
- **SPF calculation is performed separately for each area**

RST-103
3082_05_2001_c1 © 2001, Cisco Systems, Inc. All rights reserved.

11

Adjacencies

Cisco.com

- **Routers participating in a Link State Protocol are uniquely identified throughout the network with a router ID (some form of address)**
- **Link state protocol routers “discover” their adjacent neighbors with some form of Hello protocol**
- **Once discovered neighbors form a relationship to exchange/synchronize LSDB information between them**


RST-103
3082_05_2001_c1 © 2001, Cisco Systems, Inc. All rights reserved.

12

Building the Database

Cisco.com

- Hello packets discover neighbors
- Once neighbors are discovered LSDB information is exchanged

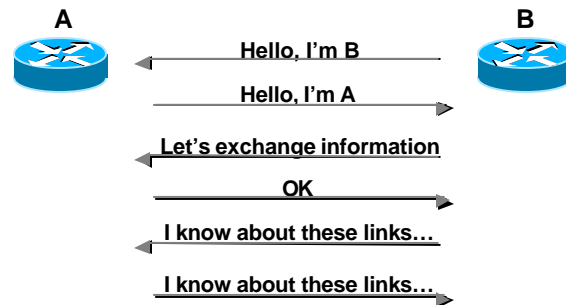

RST-103
3082_05_2001_c1 © 2001, Cisco Systems, Inc. All rights reserved.

13

Logical Hierarchy

Cisco.com


- Link State Protocols deploy a logical hierarchy in their design
- Typically consists of two levels
- Usually consists of the concept of a “backbone” level and another sub-level
 - OSPF: Backbone area (area 0), regular areas
 - IS-IS: L2 areas, L1 areas
- Enables scalability by summarizing and abstracting, thereby reducing, information from lower level areas into the higher level area

RST-103
3082_05_2001_c1 © 2001, Cisco Systems, Inc. All rights reserved.

14

Not Summarized: Specific Links

Cisco.com

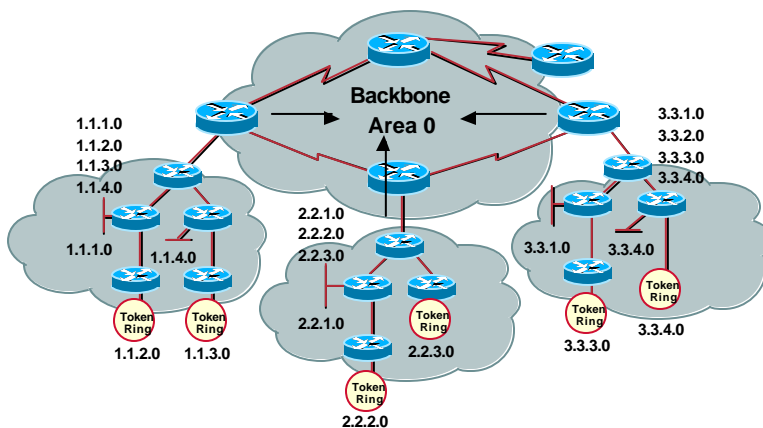


- Only summary LSA advertised out
- Link-state changes do not propagate

RST-103
3082_05_2001_c1 © 2001, Cisco Systems, Inc. All rights reserved.

15

Summarized: Summary Links

Cisco.com

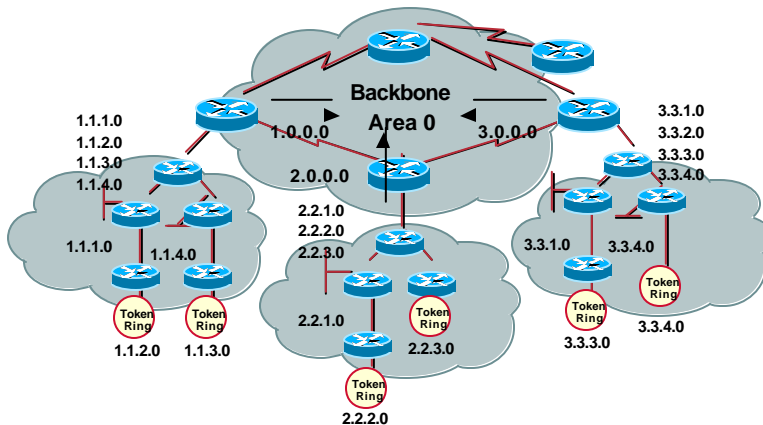

- Only summary LSA advertised out
- Link-state changes do not propagate

RST-103
3082_05_2001_c1 © 2001, Cisco Systems, Inc. All rights reserved.

16

Flooding

Cisco.com


- Information that changes or is learned from a neighbor is “flooded” across a logical network area
- This is done to maintain consistency of the LSDB across all routers

RST-103
3082_05_2001_c1 © 2001, Cisco Systems, Inc. All rights reserved.

17

Flooding

Cisco.com

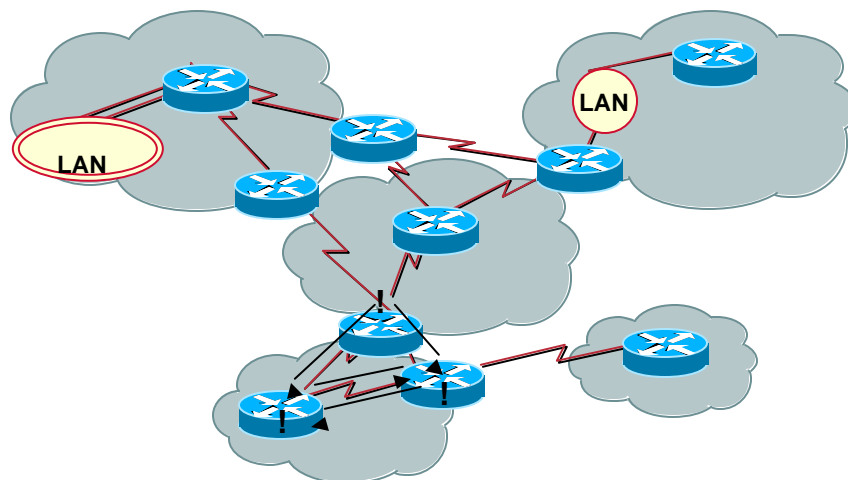

RST-103
3082_05_2001_c1 © 2001, Cisco Systems, Inc. All rights reserved.

18

The Dijkstra Algorithm

Dijkstra

Shortest Path First (SPF) Algorithm

- Dijkstra is a path finding algorithm
- Will find the shortest path from A to B given intermediate path and cost information
- One of many path finding algorithms:
Dijkstra, best path, A*, etc

Dijkstra

Cisco.com

Shortest Path First (SPF) Algorithm

- **Link state database**
Created with link state packets (LSPs) from each router
- **TENT database**
Tentative triples (ID, path cost, direction)

RST-103
3082_05_2001_c1 © 2001, Cisco Systems, Inc. All rights reserved.

21

Dijkstra (SPF) Overview

Cisco.com

- **PATH database**
Best path triples (ID, path cost, direction)
- **Forwarding database**
Aka the routing table

RST-103
3082_05_2001_c1 © 2001, Cisco Systems, Inc. All rights reserved.

22

Dijkstra (SPF) Overview (Cont.)

Cisco.com


- All routers exchange Link State Packets (LSPs)
- Each starts with itself as root
- Tent is built from LSPs
- Path is created by examining and comparing tent triples
- Once path is final the forwarding table is populated

RST-103
3082_05_2001_c1 © 2001, Cisco Systems, Inc. All rights reserved.

23

Dijkstra Basics

Cisco.com

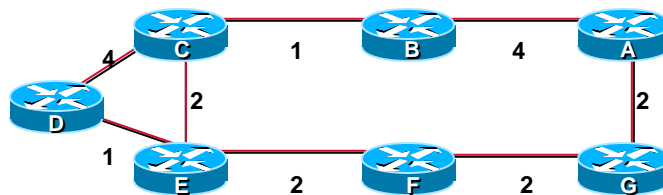


- Router IDs are alphabetic
- Costs are numeric
- Lowest cost best

RST-103
3082_05_2001_c1 © 2001, Cisco Systems, Inc. All rights reserved.


24

LSP Data

A	B	C	D	E	F	G
B/4	A/4	B/1	C/4	C/2	E/2	A/2
G/2	C/1	D/4	E/1	D/1	G/2	F/2
		E/2		F/2		

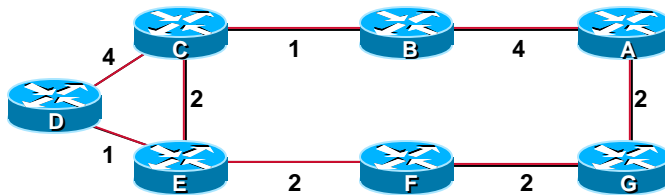

Dijkstra Example—1/7

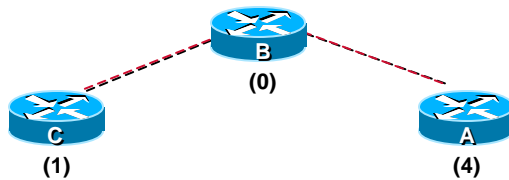


A	B	C	D	E	F	G
B/4	A/4	B/1	C/4	C/2	E/2	A/2
G/2	C/1	D/4	E/1	D/1	G/2	F/2
		E/2		F/2		

- As an example start with B
- A and C costs are tent

Dijkstra Example—2/7

Cisco.com

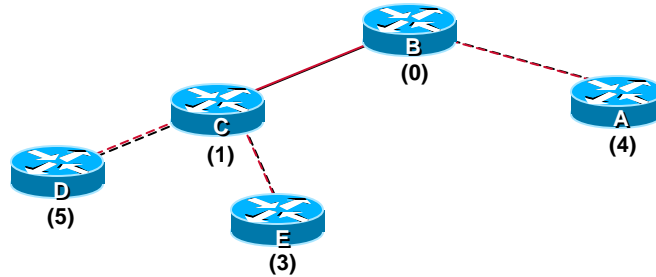

- Now fill in C
- D,E are in tent
- BC is now in path


A	B	C	D	E	F	G
B/4	A/4	B/1	C/4	C/2	E/2	A/2
G/2	C/1	D/4	E/1	D/1	G/2	F/2
		E/2		F/2		

RST-103
3082_05_2001_c1 © 2001, Cisco Systems, Inc. All rights reserved.

27

Dijkstra Example—3/7

Cisco.com

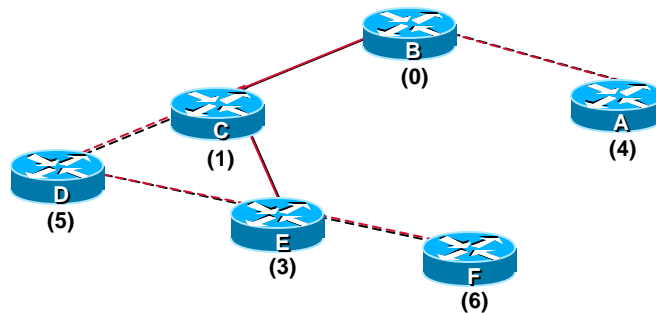

- Now fill in C
- D,E are in tent
- BC is now in path


A	B	C	D	E	F	G
B/4	A/4	B/1	C/4	C/2	E/2	A/2
G/2	C/1	D/4	E/1	D/1	G/2	F/2
		E/2		F/2		

RST-103
3082_05_2001_c1 © 2001, Cisco Systems, Inc. All rights reserved.

28

Dijkstra Example—4/7

Cisco.com

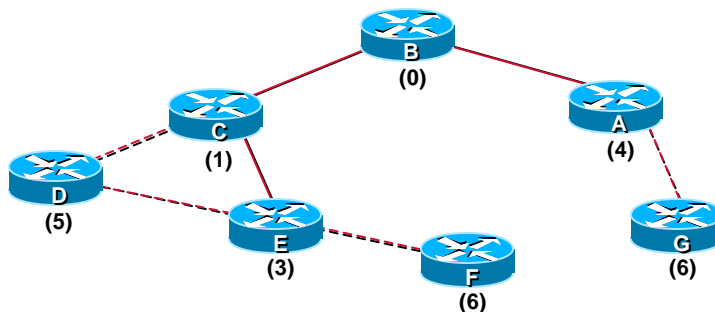

- Now fill in A
- G is in tent
- BA is now in path


A	B	C	D	E	F	G
B/4	A/4	B/1	C/4	C/2	E/2	A/2
G/2	C/1	D/4	E/1	D/1	G/2	F/2
		E/2		F/2		

RST-103
3082_05_2001_c1 © 2001, Cisco Systems, Inc. All rights reserved.

29

Dijkstra Example—5/7

Cisco.com

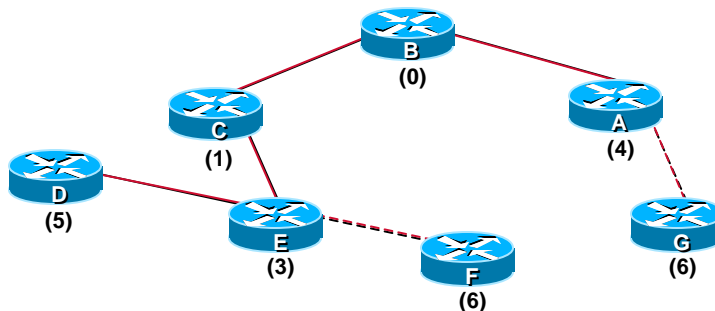

- CD is removed
- ED is placed in path


A	B	C	D	E	F	G
B/4	A/4	B/1	C/4	C/2	E/2	A/2
G/2	C/1	D/4	E/1	D/1	G/2	F/2
		E/2		F/2		

RST-103
3082_05_2001_c1 © 2001, Cisco Systems, Inc. All rights reserved.

30

Dijkstra Example—6/7

Cisco.com

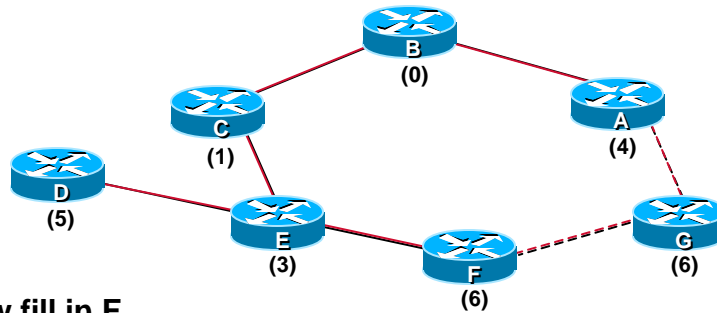

- Now fill in F
- G is Tent
- GF does not provide better path
- EF is in path


A	B	C	D	E	F	G
B/4	A/4	B/1	C/4	C/2	E/2	A/2
G/2	C/1	D/4	E/1	D/1	G/2	F/2
		E/2		F/2		

RST-103
3082_05_2001_c1 © 2001, Cisco Systems, Inc. All rights reserved.

31

Dijkstra Example—7/7

Cisco.com

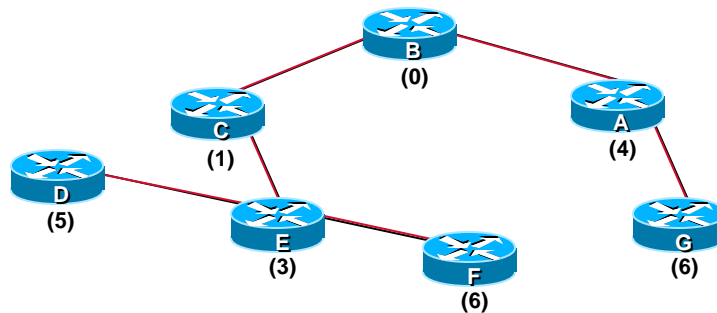

- Now fill in G
- FG is removed
- AG is in path

A	B	C	D	E	F	G
B/4	A/4	B/1	C/4	C/2	E/2	A/2
G/2	C/1	D/4	E/1	D/1	G/2	F/2
		E/2		F/2		

RST-103
3082_05_2001_c1 © 2001, Cisco Systems, Inc. All rights reserved.

32

IP Link State Protocols

Terminology in IP LSPs

OSPF

- Host
- Router
- Link
- Packet
- Designated router (DR)
- Backup DR (BDR)
- Link-State Advertisement (LSA)
- Hello packet
- DataBase Description (DBD)

ISIS

- End System (ES)
- Intermediate System (IS)
- Circuit
- Protocol Data Unit (PDU)
- Designated IS (DIS)
- N/A (no BDIS is used)
- Link-State PDU (LSP)
- IIH PDU
- Complete sequence number PDU (CSNP)

Terminology (Cont.)

Cisco.com

OSPF

- Area
- Non-backbone area
- Backbone area
- Area Border Router (ABR)
- Autonomous System Boundary Router (ASBR)

ISIS

- Sub domain (area)
- Level-1 area
- Level-2 Sub domain (backbone)
- L1L2 router
- Any IS

RST-103
3082_05_2001_c1 © 2001, Cisco Systems, Inc. All rights reserved.

35

Media Handling

Cisco.com

OSPF

- Point-to-point
- Broadcast (LAN segments)
- Non-broadcast
- Point-to-multipoint

OSPF

- Point-to-point
- Broadcast

RST-103
3082_05_2001_c1 © 2001, Cisco Systems, Inc. All rights reserved.

36

LSDB Management

Cisco.com

OSPF

- OSPF counts up to MaxAge (60 minutes)
- It is not configurable
- Thus, every LSA needs to be refreshed every LSRefreshTime period (30 minutes)
- Refresh is a fixed constant

ISIS

- ISIS counts down to 0
- LSPs get flushed when age reaches 0
- LSPs are originated with a configurable non-zero value
- Thus refreshment interval is configurable (default is 15 minutes)

RST-103
3082_05_2001_c1 © 2001, Cisco Systems, Inc. All rights reserved.

37

Cisco.com

Choosing an IP Link State Protocol

RST-103
3082_05_2001_c1 © 2001, Cisco Systems, Inc. All rights reserved.

38

Choosing an IP LSP

Cisco.com

- Both protocols are over 10 years old, using graph theory that's at least 40 years old
- Both protocols are (even still) works in progress
- OSPF is more granular so you need to know the flooding behavior of different types of LSA's
- ISIS can be simpler once you get over the NSAP addresses

* Dave Katz June 2000 NANOG19

RST-103
3082_05_2001_c1 © 2001, Cisco Systems, Inc. All rights reserved.

39

Choosing an IP LSP

Cisco.com

- **So which one is better ?**
 - Depends on your comfort level and understanding**
 - Both scale equally well**
 - Do not implement them the same way**
 - Neither one will compensate for poor design**

RST-103
3082_05_2001_c1 © 2001, Cisco Systems, Inc. All rights reserved.

40

Introduction to Link State Protocols

Session RST-103

Please Complete Your Evaluation Form

Session RST-103

