

# Table of Contents

<b><u>Configuring NFAS with Four T1s</u></b> .....	<b>1</b>
<u>Document ID: 9584</u> .....	1
<u>Introduction</u> .....	1
<u>Prerequisites</u> .....	1
<u>Requirements</u> .....	1
<u>Components Used</u> .....	2
<u>Conventions</u> .....	2
<u>Background Information</u> .....	2
<u>NFAS Terminology</u> .....	2
<u>Required Command</u> .....	2
<u>Configure</u> .....	3
<u>Network Diagram</u> .....	3
<u>Configurations</u> .....	4
<u>Verify</u> .....	6
<u>Sample show Output</u> .....	6
<u>Troubleshoot</u> .....	9
<u>Troubleshooting Commands</u> .....	9
<u>If the Controller is Shut</u> .....	9
<u>Related Information</u> .....	10

# Configuring NFAS with Four T1s

Document ID: 9584

---

## Introduction

### Prerequisites

- Requirements
- Components Used
- Conventions

### Background Information

- NFAS Terminology
- Required Command

### Configure

- Network Diagram
- Configurations

### Verify

- Sample show Output

### Troubleshoot

- Troubleshooting Commands
- If the Controller is Shut

### Related Information

---

## Introduction

ISDN Non-Facility Associated Signaling (NFAS) allows a single D channel to control multiple Primary Rate Interfaces (PRIs). You can configure a backup D channel when the primary NFAS D channel fails. When you configure the channelized T1 controllers for ISDN PRI, you only need to configure the NFAS primary D channel; its configuration is distributed to all the members of the associated NFAS group.

By using a single D channel to control multiple PRIs, one extra channel on each interface is free to carry data traffic. Any hard failure of the primary D–signaling channel results in an immediate switchover to the backup D channel without disconnecting currently connected users.

**Note:** If you configure a backup D channel, only 23 B channels can be used on the backup T1 controller because the D channel on the backup is unavailable. Therefore, only those T1s that are neither primary nor backup can have 24 B channels available. In this configuration, T1 controller 4/0 is the primary and has 23 available B channels, and T1 controller 4/1 is the backup and has 23 available B channels. T1 controllers 5/0 and 5/1 each have 24 available B channels.

## Prerequisites

### Requirements

The prerequisites for NFAS are as follows:

- NFAS is supported only with a channelized T1 controller and, as a result, the T1 controllers must also be configured for ISDN PRI before implementing NFAS. For more information on configuring ISDN, refer to the ISDN Support Page.
- The router configured for NFAS must connect to either a 4ess, dms250, dms100, or a National ISDN switch type.

**Note:** NFAS is not supported on primary–5ess type switches. Consult your Service Provider or Telco to determine whether NFAS can be configured for your T1 line.

- NFAS must be configured on your Telco's ISDN switch.
- You must be using Cisco IOS® Software Release 11.3T or later.

## Components Used

The information in this document is based on these software and hardware versions:

- The following configuration was tested with a Cisco 7507 router running Cisco IOS Software Release 12.0(5).
- This configuration illustrates how to set up four NFAS members within the same group. The primary NFAS interface is T1 4/0, and the backup is T1 4/1. T1 controllers 5/0 and 5/1 have 24 B channels available to them

The information in this document was created from the devices in a specific lab environment. All of the devices used in this document started with a cleared (default) configuration. If your network is live, make sure that you understand the potential impact of any command.

## Conventions

For more information on document conventions, refer to Cisco Technical Tips Conventions.

## Background Information

### NFAS Terminology

Commonly used NFAS terms are as follows:

- NFAS – An ISDN service that allows a single D channel to control multiple PRIs. Using a single D channel to control multiple PRIs allows one B channel on each interface to carry other traffic.
- 24 B channel interface – A PRI channel group configured to have no NFAS D channel; all the 24 channels are B channels. This particular T1 uses the D channel configured in the primary controller for signaling.
- NFAS group – A PRI channel grouping (the group of interfaces) under the control of a single D channel. The channel group can include all the ISDN channels on multiple T1 controllers.

**Note:** NFAS can be configured with members in different slots on the router (for example, NFAS members are not restricted to being on the same slot or module). Also, within a single chassis, five NFAS groups are supported. In cases where T1s from multiple providers are used, they are often grouped by provider.

- NFAS member – A PRI in an NFAS group. For example, an NFAS group might include serial interfaces 1/0:23, 1/1:23, and 2/0:23 if T1 controllers 1/0, 1/1, and 2/0 are configured in one NFAS group. To display the members of all NFAS group, use the show isdn nfas group privileged EXEC command.

## Required Command

**Note:** Normal ISDN PRI configuration commands do not appear in this document. See the Related Information section for more information on configuring ISDN PRI.

## **pri-group timeslots 1–24 nfas\_d function nfas\_interface int\_number nfas\_group group\_number**

This controller configuration command assigns the T1 controller to the NFAS group and designates its function within the group. Specify the following values as appropriate:

- **function** – The function to be performed by timeslot 24, either primary, backup, or none. Every NFAS group must have one primary. The router does not require a backup, however most NFAS implementations do have a backup D channel. Contact your telco to determine whether you should configure a backup D channel for your NFAS group. The rest of the controllers can be configured with none, which designates the 24th timeslot as a B channel.

**Note:** Configure the primary and backup D channels exactly as specified by your Telco. A common error with an NFAS configuration is incorrectly designating which T1 is the primary and which is the backup.

- **int\_number** – A value assigned by the service provider and used to uniquely identify the PRI. The values possible range from 0 to the highest t1 available on the router, minus one. For example, if the router has 10 T1s the NFAS interface number can range between 0 and 9. The 0 interface must be assigned to the primary D channel and the 1 interface to the backup D channel.

**Note:** In certain scenarios where the NFAS setup does not use a backup D channel, do not use the keyword nfas\_interface 1 as it is reserved for the backup D channel. Configure only nfas\_interfaces 0, 2, 3, 4 and so on.

**Note:** When configuring multiple NFAS groups, the 0 interface must be assigned to each primary D channel and the 1 interface to each backup D channel, provided they are in a different nfas\_group.

- **group\_number** – Group identifier unique on the router. Multiple NFAS groups can exist on the router. Each group must be configured with a primary and secondary controller.


## **Configure**

In this section, you are presented with the information to configure the features described in this document.

**Note:** To find additional information on the commands used in this document, use the Command Lookup Tool (registered customers only) .

## **Network Diagram**

This document uses this network setup:

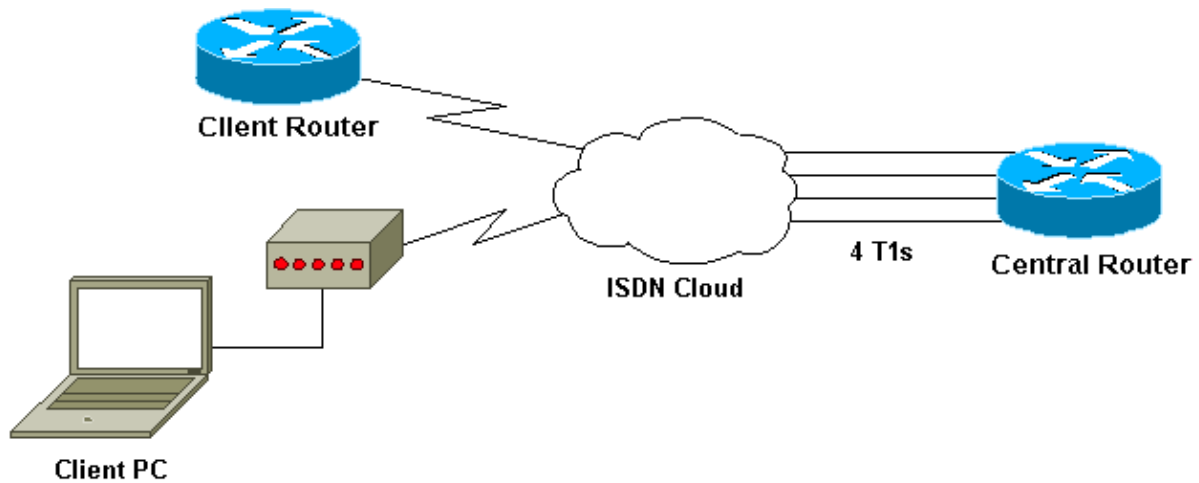

## Configurations

This document uses these configurations:

```

Cisco 7507

!
!
Last configuration change at 13:07:00 cst Mon Jan 31 2000
!
version 12.0
no service pad
service timestamps debug uptime
service timestamps log datetime localtime show-timezone
no service password-encryption
!
hostname Router
!
enable secret
!
ip subnet-zero
no ip domain-lookup
ip host west 172.22.173.21
isdn switch-type primary-dms100

!--- Switchtype must be configured.
!--- Contact your Telco for more information.
!--- Primary T1 controller.

controller T1 4/0
framing esf
linecode b8zs
pri-group timeslots 1-24 nfas_d primary nfas_int 0 nfas_group 1

!--- Primary D channel, nfas interface 0 and member of group 1.

controller T1 4/1
framing esf
linecode b8zs
pri-group timeslots 1-24 nfas_d backup nfas_int 1 nfas_group 1

!--- Backup D channel, nfas interface 1 and member of group 1.

```

```

controller T1 5/0
framing esf
linecode b8zs
pri-group timeslots 1-24 nfas_d none nfas_int 2 nfas_group 1

!--- 24th timeslot used as B channel, nfas interface 2 and member of group 1.

controller T1 5/1
framing esf
linecode b8zs
pri-group timeslots 1-24 nfas_d none nfas_int 3 nfas_group 1

!--- 24th timeslot used as B channel, nfas interface 3 and member of group 1.

process-max-time 200
!
interface FastEthernet1/0/0
 ip address 10.1.1.1 255.255.255.0
 no ip directed-broadcast
 no ip route-cache distributed
 no ip mroute-cache
 full-duplex
!
interface FastEthernet1/1/0
 no ip address
 no ip directed-broadcast
 no ip route-cache distributed
 no ip mroute-cache
 shutdown

!--- D channel for primary controller.
!--- Note: Other D channels in the group are not seen.
!--- All configuration changes made to the primary D channel propagate
to all the NFAS group members.

interface Serial4/0:23
 description primary d channel
 no ip address
 no ip directed-broadcast
 encapsulation ppp
 dialer pool-member 1
 isdn switch-type primary-dms100
 isdn tei-negotiation first-call
 ppp authentication chap
 ppp multilink
!
interface Dialer0
 ip address 192.168.10.1 255.255.255.0
 no ip directed-broadcast
 encapsulation ppp
 dialer remote-name C3620-EA-BCO
 dialer pool 1
 dialer-group 1
 ppp authentication chap
 ppp multilink
!
router eigrp 200
 redistribute static
 network 10.0.0.0
 network 192.168.10.0
!

```

```

no ip classless
ip route 0.0.0.0 0.0.0.0 10.1.1.2
!
dialer-list 1 protocol ip permit
!
line con 0
  transport input none
line aux 0
  password
  login
  modem InOut
  stopbits 1
line vty 0 4
  exec-timeout 60 0
  password
  login
!
end

```

## Verify

This section provides information you can use to confirm your configuration is working properly.

Certain **show** commands are supported by the Output Interpreter Tool ( registered customers only) , which allows you to view an analysis of **show** command output.

- **show isdn status** To ensure that the router is properly communicating with the ISDN switch. In the output, verify that Layer 1 Status is ACTIVE, and that the Layer 2 Status state = MULTIPLE\_FRAME\_ESTABLISHED appears.
- **show isdn nfas group** Privileged EXEC command to display the members of a specified NFAS group or all NFAS groups.
- **show isdn service** Privileged EXEC command to show the state and service status of each ISDN channel. The D channels are indicated as reserved. This command can be used to verify if individual channels are busied out or are faulty.
- **show controller t1** To display the controller status specific to the controller hardware. It also displays information to troubleshoot physical layer and data link layer problems. In normal operation, the output should indicate that the controller is up and that there are no alarms.

**Note:** Ensure that the T1 connection designated as primary by the Telco and in your router configuration are connected to the correct port. A common error is having the wrong T1 line (cables) connected to the primary T1 port on your router.

## Sample show Output

Following are some **show** command outputs from the router configured with NFAS.

Here is an example of the **show isdn status** command output:

```

Router#show isdn status
Global ISDN Switchtype = primary-dms100
ISDN Serial4/0:23 interface
    dsl 0, interface ISDN Switchtype = primary-dms100 :
Primary D channel of nfas group 1
    Layer 1 Status:
        ACTIVE

```

```

!--- Primary D channel is active

Layer 2 Status:
    TEI = 0, Ces = 1, SAPI = 0, State = MULTIPLE_FRAME_ESTABLISHED

!--- Layer 2 is established correctly

Layer 3 Status:
    23 Active Layer 3 Call(s)
Activated dsl 0 CCBs = 23
    CCB:callid=0xA0B, sapi=0x0, ces=0x0, B-chan=1
    CCB:callid=0xA0C, sapi=0x0, ces=0x0, B-chan=3
    CCB:callid=0xA0D, sapi=0x0, ces=0x0, B-chan=4
    CCB:callid=0xA0E, sapi=0x0, ces=0x0, B-chan=2
    CCB:callid=0xA0F, sapi=0x0, ces=0x0, B-chan=5
    CCB:callid=0xA10, sapi=0x0, ces=0x0, B-chan=6
    CCB:callid=0xA11, sapi=0x0, ces=0x0, B-chan=7
    CCB:callid=0xA12, sapi=0x0, ces=0x0, B-chan=8
    CCB:callid=0xA13, sapi=0x0, ces=0x0, B-chan=9
    CCB:callid=0xA14, sapi=0x0, ces=0x0, B-chan=10
    CCB:callid=0xA15, sapi=0x0, ces=0x0, B-chan=11
    CCB:callid=0xA16, sapi=0x0, ces=0x0, B-chan=12
    CCB:callid=0xA17, sapi=0x0, ces=0x0, B-chan=13
    CCB:callid=0xA18, sapi=0x0, ces=0x0, B-chan=14
    CCB:callid=0xA1B, sapi=0x0, ces=0x0, B-chan=15
    CCB:callid=0xA1C, sapi=0x0, ces=0x0, B-chan=16
    CCB:callid=0xA1D, sapi=0x0, ces=0x0, B-chan=17
    CCB:callid=0xA1E, sapi=0x0, ces=0x0, B-chan=18
    CCB:callid=0xA1F, sapi=0x0, ces=0x0, B-chan=19
    CCB:callid=0xA20, sapi=0x0, ces=0x0, B-chan=20
    CCB:callid=0xA21, sapi=0x0, ces=0x0, B-chan=21
    CCB:callid=0xA22, sapi=0x0, ces=0x0, B-chan=22
    CCB:callid=0xA23, sapi=0x0, ces=0x0, B-chan=23
The Free Channel Mask: 0x80000000
ISDN Serial4/1:23 interface
    dsl 1, interface ISDN Switchtype = primary-dms100 :
Backup D channel of nfas group 1
    Layer 1 Status:
        DEACTIVATED
    Layer 2 Status:
        TEI = 0, Ces = 1, SAPI = 0, State = TEI_ASSIGNED
    Layer 3 Status:
        0 Active Layer 3 Call(s)
    Activated dsl 1 CCBs = 0
    The Free Channel Mask: 0x7E7FFB
ISDN Serial5/0:23 interface
    dsl 2, interface ISDN Switchtype = primary-dms100 :
Group member of nfas group 1
    Layer 1 & 2 Status Not Applicable

!--- NFAS member: D channel is used as B channel.

Layer 3 Status:
    0 Active Layer 3 Call(s)
    Activated dsl 2 CCBs = 0
    The Free Channel Mask: 0x0
ISDN Serial5/1:23 interface
    dsl 3, interface ISDN Switchtype = primary-dms100 :
Group member of nfas group 1
    Layer 1 & 2 Status Not Applicable

!--- NFAS member-channel is used as B channel.

Layer 3 Status:

```





## Related Information

- **Configure ISDN NFAS**
  - **NFAS with D Channel Back Up**
  - **Configuring ISDN PRI**
  - **T1 Layer 1 Troubleshooting**
  - **Technical Support – Cisco Systems**
- 

All contents are Copyright © 1992–2005 Cisco Systems, Inc. All rights reserved. Important Notices and Privacy Statement.

---

Updated: Sep 15, 2005

Document ID: 9584

---