


# Data Sheet

With the new Packet OC-3 Interface Processor for Cisco 7500 and 7000/RSP series routers, Cisco offers industry-leading broadband data interface bandwidth to support the most demanding applications across both local-area and wide-area networking environments. Operating at 155 Mbps, the Packet OC-3 interface provides the highest available interface bandwidth for packet-based traffic and is completely compatible with SONET and Synchronous Digital Hierarchy (SDH) network facilities. By using standard packet protocols with efficient overhead structures, the Packet OC-3 Interface Processor maximizes data throughput and line utilization for expensive, high-bandwidth facilities.

In 1991, Cisco pioneered the packet-based High-Speed Serial Interface (HSSI®) to meet the need for high-speed data transport over 45-Mbps DS-3 facilities. Over the last five years, carriers worldwide have

In wide-area networking applications, the Packet OC-3 interface can directly connect to both carrier and private SONET and SDH facilities. SONET/SDH facilities often provide the most reliable transport, because they can be configured based on dual counter-rotating ring topologies. In local-area networking, Packet OC-3 interfaces can be used to provide direct broadband links between routers in a campus or building without the need for an intermediate switch.

Cisco's Packet OC-3 Interface Processor provides a single OC-3 155-Mbps port and is available with either single-mode or multimode interfaces. Packet data is transported using Point-to-Point Protocol (PPP) and is mapped into the STS-3c/STM-1 frame. The Packet OC-3 interface is compliant with RFC 1619, "PPP over SONET/SDH," and RFC 1662, "PPP in HDLC-like Framing." The encapsulations used apply only seven bytes of transport overhead per frame, which is less than half of that involved with ATM using ATM adaptation layer 5 (AAL5) and line card control (LCC) Subnetwork Access Protocol (SNAP) encapsulations. The Packet OC-3 Interface Processor can operate in any Cisco 7500 series or Cisco 7000 series system equipped

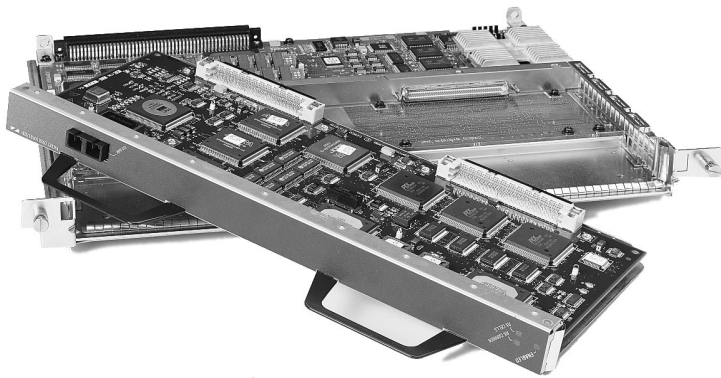

## Packet OC-3 Interface Processor Data Sheet

### Highest Available Interface Bandwidth for Packet-Based Traffic

invested heavily in SONET/SDH equipment, making SONET/SDH the most widely deployed broadband networking technology. And over the same period the bandwidth requirements of data applications have grown dramatically. The new Packet OC-3 interface now enables these broadband data applications to efficiently access this extensive broadband transport infrastructure. Equipped with OC-3 interfaces, packet-based networking equipment can match the interface bandwidths supported by Asynchronous Transfer Mode (ATM) while providing much higher bandwidth efficiencies.

with a Route Switch Processor (RSP). In Cisco 7000 series routers, the Packet OC-3 interface processor can access the system's CxBus; in Cisco 7500 series systems it can utilize the full gigabit-per-second bandwidth provided by the Cisco 7500 CyBus.

The Packet OC-3 Interface Processor operates on a version of the Cisco Internetwork Operating System (Cisco IOS™) software that will support distributed switching and distributed services capabilities.

## Features

- Standards-compliant SONET/SDH interface
- Supports full-duplex operation at 155 Mbps
- Intermediate reach optical interface with single-mode fiber
- Optical interface with multimode fiber
- Supports SONET/STS-3c and SDH/STM-1 framing and signaling overhead
- Online insertion and removal (OIR), enabling users to remove, add, or replace interface processors on line
- 16 to 64 Mbytes of onboard packet and program memory to support transmit and receive buffering
- Software download capability optimizes operation across long distance links and reduces management costs by enabling remote administration

## Specifications

### Physical Specifications

- Occupies one slot in any Cisco 7500 series or Cisco 7000 series with RSP
- Weight: 5 lbs (2.25 kg)

### Environmental Specifications

- Operating Temperature: 32 to 104°F (0 to 40°C)
- Storage Temperature: -4 to 149°F (-20 to 65°C)
- Relative Humidity: 10 to 90%, noncondensing

### Memory Options

- 16 MB (default) LAN and metropolitan area applications
- 32 MB Service provider/national backbone
- 64 MB International ISP applications

### Safety Certifications

- UL 1950
- CSA C22.2 No. 950-M29
- IEC 950
- EN60950

## Electromagnetic Emissions Certifications

- FCC Class A
- EN55022A Class B
- CISPR-22 Class B
- VCCI Class 2

## CE Mark

- IEC 801-2, 3, 4, 5, 6, 11

## Optical Power Budget—Single-Mode

- 16 dB—approximately 9 miles (15 km)
- Transmit power (at wavelength 1260–1360 nm): -15 to -8 dBm
- Receive power: -31 to -8 dBm
- Complies with Bellcore GR-253 Intermediate Reach Specification

## Optical Power Budget—Multimode

- 11.5 dB—approximately 1.5 miles (3 km)
- Transmit power (at wavelength 1270–1380nm): -18.5 to -14 dBm
- Receive power: -30 to -14 dBm

## Connector

- SC-duplex connector for network interface

## LEDs

- Enabled LED—Packet OC-3 is powered and active
- Rx Carrier LED—Indicates there is light detected on the Rx fiber
- Rx Packet LED—Indicates a packet was received on the interface

## Encapsulations

- RFC 1619 Point-to-Point Protocol over SONET/SDH
- RFC 1662 Point-to-Point Protocol in HDLC-like Framing

## Network Management

- SNMP agent v1 (RFC 1155-1157)
- MIB II (RFC 1213)

### Cisco Systems Worldwide Offices

#### Corporate Headquarters

Cisco Systems, Inc.  
170 West Tasman Drive  
San Jose, CA 95134-1706  
USA  
World Wide Web URL:  
<http://www.cisco.com>  
Tel: 408 526-4000  
800 553-NETS (6387)  
Fax: 408 526-4100

#### European Headquarters

Cisco Systems Europe s.a.r.l.  
Pare Evolic - Batiment L2  
16, Avenue du Quebec  
BP 706 Villebon  
91961 Courtaboeuf Cedex  
France  
Tel: 33 1 6918 61 00  
Fax: 33 1 6928 83 26

#### European Offices

Austria  
Tel: 43 1 7007 6256  
Fax: 43 1 7007 6027

#### Belgium

Tel: 32 2 778 42 00  
Fax: 32 2 778 43 00

#### Denmark

Tel: 45 33 37 71 57  
Fax: 45 33 37 71 53

#### Finland

Tel: 358 1594 3090  
Fax: 358 1594 3093  
Germany  
Tel: 49 89 32 15070  
Fax: 49 89 32 150710

#### Ireland

Tel: 35 3 1 475 4244  
Fax: 35 3 1 475 4778

#### Italy

Tel: 39 2 26 97 31  
Fax: 39 2 26 92 9006

#### The Netherlands

Tel: 31 183 622 988  
Fax: 31 183 622 404

#### Norway

Tel: 47 22 83 06 31  
Fax: 47 22 83 22 12

#### Portugal

Tel: 351 1 340 45 31/2  
Fax: 351 1 340 45 75

#### South Africa

Tel: 27 11 807 4444  
Fax: 27 11 807 4447

#### Spain

Tel: 34 1 383 2178  
Fax: 34 1 383 8008

#### Sweden

Tel: 46 8 681 41 60  
Fax: 46 8 19 04 24

#### Switzerland

Tel: 41 1 905 20 50  
Fax: 41 1 941 50 60

#### United Arab Emirates

Tel: 971 4 318 788  
Fax: 971 4 313 681

#### United Kingdom

Tel: 44 1 81 818 1400  
Fax: 44 1 81 893 2824

### Intercontinental and Latin American Headquarters

Cisco Systems, Inc.  
170 West Tasman Drive  
San Jose, CA 95134-1706  
USA  
Tel: 408 526-7660  
Fax: 408 526-4646

### Asia

#### Hong Kong

Tel: 852 2583 9110  
Fax: 852 2824 9528

#### Beijing

Tel: 86 10 501 8888 x821/822  
Fax: 86 10 501 4531

#### India

Tel: 91 11 688 1234 x119  
Fax: 91 11 611 7688

#### Indonesia

Tel: 62 21 523 9132  
Fax: 62 21 523 9259

#### Korea

Tel: 82 2 3453 0850  
Fax: 82 2 3453 0851

#### Malaysia

Tel: 60 3 236 5147  
Fax: 60 3 236 5146

#### Philippines

Tel: 632 892 4476  
Fax: 632 811 5998

#### Singapore

Tel: 65 738 5535  
Fax: 65 738 2202

#### Taiwan

Tel: 88 62 577 4352  
Fax: 88 62 577 0248

#### Thailand

Tel: 66 2 253 5315  
Fax: 66 2 253 8440

#### Latin America

Argentina  
Tel: 54 1 811 7526  
Fax: 54 1 811 7495

#### Brazil

Tel/Fax: 55 11 822 6095  
Tel/Fax: 55 11 822 6396

#### Central America/Caribbean

Tel: 305 228-1200  
Fax: 305 222-8456

#### Colombia

Tel: 57 1 296 0067  
Fax: 57 1 616 3030

#### Mexico

Tel: 52 5 328 7600  
Fax: 52 5 328 7699

#### Venezuela

Tel & Fax: 58 2 963 6140

### Other Regional Offices

#### Australia

Tel: 61 2 9935 4100  
Fax: 61 2 9957 4077

#### Canada

Tel: 416 217-8000  
Fax: 416 217-8099

#### New Zealand

Tel: 64 9 358 3776  
Fax: 64 9 358 4442

#### Japanese Headquarters

Nihon Cisco Systems K.K.  
Seito Kaikan 4F  
5, Sanbancho, Chiyoda-ku  
Tokyo 102

#### Japan

Tel: 81 3 5211 2800  
Fax: 81 3 5211 2810

#### Cisco Systems has more than 125 sales offices worldwide. To contact your local account representative, call Cisco's corporate headquarters (California, USA) at 408 526-4000 or, in North America, call 800 553-NETS (6387).