

Versatile Interface Processor 6 Software Guidelines

Introduction

The Versatile Interface Processor 6 (VIP6) for Cisco 7500 Series routers is supported in several Cisco IOS® software releases. This document provides a guide to the various releases, and specifically discusses migration paths for current Cisco 7500 installations adopting the VIP6.

General Discussion

At First Customer Shipment (FCS), the VIP6 is supported in the Release 12.1E, 12.2T, and 12.0S. It is helpful to understand how the releases were derived to understand the maturity and feature sets offered by each release.

Cisco IOS Software Releases 12.0T and 12.1


Cisco IOS Release 12.1 is the direct descendant of Release 12.0T—as such, it offers all the advanced features of Release 12.0T, with additional fixes, code maturity, and stability.

The last 12.0T release was 12.0(7)T, after which the release numbering was incremented—the next maintenance release of this code is called 12.1(1). Release 12.1(1) and subsequent 12.1 releases are focused on code maturity and stability, and they are intended to achieve general -deployment (GD) certification. To reach this goal, the feature set of Release 12.1 was frozen with Release 12.1(1); new features and hardware support are now directed into the 12.1E and 12.1T releases.

When Release 12.0T became Release 12.1, two new branches, called 12.1E and 12.1T, were created for new feature integration. Release 12.1T integrates features and hardware support for platforms across the Cisco product line, whereas Release 12.1E is focused exclusively on feature and hardware support for the Cisco 7500, 7200, and 7100, and Catalyst® 6000 families. Both the 12.1E and 12.1T branches are “synchronized” to 12.1, receiving the same bug fixes committed into the 12.1 branch.

The relationship between Release 12.0, 12.0T, 12.1, and 12.1T is shown in Figure 1.

Figure 1 Cisco IOS Release Relationships

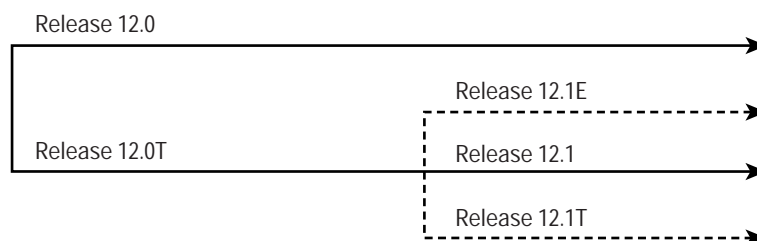

Public

Copyright © 2000 Cisco Systems, Inc. All Rights Reserved.

Page 1 of 3

Cisco IOS Software Releases 12.1T and 12.2

The last 12.1T release was 12.1(5)T, after which the release numbering was again incremented—the next maintenance release of this code is called 12.2(1). Similar to that of Release 12.1, Release 12.2(1) and subsequent 12.2 releases are also focused on code maturity and stability because they are intended to achieve general -deployment (GD) certification. To reach this goal, the feature set of Release 12.2 was frozen with Release 12.2(1).

When Release 12.1T became Release 12.2, three new branches, called 12.2S, 12.2B, and 12.2T, were created for new feature integration. Release 12.2T integrates features and hardware support for platforms across the Cisco product line. Release 12.2S is focused exclusively on feature and hardware support for the Cisco 7600, 7500, 7400, 7200, and 7100, and Catalyst® 6000 product families, and Release 12.2B is primarily focused on Broadband solutions, supporting the Cisco 7400, 7200, and 6400 product families.

Recommendations

For most VIP6 customers, Release 12.1E is the suggested release. It offers all the features of the extensively deployed 12.0T release, and is the next to become GD-certified release on the Cisco 7500 platform. Release 12.1E also offers a rich variety of software feature sets, including IP, multiprotocol, and special feature sets such as IP Security (IPSec) encryption and the Cisco IOS Firewall Feature Set. Where additional features are required, Release 12.2T should be considered.

Release 12.0S supports all 12.0 features as well as additional service-provider features; it is suitable for service-provider applications as well as large enterprises. However, Release 12.0S does not offer the extensive feature sets of Release 12.1E, and is strictly for IP deployments.

Table 1 summarizes the various releases supporting VIP6.

Table 1 VIP6 Software Release Summary

Release	Summary
12.1E	12.1-based release focused on Cisco 7x00 and Catalyst 6000 platforms; new Cisco 7500 features typically supported here first. Includes support for all 12.0T, 12.0XE, and 12.1 features.
12.2T	12.2-based release, offers additional hardware and software feature support for all Cisco platforms over time.
12.0S	Release most suitable for service providers; based on Release 12.0, with additional features and hardware support for service providers but feature sets limited to IP protocols.
12.2S	12.2-based release, offers all 12.0S and 12.1E features. Additional features for all Cisco 7x00, 10000, 12000, and Catalyst 6000 platforms added over time.

Memory Recommendations

Cisco IOS Releases 12.2T, 12.1E, and 12.0S require a minimum of 64 MB of Route Switch Processor (RSP) memory and 64 MB of VIP6 program memory. Some configurations will require more. For example, in service-provider applications, 128 MB of VIP6 program memory is required, with 256 MB recommended.

For further discussion of memory requirements, please refer to:

http://www.cisco.com/warp/customer/cc/cisco/mkt/core/7500/prodlit/mmry_wp.htm

Before Deploying a Release

Before deploying a Cisco IOS software release in a production network, always consult appropriate product-specific documentation, release notes, and field notices, refer to the online defect tracking system, and perform acceptance testing in your own test environment.

Refer to Release Notes

Before deploying a Cisco IOS software release, always refer to its release notes to confirm all appropriate features, interfaces, and platforms are supported, and to understand any caveats with a particular maintenance release. Often, a particular maintenance release (or later) may be required for your application, as indicated by the release notes.

Cisco IOS software configuration information and release notes are available at:

<http://www.cisco.com/univercd/cc/td/doc/product/software/>

More Information

For general information about Cisco IOS releases for the Cisco 7500 series, consult:

http://www.cisco.com/warp/customer/cc/cisco/mkt/core/pltsf/tech/slios_wp.htm

For questions and comments about this document, contact the Cisco 7500 Customer Service alias at cs-7500@cisco.com.

CISCO SYSTEMS



Corporate Headquarters

Cisco Systems, Inc.
170 West Tasman Drive
San Jose, CA 95134-1706
USA
<http://www.cisco.com>
Tel: 408 526-4000
800 553-NETS (6387)
Fax: 408 526-4100

European Headquarters

Cisco Systems Europe
11, Rue Camille Desmoulins
92782 Issy Les Moulineaux
Cedex 9
France
<http://www-europe.cisco.com>
Tel: 33 1 58 04 60 00
Fax: 33 1 58 04 61 00

Americas

Headquarters
Cisco Systems, Inc.
170 West Tasman Drive
San Jose, CA 95134-1706
USA
<http://www.cisco.com>
Tel: 408 526-7660
Fax: 408 527-0883

Asia Headquarters

Nihon Cisco Systems K.K.
Fuji Building, 9th Floor
3-2-3 Marunouchi
Chiyoda-ku, Tokyo 100
Japan
<http://www.cisco.com>
Tel: 81 3 5219 6250
Fax: 81 3 5219 6001

Cisco Systems has more than 200 offices in the following countries. Addresses, phone numbers, and fax numbers are listed on the Cisco Connection Online Web site at <http://www.cisco.com/go/offices>.

Argentina • Australia • Austria • Belgium • Brazil • Canada • Chile • China • Colombia • Costa Rica • Croatia • Czech Republic • Denmark • Dubai, UAE • Finland • France • Germany • Greece • Hong Kong • Hungary • India • Indonesia • Ireland • Israel • Italy • Japan • Korea • Luxembourg • Malaysia • Mexico • The Netherlands • New Zealand • Norway • Peru • Philippines • Poland • Portugal • Puerto Rico • Romania • Russia • Saudi Arabia • Singapore • Slovakia • Slovenia • South Africa • Spain • Sweden • Switzerland • Taiwan • Thailand • Turkey • Ukraine • United Kingdom • United States • Venezuela

Copyright © 2000, Cisco Systems, Inc. All rights reserved. Catalyst, Cisco, Cisco IOS, Cisco Systems, and the Cisco Systems logo are registered trademarks of Cisco Systems, Inc. or its affiliates in the U.S. and certain other countries. All other trademarks mentioned in this document are the property of their respective owners. The use of the word partner does not imply a partnership relationship between Cisco and any of its resellers. (9912R)5/00 LW