Virtualizacija 3

Martina Herceg Jungic

Cisco

mherceg@cisco.com

The Data Center Evolution

IT Relevance and Control

Phase 1	Phase 2	Phase 3
Mainframe	Client-Server and Distributed Computing	Service Oriented and Web 2.0 Based



Centralized

Decentralized

Virtualized

Appli

Addressing The Business Issues with IT

Consolidate

- Reduced complexity, less to manage
- Lower OPEX
- Regain control of IT resources

Virtualize

- Higher resource utilization
- Lower CAPEX
- Decouples logical from physical resources

Automate

- Dynamically allocate resources
- Simplified policy-based provisioning
- Increase IT productivity

FC over Ethernet (FCoE)

incits InterNational Committee for Information Technology Standards
Where IT all begins

FCoE

- Mapping of FC frames over Ethernet
- Enables FC to run on a lossless Data Center Ethernet network

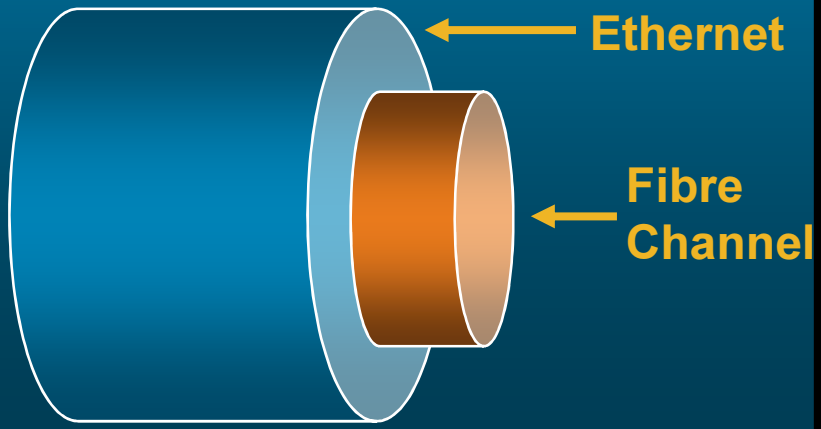

Benefits

- Wire Server Once
- Fewer cables and adapters
- Software Provisioning of I/O
- Interoperates with existing SANs
- No gateway—stateless

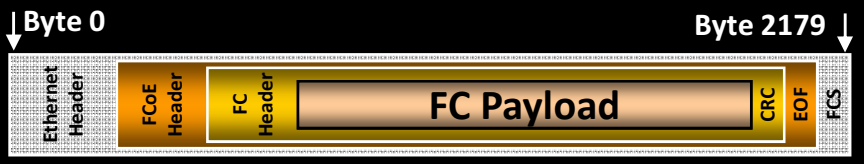

What is Cisco's Data Center Ethernet ?

Data Center Ethernet is an architectural collection of Ethernet extensions designed to improve Ethernet networking and management in the Data Center.

Data Center Ethernet - DCE

Feature	Benefit
Priority-based Flow Control (PFC) **IEEE 802.1Qbb(PFC)**	Provides ability to manage bursty, single traffic source on a multi-protocol link
CoS BW Manager – Flexible Drop-free Scheduler **IEEE 802.1Qaz (ETS)**	Bandwidth Management between traffic types for Multi-protocol links
Data Center Bridging Exchange **IEEE 802.1AB (DCBX)**	Allows auto exchange of Ethernet parameters between peers (Switch to NIC, switch to switch)
Congestion Notification (BCN/QCN) **IEEE 802.1Qau**	Addresses problem of sustained congestion, driving corrective action to the edge
L2 Multi-path for Unicast & Multicast **IETF - TRILL**	Utilize full Bi-Sectional bandwidth of L2 topologies
Lossless Service	Allows the creation of a guaranteed delivery service for Apps that require it

Data Center Ethernet Features

Priority-Based Flow Control (PFC)

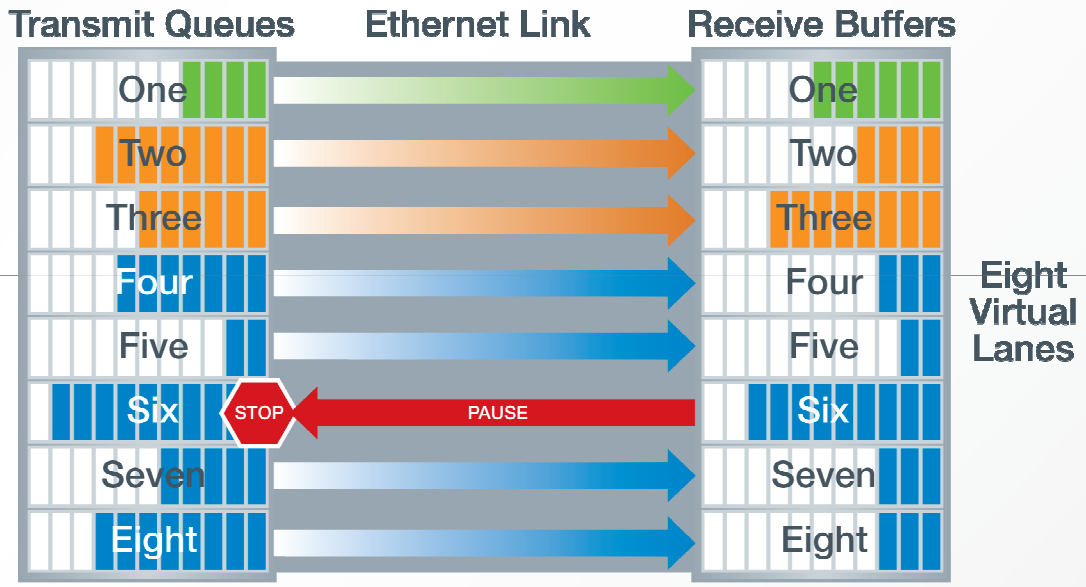

Enables lossless Fabrics for each class of service
PAUSE sent per virtual lane when buffers limit exceeded
Network resources are partitioned between VL's (E.g. input buffer and output queue)
The switch behavior is negotiable per VL

Data Center Ethernet Features

Enhanced Transmission Selection (ETS)

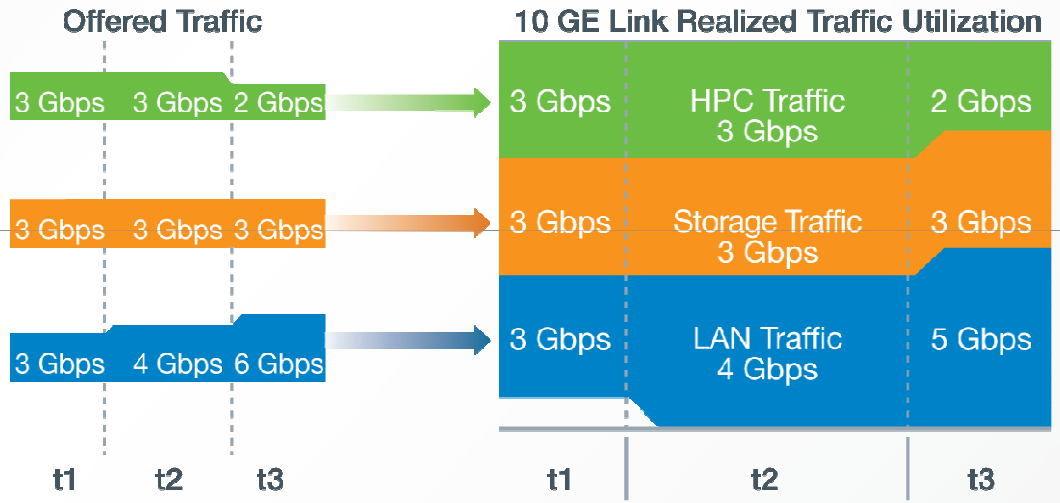

Enables Intelligent sharing of bandwidth between traffic classes control of bandwidth
Being Standardized in IEEE 802.1Qaz
Also known as Priority Grouping

FCoE Storage Networking Evolution

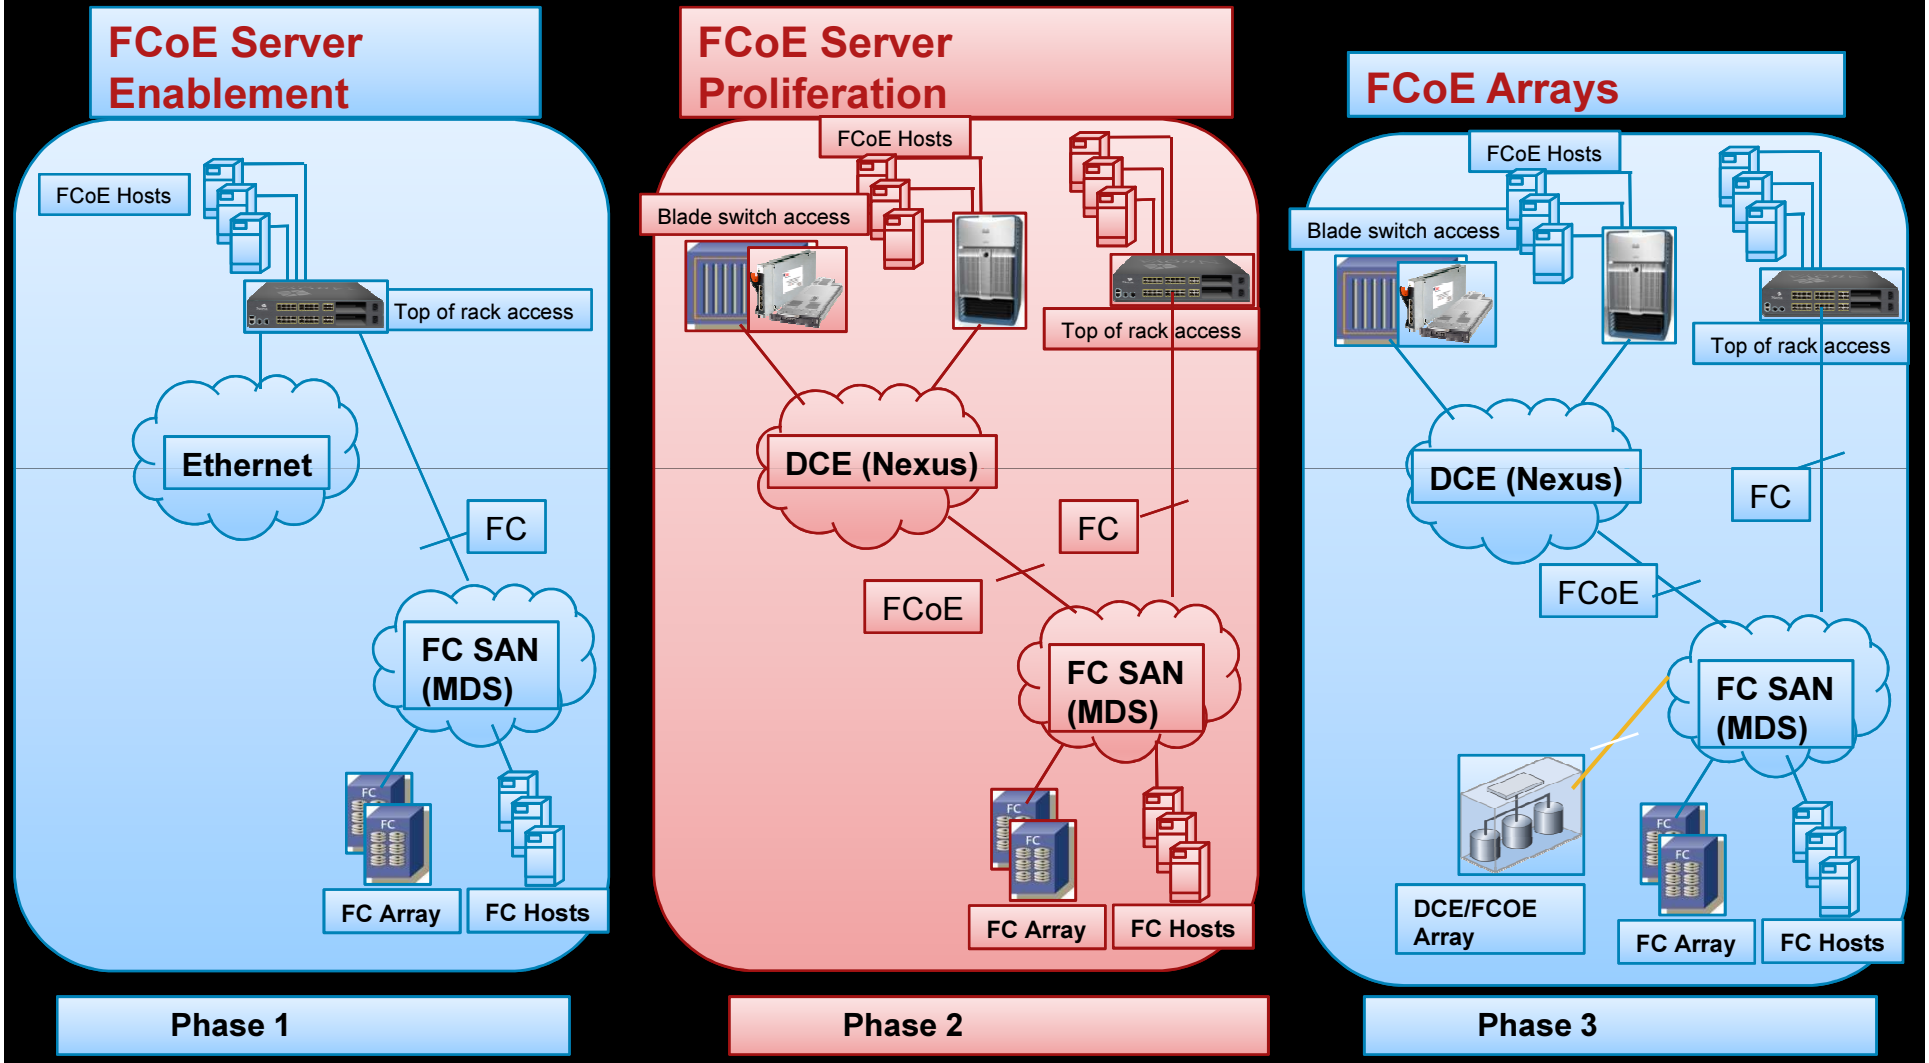

Server Consolidation ➔ 10GbE

Multi-Core CPU architectures allowing bigger and multiple workloads on the same machine

Server virtualization driving the need for more I/O bandwidth per server

Growing need for network storage driving the demand for higher network bandwidth to the server

10GE LAN on server Motherboards (LoM)

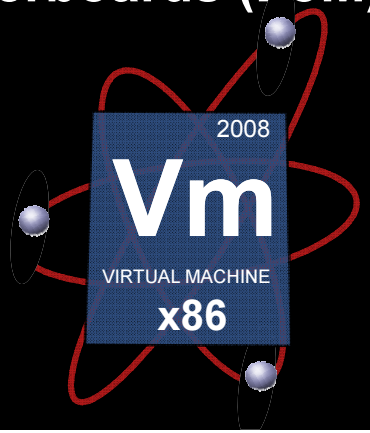

The Network Portfolio for Data Center

High Availability
Fault Tolerant
Self Healing

Virtualize
Modular Multi-Threaded
VM-Optimized Services

NX-OS

Automate
Data Center
Class platform
& operating
system

Purpose
Built
For the
Data Center

Unified
Fabric

Consolidate
10GbE Scalable
Single Fabric
Solution

NX-OS is the Data Center Operating System

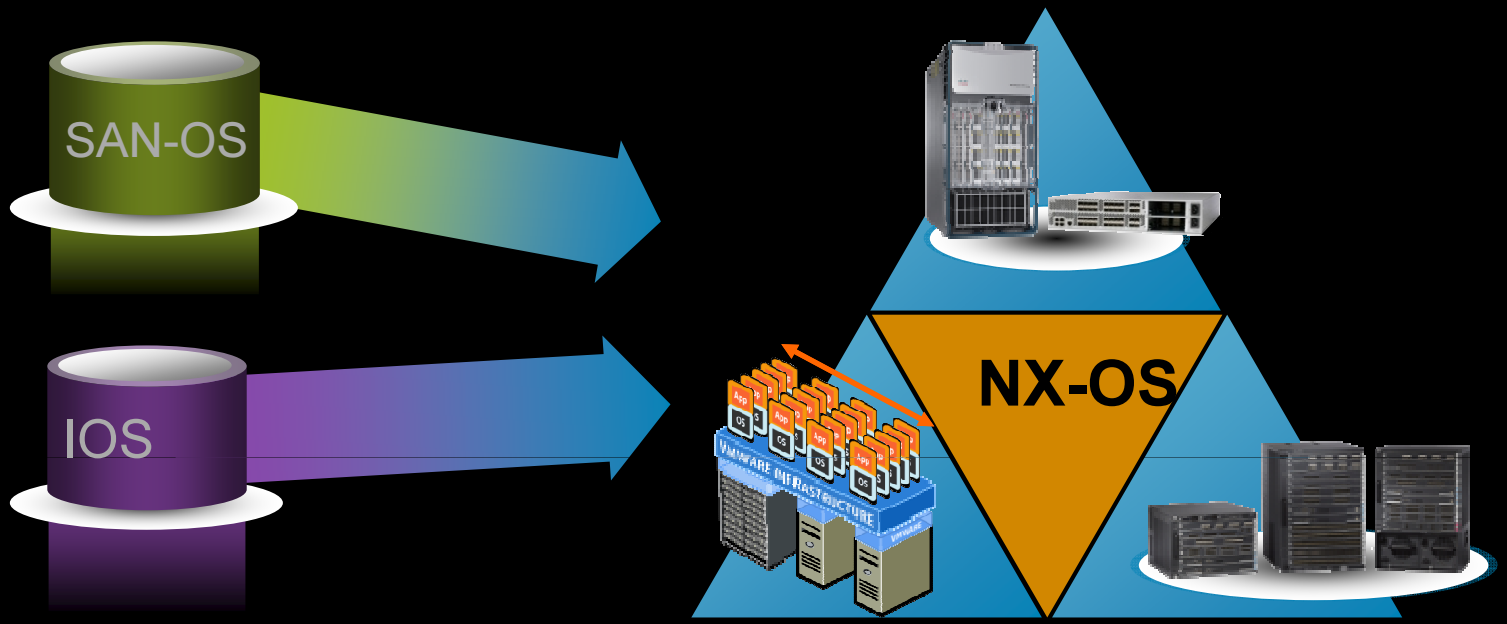

- Simplifies the data center environment
- Brings server, storage and network closer than ever
- Lays the foundation for unified fabric
- Re-Branding SAN-OS in recognition of common codebase

Cisco Nexus Family

- Complete data center class switching portfolio
- Consistent data center operating system across all platforms
- Infrastructure scalability, transport flexibility and operational manageability

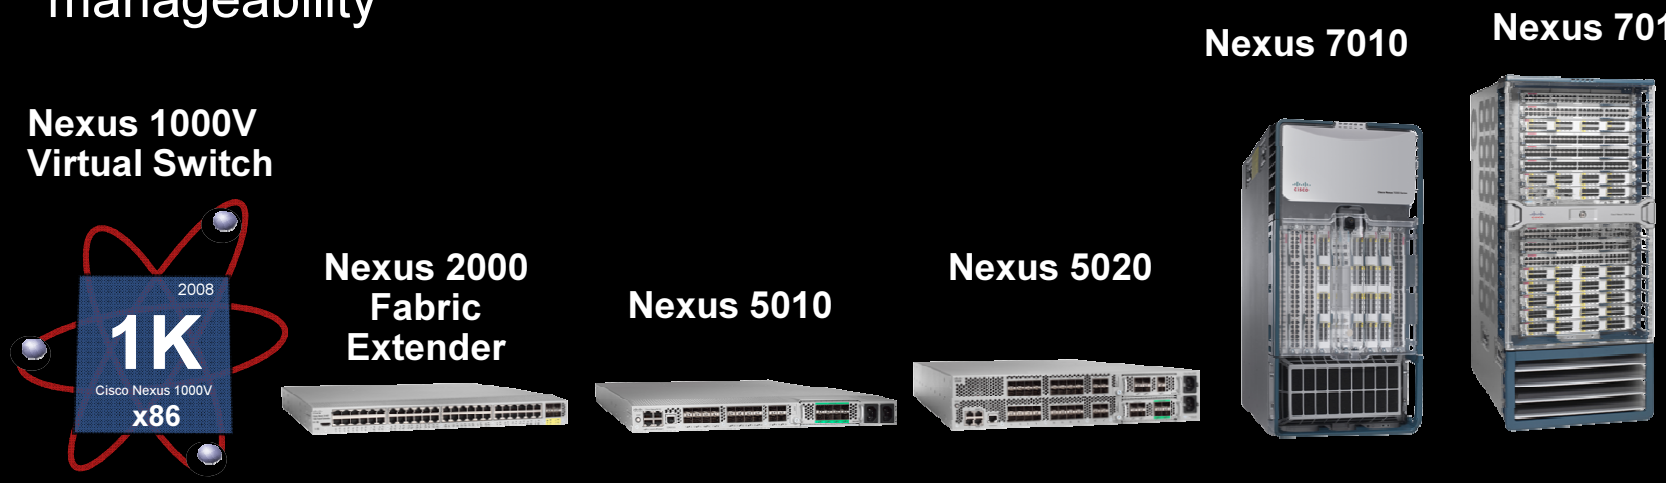

NX-OS Data Center Operating System

Data Center Network Manager

Introducing Cisco Nexus 7000 Series
Data Center Class Switches

Zero Service Disruption design via Hot Code Loads

Unified fabric (lossless) - 10GB today and 40Gb and 100Gb investment protection

Virtualized control and data plane

Operational Continuity

Transport Flexibility

Infrastructure Scalability

Virtualization with VDCs

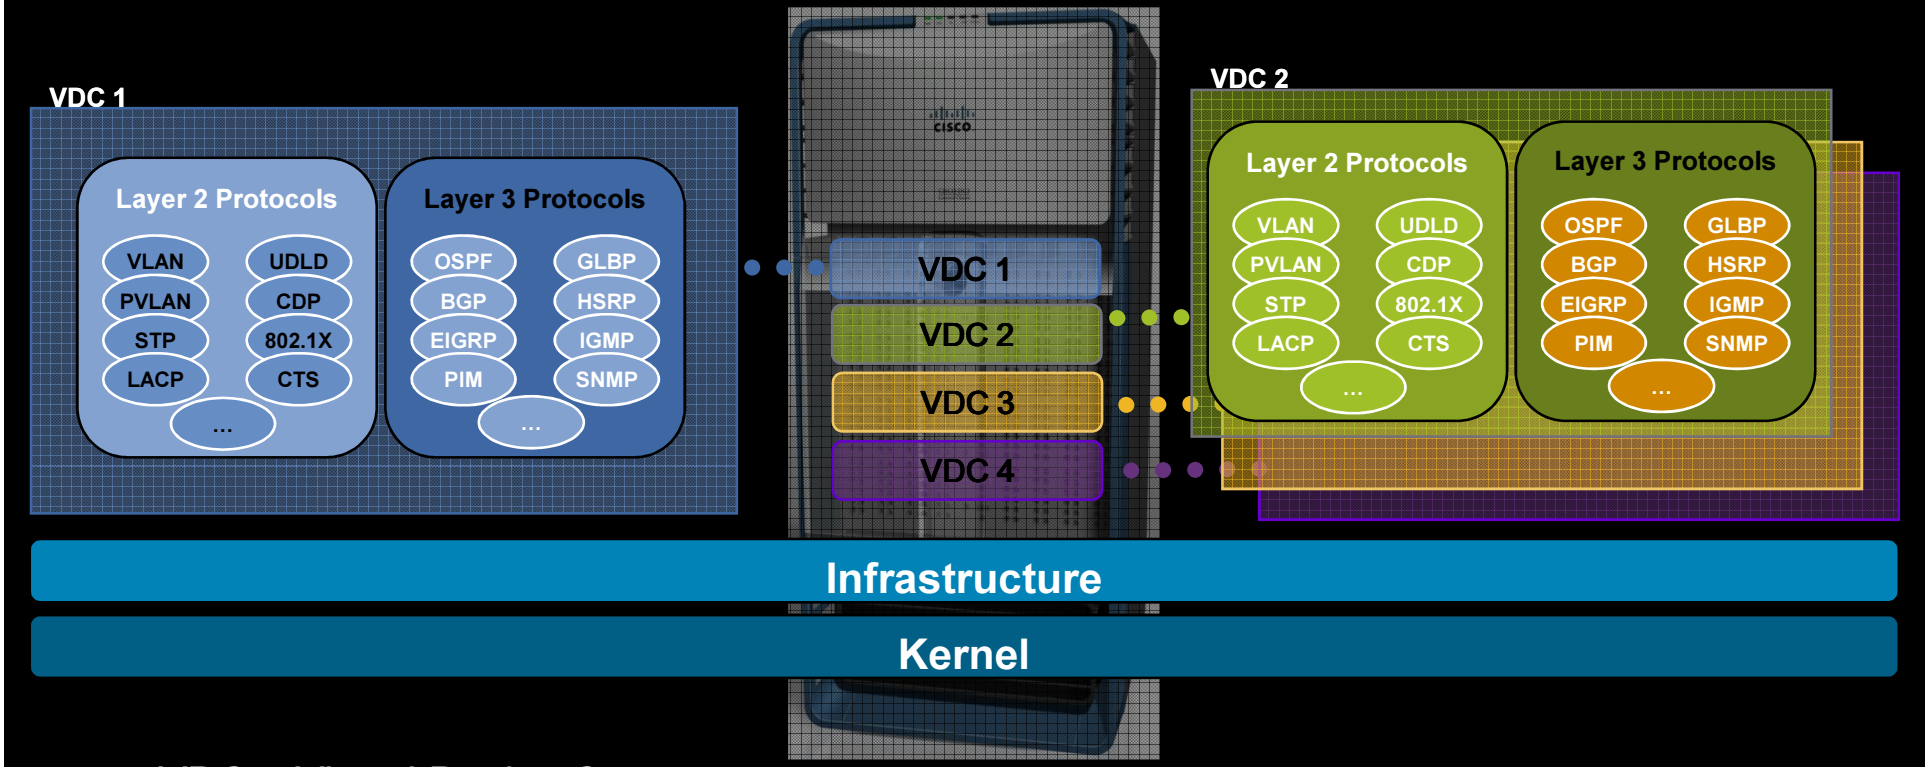

VDC – Virtual Device Context

- Flexible separation/distribution of hardware resources and software components
- Complete data plane and control plane separation
- Complete software fault isolation
- Securely delineated administrative contexts
- Forwarding engine scalability with appropriate interface allocation

Network World Independent Test Summary

- Zero Packet Loss when Upgrading and Downgrading the software image - ISSU
- Zero Packet Loss when removing Fabric Cards
- Zero Packet Loss when killing and restarting OSPF

Test Conditions: Nexus 7000 I/O modules load balance all of the traffic across all 5 Fabric Cards. The test was performed with 51,200 OSPF routes, 256 OSPF neighbors (one on each 10GbE port), every packet going through a security ACL of 7000 lines, every packet being rewritten using a 500 line QOS ACL, each line cards was doing 48 Mpps lookup, and Cisco Netflow to track up to 512,000 flows . (See "How we did it" in the Article)

Cisco's Nexus 5000/2000 Access Layer Switches

Cisco Nexus 5000 Server Access Switch

Delivering Unified Fabric Today

56-Port L2 Switch

- 40 fixed ports 10GE/FCoE/ Data Center Ethernet
- 16x1GE
- 2 Expansion Modules

28-Port L2 Switch

- 20 fixed ports 10GE/FCoE/ Data Center Ethernet
- 8x1GE
- 1 Expansion Module

Ethernet

- 6 ports 10 Gigabit Ethernet/ FCoE/DataCenterEthernet

Ethernet + FC

- 4 Ports 10 Gigabit Ethernet/ FCoE/DataCenterEthernet
- 4 ports 1/2/4G FC



Fibre Channel

- 8 ports 1/2/4G FC

NX-OS

DC-NM and Fabric Manager

Cisco's Nexus 1000 VN-Link

VN-Link With the Cisco Nexus 1000V

Cisco Nexus 1000V
Software Based

- Industry's first third-party ESX switch
- Built on Cisco NX-OS
- Compatible with switching platforms
- Maintain VirtualCenter provisioning model unmodified for server administration but also allow network administration of Nexus 1000V via familiar Cisco NX-OS

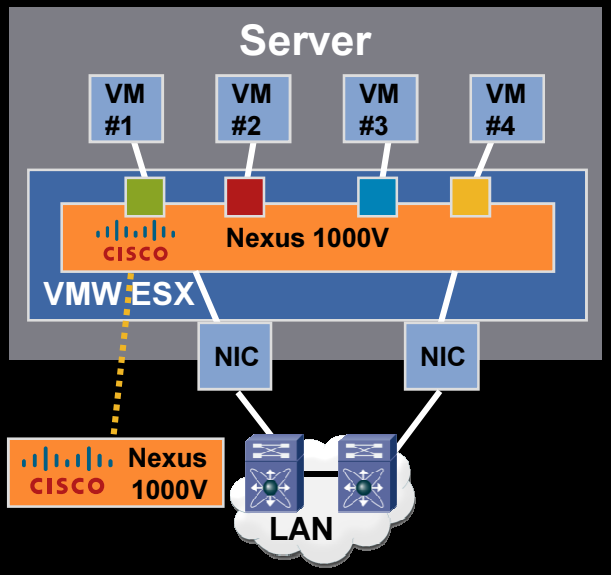

Announced VMWorld 2008 Shipping 2Q09

BEST OF vmworld 2008

Policy-Based VM Connectivity

Mobility of Network and Security Properties

Non-Disruptive Operational Model

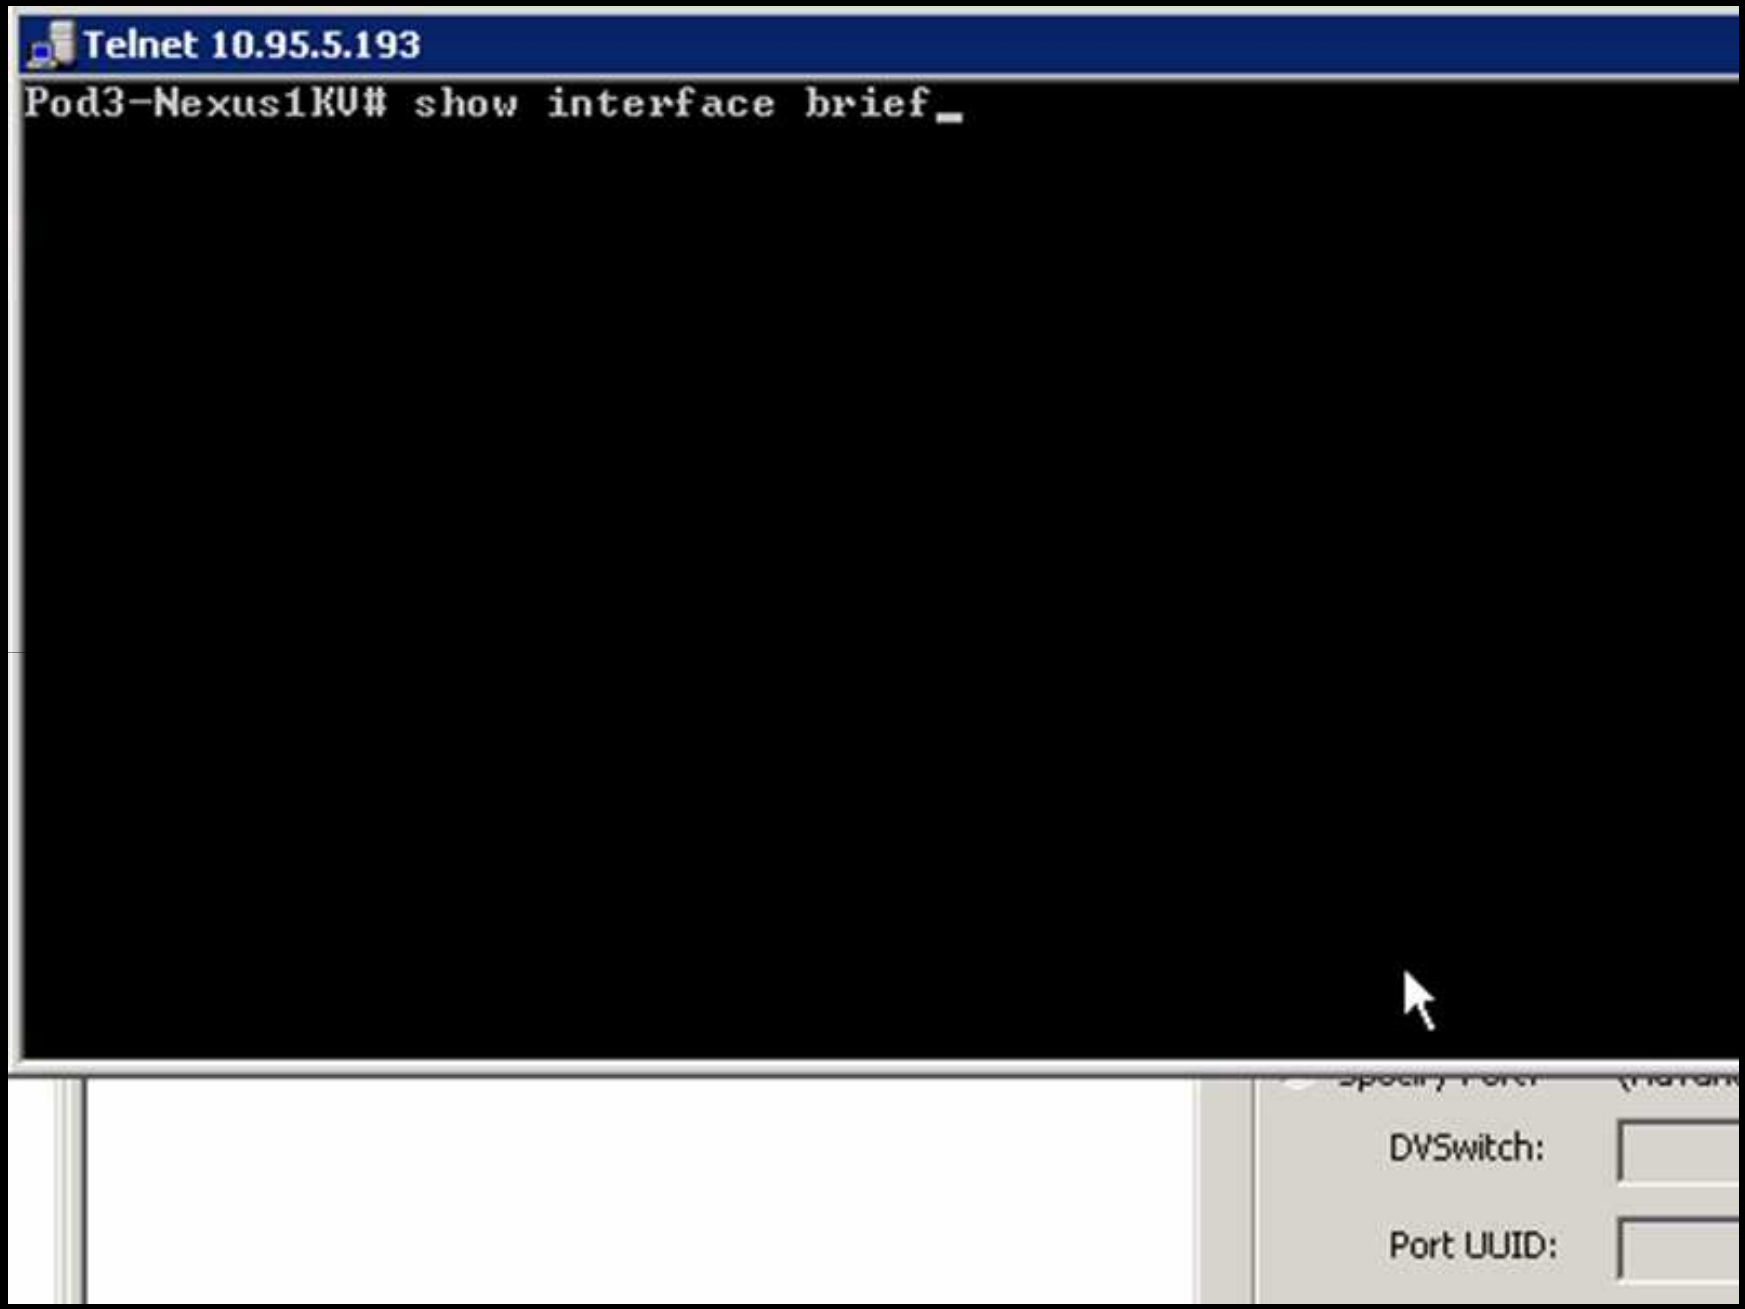

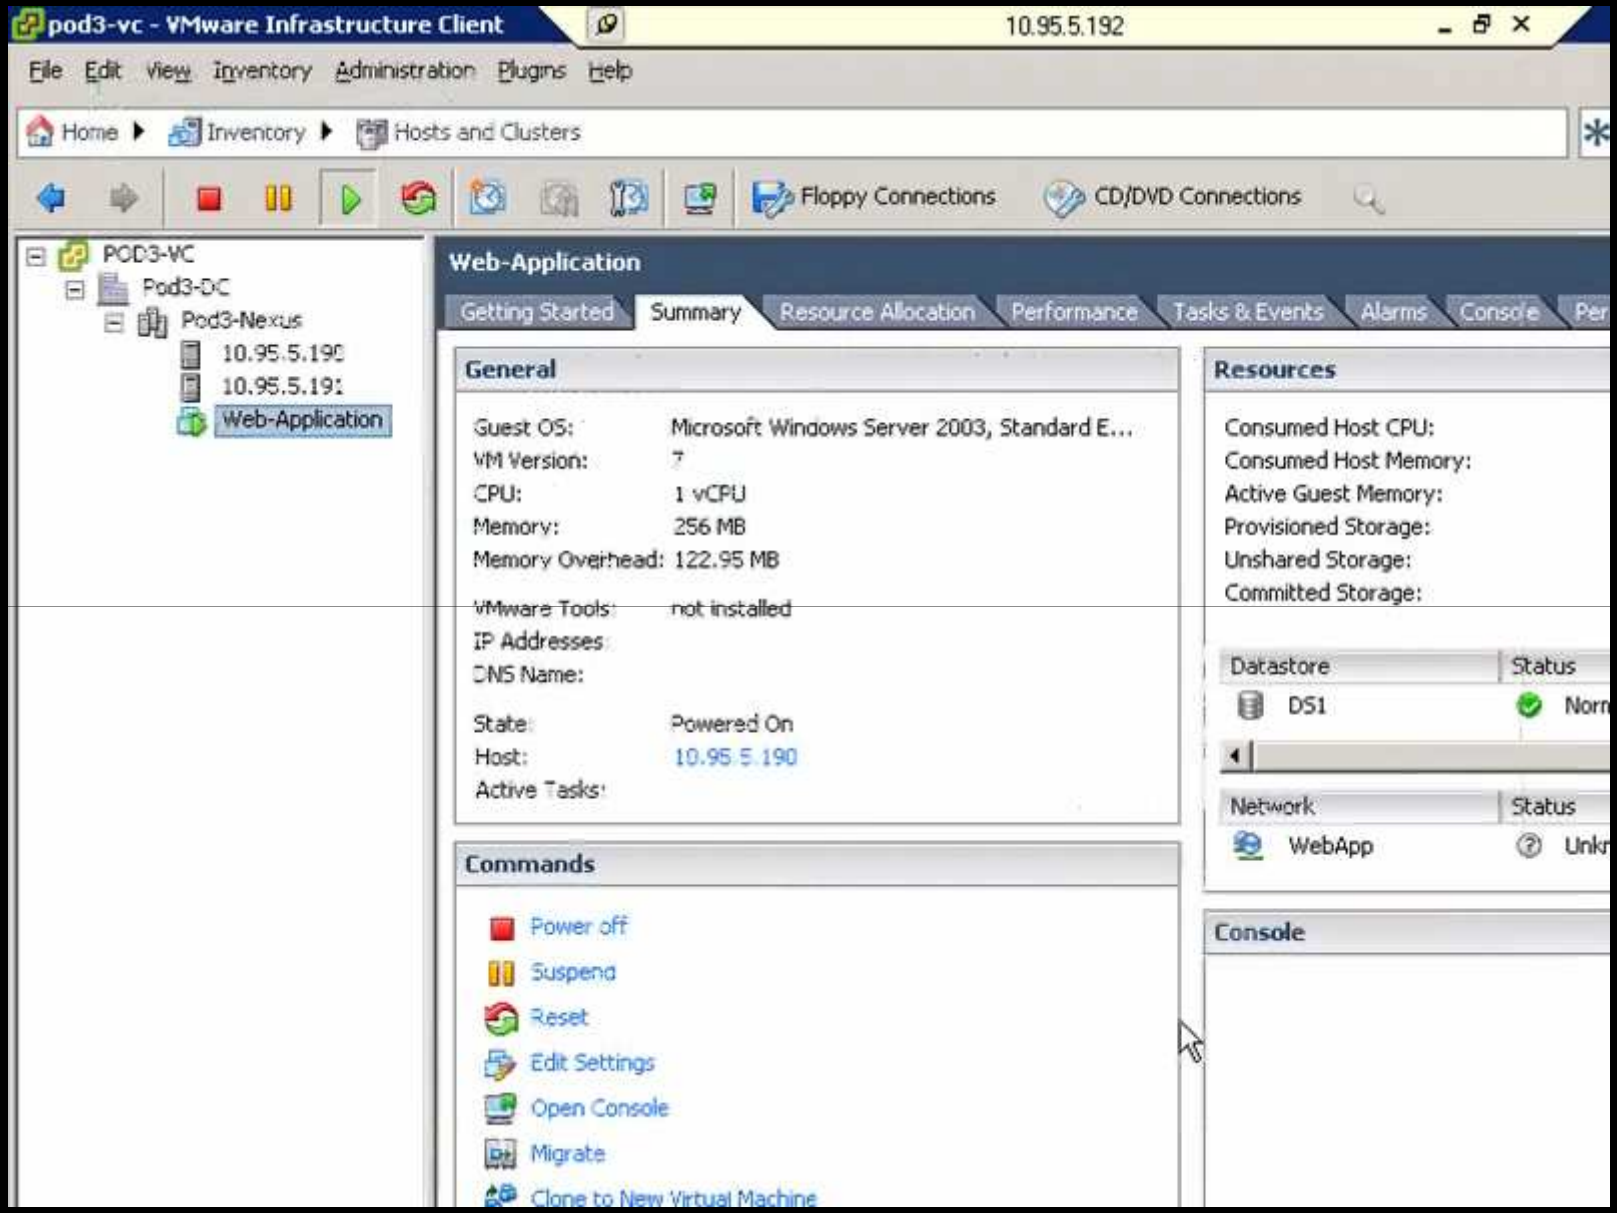

VMotion Across Data Center

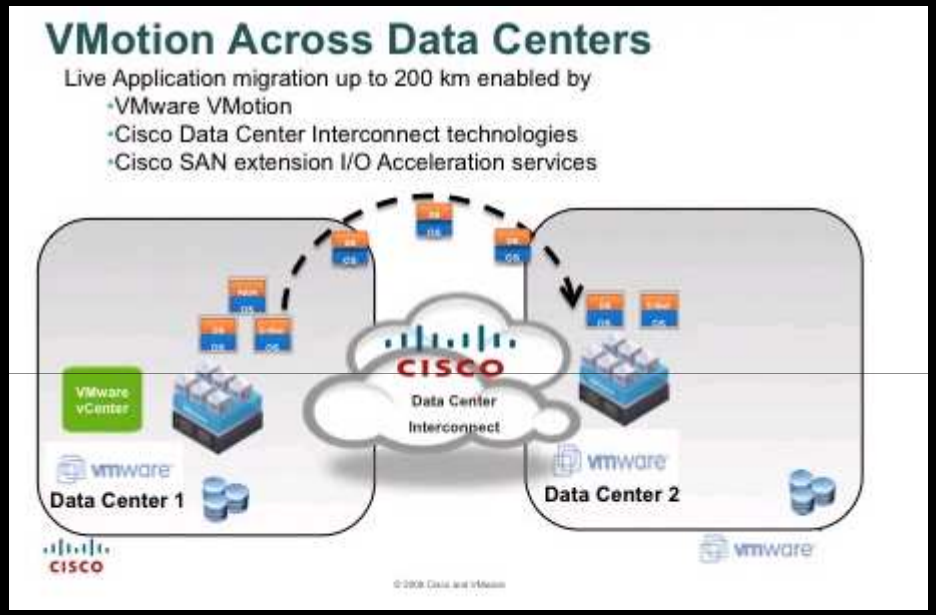

1. Mobility at layer 2
2. Mobility of the data, since there is seldom value in moving the workload if it loses access to the data it needs
3. Mobility at layer 3 and of services

DC Architecture

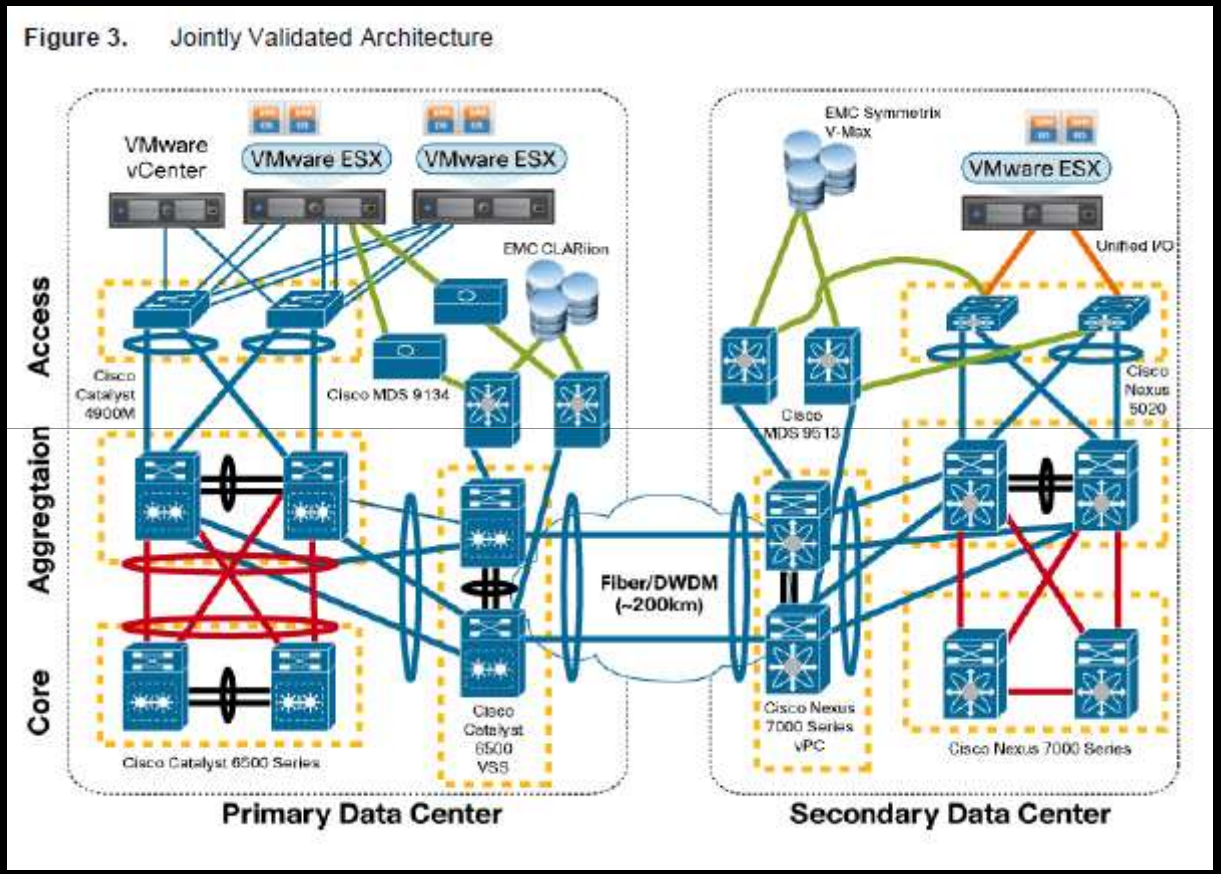

Wite paper
http://www.cisco.com/en/US/solutions/collateral/ns340/ns517/ns224/ns836/white_paper_c11-557822.pdf

Cisco UCS Solution

Server Deployment Today

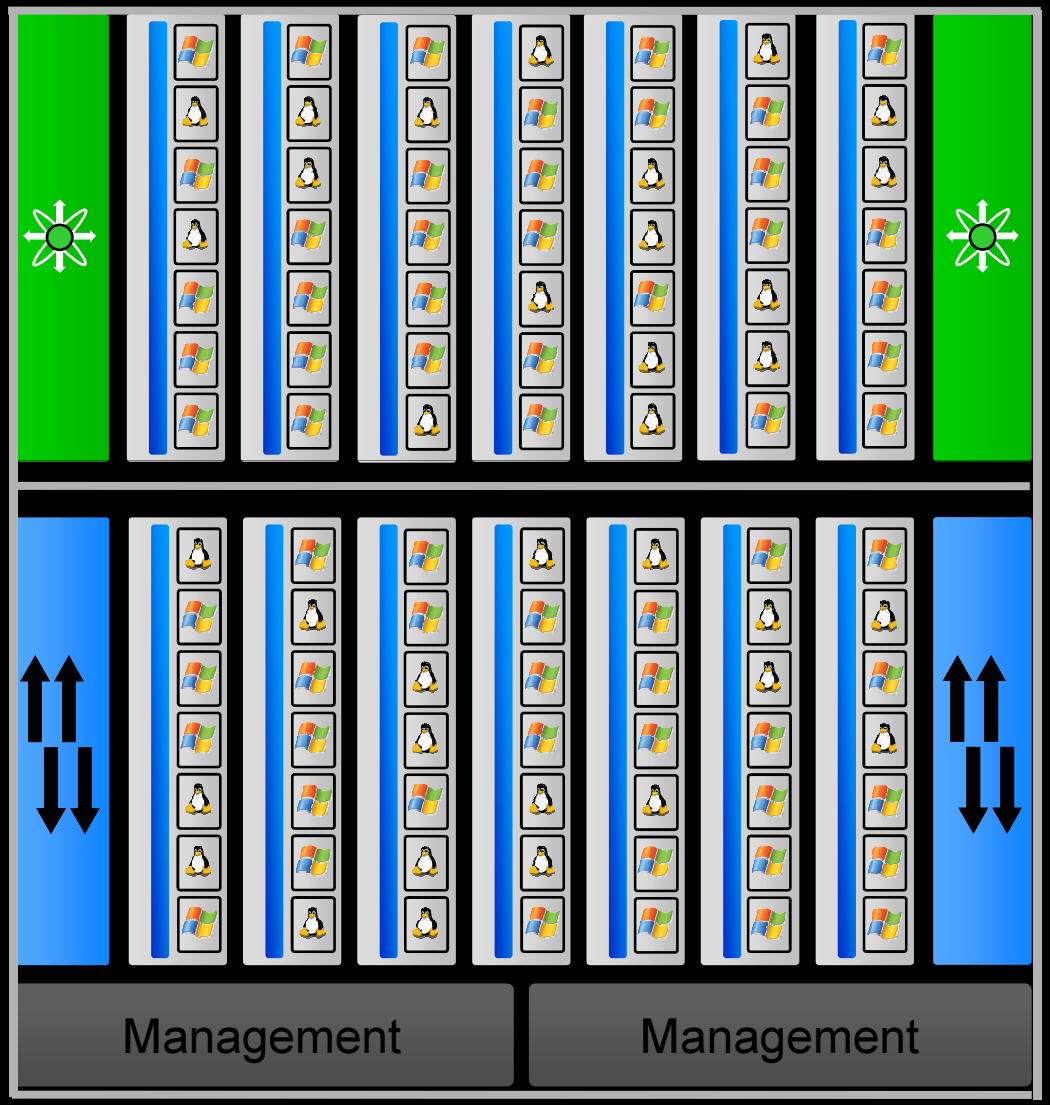

Ethernet blade switch

Fibre Channel blade switch

Mgmt

Management Module

Server Deployment Today

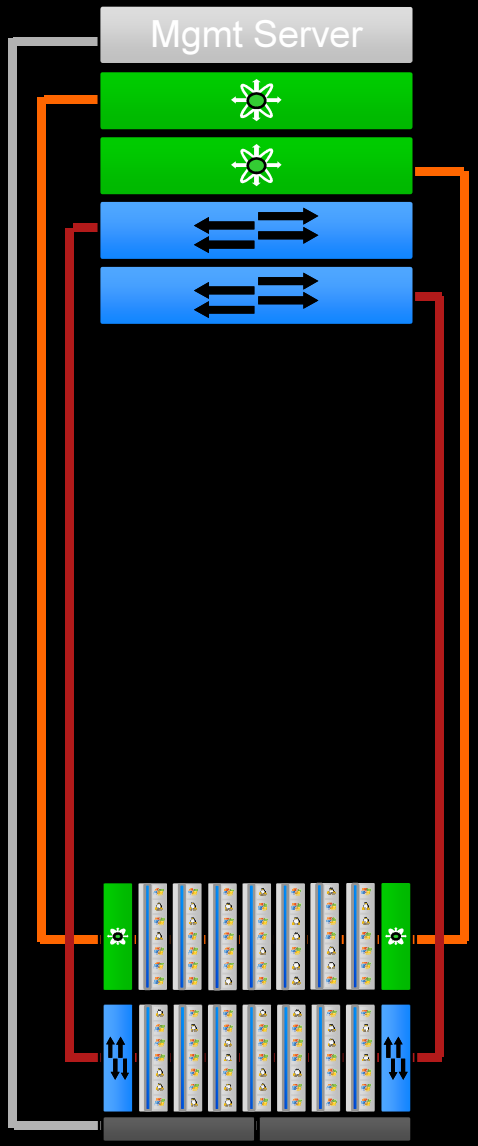

Ethernet blade switch
Fibre Channel blade switch
Mgmt Management Module

Server Deployment Today

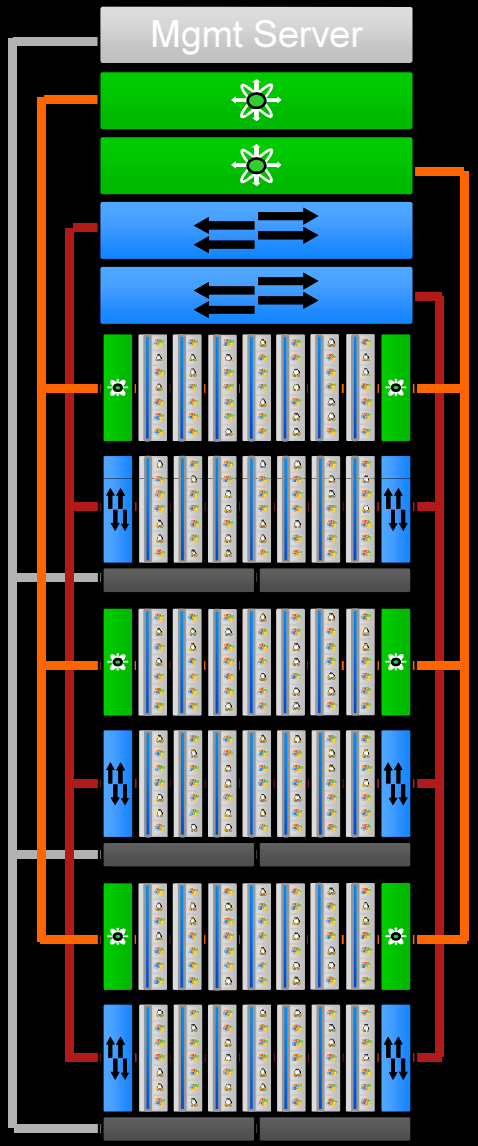

Ethernet blade switch
Fibre Channel blade switch
Mgmt Management Module

Server Deployment Today

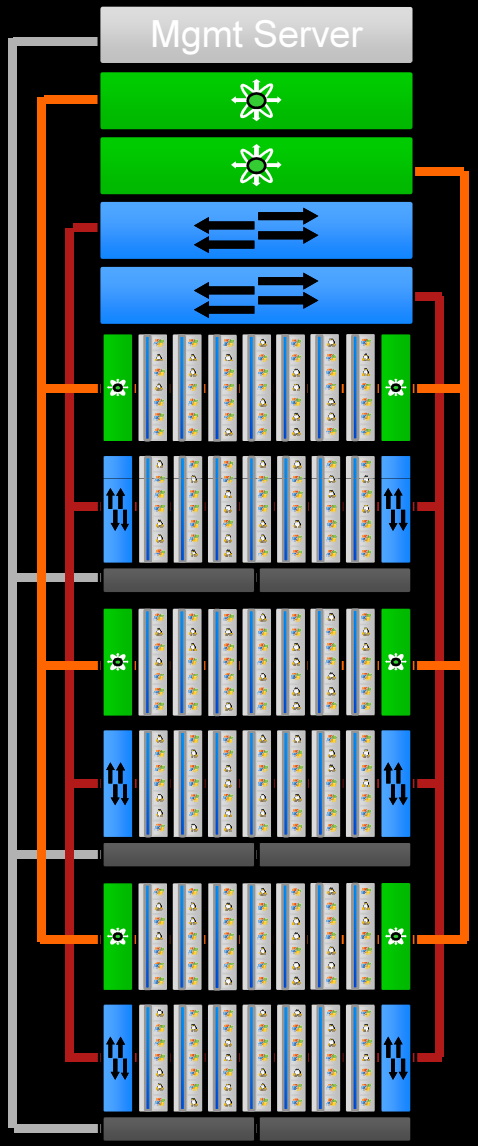

Ethernet blade switch
Fibre Channel blade switch
Mgmt Management Module

Our Solution

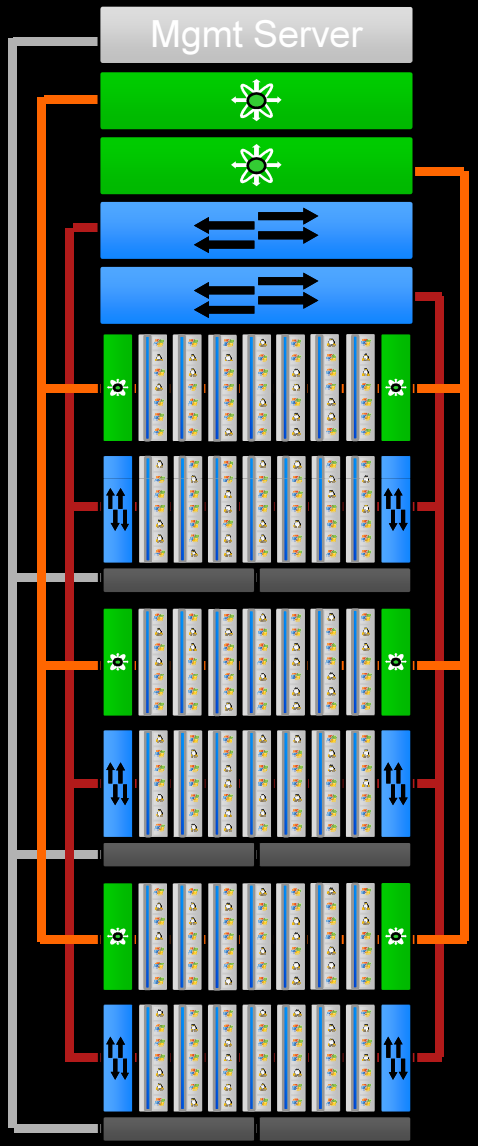

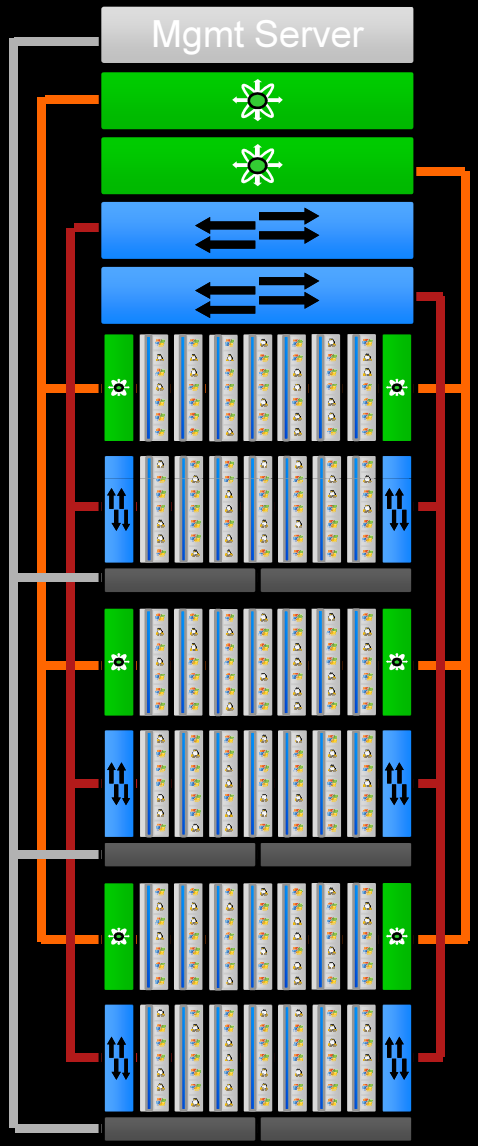

Our Solution

- Embed management

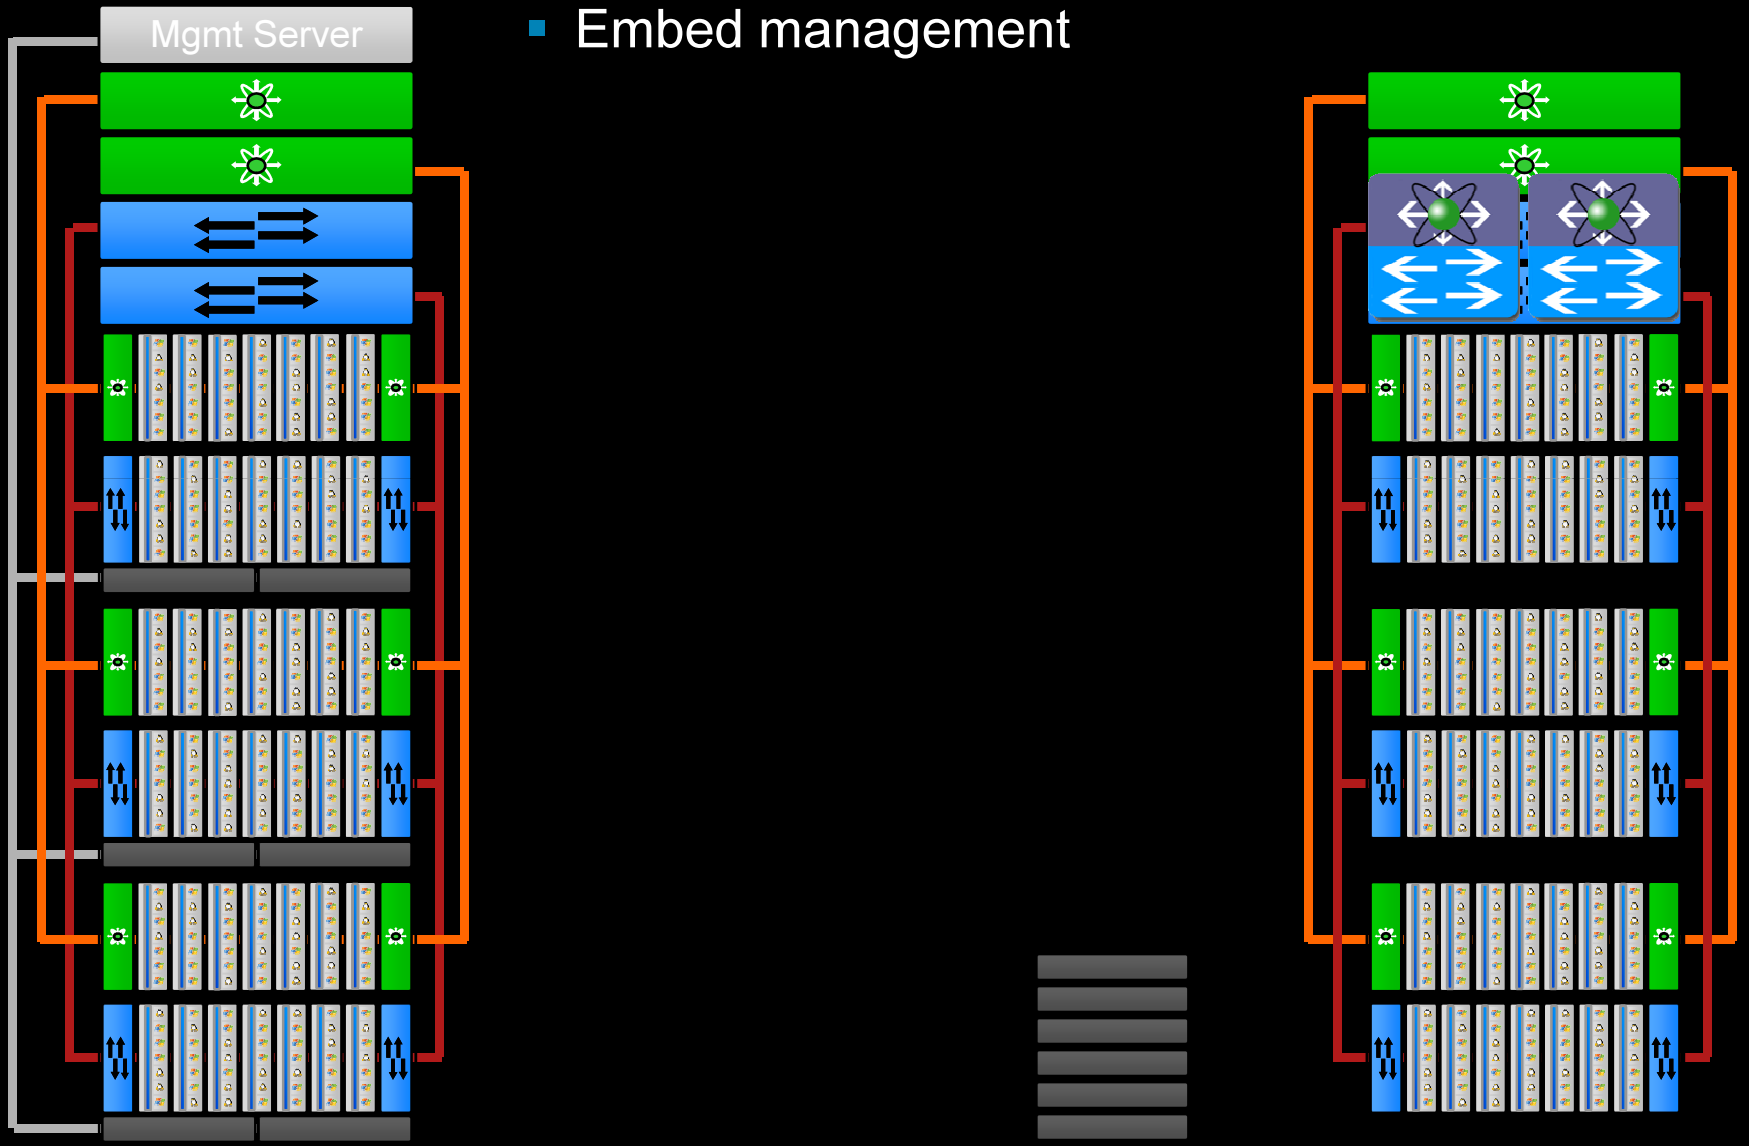

Our Solution

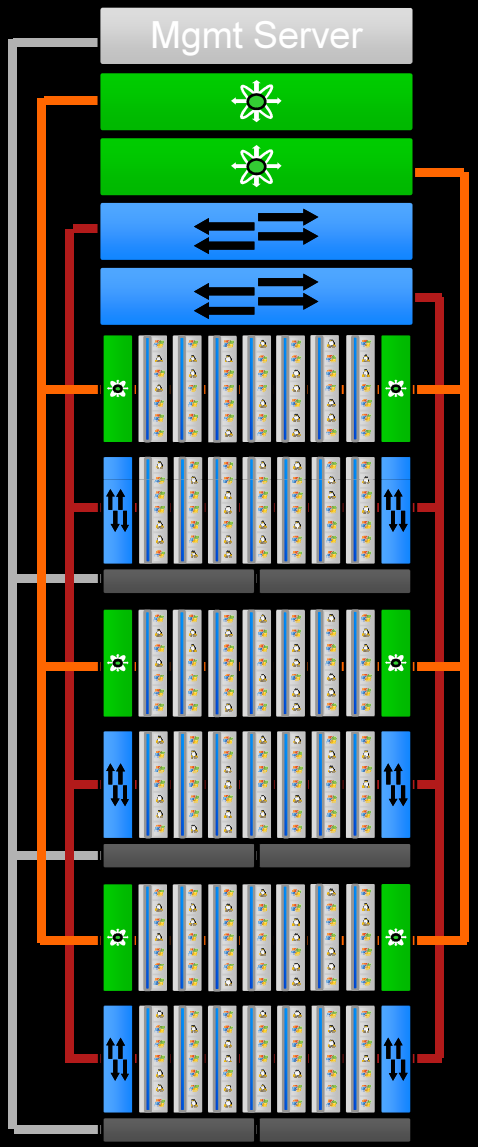

- Embed management
- Unify fabrics

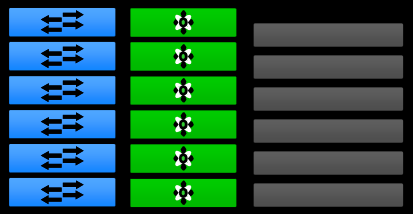

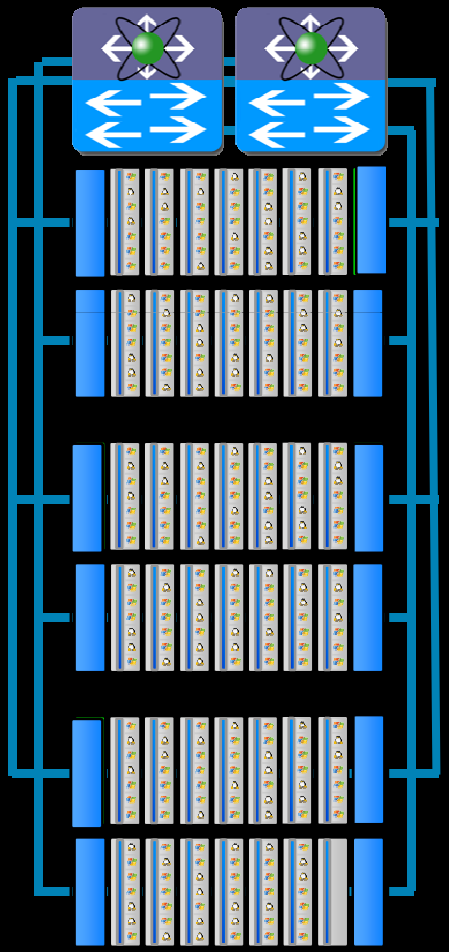

Our Solution

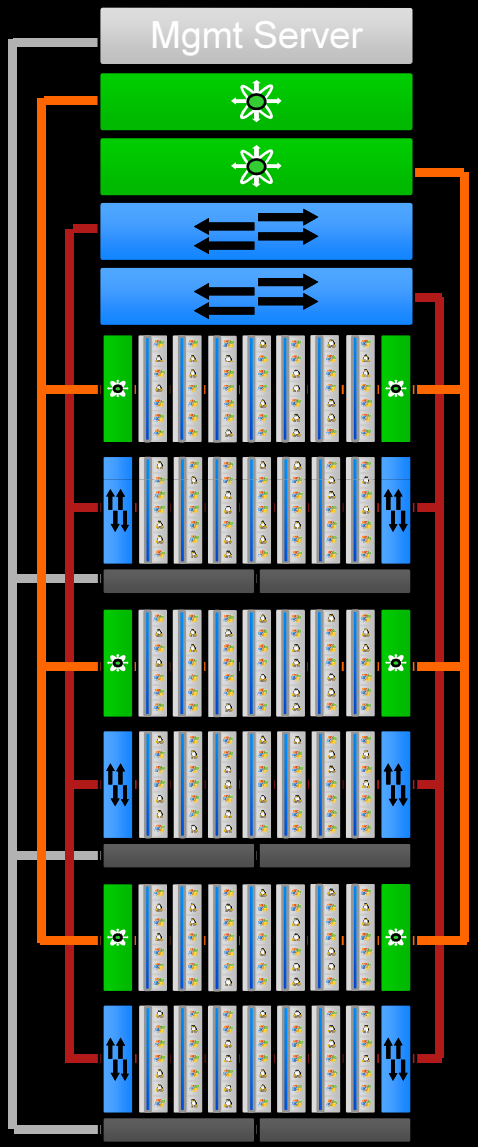

- Embed management
- Unify fabrics
- Optimize virtualization

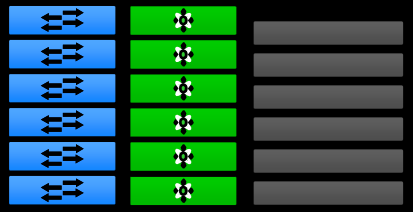

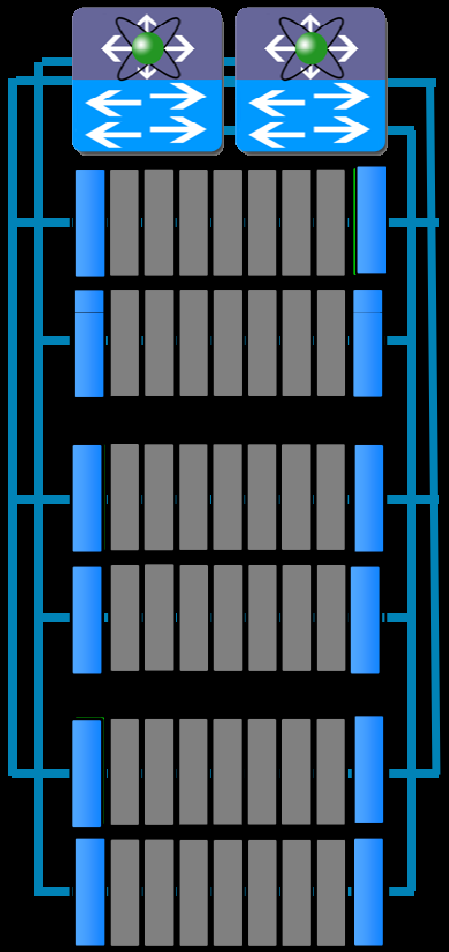

Cisco Unified Computing System

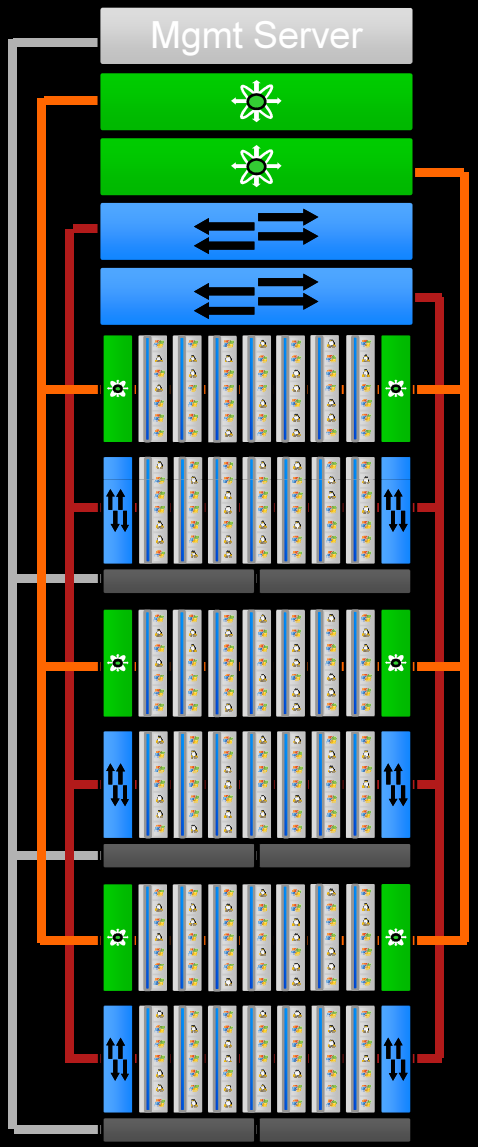

- Embed management
- Unify fabrics
- Optimize virtualization
- Remove unnecessary
  - switches,
  - adapters,
  - management modules
- Less than 1/3rd infrastructure



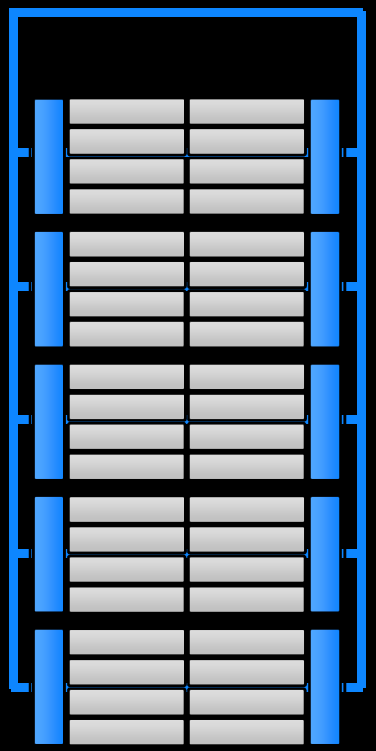

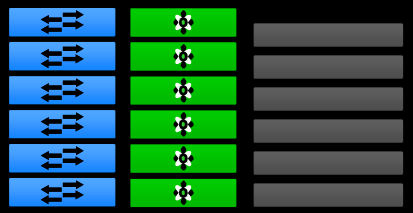

Cisco Unified Computing System

- UCS
  - Scalable compute platform
  - Integrated virtualization
  - Natural aggregation point: Network
- Unified embedded management
  - Embedded on the network controller
- Wire once: I/O on demand
  - LAN, SAN, IPC
- Efficient Scale
  - Cisco network & services scale
  - Fewer servers with more memory
- Lower cost
  - Fewer servers, switches, adapters, cables
  - Lower power consumption



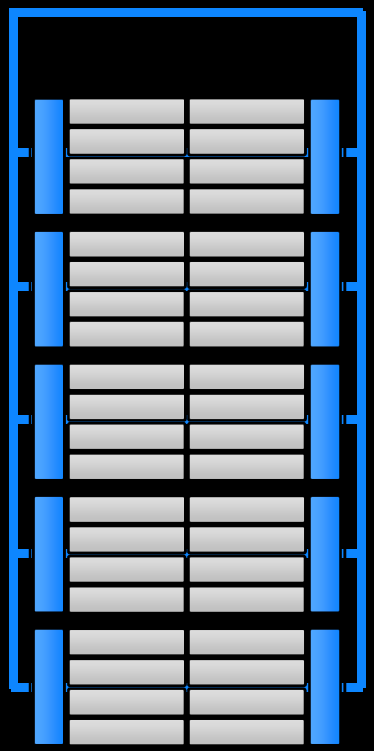

UCS has Nexus Technology Components

UCS Building Blocks

UCS Manager
Embedded in Fabric Switch



Fabric Switch
20 Port 10Gb FCoE
40 Port 10Gb FCoE

Fabric Extender
Logically part of Fabric Switch
Inserts into Blade Enclosure

Blade Enclosure
Flexible bay configurations
Logically part of Fabric Switch

Blade(s)
Three blade types
Mix blade types within enclosure



Adapters
Three adapter options
Mix adapters within blade



Nexus Products

Nexus 5000 Unified Fabric



Nexus 2148 Fabric Extender

Nexus 1000V

CNAs with FCOE

Foundation for the Virtualized Data Center

Cisco Data Centers

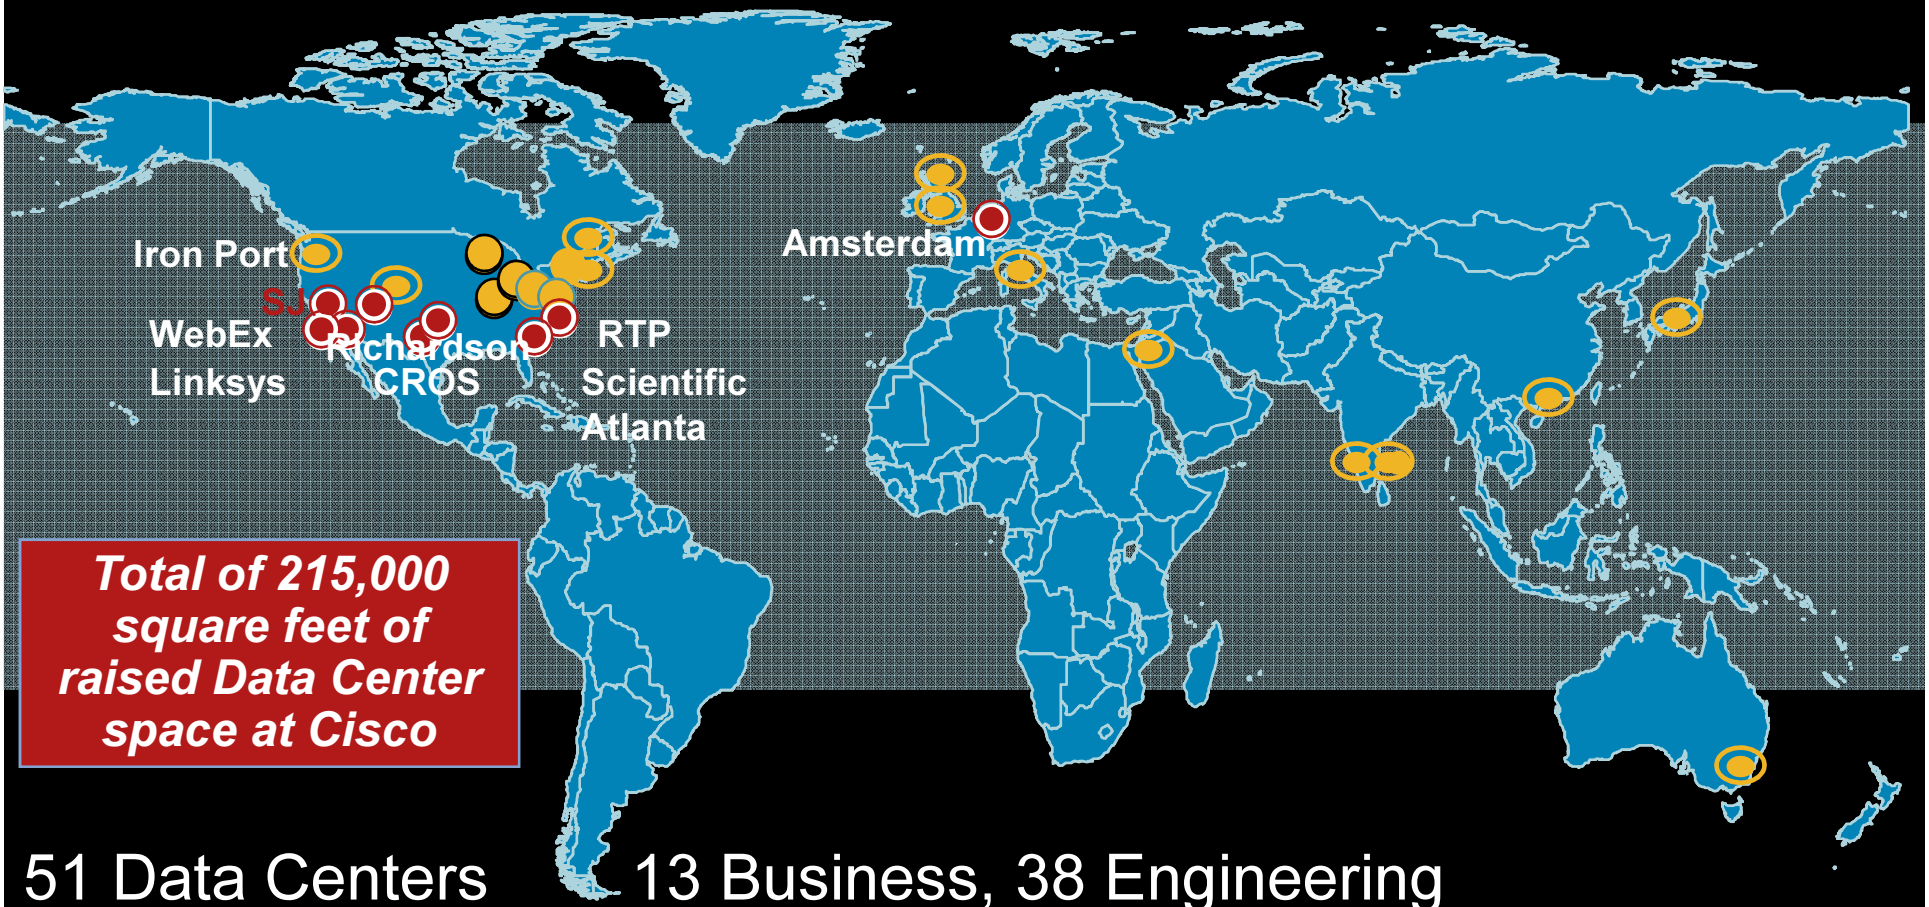

Total of 215,000 square feet of raised Data Center space at Cisco

51 Data Centers — 13 Business, 38 Engineering

Data Centers	Business Data Center	Engineering R&D Data Center

Cisco Data Center Storage Growth

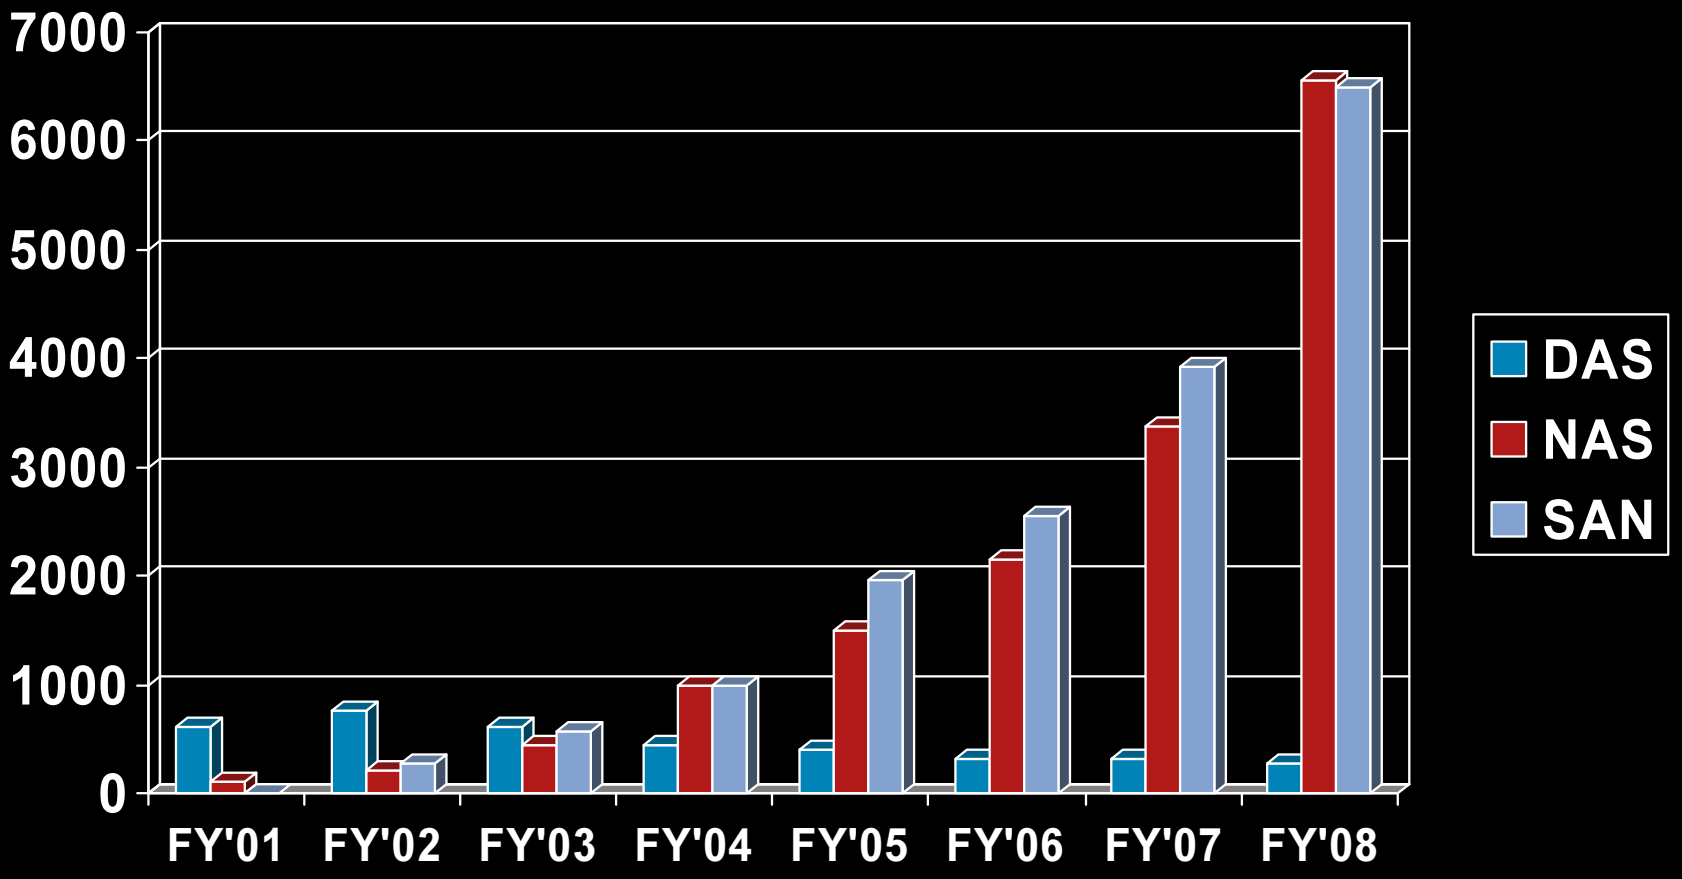

Over 13 petabytes of raw storage
~ 2000% Growth over the last 8 years

Improved TCO, Operations, Responsiveness

Storage Consolidation

- 13+PB of storage, growing at ~50% per year
- TCO reduced from $0.21/MB to $0.01/MB over 6 years
- Managed storage per FTE increased from 25 TB to 600 TB
- Overall utilization increased from 20% to 68%
- *$71 Million in cost avoidance over last 4 years*

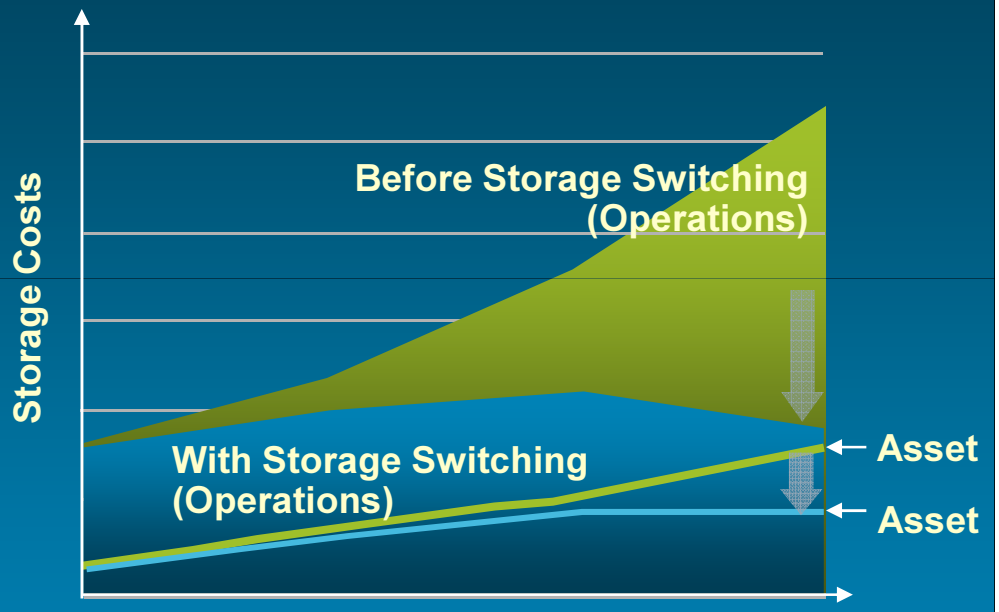

Improved TCO, Operations, Responsiveness

Server Consolidation

- 14,250 servers, 3,780 applications
- 50% of existing, 75% of all new server environments virtualized
- 2,720 VM's installed
- $19+ Million in cost avoidance and reductions to date
- Deployment time reduced from 8-12 weeks to 3 days

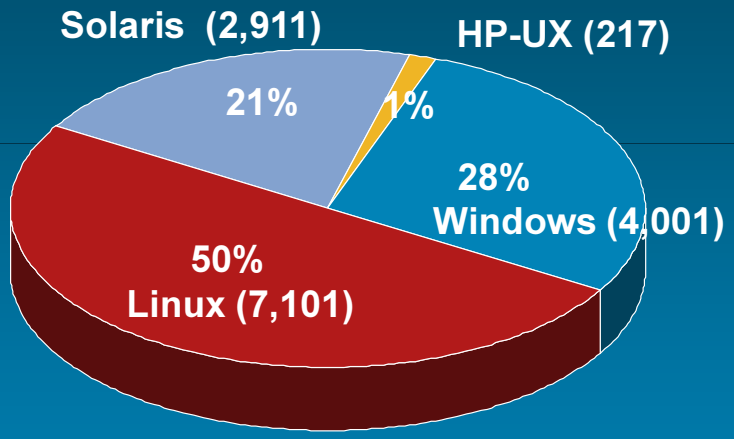

Nexus - Foundation for the Virtualized DC