



Cisco Unified Contact Center Express Solution Reference Network Design

Cisco Unified Contact Center Express Edition, Release 5.0

August, 2007

Americas Headquarters

Cisco Systems, Inc.
170 West Tasman Drive
San Jose, CA 95134-1706
USA
<http://www.cisco.com>
Tel: 408 526-4000
800 553-NETS (6387)
Fax: 408 527-0883

Customer Order Number:

THE SPECIFICATIONS AND INFORMATION REGARDING THE PRODUCTS IN THIS MANUAL ARE SUBJECT TO CHANGE WITHOUT NOTICE. ALL STATEMENTS, INFORMATION, AND RECOMMENDATIONS IN THIS MANUAL ARE BELIEVED TO BE ACCURATE BUT ARE PRESENTED WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED. USERS MUST TAKE FULL RESPONSIBILITY FOR THEIR APPLICATION OF ANY PRODUCTS.

THE SOFTWARE LICENSE AND LIMITED WARRANTY FOR THE ACCOMPANYING PRODUCT ARE SET FORTH IN THE INFORMATION PACKET THAT SHIPPED WITH THE PRODUCT AND ARE INCORPORATED HEREIN BY THIS REFERENCE. IF YOU ARE UNABLE TO LOCATE THE SOFTWARE LICENSE OR LIMITED WARRANTY, CONTACT YOUR CISCO REPRESENTATIVE FOR A COPY.

The Cisco implementation of TCP header compression is an adaptation of a program developed by the University of California, Berkeley (UCB) as part of UCB's public domain version of the UNIX operating system. All rights reserved. Copyright © 1981, Regents of the University of California.

NOTWITHSTANDING ANY OTHER WARRANTY HEREIN, ALL DOCUMENT FILES AND SOFTWARE OF THESE SUPPLIERS ARE PROVIDED "AS IS" WITH ALL FAULTS. CISCO AND THE ABOVE-NAMED SUPPLIERS DISCLAIM ALL WARRANTIES, EXPRESSED OR IMPLIED, INCLUDING, WITHOUT LIMITATION, THOSE OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT OR ARISING FROM A COURSE OF DEALING, USAGE, OR TRADE PRACTICE.

IN NO EVENT SHALL CISCO OR ITS SUPPLIERS BE LIABLE FOR ANY INDIRECT, SPECIAL, CONSEQUENTIAL, OR INCIDENTAL DAMAGES, INCLUDING, WITHOUT LIMITATION, LOST PROFITS OR LOSS OR DAMAGE TO DATA ARISING OUT OF THE USE OR INABILITY TO USE THIS MANUAL, EVEN IF CISCO OR ITS SUPPLIERS HAVE BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGES.

CCVP, the Cisco logo, and the Cisco Square Bridge logo are trademarks of Cisco Systems, Inc.; Changing the Way We Work, Live, Play, and Learn is a service mark of Cisco Systems, Inc.; and Access Registrar, Aironet, BPX, Catalyst, CCDA, CCDP, CCIE, CCIP, CCNA, CCNP, CCSP, Cisco, the Cisco Certified Internetwork Expert logo, Cisco IOS, Cisco Press, Cisco Systems, Cisco Systems Capital, the Cisco Systems logo, Cisco Unity, Enterprise/Solver, EtherChannel, EtherFast, EtherSwitch, Fast Step, Follow Me Browsing, FormShare, GigaDrive, HomeLink, Internet Quotient, IOS, iPhone, IP/TV, iQ Expertise, the iQ logo, iQ Net Readiness Scorecard, iQuick Study, LightStream, Linksys, MeetingPlace, MGX, Networking Academy, Network Registrar, *Packet*, PIX, ProConnect, ScriptShare, SMARTnet, StackWise, The Fastest Way to Increase Your Internet Quotient, and TransPath are registered trademarks of Cisco Systems, Inc. and/or its affiliates in the United States and certain other countries.

All other trademarks mentioned in this document or Website are the property of their respective owners. The use of the word partner does not imply a partnership relationship between Cisco and any other company. (0705R)

Cisco Unified Contact Center Express Solution Reference Network Design, Cisco Unified Contact Center Express Edition, Release 5.0
Copyright © 2007 Cisco Systems, Inc. All rights reserved.



CONTENTS

Preface	vii
Purpose	vii
Audience	vii
Scope	vii
Software Releases	viii
Document Structure	viii
Obtaining Documentation, Obtaining Support, and Security Guidelines	ix

CHAPTER 1

Cisco Unified Contact Center Express Overview and Packaging	1-1
Unified CCX Overview	1-1
Cisco Unified CCX Packaging	1-2
Inbound Voice	1-3
IVR Ports	1-4
Inbound Voice Packaged Components	1-5
Automatic Call Distribution (ACD)	1-5
Interactive Voice Response (IVR)	1-9
Computer Telephony Integration (CTI)	1-11
Historical Reporting	1-12
Cisco Desktop Services (CAD, IPPA, CSD)	1-13
Cisco Unified CCX Outbound Preview Dialer	1-20
Cisco Unified Email Interaction Manager (EIM)	1-21
Cisco Unified Web Interaction Manager (WIM)	1-22
Quality Management	1-23
Workforce Management	1-25

CHAPTER 2

Cisco Unified Contact Center Express Solution Architecture for Cisco Unified Communications Manager	2-1
Unified CCX Terminology	2-2
Unified CCX Call Processing	2-3
Unified CCX System Management	2-5
CRS Engine and Database Components	2-5
Monitoring and Recording Components	2-6

- Cisco Unified Wireless IP Phone 7920 IP Phone Support 2-9
- SIP Support 2-10
- Citrix Terminal Services Support for Cisco Agent Desktop 2-10
- Cisco TelePresence Virtual Agent Solution 2-11
- Cisco Unified CCX Outbound Preview Dialer 2-12
 - High Level Components 2-13
 - Functional Description 2-13
 - Behavior under High Availability 2-14
 - Scalability 2-14
 - Call Flow Description—Direct Preview Mode 2-14
 - Deployment Guidelines 2-16
- Cisco Interaction Manager 2-16
- Cisco Unified Workforce Optimization 2-17
 - Workforce Management 2-18
 - Adherence Service 2-19
 - Sync Server 2-19
 - OOO (Odyssey OEDBC Collector) Service 2-20
 - Quality Management 2-20
 - CTI Service 2-21
 - Sync Service 2-21
 - WFO Deployment 2-21
- Unified CCX ASR and TTS 2-22
- Unified CCX Integration with Unified ICME Software 2-22
- Unified CCX Fault Tolerance 2-25
 - CRS Engine Redundancy 2-25
 - Database Redundancy 2-26
 - Network Partitioning 2-27
 - Monitoring and Recording Redundancy 2-27
 - Cold Standby Support 2-28
 - Upgrading to Unified CCX 5.0 2-28
- CRS 5.0 Software Compatibility 2-29

CHAPTER 3

- Cisco Unified Contact Center Express Solution Architecture for Cisco Unified Communications Manager Express 3-1**
 - Architectural Overview 3-2
 - Unified CCX Call Processing 3-2
 - CRS Engine and Database Components 3-4
 - Monitoring and Recording Components 3-4

Unified CCX Fault Tolerance	3-5
Cold Standby Server	3-5
Basic ACD	3-5

CHAPTER 4**Cisco Unified Contact Center Express Deployment Models 4-1**

Unified CCX General Rules for Design	4-5
Single-Server Non-High Availability Deployment Model—Cisco Unified Communications Manager Integration	4-6
Two-Server High Availability Deployment Model—Unified Communications Manager Integration	4-6
Single-Server Non-High Availability Deployment Model—Unified Communications Manager Express Integration	4-7
Other Design Considerations	4-7
Multiple CRS Clusters Integrated with a Single Cisco Unified Communications Manager Cluster	4-8

CHAPTER 5**Basics of Call Center Sizing 5-1**

Terminology	5-1
Preliminary Information Requirements	5-2
Principal Design Considerations for Call Center Sizing	5-4
Planning Resource Requirements for Call Center Sizing	5-5

CHAPTER 6**Sizing Cisco Unified Contact Center Express and Cisco Unified Communications Manager Servers 6-1**

Cisco A2Q Bid Assurance Requirements	6-1
Sizing Tools	6-1
Affect of Performance Criteria on the Unified CCX Server	6-2
Effect of Performance Criteria	6-2
Impact of Performance Criteria on the Unified CM Server(s)	6-2

CHAPTER 7**Bandwidth, Security, and QoS Considerations 7-1**

Estimating Bandwidth Consumption	7-1
Remote Agent Traffic Profile	7-1
Silent Monitoring Bandwidth Usage	7-2
Silent Monitoring Requestors	7-2
Silent Monitoring Providers	7-2
IP Call Bandwidth Usage	7-4
Bandwidth Requirements for VoIP Monitor Service	7-6
CAD Desktop Applications Bandwidth Usage	7-7
Cisco Agent Desktop Bandwidth Usage	7-8

- Cisco Supervisor Desktop Bandwidth Usage 7-9
- Cisco Desktop Administrator Bandwidth Usage 7-10
- Remote Agent Traffic Profile 7-10
- Serviceability and Security 7-11
 - Corporate Data Access 7-11
 - Port Utilization for Product Revisions 7-12
 - Ping, NAT, PAT, and Reverse DNS Lookups 7-12
- QoS and Call Admission Control 7-12
 - Classifying Unified CCX and Application-Related Traffic 7-12
 - QoS Considerations for CAD software 7-13
- CAC and RSVP 7-13

APPENDIX A

Server Capacities and Limits A-1

APPENDIX B

Voice Over IP Monitoring B-1

- Design Considerations for SPAN-Based Services B-1

APPENDIX C

Cisco Unified Contact Center Express Integration with LDAP Server C-1

INDEX



Preface

Purpose

This document provides system-level best practices and design guidance for the Cisco Unified Contact Center Express (Unified CCX), Release 5.0(1). With proper planning, design, and implementation, Unified CCX provides a reliable and flexible voice processing and contact center solution for the enterprise.

Audience

This design guide is intended for the system architects, designers, engineers, and Cisco channel partners who want to apply best design practices for Unified CCX.

This design guide assumes that the reader is already familiar with the following concepts:

- Cisco Unified Communications Manager (Unified CM) Administration
- Cisco Unified CCX and Cisco Unified IP IVR administration
- General system requirements and network design guidelines available from your local Cisco Systems Engineer (SE)

Scope

This document describes the various components used to build a Cisco Unified CCX system, and it gives recommendations on how to combine those components into an effective solution for your enterprise.

The following topics are *not* covered in this design guide:

- Installation and configuration of Unified CCX, Unified IP IVR, and Agent Desktop. For more information about these Cisco products, refer to the online product documentation available at Cisco.com.
- Cisco Unified IP IVR and Cisco Unified Queue Manager (Unified QM) programming guidelines. Unified CCX is a packaged solution built upon a Cisco software platform called Customer Response Solutions (CRS). The CRS platform supports other solution packages—Unified IP IVR and Unified QM. Unified IP IVR and Unified QM are primarily used with Cisco Unified Contact Center Enterprise (Unified CCE). Unlike Unified CCX, the Unified IP IVR and Unified QM solutions do not provide ACD and CTI functions. In Unified CCE deployments, the ACD and CTI functions are

provided by the Cisco Unified Intelligent Contact Management Enterprise (Unified ICME) software. Unified ICME software, combined with either Unified IP IVR or Unified QM and Cisco Communications Manager (Unified CM), make up the Unified CCE Solution.

- Best practices for Contact Service Queues (CSQs) and priority queuing of Unified CCX.
- Design guidelines for Cisco Unified Communications common infrastructure and call processing. For information on Cisco IP Telephony design, refer to the *Cisco IP Telephony Solution Reference Network Design* documentation available online at <http://www.cisco.com/go/srnd>.
- Unified CCX Voice Browser (using VoiceXML), automatic speech recognition (ASR), and text-to-speech (TTS) best practices. For specific information on these topics, refer to the Nuance Communications Inc. website at <http://www.nuance.com> or the IBM Websphere Voice server web page at http://www-306.ibm.com/software/pervasive/voice_server/
- The call sizing guidelines in this document are intended only to illustrate concepts in providing high-level sizing of call center resources. This document is not intended to be an all-inclusive guide to designing and sizing contact centers. Each deployment will be different and specific to your system requirements.

Software Releases

Unless stated otherwise, the information in this document applies specifically to Unified CCX Release 5.0. Software releases are subject to change without notice, and those changes may or may not be indicated in this document. Refer to the Unified CCX release notes for the latest software releases and product compatibility information.

Document Structure

This guide contains the following chapters and appendices:

- [Chapter 1, “Cisco Unified Contact Center Express Overview and Packaging,”](#) provides an overview of the Unified CCX software and describes the Unified CCX packaging.
- [Chapter 2, “Cisco Unified Contact Center Express Solution Architecture for Cisco Unified Communications Manager,”](#) describes the terminology, call processing, system management, CRS Engine and Database components, Monitoring and Recording components, ASR and TTS, integration with Unified ICME, fault tolerance, and software compatibility for Unified CCX.
- [Chapter 3, “Cisco Unified Contact Center Express Solution Architecture for Cisco Unified Communications Manager Express,”](#) provides an overview of the architecture for a Cisco CRS deployment with Cisco Unified Communications Manager Express.
- [Chapter 4, “Cisco Unified Contact Center Express Deployment Models,”](#) describes the way Unified CCX can be deployed.
- [Chapter 5, “Basics of Call Center Sizing,”](#) introduces the basic concepts involved in call center sizing.

- [Chapter 6, “Sizing Cisco Unified Contact Center Express and Cisco Unified Communications Manager Servers,”](#) discusses the impact of performance criteria on the Unified CCX and Unified CM servers.
- [Chapter 7, “Bandwidth, Security, and QoS Considerations,”](#) discusses estimating bandwidth consumption, serviceability and security, and quality of service and call admission control.
- [Appendix A, “Server Capacities and Limits,”](#) provides a list of server capacities and limits.
- [Appendix B, “Voice Over IP Monitoring,”](#) provides design considerations for SPAN-based services.
- [Appendix C, “Cisco Unified Contact Center Express Integration with LDAP Server,”](#) provides information about directory services.
- The Index helps you find information in this guide.

Obtaining Documentation, Obtaining Support, and Security Guidelines

For information about obtaining documentation, obtaining support, providing documentation feedback, security guidelines, and recommended aliases and general Cisco documents, see the monthly *What's New in Cisco Product Documentation*, which also lists all new and revised Cisco technical documentation, at:

<http://www.cisco.com/en/US/docs/general/whatsnew/whatsnew.html>



CHAPTER 1

Cisco Unified Contact Center Express Overview and Packaging

This chapter describes the basic architecture and capabilities of Cisco Unified Contact Center Express (Unified CCX), release 5.0, and explains how to match those capabilities to your system requirements. This chapter contains the following sections:

- [Unified CCX Overview, page 1-1](#)
- [Cisco Unified CCX Packaging, page 1-2](#)
- [Inbound Voice, page 1-3](#)
- [Cisco Unified CCX Outbound Preview Dialer, page 1-20](#)
- [Cisco Unified Email Interaction Manager \(EIM\), page 1-21](#)
- [Cisco Unified Web Interaction Manager \(WIM\), page 1-22](#)
- [Quality Management, page 1-23](#)
- [Workforce Management, page 1-25](#)

Cisco Unified Contact Center Express 5.0 can be deployed only with Cisco Unified Communications Manager 5.1 or 6.0 (Linux based appliance) or with Cisco Unified Communications Manager Express (Unified CME) 4.2. Unified CCX 5.0 is Windows 2003 based. These applications were formerly named Cisco CallManager and Cisco CallManager Express.

This document addresses only the capabilities and deployment models of Unified CCX 5.0. For similar information about other releases of Unified CCX, refer to the appropriate SRND for the release.



Note

Unified CCX 5.0 does not support expansion server for either non-high availability or high availability inbound deployments. In addition, because Cisco Unified Communications Manager 5.1 and 6.0 operate on a Linux server and Unified CCX 5.0 operates on a Windows server, co-resident deployments are not supported. Finally, high availability is supported only for the inbound voice option.

Unified CCX Overview

Unified CCX 5.0 provides options to address multiple contact center functional areas using a variety of server deployment models. These functions and their associated deployment models are:

- Inbound voice is deployed on a one server non-high availability or a two server high availability cluster.

- Outbound voice does not support high availability but is deployed on the same servers as inbound voice.
- Multichannel capabilities are provided by Cisco Unified E-Mail Interaction for e-mail and Cisco Unified Web Interaction for chat and web collaboration.
- E-mail must be deployed on a separate dedicated server or cluster of servers. E-mail and web/chat may be deployed on the same server or cluster of servers as long as both are either the Basic package or both are the Advanced package.
- Web/chat must be deployed on a separate dedicated server or cluster of servers. E-mail and web/chat may be deployed on the same server or cluster of servers as long as both are either the Basic package or both are the Advanced package.
- Call Recording and quality management must be deployed on a separate dedicated server.
- Workforce management must be deployed on a separate dedicated single server.

**Note**

The specific deployment models and the server or multiple servers that are required for a deployment model can only be determined by using the Unified CCX 5.0 Configuration & Ordering Tool. This tool is required by the Cisco Assessment to Quality (A2Q) process for every new, add-on, and upgrade system. The tool is available at:

http://www.cisco.com/en/US/partner/products/sw/custcosw/ps1846/prod_how_to_order.html

The tool provides a structured way to configure a Unified CCX system, automatically pass or fail a configuration, and it provides a complete bill of materials for the configuration.

These options can be deployed on Cisco Media Convergence Servers (MCSs) or on HP or IBM MCS equivalents for any of the functional components with the supported deployment models. However, different functional components require different deployment models and high availability is available only for inbound voice. In addition, high availability for inbound voice, outbound, quality management, and workforce management are not supported for Unified CME. Different features require different deployment models.

Unified CCX 5.0 supports Unified Communications Manager and Unified Communications Manager Express. Not all features that are supported by Unified CCX for Unified CM are supported for Unified CME. In particular high availability, the Cisco Unified CCX Outbound Preview Dialer (Outbound), Quality Management, and Workforce Management are not supported by Unified CCX for Unified CME.

Cisco Assessment to Quality (A2Q) requires that all deployments of Unified CCX 5.0 use the Unified CCX 5.0 Configuration & Ordering Tool to complete pass bid assurance. The Unified CCX 5.0 Configuration & Ordering Tool provides a complete list of all the servers and server configurations required for a given Unified CCX 5.0 deployment.

Cisco Unified CCX Packaging

Unified CCX is a complete customer interaction management solution available in three different packages: Standard, Enhanced and Premium. Different packages provide varying levels of customer interaction management channel options and capability within a contact channel. [Table 1-1](#) and [Table 1-2](#) describe the major customer interaction management options and their availability. For more detailed information, refer to product data sheets, feature guides and end user documentation for each type of Unified CCX customer contact interaction management at the following URL:

<http://www.cisco.com/en/US/partner/products/sw/custcosw/ps1846/index.html>

Unified CCX deployments must have all product components and optional features of the same package type. Mixing components or options from different packages is not supported. For example, Enhanced Inbound voice agents and Premium Basic Email Interaction Manager agents is not supported.

**Note**

All Unified CCX deployments require a minimum of 10 seats of the inbound voice feature. Some configurations may require more as described in the sections that follow.

Table 1-1 Customer Interaction Channel Availability by Unified CCX Package for Unified Communications Manager

Contact Channel	Premium	Enhanced	Standard
Inbound Voice	Yes	Yes	Yes
Inbound Voice High Availability	Yes	Yes	No
Cisco Unified CCX Outbound Preview Dialer	Yes	No	No
Basic or Advanced Email Interaction Manager	Yes	No	No
Basic or Advanced Web Interaction Manager	Yes	No	No
Quality Manager	Yes	No	No
Workforce Manager	Yes	No	No

Table 1-2 Customer Interaction Channel Availability for Unified Communications Manager and Unified Communications Manager Express

Contact Channel	Unified Communications Manager	Unified Communications Manager Express
Inbound Voice	Yes	Yes
Inbound Voice High Availability	Yes	No
Cisco Unified CCX Outbound Preview Dialer	Yes	No
Basic or Advanced Email Interaction Manager	Yes	Yes
Basic or Advanced Web Interaction Manager	Yes	Yes
Quality Manager	Yes	No
Workforce Manager	Yes	No

Inbound Voice

Unified CCX Standard, Enhanced and Premium each provide varying levels of inbound voice ACD, IVR, CTI, agent and supervisor desktops and desktop administration, real-time and historical reporting, and web based administration features.

Unified CCX Standard, Enhanced, and Premium each require a minimum purchase of 10 seats.

For a comparison of feature content by package, refer to the Cisco Contact Center Express 5.0 Features and Specifications reference document at:

http://www.cisco.com/en/US/partner/products/sw/custcosw/ps1846/products_data_sheets_list.html

Each user license is for a concurrent user. For example, a contact center with three shifts of 100 agents and supervisors requires 100 concurrent user licenses. Each shift of 100 users would reuse these licenses during their shifts.

Table 1-3 lists the inbound voice licensed components.

Table 1-3 Inbound Voice Licensed Components

License	Premium	Enhanced	Standard
<p>Concurrent inbound voice seat.</p> <p>Each concurrent inbound voice user (agent or supervisor) requires a concurrent seat license. Each quantity one seat license provides:</p> <ul style="list-style-type: none"> Quantity one Cisco Agent Desktop (CAD) Quantity one Cisco IP Phone Agent (IPPA) Quantity one Cisco Supervisor Desktop (CSD) Quantity one Cisco Desktop Administrator (CDA) Quantity one historical reporting client Quantity one on demand recording client (CAD and CSD) 	<p>Yes.</p> <p>Note On demand recording only available in Enhanced and Premium.</p>	<p>Yes.</p> <p>Note On demand recording only available in Enhanced and Premium.</p>	<p>Yes.</p> <p>Note On demand recording not available in Standard.</p>
<p>Advanced IVR port.</p> <p>Note For more detailed information, see the “IVR Ports” section on page 1-4.</p>	<p>Yes.</p> <p>Note Quantity two Advanced IVR Ports per each quantity one Premium Inbound Voice seat.</p>	Not available.	Not available.
<p>High Availability (HA) option.</p> <p>HA provides licensing for mirrored, warm standby server software.</p>	Yes.	Yes.	Not available.

IVR Ports

IVR ports are packaged as either Basic or Advanced IVR ports.

- Basic IVR Ports Licensing—Basic IVR ports are not licensed and a given configuration may have as many Basic IVR ports as fit given the server on which the system is deployed and the mix of other features deployed on that server. You must use the Unified CCX Configuration & Ordering Tool to determine the maximum number of Basic IVR ports that are supported on a per configuration basis. Basic IVR ports provide a queue point, custom messaging and prompting, caller input collection, and processing via DTMF decoding. Decoded DTMF input may be used for both routing and screen pop purposes. Basic IVR ports (and only Basic IVR ports) are available in both the Standard and Enhanced packages.

- **Advanced IVR ports licensing**— Advanced IVR ports are licensed on a per inbound voice seat basis and are available only with the Premium package. Each inbound voice seat provides two Advanced IVR port licenses. For example, a 100 seat inbound voice deployment provides 200 Advanced IVR port licenses. Advanced IVR port licenses counts are checked at run-time. In the example given here, the 201st simultaneously active request for an Advanced IVR port to handle an incoming call would be denied. Deployments requiring more IVR ports than provided by this 1:2 seat:Advanced IVR port ratio would need to purchase one additional Premium inbound voice seat for each two additional Advanced IVR ports required.

Inbound Voice Packaged Components

The primary components provided with inbound voice are described in the following sections. These sections provide high level descriptions of the features and functions provided for these components. For more specific information, refer to the Cisco CRS user documentation

- [Automatic Call Distribution \(ACD\), page 1-5](#)
- [Interactive Voice Response \(IVR\), page 1-9](#)
- [Computer Telephony Integration \(CTI\), page 1-11](#)
- [Cisco Desktop Services \(CAD, IPPA, CSD\), page 1-13](#)
- [Historical Reporting, page 1-12](#)

Automatic Call Distribution (ACD)

Table 1-4 describes the Automatic Call Distribution (ACD) features that are available in each Unified CCX Package.

Table 1-4 ACD Features Available in Each Unified CCX Package

Feature	Premium	Enhanced	Standard
Conditional Routing. Unified CCX supports routing based upon caller input to menus, real-time queue statistics, time of day, day of week, ANI, dialed number, and processing of data from XML text files.	Included.	Included.	Included.
Agent Selection. Unified CCX supports longest available, linear, most handled contacts, shortest average handle time, and circular agent selection algorithms. With Basic ACD functionality, agents are associated with one resource group only.	Included.	Included.	Included.
Customizable Queuing Announcements. Unified CCX supports the playing of customizable queuing announcements based upon the skill group that the call is being queued to, including announcements related to position in queue and expected delay.	Included.	Included.	Included.

Table 1-4 ACD Features Available in Each Unified CCX Package (continued)

Feature	Premium	Enhanced	Standard
Re-route on Ring No Answer. If the selected agent does not answer within the allowed time limit, the caller retains the position in queue. Any screen pop data is also preserved.	Included.	Included.	Included.
Cisco Unified Intelligent Contact Management Enterprise (Unified ICME) Integration. Unified CCX can integrate with Unified ICME 7.x. Unified ICME integration provides the following capabilities: <ul style="list-style-type: none"> • The ability for Unified CCX to send agent, queue, and call state changes to Unified ICME software • The ability of Unified ICME software to intelligently route and load balance (using pre-routing or post-routing) calls across multiple ACD sites, which can include one or more Unified CCX systems, Unified CCE systems, or traditional ACDs (that are supported by Unified ICME software). Calls routed to an Unified CCX application can also be sent call data so that the data can be popped onto an agent screen. • The ability for Unified CCX to send post-route requests with call data to the Unified ICME software to request routing instructions. This event could be in response to a new call that just arrived at Unified CCX or a call that is being transferred from an IVR port or agent. Call data included in the post-route request can be used by the Unified ICME software to profile route the call. Call data is also passed to the terminating ACD site (Unified CCX, Unified CCE, or traditional ACD) for an agent screen pop. • The ability for Unified ICME software to provide multi-site ACD reporting for a mixed network of ACD sites, which can include one or more Unified CCX systems, Unified CCE systems, or traditional ACDs. 	Optional.	Optional.	Optional.
Data driven routing for HTML and XML data sources. The ability to use data obtained from HTML or XML documents to make routing decisions. XML document processing can also be used as a data store to access system-wide static data like a list of holidays, hours of operations, a short list of hot customer accounts, and so on.	Included.	Included.	Included.

Table 1-4 ACD Features Available in Each Unified CCX Package (continued)

Feature	Premium	Enhanced	Standard
<p>Cisco Unified Intelligent Contact Management Enterprise (Unified ICME) Integration. Unified CCX can integrate with Unified ICME 7.x. Unified ICME integration provides the following capabilities:</p> <ul style="list-style-type: none"> • The ability for Unified CCX to send agent, queue, and call state changes to Unified ICME software • The ability of Unified ICME software to intelligently route and load balance (using pre-routing or post-routing) calls across multiple ACD sites, which can include one or more Unified CCX systems, Unified CCE systems, or traditional ACDs (that are supported by Unified ICME software). Calls routed to an Unified CCX application can also be sent call data so that the data can be popped onto an agent screen. • The ability for Unified CCX to send post-route requests with call data to the Unified ICME software to request routing instructions. This event could be in response to a new call that just arrived at Unified CCX or a call that is being transferred from an IVR port or agent. Call data included in the post-route request can be used by the Unified ICME software to profile route the call. Call data is also passed to the terminating ACD site (Unified CCX, Unified CCE, or traditional ACD) for an agent screen pop. • The ability for Unified ICME software to provide multi-site ACD reporting for a mixed network of ACD sites, which can include one or more Unified CCX systems, Unified CCE systems, or traditional ACDs. 	Optional.	Optional.	Optional.
<p>Data driven routing for HTML and XML data sources. The ability to use data obtained from HTML or XML documents to make routing decisions. XML document processing can also be used as a data store to access system-wide static data like a list of holidays, hours of operations, a short list of hot customer accounts, and so on.</p>	Included.	Included.	Included.

Table 1-4 ACD Features Available in Each Unified CCX Package (continued)

Feature	Premium	Enhanced	Standard
<p>Agent Skill and Competency-Based Routing. Agents can be configured with up to 50 skills, each with up to 10 a different competency levels. Contact Service Queues (also known as skill groups) can be configured as requiring up to 50 skills, each with up to 10 minimum skill competency levels. The Unified CCX routing logic then matches the caller and contact requirements with agent skills to find the optimum match using one of the following agent selection criteria:</p> <ul style="list-style-type: none"> • Longest available, most handled contacts, or shortest average handle time • Most skilled, most skilled by weight, or most skilled by order • Least skilled, least skilled by weight, or least skilled by order 	Included.	Included.	Not available.
<p>High Availability Failover. With HA failure of the active server can be detected and the ACD subsystem can automatically fail over from the active to the standby server. All ACD functions are restored on the standby server within 5 seconds.</p>	Optional with HA license.	Optional with HA license.	Not available.
<p>Dynamic Reskilling. Changes to CSQ skills and competencies and agent skills and competencies are applied immediately.</p>	Included.	Included.	Not available.
<p>Prioritized Queuing. Up to 10 levels of customer contacts can be prioritized based upon call or customer data, and calls may be moved within or among queues under workflow control using priority information.</p>	Included.	Included.	Not available.
<p>Agent Routing. Unified CCX routing applications can select a specific agent if that agent is in Ready state. (Queuing on a per agent basis is not supported.)</p>	Included.	Included.	Not available.
<p>Data driven routing based on ODBC database sources via SQL. The ability to use data obtained from an ODBC compatible database via a SQL query to make routing decisions</p>	Included.	Not available.	Not available.
<p>Wrap-up and work Modes. After call completion, an agent can be configured to be automatically placed into Work state, on a per CSQ basis. The agent can also choose to enter work state if that option is provided by the agent's desktop administrator. A wrap-up timer is also configurable on a per CSQ basis.</p>	Included.	Included.	Not available.
<p>Wrap Up Codes. Agents may select administratively defined wrap up codes.</p>	Included.	Included.	Not available.

Interactive Voice Response (IVR)

Table 1-5 describes the Interactive Voice Response (IVR) features that are available in each Unified CCX Package.

Table 1-5 IVR Features Available in Each Unified CCX Package

Feature	Premium	Enhanced	Standard
<p>Basic Prompt & Collect IVR. Basic IVR ports provide a queue point, custom messaging and prompting, caller input collection, and processing via DTMF decoding. Decoded DTMF input may be used for both routing and screen pop purposes. Basic call controls such as terminate, transfer, and place call are also supported as part of the basic IVR functionality.</p>	Included.	Included.	Included.
<p>High Availability Failover. With HA, failure of the active server is can be detected and the IVR subsystem can automatically fail over from the active to the standby server. All IVR functions will be restored on the standby server within 5 seconds.</p> <p>Note All calls in queue and calls receiving IVR call treatment will be lost. Calls already transferred to the agent will be preserved.</p>	Optional with HA license.	Optional with HA license.	Not available.
<p>Advanced IVR Port Database Integration. The Unified CCX server can interoperate with any ODBC-compliant database. Databases tested and supported by Cisco are listed in <i>Cisco CRS Software and Hardware Compatibility Guide</i>, which is available at:</p> <p>http://www.cisco.com/en/US/products/sw/custcosw/ps1846/products_device_support_tables_list.html</p> <p>Data retrieved from databases can be used with the conditional routing capabilities to provide customer profile-based routing and queuing. Database integration also provides the ability to offer complete self-service applications to callers. Database views are not supported using the CRS Editor database steps, but database views could be accessed using Voice XML or Java logic modules.</p>	Included.	Not available.	Not available.

Table 1-5 *IVR Features Available in Each Unified CCX Package (continued)*

Feature	Premium	Enhanced	Standard
Advanced IVR Ports HTTP Triggers (the web analogue to Unified CM Telephony) to invoke and run a workflow. HTTP triggers enable a Unified CCX to receive a customer contact request through an HTTP request. This approach allows web users to be offered service through a “click to talk to an agent” button. Information collected using the web (a customer call back number, account number, shopping cart content, and so on) can be passed to the Unified CCX script to allow customer profile-based routing and a data-rich screen pop. These contacts can be prioritized and routed using the same methods available to normal inbound voice callers.	Included.	Not available.	Not available.
Advanced IVR Port SMTP outbound mail subsystem that may be used at run time under workflow control to send an e-mail. Third-party paging or fax products that accept an incoming e-mail to invoke a page or fax service may use this subsystem to provide real-time paging and fax responses in addition to e-mail responses.	Included.	Not available.	Not available.
Advanced IVR Port Voice XML 2.0 Support. Unified CCX supports executing application logic developed with the Voice XML (VXML) standard. VXML is required for certain complex grammar ASR and TTS interactions and is optional for a DTMF or simple ASR or TTS voice interaction service. VXML allows organizations to reuse application logic from other applications, such as a transaction server to a mainframe database.	Included.	Not available.	Not available.
Advanced IVR Port Call Recording. The Unified CCX server can record input from callers. This capability could be used to allow call center staff to remotely record new announcements or prompts.	Included.	Not available.	Not available.
Advanced IVR Port Java Support. The Unified CCX server can support logic defined using Java. Java support allows for logic from existing web and Java applications to be reused.	Included.	Not available.	Not available.
Advanced IVR Port Automatic Speech Recognition via MRCP. ASR provides the ability to use natural human speech to replace DTMF keypad presses as a way to interact with IVR applications.	Optional with purchase of compatible ASR product from Nuance or IBM.	Not available.	Not available.

Table 1-5 *IVR Features Available in Each Unified CCX Package (continued)*

Feature	Premium	Enhanced	Standard
Advanced IVR Port Text to Speech via MRCP. TTS provides the ability to use flat text files as input to a computer generated speech engine. TTS can replace pre-recorded human speech in IVR applications.	Optional with purchase of compatible TTS product from Nuance or IBM.	Not available.	Not available.
Advanced IVR Port Remote Silent Monitoring. Provides a mechanism for silent monitoring of calls using an IP phone or a PSTN phone. This form of silent monitoring does not require a CSD application to be running but does require a seat license for any supervisor engaged in remote silent monitoring. Remote silent monitoring also does not require any data network connectivity and is ideally suited for management of outsourced customers of a call center service provider. The agent is unaware when being monitored using remote silent monitoring.	Included.	Not available.	Not available.

Computer Telephony Integration (CTI)

Computer Telephony Integrative (CTI) refers to the ability to use data available from caller entered data, ACD, IVR or other data sources, to pop to the agent, to use to make routing decisions, or to use as a key to perform a data lookup (for example, via a database access prior to popping to the agent or to use in making routing decisions). CTI may also imply the ability to invoke a third-party application and to pass data to that application as part of the agent screen pop.

[Table 1-6](#) describes the CTI features that are available in each Unified CCX Package.

Table 1-6 CTI Features Available in Each Unified CCX Package

Feature	Premium	Enhanced	Standard
Basic CTI. Provides a customizable enterprise data window that is popped on the agent desktop upon call ringing. Data within the enterprise data window includes ANI, dialed number, and any caller input (account number, order number, case number, reason for calling, and so on), and details about how long the caller interacted with the IVR, how long the caller waited in queue, and how long the caller spent with all other agents if this was a transferred call.	Included.	Included.	Included.
Advanced CTI. Advanced CTI functionality allows call data to be passed to other Windows-based desktop applications (for example, CRM applications) for an application screen pop on ringing. Passing data to other applications is performed through keystroke macros that are then associated with specific call events such as call ringing or call release. With keystroke macros and HTTP put/get commands, no programming is required to develop a screen pop application.	Included. Premium package adds support for using data from supported databases using workflow-based SQL queries.	Included. Enhanced package adds support for using data from XML data sources. Database integration is not supported.	Not available.

Historical Reporting

Cisco CRS Historical Reporting provides supervisors and administrators with information about call, agent, and CSQ activities. Users of the Historical Reports can perform the following functions:

- View, print, and save reports.
- Sort and filter reports.
- Send scheduled reports to a file or to a printer.
- Export reports in a variety of formats, including PDF, RTF, XML, and CSV.
- Prepare custom reports using a variety of generally available 3rd party applications that are designed to create reports from databases.

[Table 1-7](#) describes the CTI features that are available in each Unified CCX Package.

Table 1-7 Historical Reporting Features Available in Each Unified CCX Package

Feature	Premium	Enhanced	Standard
Viewing Reports. View reports for the entire contact center using the Historical Reports client.	Included	Included	Included
Custom Reports. Generate custom reports using a combination of the Crystal Reports Developer's Toolkit and SQL stored procedures. For more information, refer <i>Cisco CRS Historical Reporting Administrator and Developer Guide</i> and to <i>Cisco CRS Database Schema</i> .	Included	Included	Included

Cisco Desktop Services (CAD, IPPA, CSD)

Cisco Desktop Services provide Cisco Agent Desktop and IP Phone Agent for agent use, and Cisco Supervisor Desktop for supervisor use.

[Table 1-8](#) describes the Cisco Desktop Services features that are available in each Unified CCX Package.

[Table 1-9 on page 1-17](#) describes the IP Phone Agent (IPPA) features that are available in each Unified CCX Package.

[Table 1-10 on page 1-18](#) describes the Cisco Supervisor Desktop features that are available in each Unified CCX Package.

Table 1-8 Cisco Agent Desktop Features Available in Each Unified CCX Package

Feature	Premium	Enhanced	Standard
Agent State Control. From the agent desktop, agents log in, log out, and make themselves ready and not ready.	Included.	Included.	Included.
Call Control. From the agent desktop, agents answer, release, hold, retrieve, conference, and transfer calls. (Call control can also be performed from a Cisco Unified IP Phone.) For example, to answer a call, the agent can simply pickup the phone handset. The Unified CCX software ensures that the current call state for the phone and CAD application are kept in synch. Note Call control initiated from the agent desktop is available only with Unified CCX with Unified CM, not with Unified CCX with Unified CME.	Included.	Included.	Included.
Dynamic Regrouping. Change of agent association with a resource group is applied immediately.	Included.	Included.	Included.

Table 1-8 Cisco Agent Desktop Features Available in Each Unified CCX Package (continued)

Feature	Premium	Enhanced	Standard
Real-Time Statistics. Agents have access to real-time statistics for themselves and the queues to which they are associated. For example, from the agent desktop application, agents can see how many calls they have handled today and how many calls are currently in queue for their team.	Included.	Included.	Included.
Integrated Text Messaging. Agents can interact with their supervisor and other agents through text chat.	Included.	Included.	Included.
Reason Codes. Agents can be configured to enter reason codes for not ready and logout.	Included.	Included.	Included.
Basic CTI. Agent desktops provide an enterprise data window that is popped upon call ringing.	Included.	Included.	Included.
<p>Telephony Support. CAD can be deployed with select Cisco Unified IP Phone models, as described <i>Cisco CRS Software and Hardware Compatibility Guide</i>. However, there are different features available on different phones.</p> <p>CAD also supports the agent using the Cisco IP Communicator soft phone application running on the same workstation with CAD.</p> <p>An agent ACD (Unified CCX) extension is valid only with a single line. An agent ACD extension must not be configured to forward on no answer to a voice messaging system or to any other termination point. Doing so might affect re-routing on ring-no-answer of a Unified CCX routed call to another agent or back to queue. Agents who need to be contacted directly or who need voice messages should have their phones configured with a second extension (and multiple lines if necessary).</p> <p>Unified CCX does not monitor or report on activity on the non-ACD extensions on a phone.</p> <p>Agents are associated with a specific Cisco Unified Communications Manager extension (directory number).</p>	Included.	Included.	Included.

Table 1-8 Cisco Agent Desktop Features Available in Each Unified CCX Package (continued)

Feature	Premium	Enhanced	Standard
<p>Hot Desking. Hot desking allows agents to log in using CAD and any Cisco Unified IP Phone that is registered with the same Cisco Unified Communications Manager cluster. Agents using CAD and Cisco IP Communicator can also use Extension Mobility. This capability allows multiple agents to use the same phone, but only one at a time. For example, different agents on different shifts may use the same workstation and phone.</p> <p>Extension Mobility brings a user specific phone profile (including configured extensions for that user) to the phone being logged in from. After logging into Cisco Unified Communications Manager with Extension Mobility, agents can log into Unified CCX using CAD.</p>	Included.	Included.	Included.
<p>Auto Update. When the CAD starts up, it checks to see if a new version of the CAD program is available and automatically performs an update on the agent workstation.</p>	Included.	Included.	Included.
<p>Desktop Workflows. A wizard based interface allowing desktop events (such as ringing or going off hook) to have associated rules and rule actions that are invoked when the rule is met for that event.</p>	Included.	Included.	Not available.
<p>Application Integration. CAD can be configured using desktop workflows to allow call data to be passed to other desktop applications (for example, CRM applications) for an application screen pop. Passing data to other applications is performed through keystroke macros or HTTP put/get commands that are then associated with specific call events such as call ringing. No programming is required to develop a screen pop. Application integration can also be done upon call release to pop open a wrap-up application on the agent workstation</p>	Included.	Included.	Not available.
<p>Workflow Buttons. CAD can be configured to have pre-defined workflow buttons that execute specified programs and keystrokes. Workflow buttons aid agents in completing repetitive tasks quickly.</p>	Included.	Included.	Not available.

Table 1-8 Cisco Agent Desktop Features Available in Each Unified CCX Package (continued)

Feature	Premium	Enhanced	Standard
On-Demand Call Recording. CAD can be configured to allow clicking a single button to start and stop call recording. The call recording contains only the portion of the call that occurs after the start record button is clicked. There are limits to how many simultaneous call recording sessions can be performed. Capacity and configuration limits are defined in the Unified CCX 5.0 Configuration & Ordering Tool.	Included.	Included.	Not available.
Complete Call Recording. CAD can be configured to automatically start and stop recording upon call answer and release. Conditions upon which calls are to be recorded are defined in an application script. There are limits to how many simultaneous call recording sessions can be performed.	Included.	Included.	Not available.
Automatic Failover. Upon failure of the active Unified CCX server, CAD will automatically re-login agents on the standby server, and the agent will be placed into a Not Ready state. Upon failure of the active Unified CCX server, active calls on agents phones will survive. However, the call duration and other information that is associated with the call in the historical reporting database may be affected. Historical reports generated for time periods in which a failover occurred will have missing or incorrect data. It will be called out in the report that a failover occurred.	Optional with HA license.	Optional with HA license.	Not available.
Wrap up Codes. Agents can use the CAD to select from one of many predefined wrap up codes either during the call or while the agent is in Work state.	Included.	Included.	Not available.
E-mail and Chat. CAD includes browser-based handling of e-mail and chat contacts. Agents may use the integrated browser within the CAD for this feature. Chat contact handling includes the ability for the agent to push web pages to the customer	Optional with EIM or WIM license.	Not available.	Not available.

Table 1-8 Cisco Agent Desktop Features Available in Each Unified CCX Package (continued)

Feature	Premium	Enhanced	Standard
Workforce Management. Workforce Management is a workforce scheduling solution in which the supervisor or any contact center manager can schedule their agents based on forecasted call volume and agent expertise, availability, and other factors. Agents have an interface for that portion of the Workforce Management application that applies to them	Optional with Workforce Management user license.	Not available.	Not available.
Outbound. CAD includes buttons to control an agent response to an outbound contact offering by the system. If the agent clicks the Accept button, the system places the outbound call to the customer from the agent phone. Note The Outbound Dialer feature is only available with Unified CCX with Unified CM, not with Unified CCX with Unified CME.	Optional with Outbound license.	Not available.	Not available.

Table 1-9 IPPA Features Available in Each Unified CCX Package

Feature	Premium	Enhanced	Standard
Agent State Control. From the IPPA XML application, agents log in, log out, and make themselves ready or not ready.	Included.	Included.	Included.
Call Control. The Cisco Unified IP Phone provides call control.	Included.	Included.	Included.
Dynamic Regrouping. Change of agent association with a resource group is applied immediately.	Included.	Included.	Included.
Real-Time Statistics. Agents have access to real-time statistics for themselves and the queues to which they are associated.	Included.	Included.	Included.
Reason Codes. Agents can be configured to enter reason codes for not ready and logout.	Included.	Included.	Included.
Basic CTI. IPPA allows for call data to be popped onto the IP Phone display upon call ringing	Included.	Included.	Included.
Telephony Support. IPPA can be run from any phone that supports an XML client.	Included.	Included.	Included.

Table 1-9 *IPPA Features Available in Each Unified CCX Package (continued)*

Feature	Premium	Enhanced	Standard
<p>Hot Desking. Hot desking allows agents to log in using IPPA and any Cisco Unified IP Phone that is registered with the same Cisco Unified Communications Manager cluster. Agents using IPPA and Cisco IP Communicator can also use Extension Mobility. This capability allows multiple agents to use the same phone, but only one at a time. For example, different agents on different shifts may use the same workstation and phone.</p> <p>Extension Mobility brings a user specific phone profile (including configured extensions for that user) to the phone being logged in from. After logging into Cisco Unified Communications Manager with Extension Mobility, agents can log into Unified CCX using CAD.</p>	Included.	Included.	Included.
<p>On-Demand Call Recording. IPPA can be configured to allow clicking a single button to start and stop call recording on demand. The call recording contains only the portion of the call that occurs after the start record button is clicked. There are limits to how many simultaneous call recording sessions can be performed. Capacity and configuration limits are defined in the Unified CCX 5.0 Configuration & Ordering Tool.</p>	Included.	Included.	Not available.

Table 1-10 *Cisco Supervisor Desktop Features Available in Each Unified CCX Package*

Feature	Premium	Enhanced	Standard
<p>View / Change Agent State. Supervisor desktops allow supervisors to view the current state of all agents that are part of that supervisor's team. The supervisor desktop also allows supervisors to change an agent state (Ready, Not Ready, Logout).</p>	Included.	Included.	Included.
<p>Real-Time Agent and Skill Statistics. Supervisors can view statistics for all agents and queues that are associated with their team. Refer to <i>Cisco Supervisor Desktop User's Guide</i> for more details about statistics available through the CSD application.</p>	Included.	Included.	Included.
<p>Integrated Text Messaging. Supervisors can send text messages to one or more agents.</p>	Included.	Included.	Included.
<p>Marquee Messages. Supervisors can send a scrolling marquee (broadcast) message to all agents on their team.</p>	Included.	Included.	Included.

Table 1-10 Cisco Supervisor Desktop Features Available in Each Unified CCX Package (continued)

Feature	Premium	Enhanced	Standard
Silent Monitoring. CSD allows a supervisor to silently monitor agent calls. Agents can be configured to be aware or unaware that they are being monitored.	Included.	Included.	Not available.
Barge-in. CSD allows a supervisor to barge in on an agent call. The barge-in feature enters the supervisor, the agent, and the caller into a three-way conference. This feature requires the supervisor to have the CAD application open and to be logged in as an agent. The agent is aware when the supervisor barges in. Barge-in is supported for agents using CAD with IP Communicator, CAD with IP Phone, or IPPA.	Included.	Included.	Not available.
Intercept. CSD allows a supervisor to intercept an agent call. The intercept feature transfers the call to the supervisor. This feature requires the supervisor to have the CAD application open and to be logged in as an agent. As the call releases from the agent desktop and phone, the agent is aware when an intercept occurs. The agent is then available to take another call. Intercept is supported for agents using CAD with IP Communicator, CAD with IP Phone, or IPPA.	Included.	Included.	Not available.
On-Demand Agent Call Recording. CSD allows a supervisor to dynamically start and stop recording agent calls on demand. Agents are not aware that they are being recorded. A call recording only contains the portion of the call that occurs after the start record button is clicked. There are limits to how many simultaneous call recording sessions can be performed. Capacity and configuration limits are defined in the Unified CCX 5.0 Configuration & Ordering Tool.	Included.	Included.	Not available.
Call Recording Playback and Exports. The CSD Record Viewer application allows a supervisor to play back calls that were recorded within the last 7 days. Supervisors can sort the recorded call list by agent, DN, or date/time. Within Record Viewer, supervisors can tag selected recordings for a 30-day extended archiving, and supervisors can save selected recordings as a .wav format in a specified folder for permanent archiving.	Included.	Included.	Not available.
Automatic Failover and Re-login. Upon CRS Engine failover, the CSD automatically fails over to the standby CRS Engine so the supervisor does not have to re-login.	Included.	Included.	Not available.

Table 1-10 Cisco Supervisor Desktop Features Available in Each Unified CCX Package (continued)

Feature	Premium	Enhanced	Standard
Workforce Management. Workforce Management is a workforce scheduling solution in which the supervisor or any contact center manager can schedule their agents based on forecasted call volume and the agents expertise, availability, and other factors.	Optional with Workforce Management user license.	Not available.	Not available.
Quality Management. Quality Management is a recording and quality management solution in which supervisors can choose to record all agent-customer calls, review the recordings, evaluate the agents, and suggest training classes accordingly	Optional with Quality Management license.	Not available.	Not available.

Cisco Unified CCX Outbound Preview Dialer

The Cisco Unified CCX Outbound Preview Dialer (Outbound) provides campaign based outbound preview dialer support as an additional option for inbound voice agents.

The GUI for outbound agents is CAD. CAD is packaged only with inbound voice seats. As a result, each agent licensed for outbound must also be licensed for inbound, as described in these examples:

- Example 1—A deployment that requires 100 inbound voice agents, 25 of whom need to perform outbound voice calls, would require 100 inbound voice seats and 25 outbound seats.
- Example 2— A deployment that requires 25 inbound voice agents performing only inbound voice and 75 outbound agents performing only outbound voice would require 100 inbound voice seats and 75 outbound voice seats.

Each user license is for a concurrent user. For example, a contact center with three shifts of 100 agents and supervisors would need 100 concurrent user licenses. Each shift of 100 users would reuse these licenses during their shifts.

Table 1-11 lists the Outbound voice licensed component.

Table 1-11 Outbound Voice Licensed Component

License	Premium	Enhanced	Standard
Outbound User.	Yes. Note Note: Outbound is an add-on option for inbound voice seats. Outbound requires that each licensed Outbound user also have an inbound voice license.	Not available.	Not available.

Table 1-12 describes the Outbound Voice features that are available in each Unified CCX Package.

Table 1-12 Outbound Voice Features Available in Each Unified CCX Package

Feature	Premium	Enhanced	Standard
Campaign Management. Administrators create and configure campaigns. They can specify a daily time range during which outbound calls are made and a set of CSQs whose agents make the outbound calls. They can also specify and import a list of customer contacts to be called.	Included.	Not available.	Not available.
Area Codes Management. Administrators can add mappings from area code to time zone for non-North American locations. This information is used to determine the customer contact current time before placing an outbound call.	Included.	Not available.	Not available.
Agent Outbound Controls. Agents can accept, reject, or skip outbound call requests. Agents can also reclassify calls to any one of many call results, such as Busy, Fax, and Answering Machine.	Included.	Not available.	Not available.
Removing “Do Not Call” Contacts. After an agent reclassifies a contact as “Do Not Call”, the Administrator can remove this contact from all campaigns.	Included.	Not available.	Not available.

Cisco Unified Email Interaction Manager (EIM)

Cisco Unified Email Interaction Manager (EIM) provides inbound e-mail routing, automated or agent assisted e-mail response, real-time and historical reporting and role based hierarchical rights management for agents, supervisors, administrators and knowledge base administrators. Unified EIM shares a common routing engine, services creation editor, look and feel, roles, and desktops with Unified Web Interaction Manager (WIM) and is available in either a Basic or Advanced package.

Unified EIM may be deployed on a dedicated server or server cluster or share a server or server cluster with Unified WIM. When Unified EIM and WIM are deployed on shared servers or server clusters, both must be either the Basic or Advanced package. Mixing packages is not supported.

Each user license is for a concurrent user. For example, a contact center with three shifts of 100 agents and supervisors would need 100 concurrent user licenses. Each shift of 100 users would reuse these licenses during their shifts.

Table 1-13 lists the Unified EIM licensed components.

Table 1-13 Unified EIM Licensed Component

License	Premium	Enhanced	Standard
Basic EIM Concurrent User.	Yes.	Not available.	Not available.
Advanced EIM Concurrent User.	Yes.	Not available.	Not available.

Unified EIM is packaged on a per-user basis and provides all the server software required for users, with the exception of the Windows operation system (Windows 2003) and database software (Microsoft SQL 2000), which must be purchased off the shelf.

Table 1-14 describes the Unified EIM features that are available in each Unified CCX Package.

Table 1-14 Unified EIM Features Available in Each Unified CCX Package

Feature	Premium Advanced Unified EIM	Premium Basic Unified EIM	Enhanced	Standard
Full HTML email support (incoming and outgoing).	Included.	Included.	Not available.	Not available.
Extensive knowledge base functionality—edit, search, link.	Included.	Included.	Not available.	Not available.
Flexible Attachment Handling—large attachments, from knowledge base or desktop.	Included.	Included.	Not available.	Not available.
Data adapters to integrate with external databases, HTTP, Java, Web Services, SOAP.	Included.	Database adaptor only.	Not available.	Not available.
Workflow extensibility, outbound workflows—workflows can be customized to invoke external programs, allow for approval of outbound e-mail.	Included.	Not available.	Not available.	Not available.
Custom roles.	Included.	Not available.	Not available.	Not available.
Multiple Partitions and departments.	Included.	Not available.	Not available.	Not available.

Cisco Unified Web Interaction Manager (WIM)

Cisco Unified Web Interaction Manager (WIM) provides inbound chat routing, agent assisted chat sessions, real time and historical reporting and role based hierarchical rights management for agents, supervisors, administrators, and knowledge base administrators. Unified WIM shares a common routing engine, services creation editor, look and feel, roles, and desktops with Unified EIM and is available in either a Basic or Advanced package.

Unified WIM may be deployed on a dedicated server or server cluster or share a server or server cluster with Unified EIM. When Unified EIM and WIM are deployed on shared servers or server clusters both must be either the Basic or Advanced package. Mixing packages is not supported

Each user license is for a concurrent user. For example, a contact center with three shifts of 100 agents and supervisors would need 100 concurrent user licenses. Each shift of 100 users would reuse these licenses during their shift.

Table 1-15 lists the Unified WIM licensed components.

Table 1-15 Unified WIM Licensed Components

License	Premium	Enhanced	Standard
Basic WIM Concurrent User.	Yes.	Not available.	Not available.
Advanced WIM Concurrent User.	Yes.	Not available.	Not available.

Unified WIM is packaged on a per-user basis and provides all the server software required for users, with the exception of the Windows operation system (Windows 2003) and database software (Microsoft SQL 2000), which must be purchased off the shelf.

Table 1-16 describes the Unified WIM features that are available in each Unified CCX Package.

Table 1-16 Unified WIM Features Available in Each Unified CCX Package

Feature	Premium Advanced Unified WIM	Premium Basic Unified WIM	Enhanced	Standard
Support for callers on most browsers.	Included.	Included.	Not available.	Not available.
Integrated, searchable Knowledge bas.	Included.	Included.	Not available.	Not available.
Single desktop for chat, collaboration, email.	Included.	Included.	Not available.	Not available.
Templates to control customer experience. Defined entry points to ease deployment.	Included.	Database adaptor only.	Not available.	Not available.
Data adapters to integrate with databases, HTTP, Java, Web Services, SOAP.	Included.	Database adaptor only.	Not available.	Not available.
Configurable roles.	Included.	Not available.	Not available.	Not available.
Multiple Departments—separate administration (data not separated).	Included.	Not available.	Not available.	Not available.

Quality Management

Quality Management supports the recording and archiving of every call between agents and customers. Managers and supervisors can evaluate a customer contact by listening to the recording and filling out an electronic evaluation form. They can also monitor and analyze the performance of groups, teams, and individual agents by looking at summary and detail reports of those evaluations. Supervisors and managers can then use these results to suggest training classes for the agents to take.

Each user license is for a configured (not concurrent) user. For example, a contact center with three shifts of 100 agents and supervisors would need 300 configured user licenses. Each shift of 100 users would use the license associated with them during their shift.

Table 1-17 lists the Quality Management licensed component.

Table 1-17 Quality Management Licensed Component

License	Premium	Enhanced	Standard
Quality Management Configured User.	Yes.	Not available.	Not available.

Quality Management is packaged on a per-user basis and provides all the server software required for users, with the exception of the Windows operation system (Windows 2003) and database software (Microsoft SQL 2000), which must be purchased off the shelf.

[Table 1-18](#) describes the Quality Management features that are available in each Unified CCX Package.

Table 1-18 Quality Management Features Available in Each Unified CCX Package

Feature	Premium	Enhanced	Standard
Endpoint recording, background software services.	Included.	Not available.	Not available.
Secure login, user role based model for access scope.	Included.	Not available.	Not available.
Agent, supervisor, manager, role based dashboards.	Included.	Not available.	Not available.
Endpoint software solution, self-service administration. Users synchronized with ICM.	Included.	Not available.	Not available.
Agent review and dashboard, multiple user comments.	Included.	Not available.	Not available.
Schedule, push training via CAD.	Included.	Not available.	Not available.
Third-party authoring.	Included.	Not available.	Not available.
Schedule contact uploads as low priority FTP transfer.	Included.	Not available.	Not available.
Endpoint architecture extends to contact processing—compression and analytics.	Included.	Not available.	Not available.

Workforce Management

Cisco Workforce Management allows supervisors and contact center managers to develop schedules for their agents and manage key performance indicators and real-time adherence. Managers can create and manage schedules for an unlimited number of sites, manage scheduling for offices spread out in different time zones, and schedule alternative media sources seamlessly, including chat and e-mail.

Each user license is for a configured (not concurrent) user. For example, a contact center with three shifts of 100 agents and supervisors would need 300 configured user licenses. Each shift of 100 users would use the license associated with them during their shift.

Table 1-19 lists the Workforce Management licensed component.

Table 1-19 Workforce Management Licensed Component

License	Premium	Enhanced	Standard
Workforce Management Configured User.	Yes.	Not available.	Not available.

Table 1-20 describes the Workforce Management features that are available in each Unified CCX Package.

Table 1-20 Workforce Management Features Available in Each Unified CCX Package

Feature	Premium	Enhanced	Standard
Forecasting	Included.	Not available.	Not available.
2-step scheduling	Included.	Not available.	Not available.
Multimedia Scheduling	Included.	Not available.	Not available.
Intraday management	Included.	Not available.	Not available.
KPIs and reporting	Included.	Not available.	Not available.
Alerts	Included.	Not available.	Not available.
Reporting	Included.	Not available.	Not available.
Web interface	Included.	Not available.	Not available.
Desktop integration	Included.	Not available.	Not available.



CHAPTER 2

Cisco Unified Contact Center Express Solution Architecture for Cisco Unified Communications Manager

Cisco Unified Contact Center Express (Unified CCX), Release 5.0, is a solution composed of many components. These components include not just the Unified CCX software and the servers upon which that software runs, but also include Cisco Unified Communications Manager (Unified CM), Cisco routers, Cisco data switches, Cisco Voice Gateways, and Cisco IP Phones. Cisco Unified CCX software is part of the Customer Response Solutions (CRS) software platform. CRS provides the software capabilities for not just Unified CCX, but also Unified IP IVR and Unified Queue Manager. (Note that Extended Services is no longer offered as part of Cisco Unified CM for either Cisco CRS 3.5 or 4.0 releases.) Unified IP IVR and Unified Queue Manager are primarily used for Cisco Unified Contact Center Enterprise (Unified CCE) deployments. A single physical server can run only one of the CRS packages, either Unified CCX, Unified IP IVR, or Unified QM.

This chapter includes the following sections:

- [Unified CCX Terminology, page 2-2](#)
- [Unified CCX Call Processing, page 2-3](#)
- [Unified CCX System Management, page 2-5](#)
- [CRS Engine and Database Components, page 2-5](#)
- [Monitoring and Recording Components, page 2-6](#)
- [Cisco TelePresence Virtual Agent Solution, page 2-11](#)
- [Cisco Unified CCX Outbound Preview Dialer, page 2-12](#)
- [Unified CCX ASR and TTS, page 2-22](#)
- [Cisco Interaction Manager, page 2-16](#)
- [Cisco Unified Workforce Optimization, page 2-17](#)
- [Unified CCX Integration with Unified ICME Software, page 2-22](#)
- [Unified CCX Fault Tolerance, page 2-25](#)
- [CRS 5.0 Software Compatibility, page 2-29](#)

Unified CCX Terminology

The Unified CM Telephony subsystem provides a mechanism for Unified CCX to communicate with Cisco Unified CM for call processing. Within Unified CM, an application user with CTI permissions is defined and that user ID is used by the Unified CM Telephony subsystem to log into Unified CM through JTAPI messaging. This user ID is referred to as the Unified CM Telephony user ID. This login process is what allows Unified CCX to begin communications with Unified CM and offer services like routing control.

When a caller dials the number of an extension configured on an IP Phone, Unified CM is capable of setting up that call without the aid of Unified CCX. However, sometimes callers dial generic numbers that are not associated with any particular phone. In those situations, Unified CM needs a mechanism to request routing instruction from some other application. One such mechanism is a route request message and one such application that can provide routing control is Unified CCX. In order for Unified CM to request routing from another application for a particular dialed number, there must be a CTI Route Point defined within Unified CM for that dialed number. In Unified CCX, this CTI Route Point is defined in the Unified CM Telephony Trigger. Within Unified CM the CTI Route Point is also associated with the user (application) that can provide routing control. This Unified CM configuration is what enables Unified CM to ask Unified CCX how to route a call. The creation of a CTI Route Point, the association of that CTI Route Point to the dialed number, and the user association of that CTI Route Point to the Unified CM Telephony user responsible for routing control is done automatically by the Unified CCX Server as part of the creation of a Unified CM Telephony trigger within Unified CCX.

The Unified CM Telephony trigger also specifies what CTI port group and CRS application to use for a specified dialed number. As discussed in Chapter 1, Unified CCX provides IVR functionality. A Unified CCX system can provide up to 300 logical IVR ports (also called CTI Ports). The CTI ports within Unified CCX are logical VoIP endpoints where calls can be terminated—very similar to a softphone. The difference is that these softphones are controlled by an application that has the ability to encode .wav files from disk into one of the supported VoIP formats (G.711 or G.729) and then stream those VoIP packets out the Ethernet interface on the Unified CCX Server to the calling VoIP endpoint (IP Phone or Voice Gateway port). Each CTI Port must be defined within Unified CM as a device with a type of “CTI Port.” Each CTI Port device is assigned a unique directory number (extension), just like a phone. This allows Unified CM to setup calls to these devices and endpoints. The creation of the CTI Ports on Unified CM is done automatically by the Unified CCX server when a group of CTI Ports (Call Control Group) is defined.

When a caller dials a dialed number that is associated with a CTI Route Point, Unified CM sends a route request to Unified CCX which has the dialed number associated with a group of CTI Ports. The Unified CCX software selects an available CTI Port from that CTI Port Group and returns the extension of that CTI Port to Unified CM. Unified CM then attempts to setup a call to that extension (CTI Port) by sending a ring message to the Unified CCX server. When the Unified CCX server gets the ring message for a particular CTI Port for a particular dialed number, the Unified CCX server begins executing the script associated with that trigger’s application. The first step in a script is typically an Accept step. The Accept step in the application will answer the call by sending a message to Unified CM to establish an RTP stream between the selected CTI Port and the Voice Gateway (VG) port (or calling IP Phone). The application can then prompt callers for input and provide the caller self service. When either the caller hangs up or the application executes a Terminate step, Unified CM tears down the call.

Within the application, it is also possible to route or transfer the call to an available agent. If no agents are available, queuing treatment is provided to the caller. Agents in Unified CCX are called resources. There is a subsystem within Unified CCX called the Resource Manager which is responsible for monitoring the state of agents and selecting agents based upon the agent skills and queue skills required. Queues in Unified CCX are called Contact Service Queues (CSQs). Agents use CAD or IPPA state controls to log in and make themselves ready. The Resource Manager is updated upon every agent state change.

Administrators use the CRS Administration web interface to configure agent skills and competencies. CRS Administration is also used to define CSQ skill and competency requirements and the agent selection criteria to be used for that CSQ. Applications use the Select Resource step to specify the CSQ into which the caller shall be placed. The Resource Manager subsystem is queried by the application to select the appropriate agent based upon the agent selection criteria. If no agent is available, the Select Resource step has a queued branch where queueing treatment is defined. When the Resource Manager finds an available and appropriately skilled agent, it will reserve that agent and then request for that call to be transferred to the agent's IP Phone (using JTAPI messaging to Unified CM). After the call has been transferred to and answered by the agent, the CTI Port being used for that call is released.


An agent must be configured in Unified CM as a user. This adds a record to the Unified CM user table. The Unified CM user table can be synchronized with LDAP directories like Microsoft's Active Directory. Details on LDAP integration can be found in Appendix C. Unified CM supports usage of one of the following LDAP directory servers—DC Directory (default), Netscape IPlanet, and Microsoft Active Directory. In Unified CM, an agent's phone and directory number are associated with the agent's Unified CM user name and the directory number is also marked as a Unified CCX extension. This allows Unified CCX to know that this Unified CM user is an agent, and the user then shows up in the resource list in CRS Administration.

In Unified CM, agent phones also are associated with another application user with CTI permissions called the Resource Manager user. This user is referred to as the RmCm Provider. The RmCm Provider allows Unified CCX to monitor the state of the phone. For example, when an agent goes off hook to make an outbound call using the Unified CCX extension, the Unified CCX application needs to be notified so that the Resource Manager can update its agent state machine to show that agent being on an outbound call. The RmCm Provider also allows Unified CCX to control the state of the phone. For example, when an agent clicks Answer on Cisco Agent Desktop, this triggers Unified CCX to have the RmCm Provider signal to Unified CM to have that agent's phone go off hook.

Unified CCX Call Processing

[Figure 2-1](#) and the description that follows explain a typical Unified CCX call flow:

Figure 2-1 Unified CCX Call Flow

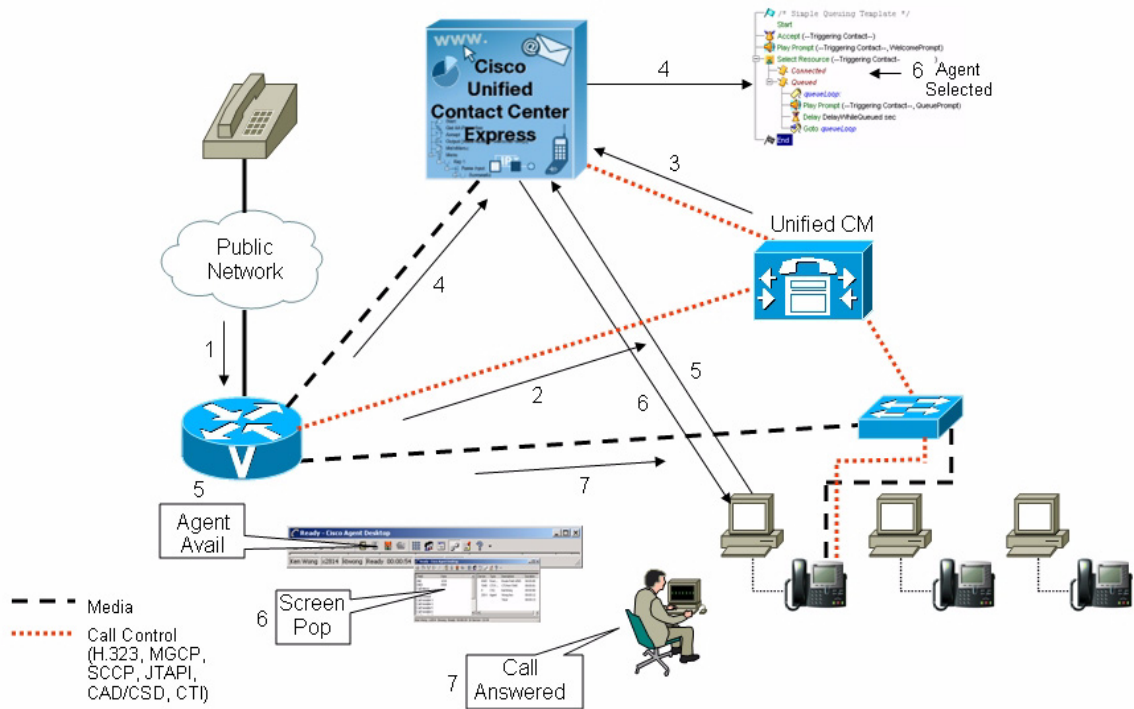

1. Call arrives at Voice Gateway (VG)
2. Voice Gateway asks Unified CM how to route the call (using H.323 or MGCP).
3. Unified CM has the dialed number (DN) associated with a CTI Route Point that is associated with a Unified CM Telephony user for Unified CCX. This triggers a JTAPI route request to be sent to Unified CCX.
4. Based upon the DN, which is mapped to a Unified CM Telephony trigger, the Unified CCX server selects an available CTI port and replies back to Unified CM with the extension of the CTI Port to send this call to. Unified CM then sends a call setup (ring) message to Unified CCX, which then maps the DN to the appropriate Unified CCX script. The Accept step (typically the first step) in the script will answer the call and trigger Unified CM to establish an RTP stream between the Voice Gateway port and the selected CTI Port. Then the script prompts the caller for an account number and does a database lookup. Then the caller is prompted to select from a menu of choices and is provided self-service treatment. If the user presses 0, we go to the transfer to agent section of the script. In this scenario, we are assuming no appropriately skilled agents are available, so the script executes the queued loop logic until an appropriately skilled agent becomes available.
5. An appropriately skilled agent becomes available as a result of logging in and going ready or completing a previous call.
6. The agent is selected or reserved by the Unified CCX server and this triggers the call to be transferred to the agent phone and subsequently causes the agent phone to ring (using Unified CM signaling). In addition, the Unified CCX server delivers a screen pop to the selected agent desktop and enables the answer button on the agent desktop.
7. The agent answers the call which causes Unified CCX to complete the transfer from the CTI Port to the agent phone and Unified CM to initiate the establishment of an RTP VoIP data stream between the agent's phone and the VG port. The transfer releases the CTI Port on the Unified CCX server. But the Unified CCX software continues to monitor the agent state for the duration of that call.

When the agent or caller releases, a Contact Call Detail Record (CCDR) is written to the CCDR table in the database, and the agent's state is updated to reflect the agent's new state (work, ready, or not ready).

Unified CCX System Management

Several applications are available for administering and monitoring a Unified CCX deployment. The primary tool an administrator uses to manage a Unified CCX deployment is the CRS Administration web interface. CRS Administration is a web-based application accessed using a Windows Internet Explorer 6.0 or above browser. Using CRS Administration, administrators perform tasks such as uploading applications, uploading prompts, mapping applications to dialed numbers, configuring agent skills and CSQs, starting and stopping CRS subsystems, and monitoring overall server status.

In addition to CRS Administration, an administrator uses the Cisco CRS Editor. The Cisco CRS Editor is a client-based utility that produces .aef files which the administrator uploads using CRS Administration. The Cisco CRS Editor is automatically installed on the Unified CCX server by default. The Cisco CRS Editor can also be downloaded and installed from CRS Administration onto other workstations.

The Cisco Desktop Administrator (CDA) is another client-based utility that can be downloaded and installed from CRS Administration. It is installed on the Unified CCX server by default. CDA allows an administrator to perform tasks such as configuring the agent interface, setting up reason codes, and defining agent workflows and keystroke macros.

Another client utility to monitor a Unified CCX deployment is the Historical Reports client application. You download and install the Historical Reports client from CRS Administration. There are 34 historical reporting templates available. Taken in combination with filtering parameters and chart or no chart options, there are 282 possible reports available. Some of them provide integrated information about voice and multichannel activities. Custom reporting templates can be created with Crystal Reports development toolkit. Within CRS Administration, there are also 11 browser-based real-time reports. The Cisco Supervisor Desktop (CSD) and Cisco Agent Desktop (CAD) both also provide reports to allow real-time monitoring of a Unified CCX deployment. Both CSD and CAD are downloaded and installed from CRS Administration.

For additional information about CRS Administration, see the *Cisco CRS Administration Guide*.

CRS Engine and Database Components

Unified CCX has four core software components:

- CRS Engine
- Database
- Monitoring
- Recording

Every Unified CCX deployment must have a CRS Engine component and a Database component. The Monitoring and Recording components are optional and are discussed in the next section of this chapter. With Unified CCX 5.0, only one instance of each of these components can be installed, and all components must be on the same server.

The CRS Engine (and closely related subsystems) is the component that provides functions like the following:

- JTAPI communications with Unified CM
- Execution of scripts
- Encoding and streaming of .wav files for all CTI Ports defined
- Communications with CAD for agent state control, call control, and screen pop
- Agent monitoring and selection
- CRS Administration web interface.

Simply put, one can think of the CRS Engine component as providing the core ACD, IVR, and CTI services. The other components—Database, Monitoring, and Recording—are auxiliary software components.

The Database component is a required component for any Unified CCX deployment and is the component that manages access to the database. The CRS Database contains four data stores. They are as follows:

- Configuration data store
- Repository data store
- Agent data store
- Historical data store

The configuration data store contains Unified CCX configuration information like Resources (agents), skills, resource groups, teams, and CSQ information. The repository data store contains user prompts, grammars, and documents. The agent data store contains agent logs, statistics, and pointers to the recording files. The historical data store contains Contact Call Detail Records (CCDRs).

Monitoring and Recording Components

The previous section introduced the CRS Engine and Database components. This section introduces the Monitoring and the Recording components, which are optional.

Unified CCX Enhanced and Premium provide the ability for a supervisor to silently monitor agents. Unified CCX Enhanced and Premium also provide the ability for agent calls to be recorded. Agent call recording can be triggered in the following ways:

- Supervisor clicks record button on Cisco Supervisor Desktop (CSD) for a specified agent call
- Agent clicks record button on Cisco Agent Desktop (CAD) or IP Phone Agent (IPPA)
- Workflow configuration automatically triggers complete call recording on certain types of calls for agents using CAD.

In order to use the silent monitoring or recording features, access to the RTP (Real-Time Protocol) packet streams is required. Silent monitoring and recording will work with either G.711 or G.729 RTP streams and a mixture of agents using G.711 and G.729 phones is supported. However, silent monitoring and recording will not work with encrypted media streams. Unified CCX provides two mechanisms for access to the RTP packet stream—SPAN port monitoring and desktop monitoring.

SPAN port monitoring requires the Unified CCX server to be connected to the SPAN port of a VLAN on a Catalyst switch where the agent phones are installed. The SPAN port is like a broadcast port for all data traffic (including voice RTP streams) traversing a VLAN segment. When a supervisor clicks the silent monitor button on the CSD, it signals to the Monitoring component to forward a copy of the captured RTP streams for the selected agent to the requesting CSD. The CSD then plays the packets through the sound card on the CSD workstation. No IP Phone (or any type of phone) is involved when the silent monitoring stream is being played using CSD. The CSD can reside anywhere on the Unified

Communications network, but the agent's phone must be on the same VLAN where the Unified CCX server is installed. The Catalyst switch RSPAN feature allows a VLAN to extend across multiple Catalyst switches. Please refer to Appendix B for more detail on SPAN port monitoring design guidance.

**Note**

For any deployment in which an agent desktop is the IP Phone Agent or any deployment in which the desktop is a Cisco Agent Desktop and the associated phone does not support desktop (endpoint) monitoring, monitoring and recording have to be based on SPAN port monitoring. For a list of phones that support desktop (endpoint) monitoring, refer to *Cisco CRS Software and Hardware Compatibility Guide*, which is available at:

http://www.cisco.com/en/US/products/sw/custcosw/ps1846/products_device_support_tables_list.html

Desktop monitoring provides a mechanism for the CAD application to obtain a copy of the RTP packet streams directly from the phone and therefore removes the need for a Monitoring component connected to the SPAN port on the Catalyst switch. A Cisco phone supporting desktop monitoring is required and the agent workstation running CAD must be connected to the data port on the back of the agent phone. The IP Communicator (softphone) also supports using desktop monitoring for silent monitoring and recording.

**Note**

For all deployments in which agents use Cisco Agent Desktop and agent phones support desktop monitoring, use desktop monitoring instead of SPAN port monitoring.

When a supervisor clicks the silent monitor button on the Cisco Supervisor Desktop for an agent using desktop monitoring, the RTP streams are sent directly from Cisco Agent Desktop to Cisco Supervisor Desktop, and the SPAN port monitoring component is not required. However, for silent monitoring to occur with desktop monitoring, there must be at least one VoIP Monitor service running. This service is used by Cisco Agent Desktop to retrieve the MAC address of the agent phone from the Cisco Unified CM. For desktop monitoring, the agent workstation must have a NIC that supports 802.1Q. This allows the NIC to process packets from both the data and voice VLANs. Appendix C of the *Cisco CAD Installation Guide* provides a quick and simple test to determine if a workstation NIC will operate properly with the desktop monitoring feature of CAD.

A Unified CCX deployment can have a mixture of some agents using desktop monitoring and some agents using SPAN port monitoring.

If an agent call requires recording, then a copy of the RTP packet streams is sent to the Recording Server process. If desktop monitoring is being used by the agent being recorded, then CAD sends the RTP streams to the Recording component. If SPAN port monitoring is being used by the agent being recorded, then the Monitoring component sends the RTP streams to the Recording component. Agents can be silently monitored and recorded at the same time. When that occurs in a desktop monitoring environment, CAD sends one copy of the RTP packet streams to the requesting CSD and one copy of the RTP packet streams to the recording component.

A normal G.7xx VoIP RTP call has two RTP streams (one representing what the agent is hearing and one representing what the agent is saying). These two streams flow in opposite directions across the network. When an agent call is being silently monitored or recorded, both of those RTP streams must be sent. For example, if a supervisor is silently monitoring an agent, two G.7xx RTP streams will be sent from either CAD (desktop monitoring) or the Monitoring component to the CSD. If an agent call is being recorded, two G.7xx RTP streams are sent to the Recording component. If the agent is being silently monitored and recorded, four RTP streams are being sent. This is in addition to the two bi-directional RTP streams of the actual call.

The monitoring and recording packet streams are true G.7xx RTP streams and therefore these packets are tagged like any other RTP stream to ensure these packets are delivered with appropriate priority and minimal latency. Chapter 6 further discusses bandwidth requirements.

The agent call recordings are stored on the hard drive of the Unified CCX server with agent data store locator records pointing to the actual recording files. The call recordings in Unified CCX 5.0 are stored in a raw format that is only playable using the Cisco Supervisor Desktop (CSD) Record Viewer. The CSD Record Viewer shows 7 days worth of call recording as well as those tagged for 30-day extended archiving. The CSD Record Viewer also provides the supervisor the option to save selected individual recordings into a .wav format in a specified folder.

The recording capability of Unified CCX is not intended for usage as a permanent recording archival solution. However, an export utility is also available to bulk export all recordings into a .wav format. The export utility has no ability to specify selected recordings and will export all recordings on the Unified CCX server. System administrators could build their own customized command macros or process that would perform regular (at least weekly) exporting of the recordings for permanent archival of agent call recordings.

With Unified CCX Enhanced and Premium, up to 32 simultaneous agent calls can be recorded. When a supervisor is playing back or saving a recording using the CSD Record Viewer application, a recording resource is used and therefore counts against the maximum simultaneous call recording capacity for the duration of that recording playback. Maximum simultaneous call recording and playback capacity is dependent upon the server sizing. The Configuration & Ordering tool can assist you in determining an appropriately sized server for the amount of recording required.

Because IP Phone Agent (IPPA) does not include an agent using CAD, IPPA requires a SPAN port Monitor component on the local VLAN segment for silent monitoring or recording. Also the Cisco Unified IP Phone 7902, 7905, 7912, and 7920 require a SPAN port Monitor component as there are either no data ports on these phones or these data ports are not compatible with desktop monitoring. IPPA also cannot be configured to have calls automatically recorded.

Unified CCX Premium is required for remote supervisory monitoring. Remote supervisory monitoring provides a mechanism to silent monitor calls using an IP Phone or PSTN phone. This form of silent monitoring does not require a CSD or any data network connectivity and is ideally suited for management from outsourcer customers of a call center service provider. Agents are unaware when they are being silent monitored using remote supervisory monitoring. A remote supervisor is configured with a numeric user ID and password and also with the CSQs and agents that the remote supervisor is allowed to silent monitor in this fashion. The remote supervisor then dials a specific number that invokes a Unified CCX application. The application begins by prompting the supervisor for the user ID and password. After the remote supervisor is authenticated, the remote supervisor is prompted on whether they wish to silent monitor calls for a specific agent or for a specific CSQ. Then the Unified CCX application requests a copy of the RTP streams for the selected types of calls, and the Unified CCX application and CTI Port relays those packets to the remote supervisor's phone. Remote supervisory monitoring works with both SPAN port monitoring and desktop monitoring. However, remote supervisory monitoring only works with a CRS Engine and CTI Ports and agent phones using G.711 encoding. Remote supervisory monitoring also places an additional performance impact on the Unified CCX server CRS Engine. This activity is reflected in the Unified CCX 5.0 Configuration & Ordering Tool.

Cisco Unified Wireless IP Phone 7920 IP Phone Support

Unified CCX supports use of the Cisco Unified Wireless IP Phone 7920 Wireless IP Phone by agents. Agents can be using Cisco Agent Desktop (CAD) with the Cisco Unified Wireless IP Phone 7920 Wireless IP Phone, or agents can use the IP Phone Agent (IPPA) interface with the Cisco Unified Wireless IP Phone 7920 Wireless IP Phone. When planning to use the Cisco Unified Wireless IP Phone 7920 for agents with Unified CCX, the following considerations need to be taken into account:

- If a logged in agent using a Cisco Unified Wireless IP Phone 7920 Wireless IP Phone roams outside Wireless Access Point (WAP) range for greater than 60 seconds (possibly slightly longer depending upon Unified CM time out), Unified CM unregisters the Cisco Unified Wireless IP Phone 7920 Wireless IP Phone (and ends any call in progress if the Cisco Unified Wireless IP Phone 7920 Wireless IP Phone was off hook). This generates a device unregistered JTAPI event to be sent to Unified CCX which causes the Unified CCX agent state to change to 'not ready'. When agents roam between WAPs, the hand off occurs within a second or two (depending upon wireless LAN design, encryption, and authentication techniques used). Therefore, roaming between WAPs is supported. If an agent is using the Cisco Unified Wireless IP Phone 7920 Wireless IP Phone with CAD, but is away from the CAD workstation, there is no way for the agent to know that the agent state is 'not ready' and there is no way for the agent to change the agent state to 'ready'. If the agent is using the Cisco Unified Wireless IP Phone 7920 Wireless IP Phone with IPPA, then the agent can check the agent state via IPPA and can change the agent state to 'ready' via IPPA. Therefore, if agents anticipate roaming outside WAP range for greater than 60 seconds, then it is recommended that they log in to Unified CCX via IPPA for that login session. If agents anticipate working at their desk or not roaming outside WAP range, then it is okay for them to log in to Unified CCX via CAD for that login session.
- The Cisco Unified Wireless IP Phone 7920 Wireless IP Phone is not supported as a second-line appearance for a wired IP phone for the Unified CCX agents. Second-line appearance is not supported for IP phone agents.
- Cisco WAPs currently support only a maximum of seven G.711 or eight G.729 active calls. Therefore, do not have a large volume of agents in one location all using the Cisco Unified Wireless IP Phone 7920 Wireless IP Phone. The maximum number of agents that can be equipped with Cisco Unified Wireless IP Phone 7920 Wireless IP Phones depends upon the agent utilization of the phone during busy hour, the codec being used by the phone, and the proximity of agent phones to WAPs.
- Use of the Cisco Unified Wireless IP Phone 7920 Wireless IP Phone as an agent phone requires using SPAN port monitoring for supervisory silent monitoring and call recording. This applies to the Cisco Unified Wireless IP Phone 7920 Wireless IP Phone when used with either CAD or IPPA. The port that is to be included in the SPAN is the one to which the WAP is wired. Unified CCX 5.0 supports only one monitoring domain. However, that monitoring domain may include multiple WAPs on the same VLAN segment. This will allow agents to roam between WAPs and still be silently monitored by supervisors and have their calls recorded. For Cisco Unified Wireless IP Phone 7920 Wireless IP Phone caller to Cisco Unified Wireless IP Phone 7920 Wireless IP Phone agent phone conversations where both are on the same WAP, the RTP stream will not leave the WAP and thus will never traverse the LAN segment that the SPAN port monitoring server is monitoring. Therefore, silent monitoring or recording of those phone calls is not possible.
- For more details on designing wireless LANs with optimal Cisco Unified Wireless IP Phone 7920 Wireless IP Phone QoS and necessary security, please reference the campus design Solution Reference Network Design (SRND) documents for wireless LAN and Cisco Unified Wireless IP Phone 7920 Wireless IP Phone. These SRNDs can be found at:

www.cisco.com/go/srnd

SIP Support

Unified CCX 5.0 agents may use Unified CM Session Initiation Protocol (SIP) phone models 7941, 7961, 7970, and 7971. The 7940 and 7960 phones do support SIP with Unified CM 5.x and 6.x but may not be used for Unified CCX agents, because the necessary third-party call control and monitoring required is not present. The lower-end phone models are also not available to be used as SIP phones for Unified CCX agents. SCCP support for Cisco IP Phones continues to be supported for agent phones.

Unified CCX CTI ports are notified of caller-entered digits (DTMF input) via JTAPI messages from Unified CM. Unified CCX does not support any mechanism to detect in-band DTMF digits where DTMF digits are sent with voice packets. In deployments with voice gateways or SIP phones that only support in-band DTMF or are configured to use in-band DTMF, an MTP resource must be invoked by Unified CM to convert the in-band DTMF signalling so that Unified CM can notify Unified CCX of the caller-entered digits. Be sure to enable out-of-band DTMF signalling when configuring voice gateways in order to avoid using the previous MTP resources. For detailed design consideration related to DTMF handling, media resources and voice gateway deployments, please refer to *Cisco Unified Communications Solution Reference Network Design (SRND)*.

Citrix Terminal Services Support for Cisco Agent Desktop

Unified CCX supports the running of Cisco Agent Desktop (CAD) within a Citrix terminal services environment. When planning to use Citrix terminal services for CAD, the following considerations need to be taken into account:

- The agent must be using a Cisco IP Phone (that is, no softphone)
- Cisco Supervisor Desktop (CSD) and Cisco Desktop Administrator (CDA) are not supported in a Citrix terminal services environment.
- Desktop monitoring (for silent monitoring and recording) is not supported with Citrix terminal services. SPAN port monitoring must be used.
- Macros work only if they involve applications running on the Citrix server, and not those running on the client PC.
- Only one Citrix user name is supported per CAD application login.
- The login ID and extension that appear by default in the login dialog box when CAD is started are those associated with the last login by any user.
- The Citrix web client is not supported.
- Only Citrix 4.0 running on Windows 2000 Server or Windows 2003 Server are supported.

Please reference *Integrating CAD into a Citrix MetaFrame Presentation Server Environment* for implementation details. This document can be found at:

http://www.cisco.com/application/pdf/en/us/guest/products/ps427/c1676/ccmigration_09186a00805fd93c.pdf

Cisco TelePresence Virtual Agent Solution

The Cisco TelePresence Virtual Agent solution enables organizations to create a live, “face-to-face” interaction with their customers—over the network with Cisco TelePresence. The life-size, high-definition video, CD-quality audio, and interactive elements of the TelePresence solution give customers the feeling of being “in person” with a specialist agent, while the agent maintains all of the contact center functions they would expect.

For example, a national bank has a limited number of property insurance specialists on staff, resulting in customers being unable to receive the guidance and service the bank wants to deliver. By providing insurance and mortgage experts at branch offices through Cisco TelePresence Virtual Agent, quality service is always available to customers. At the bank branch, a customer can enter an office designated for the virtual agent, make a selection on the Cisco Unified IP Phone, and have a in-person remote meeting with an expert.

This solution consists these hardware and software components:

- Cisco TelePresence System (CTS-1000, Primary Codec and other associated software)
- Cisco Unified CM
- Cisco Unified CCX Software
- Cisco Unified IP Phone 7970G (SIP), for caller and agent
- Cisco Agent Desktop Software


Cisco Unified IP Phone 7970G phone includes the Cisco IP Phone Service, the contents of which are pushed over from the primary codec in XML format over HTTP. The phone provides the user interface to interact with the primary codec for call control and other functions. The phone and primary codec are registered with Cisco Unified CM as SIP devices and they share the same line appearance. However, on the agent side, the phone is associated with the RmCm Provider user so that Unified CCX can monitor the phone for any state changes. Because call signaling and media stream traverse through the primary codec (but not the agent phone), the following guidelines apply:

- Agent must perform all call control actions from the phone but not from CAD.
- Supervisor cannot perform barge-in or intercept from CSD.
- Calls cannot be monitored or recorded.

Cisco TelePresence supports both wideband/AAC and G.711 audio codec. However, the virtual agent solution only supports G.711, which is the common supported audio codec between Cisco Unified CCX and Cisco TelePresence. Cisco recommends using Wideband/AAC audio codec for inter- or intra-region setting when configuring Cisco TelePresence device, In this case, Cisco TelePresence will automatically negotiate down to G.711 when connecting to Unified CCX.

[Figure 2-2](#) and the description that follows explain the virtual agent solution call flow:

Figure 2-2 Cisco TelePresence Virtual Agent Call Flow

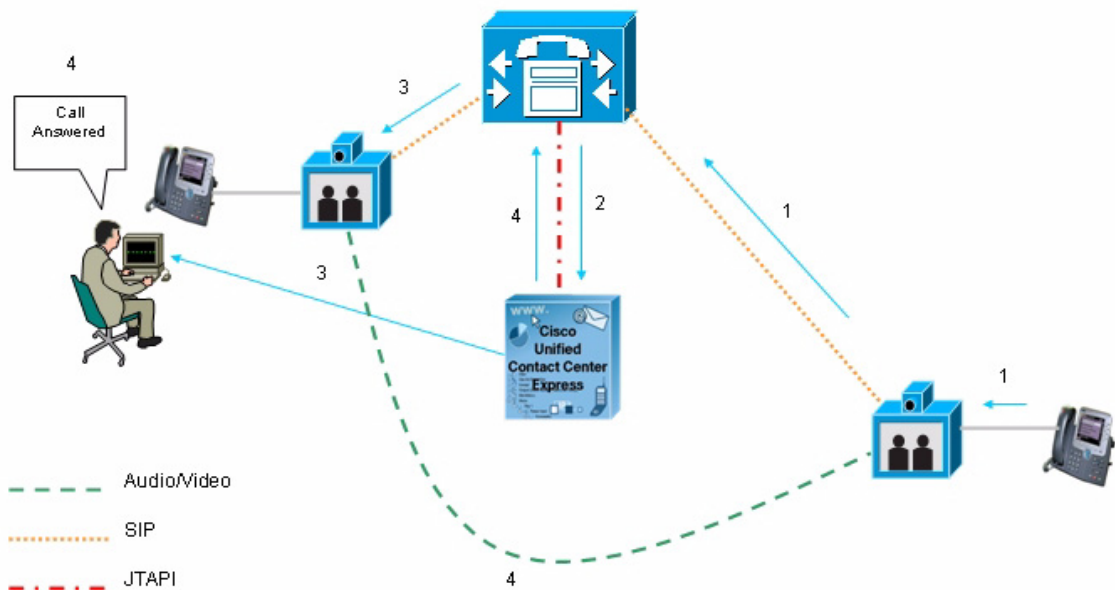

1. Customer (caller usually calls inside the corporate network) dials a number to reach an application.
2. Unified CM finds the dialed number associated with a CTI route point that is associated with a CRS Unified CM Telephony user for Unified CCX. This event triggers a JTAPI route request to be sent to Unified CCX.
3. Based upon the DN, which is mapped to a Unified CM Telephony trigger, Unified CCX finds an available CTI port and redirects the call to the port. Unified CCX runs a script that finds an available agent and reserves the agent. The call is transferred to the primary codec on the agent side and the call is presented to the agent device.
4. The agent presses the answer button on the agent device to answer the call. This action causes Unified CCX to instruct Cisco Unified CM to complete the transfer and establishes audio and video between the Cisco TelePresence devices.

Cisco Unified CCX Outbound Preview Dialer

Cisco Unified CCX Outbound Preview Dialer (Outbound) allows Outbound agents to participate in outbound campaigns in addition to handling inbound calls. This feature selects those agents who are not busy with inbound calls to handle outbound calls, thereby maintaining a high level of agent productivity.

The following sections explain the solution architecture for Outbound in the context of Unified CM:

- [High Level Components, page 2-13](#)
- [Functional Description, page 2-13](#)
- [Scalability, page 2-14](#)
- [Call Flow Description—Direct Preview Mode](#)
- [Deployment Guidelines, page 2-16](#)

High Level Components


Outbound uses CAD agent IP phone to place outbound calls through a voice gateway configured in Unified CM. The dialer software is IP based and does not require any telephony cards for making outbound calls.

Outbound involves the following components, which are illustrated in [Figure 2-3](#):

- Campaign Manager—Responsible for starting and stopping each campaign and retrieving and updating contact records from and to the database.
- Dialer—Receives contacts from the Campaign Manager and initiates the outbound calls. Notifies the Campaign Manager of the call status and call result after the call is answered.
- Resource Manager—Monitors agent states, reserves agents and receives instructions from the Dialer to place the outbound call.
- CTI Server—Handles requests and responses from and to the CAD and passes the customer data to the CAD for screen pop.
- Config Datastore (CDS)—Database that contains the customer contacts information.

All of these components are running as part of the CRS Engine and cannot be installed separately. The Dialer communicates only with the Campaign Manager and other components within the engine process but not outside of the engine process. It does not communicate with other processes.

Figure 2-3 Unified OUTDX Components

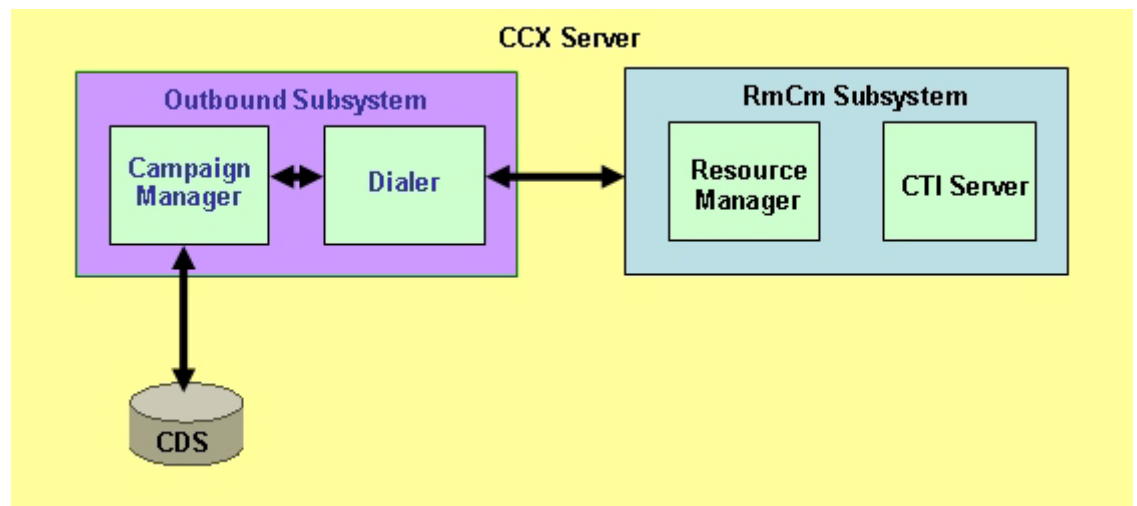

Functional Description

There are typically four types of dialing modes in today's outbound ACDs: predictive, progressive, preview, and direct preview. Outbound supports only the direct preview dialing mode.

Outbound uses a 3-stage process for making outbound call. The first stage is to find an available agent and retrieve the customer information for making the outbound call. The second stage is the reservation call and its purpose is to reserve an agent and send customer data to the agent desktop. During this stage, the agent is reserved and the data appears on the desktop so that the agent can review the data and decide whether to accept the call by pressing the corresponding button on the CAD. If the agent does not accept

the call, the call is handled by other outbound agents or closed for the campaign. If the agent does accept the call, Outbound kicks in the last stage where Unified CM is instructed to place the outbound call using the CAD agent's phone. When the outbound call is answered, Outbound updates the customer contact in the database with the call status and call result.

When the outbound call connects with the customer, the agent can perform all call control operations that are normally supported on inbound calls (transfer, conference, hold, retrieve, and so on). Cisco recommends that the agent transfers or conferences the outbound call only if the call is answered by a person but not through other media such as an answering machine or a fax machine.

Behavior under High Availability

The CDS is required for normal operation of Outbound for call status and call result updates of contact records. When deploying in a 2-nodes high availability system, the CDS must be running on both nodes to enable the database write operation. If either CDS is down, then the Outbound Subsystem will not be operational.

The following events occur during a failover:

- If a reservation call is at the agent desktop waiting for the agent to accept the call, when the master engine goes down, the agent is automatically logged out and the reservation call disappears from the agent desktop. If the master engine restarts during failover, the call status for that contact record is set to unknown. If the master engine does not restart during failover, the contact is called when the campaign starts and there are available agents.
- If a reservation call has been accepted by the agent and the call is ringing on the customer phone, there is no effect on the call. However, the agent is logged off and will be able to invoke call control capabilities only through the phone.

When deploying Outbound in a high availability environment, only the dialer in the master node is active. Therefore, even though you have two dialers in the system, outbound calls cannot be distributed or load balanced between the Dialers.


Scalability

Outbound supports different capacities and limits when compared to inbound agents. Refer to the Configuration and Ordering Tool for more details.

Call Flow Description—Direct Preview Mode

In the direct preview mode, the agent hears the ring-out on the agent phone. The direct preview call flow proceeds as illustrated in [Figure 2-4](#) and the description that follows.

Figure 2-4 Call Flow for Direct Preview Mode

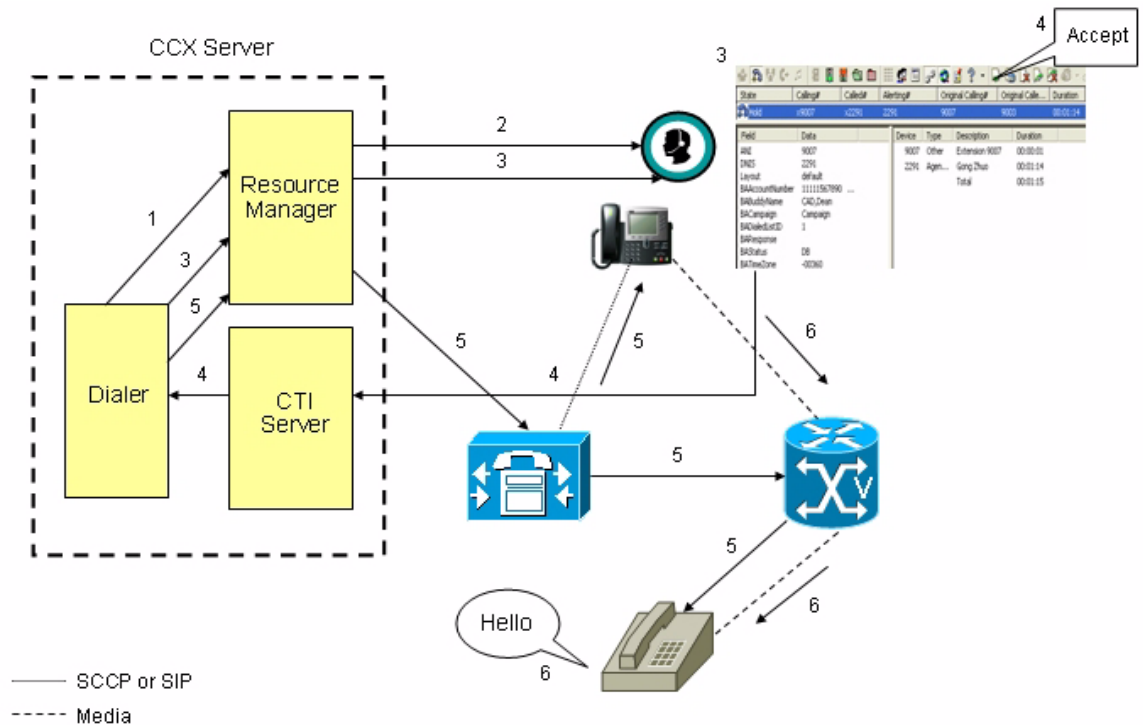

1. An agent in READY state is available and the Dialer has retrieved contact records from the Campaign Manager. The Dialer requests the Resource Manager to reserve the agent.
2. The Resource Manager reserves the agent by moving the agent to Reserved state.
3. The Dialer sends a reservation call to the agent desktop and at the same time, a screen pops that contains the customer information is presented to the agent. The agent reviews the customer data and decides whether to take the call.
4. The agent can choose to accept, skip, reject, or cancel this reservation call. If the agent chooses to accept it, the agent clicks Accept button on the desktop.
5. The Dialer instructs the Resource Manager to place an outbound call from the agent phone via Unified CM out to the voice gateway. Because this call is a direct preview call, the agent immediately hears the ringback of the customer phone.



Note Note that no CTI Port is needed to place the outbound call.

6. As soon as the call is answered, the Dialer closes the contact, classifies it as a voice call and sends the result to the Campaign Manager. If an answering machine answers the call, the number is invalid, or the customer requests a callback, and the agent can reclassify the call from the desktop accordingly. If the customer requests a callback and the agent reclassifies the call, the customer is called back using the same number, an alternate number, or a callback number specified by the customer.

Deployment Guidelines

The following guidelines should be followed when deploying Outbound:

- Outbound supports a maximum of 15 campaigns, a maximum of 10 CSQs for each campaign, and a maximum of 10,000 active outbound records for each campaign.
- Only CAD agents are supported. IP Phone Agents are not supported.
- Outbound cannot detect an answering machine, fax, or modem. The agent should manually reclassify the call to “answer machine” or “fax” from the desktop. The contact will be called again using the same number in the case of “answer machine” or using an alternate number in the case of “fax.”
- Agent should not transfer or conference the outbound call if the call is answered by the media other than a person, such as an answering machine or fax machine.
- All macros and automatically invoked workflows configured for the agent desktop are disabled during and outbound call.
- Outbound does not come pre-installed with any US National Do Not Call lists. The system administrator should manually filter the contact list against the Do Not Call list prior to importing contacts.

Cisco Interaction Manager

Unified CCX can be integrated with Cisco Interaction Manager to provide multichannel capabilities and allow agents to handle e-mail, chat, and basic web collaboration sessions in addition to voice calls. Cisco Interaction Manager is a shared platform that contains Cisco Unified E-mail Interaction Manager (Unified EIM) and Cisco Unified Web Interaction Manager (Unified WIM). Unified EIM provides sophisticated e-mail management capabilities and Unified WIM provides high-value live assistance to online customers and prospects through text chat and web collaboration (page-pushing through URL sharing).

Web collaboration is available through chat sessions. E-mail and chat/web collaboration activities are handled by agents through the CAD embedded browser or a separate browser. Voice activities are handled as usual through the CAD desktop or through IPPA.

Universal queuing is not supported with Unified CCX and Cisco Interaction Manager integration. The queues for voice, e-mail, and chat/web collaboration are independent. The agent states Ready and Not Ready for voice, e-mail, and chat/web collaboration are also independent. Therefore, if an agent state is set to Ready for voice, e-mail, and chat/web collaboration, this agent could be assigned to all these activities simultaneously. When handling one of these activities, an agent could manually change state to Not Ready for the other types of activities to avoid this situation.

When integrating Cisco Interaction Manager with Unified CCX, the following data is automatically downloaded from Unified CCX to Cisco Interaction Manager

- CSQs (referred as queue in Cisco Interaction Manager), agents, and supervisors configurations
- Teams (referred as User Group in Cisco Interaction Manager) information

If some of this data is modified in CCX, the change will be automatically propagated to Cisco Interaction Manager.

Some multichannel historical reports are integrated with voice historical reports and are available through the Unified CCX Historical Report Client. In Unified CCX 5.0, these reports are the Multichannel Agent Contact Summary Report, the Multichannel Agent Login Logout Activity Report,

and the Multichannel CSQ Activity Report. For these reports, the Historical Reporting Client queries the Unified CCX database, which in turn queries the Cisco Interaction Manager database to obtain information about the multichannel activities. Other detailed Cisco Interaction Manager historical reports are available directly through the Cisco Interaction Manager interface.

The guidelines to follow when deploying Cisco Interaction Manager with Unified CCX are:

- Unified CCX and Cisco Interaction Manager must be installed on separate servers.
- Cisco Interaction Manager can be deployed on a single server or on multiple servers for larger deployments. Refer to the *Cisco Interaction Manager integration with Unified CCX SRND* for more details.
- A Cisco Interaction Manager deployment can be integrated with only one CRS cluster.
- A CRS cluster can be integrated with only one Cisco Interaction Manager deployment.
- Cisco Interaction Manager can be integrated with a Unified CCX HA deployment. If a Unified CCX engine fails, Cisco Interaction Manager connects to the redundant Unified CCX engine, if available.
- The Cisco Interaction Manager servers must be located in the same campus LAN as the Unified CCX servers. The maximum round-trip delay between the Cisco Interaction Manager servers and the Unified CCX servers should be less than 5 ms


Cisco Unified Workforce Optimization

Cisco Unified Workforce Optimization (WFO) for Unified CCX is a full-featured solution for optimizing performance and quality and is an integral component of the Cisco Unified Communications System. WFO suite provides these solutions:

- Workforce Management (WFM)—Allows for forecasting and development of schedules for multi-channel, multi-sites, manage key performance indicators, and manage real-time adherence to schedules of agents.
- Quality Management (QM)—A recording, compliance and evaluation solution for agent performance optimization and dispute resolution.

[Figure 2-5](#) shows the overall service communications medium between the WFO solutions and the Cisco CRS system.

Figure 2-5 Service Communications Medium Between WFO solutions and Cisco CRS

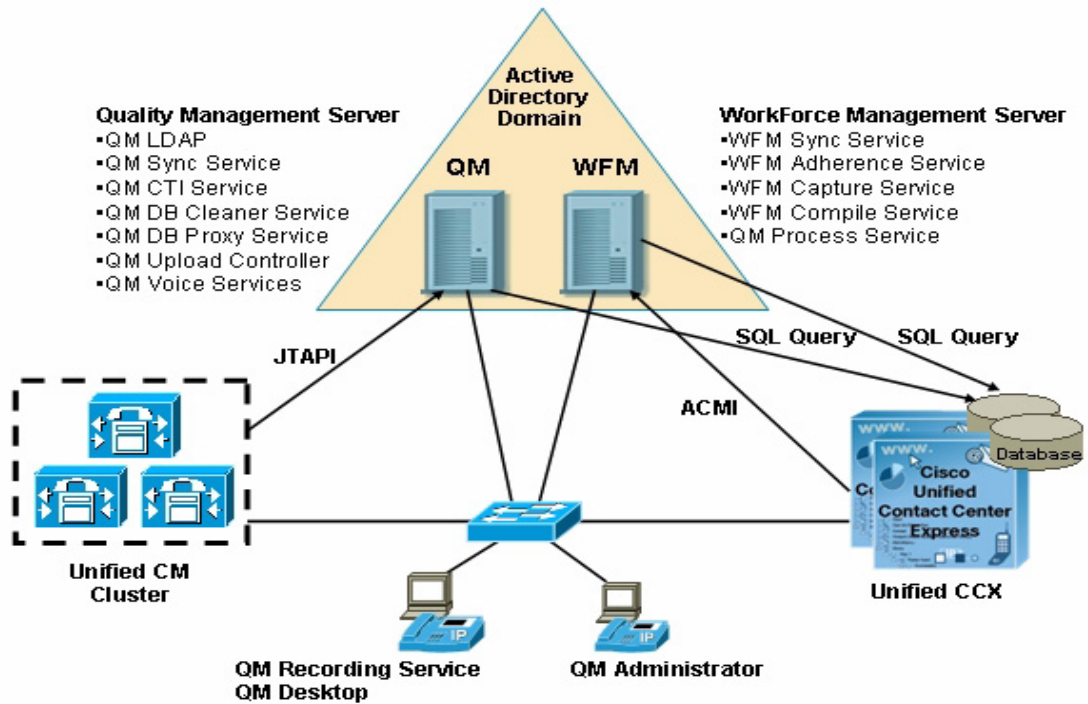


Workforce Management

The Workforce Management system for agent access is available through the CAD embedded browser or a separate browser. The supervisor access is available through the CSD embedded browser or a separate browser. The CRS and Workforce Management system must be installed on separate servers.

Figure 2-6 shows the detailed service interaction between Workforce Management services and CRS environment:

Figure 2-6 Service Interaction Between Workforce Management Services and Cisco CRS

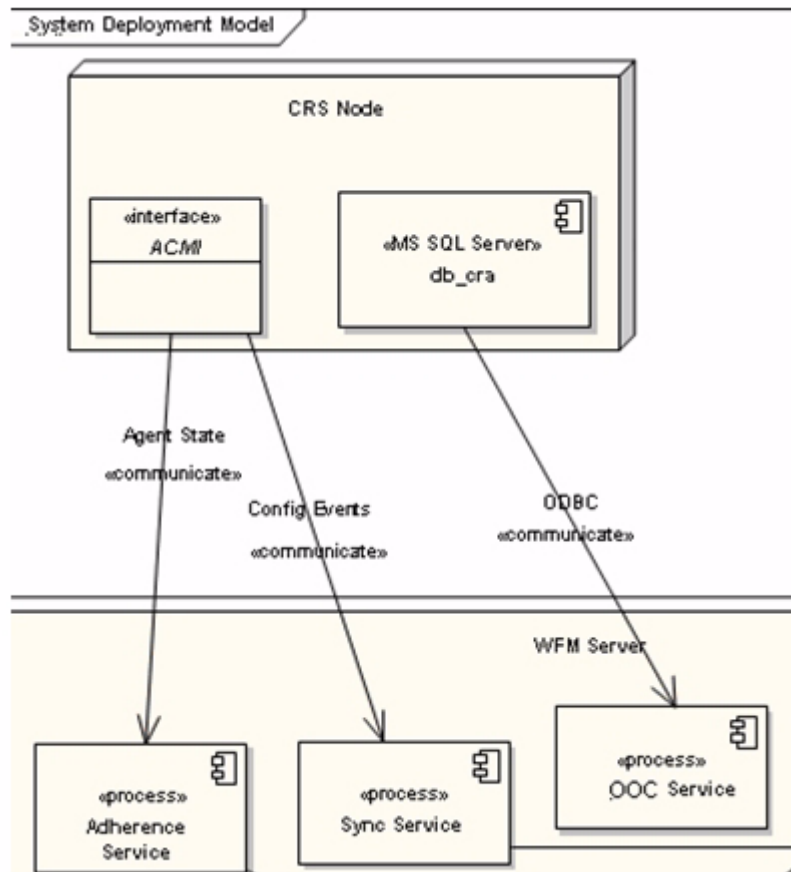

Adherence Service

The Adherence service is a background process that uses the ACMI protocol to obtain real-time information about agent states. This information is displayed in the Supervisor Adherence dashboard.

The ACMI feed from the Unified CCX CTI components registers only for Agent State events. No other event types are monitored on this feed. This feed also monitors only agent state events and does not make any attempt to modify the agent state. This process limits the amount of data coming from the Unified CCX CTI components.

Sync Server

Sync Server is a background process that uses the ACMI based synchronization process to retrieve configuration data from a CRS node. The Sync Service registers for configuration events and processes information retrieved for:

- Contact Service Queue configurations
- Team configurations
- CSQ Mappings configurations
- Agents configurations

The ACMI feed from the Unified CCX CTI components registers only for configuration events. This process limits the amount of data coming from the Unified CCX CTI components.

OOO (Odysoft OEDBC Collector) Service


OOO is a background process that reads the data from the Unified CCX database every 30 minutes. For high availability configurations, up to two Unified CCX databases can be configured. However, the OOO always connects to the first node and fails over to the second node only if the first connection fails.

Quality Management

The Quality Management system for agent, supervisor, and other roles is accessed through the Quality Management Desktop application. The CRS and Quality Management systems must be installed on separate servers.

Figure 2-7 shows the detailed service interaction between Quality Management services and the Cisco CRS and Unified CM environment

Figure 2-7 Service Interaction Between Quality Management Services and Cisco CRS and Unified CM

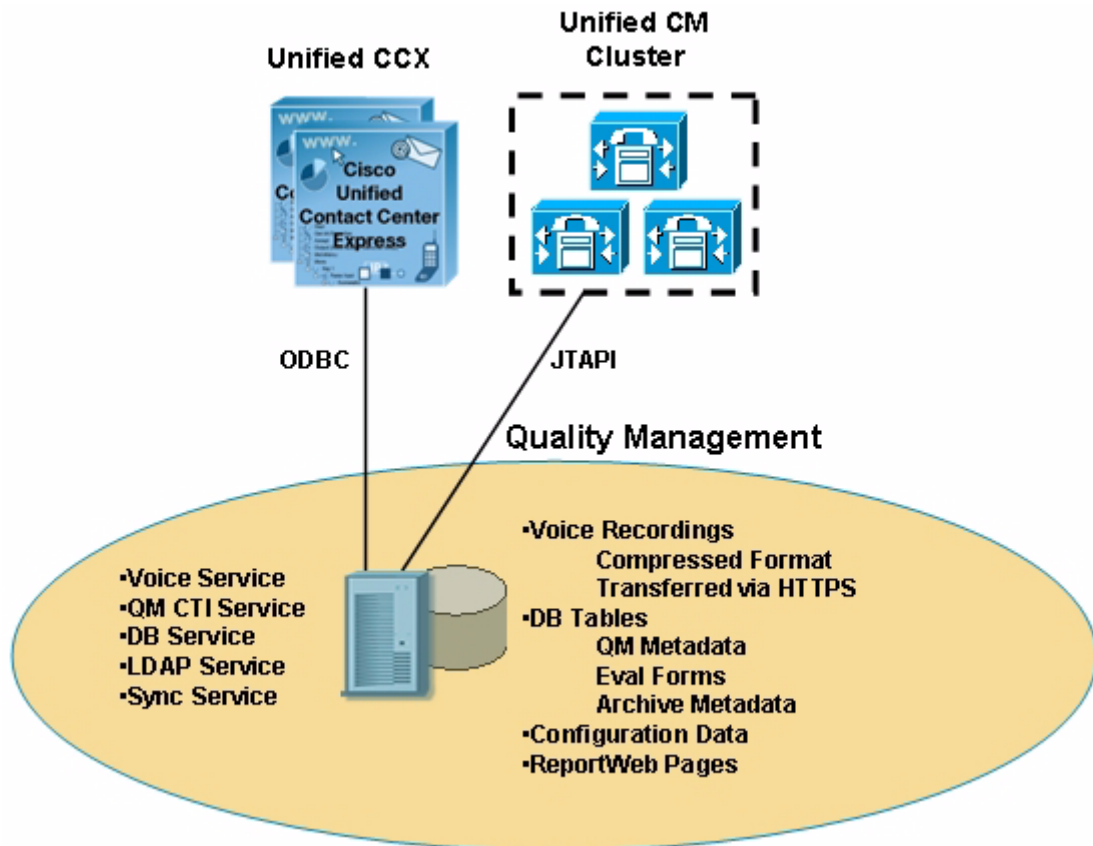

CTI Service

The CTI service provides the CTI feed to the Quality Management Recording service. The Quality Management CTI Service bridges the Quality Management Recording Service on the Quality Management Desktop and the Cisco Call Manager/CTI Manager. The Quality Management CTI Service sends events to the Recording Service when the status of the phone the Recording Service is monitoring changes.

The Quality Management CTI Service communicates with the CTI Manager using the Cisco JTAPI interface to listen for phone events (it does no call control). The Quality Management CTI Service forwards these events to the recording client for workflow processing.

When agents that have been configured in Quality Management log in to a PC with the recording service installed, a message is sent to the Quality Management CTI Service. The Quality Management CTI Service in turn registers an event listener with JTAPI and is notified when phone events occur. When the agent logs off the PC, the registration with JTAPI is removed for that agent.

Sync Service

The Quality Management Sync service reads data from the Express system using an ODBC interface. It maintains an ODBC connection with the Express DB, runs queries every 10 minutes and stores the information on the Quality Management Base server (LDAP). The information that is read consists of:

- Agents
- Teams
- Supervisors

WFO Deployment

The WFO products, Quality Management and Workforce Management, are supported for CRS 4.1 and CRS 5.0. Quality Management and Workforce Management must be installed independently on separate servers from each other and CRS. No form of co-residency is supported with any other software, such as installing with CRS or installing both Quality Management and Workforce Management on the same server. The latest product documentation is available online at cisco.com. For additional product questions send e-mail to ask-wfo@external.cisco.com.

When planning deployments, consider the following general guidelines:

- When deploying in an AD environment, both Quality Management and Workforce Management servers should be a member of the domain.
- When deploying WFO, a user must exist or be created on the CRS server who has read access to `db_cra`.
- WFO products do not currently provide redundancy. However, both Quality Management and Workforce Management do support redundant CRS environment and are able to switch to a secondary/backup server on failure of the primary CRS system.
- Workforce Management and Quality Management servers should be installed on the same Campus LAN as the CRS servers and the CTI Managers that they are communicating with. The round-trip delay between all these servers should be less than 2 ms

Unified CCX ASR and TTS

Unified CCX allows integration with Media Resource Control Protocol (MRCP) compliant Automatic Speech Recognition (ASR) and Text-To-Speech (TTS) servers. Nuance, Scansoft, and IBM are the only ASR and TTS providers that have been tested and will be supported. ASR and TTS software must be purchased from one of these vendors. These vendors can provide design and server sizing requirements for their software. Cisco no longer resells Nuance ASR and TTS as a Unified CCX option.

From CRS Administration, you must configure the address of an MRCP server and the number and type of resources provided by that MRCP server. Multiple Unified CCX clusters can interact with the same MRCP servers. Multiple Unified CCX servers can interact with the same MRCP servers. A Unified CCX server can also define multiple MRCP servers, and resources from those servers are selected based upon the system and application configuration.

Calls requiring ASR require the CRS Engine to pass the media stream from the CTI port to the ASR Server. This activity impacts system performance and system sizing. The impact is reflected in the Unified CCX 5.0 Configuration & Ordering Tool.

When using ASR, the ASR resource is allocated at the time of the first step that uses ASR. The ASR resource is then allocated for the duration of the call. When using ASR, you must calculate the required number of ASR resources (ports) similar to the way you calculate any IVR port requirement. You will need the average time the ASR port is used (similar to average call treatment time) and the number of calls using ASR in the busy hour. You can then input this data into any Erlang-B traffic calculator or other tool to compute the number of ASR resources required. In environments where you have long queue times, it might be economical to transfer the call to another CTI Route Point and pass call data to the second application (via session data steps) in order to allow the ASR resource to be released.

For TTS, each 'Generate TTS Prompt' allocates and releases a TTS resource, and the TTS resource is typically only allocated for a couple of seconds and then released (this might vary depending on the application). To determine the number of TTS resources, use the same methodology described above for ASR resources.

Unified CCX Integration with Unified ICME Software

Unified CCX can also be implemented as a child ACD of Cisco Unified Intelligent Contact Management Enterprise (Unified ICME) 7.0 software. The Unified CCX integration with Unified ICME software requires a Unified CCX Gateway PG process to be co-resident on the Unified CCX. This integration provides the following capabilities:

- The ability for Unified CCX to send agent, queue, and call state changes to the Unified ICME.
- The ability for Unified ICME software to intelligently route and load balance calls across multiple ACD sites which can include one or more Unified CCX systems, Unified Contact Center Enterprise (Unified CCE) systems, or traditional ACDs (that are supported by Unified ICME software). Calls routed to a Unified CCX application can also be sent call data so that it can be popped onto an agent's screen.
- The ability for Unified CCX to send post-route requests with call data to the Unified ICME in order to request intelligent routing instruction. This could be in response to a transfer request from an agent or from a step within and Unified CCX application running on a CTI port.
- The ability for ICM software to provide multi-site ACD reporting for a mixed network of ACD sites which can include one or more Unified CCX systems, Unified Contact Center Enterprise systems, or traditional ACD's.

- The ability for Unified CCX to send post-route requests with call data to the Unified ICME software in order to request routing instructions. This could be in response to a new call that just arrived at Unified CCX or a call that is being transferred from an IVR port or agent. Call data included in the post-route request can be used by the Unified ICME software to profile route the call, and call data is also passed to the terminating ACD site (Unified CCX, Unified CCE, or traditional ACD) for an agent screen pop.

Figure 2-8 shows one Unified ICME integration deployment scenario. In this scenario, the Unified ICME routes and load balances calls between two Unified CCX 5.0 deployments. A separate deployment of Unified IP IVR's is also included to demonstrate how additional IVR capacity (beyond 300 IVR ports) could be added to a Unified CCX 5.0 deployment. The IVR PG allows call data from IVR applications to be passed to Unified CCX agents at either site. The IVR PG could also connect traditional IVR's (that are supported by the Unified ICME) to allow an organization that has existing IVR applications to continue using those IVR applications.

Figure 2-8 Unified CCX Gateway Solution with Two Unified CCX Sites


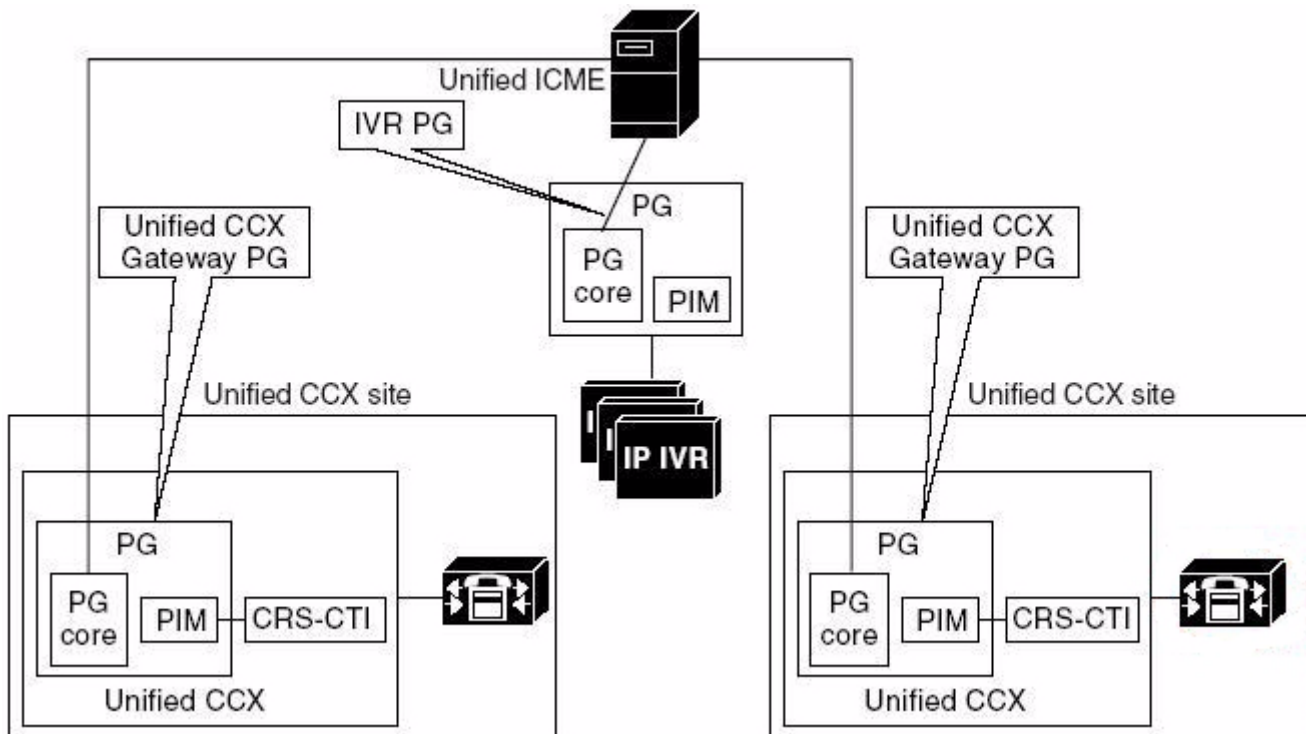


Figure 2-9 shows another Unified ICME integration deployment scenario. In this scenario, the Unified ICME routes and load balances calls between a Unified CCX 5.0 site, a Unified CCE 7.0 site, and a traditional ACD site. Call data for agent screen pop can be passed between these sites via the Unified ICM.

Figure 2-9 Unified ICME Integration with Two Unified Gateway Sites and one Traditional ACD Site

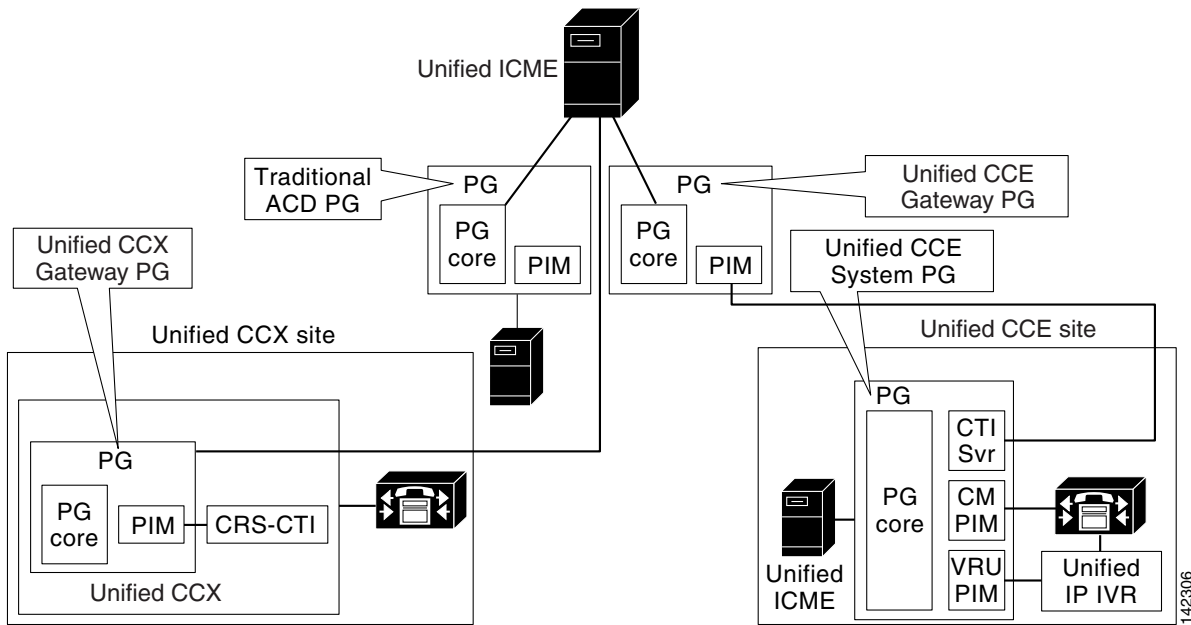

For Unified CCX to integrate with Unified ICME software, there must be a Unified CCX Gateway PG installed on the Unified CCX server. It is not supported for the Unified CCX Gateway PG to run on a separate server when integrating Unified CCX with the Unified ICME software.

The Unified CCX Gateway PG must be ordered as a part of the Unified ICME 7.0 software suite. The Unified CCX Gateway PG software is installed from the Unified ICME software installation CD—not from the CRS software CD.

**Note**

Partners must have Unified ICME/Unified CCE ATP status to order and deploy the Unified Gateway PG with Unified ICME software.

Running the Unified Gateway PG might reduce the maximum supported number of agents and call processing capabilities of a Unified CCX deployment. The Unified CCX 5.0 Configuration & Ordering Tool can assist solution planners and designers in sizing the hardware required for a Unified CCX deployment.

When the Unified ICME routes calls to Unified CCX, it is really routing them to a Unified CM dialed number. Then Unified CM goes through the process of resolving the dialed number association to the CTI Route Point and Unified CM Telephony user and offering the call to Unified CCX. Unified CCX then invokes the appropriate script.

For more information about the Unified CCX Gateway, see the *Cisco Unified Gateway Deployment Guide*.

Unified CCX Fault Tolerance

The Unified CCX solution offers a number of capabilities to provide fault tolerance. To begin with, a Unified CCX deployment utilizes a Cisco Unified Communications network composed of Cisco data switches and routers, which provide for a highly available data network with many options for redundancy. Cisco campus and network design guides discuss best practices for designing highly available networks with Cisco switches and routers.

A Cisco Unified CM deployment utilizes a cluster approach with up to eight call processing servers per Cisco Unified CM cluster. Unified CM groups devices (voice gateways, IP Phones, and CTI Ports) into device pools and allows for device pools to have a primary, secondary, and tertiary Cisco Unified CM server. When a device pool's primary Cisco Unified CM server fails, the devices within that device pool automatically fail over to the secondary or tertiary Cisco Unified CM server. Unified CCX CTI Ports are grouped together into CTI call control groups (often called a CTI port group). Each CTI port group is configured as part of a device pool. Cisco Unified CM also supports voice gateways deployed at many locations with trunks from different service providers.

Cisco Unified CM has a subsystem called the CTI Manager that abstracts the device management from the JTAPI communications to an application server (like Unified CCX). This implementation allows an application to not be concerned with what specific server a device (voice gateway, agent phone, or CTI port) is currently registered. Unified CCX has the ability to communicate with up to two CTI Managers within a Cisco Unified CM cluster, but only actively communicates with one at a time. If the active CTI Manager subsystem or the Cisco Unified CM node running the active CTI Manager fails, Unified CCX closes the sockets for all CTI ports and immediately begins JTAPI communications with the backup CTI Manager. Calls being handled by agents survive, but if their phones are registered with the failed Cisco Unified CM, they will not be able to perform any subsequent call control. Upon completion of existing calls, agent phones will automatically re-register to the secondary Cisco Unified CM server. For agents who were not off hook, their phones will re-register to the secondary Cisco Unified CM immediately.

In addition to being able to fail over to another Cisco Unified CM node within the cluster, Unified CCX itself provides a clustering mechanism. In a high availability deployment, up to two servers can be deployed, each server configured with the CRS Engine and Database components with the optional, Monitoring and Recording components.

The four components all provide some level of redundancy and fault tolerance, but each functions a bit differently.

CRS Engine Redundancy

When deploying with high availability, two CRS Engine components must be deployed on separate servers. If one server initiates the engine mastership election first, it becomes master. The other server becomes standby. If both servers are started approximately at the same time, it is not specified which server becomes master. If the CRS Engine component server fails over, the standby server becomes the master server and remains as the master server until another failure occurs. Any active calls being processed by applications on CTI Ports will be released upon failure of the master CRS Engine server.

All ACD, IVR, and desktop services will failover within 5 seconds. Any incoming call arriving at Cisco Unified CM destined for CRS route points can be accepted by the CRS engine and all CRS call treatment and ACD routing services are operational. Automatically logging on large numbers of agents may take up to 1 minute. For a given agent, the ACD is not able to route calls to agents until the automatic login process completes and the agent manually sets the state to Ready. Agents on Unified CCX routed calls will see those calls survive and CAD will automatically relog agents back in within one minute, and they

will see a visual indicator that a failover has occurred. After being logged back in, agents will have to set the state to 'Ready' when they are ready to begin receiving calls. Agents using IPPA will need to manually log in to the new master CRS Engine server.

**Note**

Historical Report generation is done by giving preference to non-Engine master node so that generation of Historical Reports does not Affect the CRS Engine performance. In a two-node scenario where the Engine Master is on the Database Publisher node, the historical reports are generated on the database subscriber node. If the Engine master fails over to the database subscriber node, the historical reports are generated on the database publisher node. Therefore, in a deployment with high availability and with both Unified CCX servers running, the maximum number of historical reporting sessions that is supported during normal operating hours is higher. If a server fails, this number reverts to the limit in a deployment without high availability.

Database Redundancy

When deploying with high availability, for Historical Data store, Agent Data store, and Repository Data store, the two servers running the Database components are set up with one being the publisher and one being the subscriber. These roles do not change in the event of a failure. If both the publisher and the subscriber are up and running, the server running the Publisher Database component is given DB mastership, where data is written to and read from. If the server running the Publisher Database component is down (or any of the SQL Services such as MSSQL\$CRSSQL, Distributed Transaction Coordinator or SQL Agent\$CRSSQL on the server with the Publisher Database is down), the subscriber is given the DB mastership, where data is written to and read from. SQL Merge Replication replicates the data between the publisher and subscriber. If the subscriber or publisher is down for less than the retention period (default is 4 days), replication will automatically kick-in to sync data from the publisher when the subscriber comes back in service and vice versa. If the subscriber is down for more than the retention period, the Subscriber has to be reinitialized at off-peak hours from the CRS Administration Datastore Control Center page.

Under normal call load volume, a latency of 1 to 3 minutes for SQL Merge Replication is expected; this period could be higher for higher call load. The affect could be more when historical reports are running as it affects the SQL processing. Due to replication latency, the historical reports that are generated from a subscriber might not have the latest call records; the Historical Reports will be generated up to the last replicated time.

SQL Server *linked server* technique is used to replicate Configuration Data Store data in high availability deployments. The way it works is that when both servers with Databases components are operational, configuration data store changes, such as skills and resource groups, are written to both the servers with Database components. If one server with a Database component is down, configuration data store changes are not possible. However, configurations can be read in CRS Administration; that is, no configuration data store data writes are possible, but data reads are possible when one server with a Database component is down. However, call processing, historical data writing, and call activity reporting can continue even when one Database component is down.

In the case where one of the Database servers is not operational and configuration data store changes are required, you can temporarily deactivate the configuration data store component on the off-line Database component server using CRS Administration. After that, you can make configuration data store changes on the active Database server. Once the off-line Database server is back in service, you can activate the configuration data store component on that Database server during off-peak hours as the whole active database configuration data store data will get synchronized.

Network Partitioning

When the network is partitioned (split into two or more islands), every island elects its own set of masters. When the partition is restored, all masters are dropped; therefore all calls receiving call treatment or in queue are dropped, and a new election process is initiated. As a result of this new election, the Database Publisher is elected as a master for the ADS, RDS, and HDS. It is not specified which Engine or CDS becomes the master.

Monitoring and Recording Redundancy

The Monitoring component is automatically installed on the Unified CCX server and should be activated to enable agent monitoring. When deploying with high availability and agent monitoring, the Monitoring components on each server should be activated. The two servers running the Monitoring service are sometimes considered as one *monitoring domain*. When configuring a phone with SPAN port monitoring, only one SPAN port monitoring server can be assigned to this phone.

When desktop monitoring is configured, CAD forwards the RTP stream to CSD. A server running the Monitoring component is still required for CAD to retrieve the agent phone's MAC address from the Cisco Unified CM. Any one of the two monitoring servers could be chosen for this purpose. If one Monitoring components fail, desktop monitoring still works, as long as the other server running the Monitoring component is still available in the CRS cluster. It is possible to configure and enable both SPAN port monitoring and desktop monitoring for a phone. However, only one method is used at any time for that phone. If both SPAN port monitoring and desktop monitoring are configured correctly, desktop monitoring is chosen. If desktop monitoring fails, SPAN port monitoring is used as a backup. Refer to *Cisco Desktop Administrator User's Guide* for more information.

When deploying with high availability and agent call recording, the Recording components on each server must be activated. The two physical recording servers work as a single logical recording server (a *recording domain*) and recording tasks are load balanced in a round robin fashion across the two physical Recording Servers. A Unified CCX deployment only supports one recording domain. The actual call recordings are stored only on the disk of the physical Recording component server where the recording task took place. Therefore, if a recording server fails, the supervisor will be unable to playback those recordings on the failed Recording server until that Recording server is operational again.

The two servers where the Recording components are running also serve as a backup for each other. To function properly during a period when one of the servers fails, the two Recording servers must be sized to be capable of supporting all recording for the Unified CCX cluster. For example, under normal operating conditions, a large call center may be set up to handle 16 recording sessions on each Recording component, for a total of 32 simultaneous call recordings. If either server with a Recording component fails, the other server processes all call recordings. In this failure scenario, make sure that the total number of call recordings does not exceed the server capacity that is shown in the Configuration and Ordering tool.

Recording requires a Monitoring component. When SPAN port monitoring is configured for silent monitoring, the SPAN port monitoring server forwards the RTP stream to the Recording component. If that SPAN port monitoring server fails, recording is not possible. When desktop monitoring is configured, the Monitoring component is still required in order for CAD to retrieve the agent phone's MAC address from the Cisco Unified CM. Either of the two monitoring servers could be used for this purpose. If one Monitoring component fails, recording still works, as long as the other server running the Monitoring component is still available in the CRS cluster.

Cold Standby Support

CRS high availability requires that the CRS Engine and Database components and the CTI Managers with which the CRS servers communicate be located in the same campus LAN and that the maximum round-trip delay between these servers be less than 2 ms.

For disaster recovery deployments where the backup CRS servers need to be in a different geographic location, CRS high availability is therefore not supported. However, for this requirement, it is possible to deploy identically configured cold standby servers in the disaster recovery site. These cold standby servers at the second site should be shut down while the primary servers are in service at the first site. If a disaster occurs and the primary site is down, the standby servers are turned on, restored, and become the active servers.

Cold standby is supported for all Unified CCX deployment models that are described in [Chapter 4, “Cisco Unified Contact Center Express Deployment Models.”](#) For example, in the two-server high availability deployment model, two cold standby servers can be added on the disaster recovery site.

When deploying cold standby, the following rules apply:

- Use the Backup and Restore tool to backup the primary servers and restore the cold standby server. For information about this tool, refer to *Cisco CRS Administration Guide*.
- The deployment in the disaster recovery site must be identical to the deployment in the primary site (same number of servers, same server type).
- The standby servers should be shut down if the primary servers are running, and vice versa.
- The servers at the disaster recovery site must have the same IP addresses and hostnames as their corresponding servers at the primary site during the restore procedure.
- During the restore procedure at the disaster recovery site, the server attempts to access Unified CM. If it cannot access Unified CM, the restore fails.
- The deployment at the disaster recovery site must follow the Unified CCX rules for design that are described in [Chapter 4, “Cisco Unified Contact Center Express Deployment Models.”](#) For example, when deploying with high availability at each site, the Cisco Unified CCX servers must be located in the same Campus LAN and the round-trip delay between these servers should be less than 2 ms.
- It might be necessary to modify the Unified CCX configuration. For example, the appropriate region and location for the CTI ports might need to be reconfigured for proper CAC and codec negotiation.
- Once the restore procedure is completed, changing IP addresses on the CRS servers is possible. In this case, follow the procedure described in *Cisco CRS Administration Guide* to change the IP addresses of the CRS servers. Also update every CAD and CSD desktop by running the postinstall.exe program at C:\Program Files\Cisco\Desktop\bin on the desktop PC.

Upgrading to Unified CCX 5.0

Software upgrade to Unified CCX 5.0 is available only for Unified CCX 4.5 users. If you wish to upgrade to 5.0 and add high availability, one additional physical server equal or better in performance than the existing server must be added.

There is a limitation on the database size based on system hardware size. For more details, refer to the “Cisco CRS Disk Space Usage” section in *Cisco CRS Installation Guide*:

http://www.cisco.com/en/US/products/sw/custcosw/ps1846/prod_installation_guides_list.html

In addition, the Pre-upgrade check tool, which can be downloaded from CCO, can be run to find out how much data can be migrated before upgrade. This tool can be found on the same web site as the Configuration & Ordering tool.

CRS 5.0 Software Compatibility

CRS software is dependent upon integration with many other software components, especially Cisco Unified CM. Make sure to check to ensure the CRS release you are planning is supported with the Cisco Unified CM release for which this deployment is planned. The *Cisco CRS Software and Hardware Compatibility Guide* is available at:

http://www.cisco.com/en/US/products/sw/custcosw/ps1846/products_device_support_tables_list.html



CHAPTER 3

Cisco Unified Contact Center Express Solution Architecture for Cisco Unified Communications Manager Express

Cisco Unified CCX for Cisco Unified Communications Manager Express (Unified CME) is a solution composed of many components. These components include Unified CCX software, Unified CME, Cisco routers, Cisco data switches, Cisco Voice Gateways and Cisco Unified IP Phones. Unified CCX software is part of the Cisco CRS software platform running with Cisco Unified CME. CRS provides software capabilities for both Unified CCX and Unified IP IVR. With Unified CME, CRS can run either Unified CCX or Unified IP IVR package.

Unified CCX for Unified CME and Unified CCX for Unified CM have the same solution architecture for the following:

- Unified CCX system management
- Cisco Unified Wireless IP Phone 7920 support
- Citrix and Microsoft Terminal Services support for CAD
- Unified CCX ASR and TTS
- Cisco Interaction Managers

For detailed information about the Cisco Unified Communications Manager architecture, see [Chapter 2, “Cisco Unified Contact Center Express Solution Architecture for Cisco Unified Communications Manager.”](#)

Unified CCX for Unified CME does not support the following solution architecture:

- Session Initiation Protocol (SIP) phone as an agent phone
- Unified CCX Integration with Unified ICM Software
- Cisco Unified CCX Outbound Preview Dialer
- Cisco TelePresence Virtual Agent Solution
- Cisco Unified Workforce Optimization

This chapter includes the following sections:

- [Architectural Overview, page 3-2](#)
- [Unified CCX Call Processing, page 3-2](#)
- [CRS Engine and Database Components, page 3-4](#)
- [Unified CCX Fault Tolerance, page 3-5](#)

Architectural Overview

Unified CCX communicates with Unified CME using open standard Session Initiation Protocol (SIP) for call processing. When the CRS Engine starts, the CME Telephony Subsystem sends a SIP REGISTER request to initiate communication with Unified CME. Thereafter, Unified CCX sends SIP REGISTER requests at a configurable interval to Unified CME to keep the communication link active.

When Unified CCX registers with Unified CME, a session server is created in Unified CME. Each device that is created for this Unified CCX is associated with the session server so that Unified CCX can only monitor its own set of devices.

Unified CME offers line monitoring and call monitoring. Unified CCX uses line monitoring to monitor the ACD line on an agent device and call monitoring to detect incoming call and keep track of the call on the line. Unified CME uses the SIP Presence package for line monitoring and the SIP Dialog package for call monitoring. In Unified CME, an ephone is a Cisco Unified IP Phone and an ephone-dn is the line on the Cisco Unified IP Phone. To configure a Cisco Unified IP Phone as an agent device, the line monitoring attribute on the ephone-dn of the ephone should be enabled. Using line monitoring and call monitoring, when an agent device goes on or off hook or a call is transferred to or out of the agent device, Unified CME notifies Unified CCX about the changes and Unified CCX can change the agent state accordingly.


In Unified CME, there is no concept of CTI ports. During the engine activation phase, a default call control group with the number of channels equal to the number of licensed ports is created automatically by the system. All CME telephony triggers will use this default call control group.

An agent is configured in Unified CCX as a user with agent capability and is stored in the Unified CCX database. An agent does not have an associated extension until the agent logs in successfully. Even though an agent has an assigned extension, the agent can log off and log in with a different extension. Thus, an agent can log in with multiple agent devices without using Extension Mobility.

Unified CCX Call Processing

[Figure 3-1](#) and the description that follows explain a typical inbound call flow in Unified CCX for Unified CME.

Figure 3-1 Unified CCX for Unified CME Inbound Call Flow

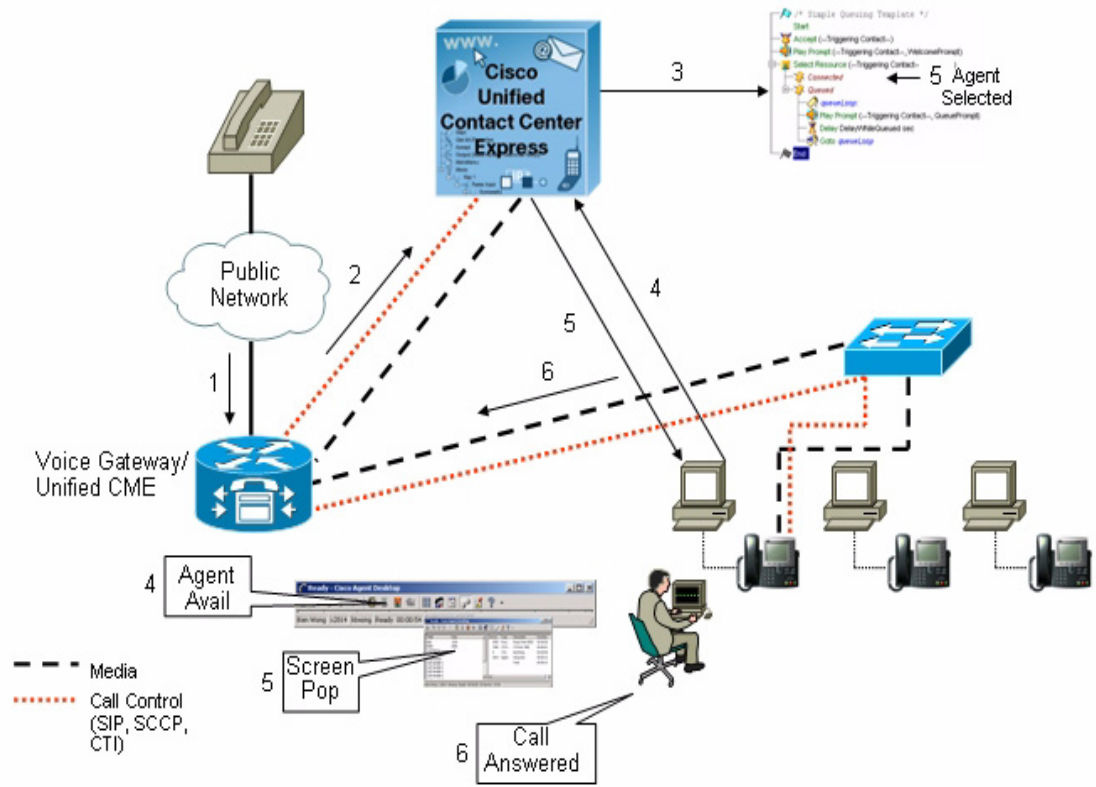

1. Call arrives at voice gateway, which is also a Unified CME.
2. Voice gateway asks Unified CME how to route the call through SIP. Unified CME has a dialed number (DN) that Unified CCX has subscribed for monitoring. Unified CME notifies Unified CCX about the call arrival on the DN.
3. Based upon the DN, Unified CCX finds an available channel from the default call control group to handle the call and then map the DN to the appropriate Unified CCX script. The script then answers the call and establishes a RTP stream between Unified CCX and Unified CME for media exchange. Then the caller is prompted to enter some information and wait for the next available agent. Assuming that there is no skilled agent available, the script executes the queued loop logic until an agent becomes available.
4. An agent becomes available as a result of logging in and going to Ready state or completing a customer call.
5. The agent is selected and reserved by Unified CCX server and the call is transferred to the agent phone. As a result, the agent phone rings. At the same time, a screen that contains the information entered by the caller pops up on the agent desktop.
6. Agent answers the call and an RTP stream is established between the agent phone and Unified CME for exchanging media

CRS Engine and Database Components

Unified CCX for Unified CME includes these core software components:

- CRS Engine
- Database
- Monitoring
- Recording

Every Unified CCX deployment must have the CRS Engine and database components. The monitoring and recording components are optional and are discussed in the [“Monitoring and Recording Components” section on page 3-4](#). With Unified CCX for Unified CME, only one instance of each of these components can be installed and all components must be on the same physical server.

The CRS Engine (with its closely related subsystems) is the component that provides functions such as the following:

- Telephony Interface with Cisco Unified CME
- Execution of scripts
- Encoding and streaming of .wav files (G.711 codec only)
- Communications with CAD for agent state control and screen pop
- Agent monitoring and selection
- CRS Administration web interface.

You can think of the CRS Engine component as providing the core ACD, IVR and CTI services. The other components—Database, Monitoring and Recording—are auxiliary software components.

The database component is a required component for any Unified CCX deployment. It manages access to the database. The CRS Database contains these datastores:

- Configuration datastore (CDS)
- Repository datastore (RDS)
- Agent datastore (ADS)
- Historical datastore (HDS)

The configuration datastore contains Unified CCX configuration information such as resources (agents), skills, resource groups, teams, CSQ, applications, triggers, call control groups, and dialog groups. The repository datastore contains user prompts, grammars, and documents. The agent datastore contains agent logs, statistics, and pointers to the recording files. The historical datastore contains Contact Call Detail Records (CCDRs) and other data for historical report.

Monitoring and Recording Components

Unified CCX for Unified CME has the same solution architecture for SPAN port monitoring, desktop monitoring, and recording as Unified CCX for Cisco Unified Communications Manager. However, Unified CCX for Unified CME does not support:

- G.729 as the audio codec
- Remote supervisory monitor using an IP phone or PSTN phone.

See to the [“Monitoring and Recording Components” section on page 2-6](#) for related architecture information.

Unified CCX Fault Tolerance

Although Unified CCX for Unified CME only supports a single server deployment, this solution offers some fault tolerance capabilities through other methods, as described in the following sections:

- [Cold Standby Server, page 3-5](#)
- [Basic ACD, page 3-5](#)

Cold Standby Server

The cold standby server deployment and configuration guidelines are the same as Unified CCX for Cisco Unified Communications Manager. See the [“Unified CCX Fault Tolerance” section on page 2-25](#) for detailed information.

Basic ACD

Basic ACD (B-ACD) is an application running in Unified CME that provides auto-attendant and call distribution services for calls through the use of interactive menus and local hunt groups. It is a package of TCL scripts and audio prompts that can be downloaded from Cisco website for a specific Unified CME version. The menu options and the audio prompts for B-ACD can be customized for a specific need.

In the normal scenario, when there is an incoming call to a dial-peer in Unified CME, Unified CCX is notified and runs the configured application for the telephony trigger. However, assume that Unified CCX server is down for some reason so the inbound call to the dial-peer receives a busy tone. In this case, B-ACD can be used to temporarily handle the incoming call and route the call to the hunt group. If Unified CCX agent phones are put into the B-ACD hunt group, B-ACD can route the incoming calls to the Unified CCX agents (without CAD running).

To configure B-ACD to handle incoming calls when Unified CCX server is down, perform the following configurations in Unified CME:


1. Configure a low precedent voice dial-peer and set the destination-pattern and incoming called-number fields using the CME Telephony Trigger configured for the Unified CCX application. For example, if the Unified CCX application has the CME Telephony Trigger 8003 and its associated voice dial-peer in Unified CME has the preference of zero, the B-ACD voice dial-peer should be as follows:

```
!  
dial-peer voice 50001 voip  
  preference 5  
  service agentaa  
  destination-pattern 8003  
  session target ipv4:10.4.45.3  
  incoming called-number 8003  
  dtmf-relay h245-alphanumeric  
  codec g711ulaw  
  no vad  
!
```

2. Put the Unified CCX agent phones into the B-ACD hunt group.
3. Use the destination-pattern in the voice dial-peer as defined in Step 1 as the pilot number for B-ACD.

After finishing this configuration, when both Unified CME and Unified CCX are running, two voice dial-peers with the same destination-pattern but different preference will exist in Unified CME. Unified CCX will be notified when there is an incoming call to 8003 as illustrated in Figure 3-2 and the table that follows.


Figure 3-2 Two Voice Dial-Peers under Normal Operation

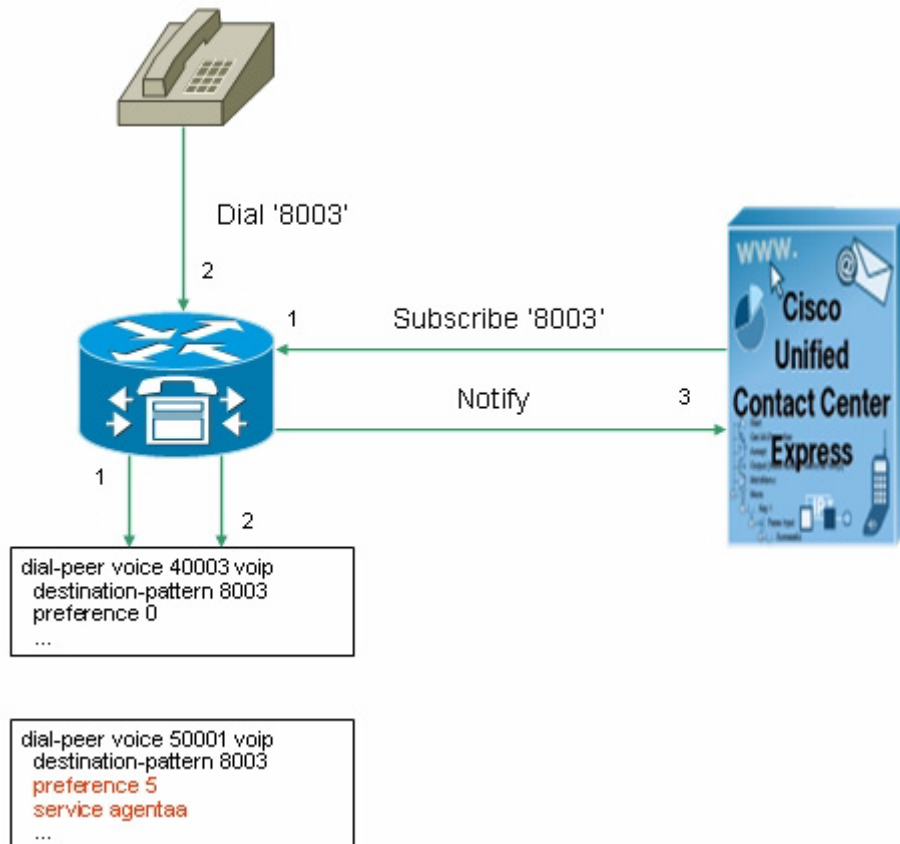

Step	Activity
1	Unified CCX starts up and finds the telephony trigger 8003, and it sends a subscription to Unified CME to receive all call related events on that trigger. Unified CME internally creates a voice dial-peer with destination-pattern 8003 and preference 0.
2	Incoming call to 8003 in Unified CME matches the voice dial-peer with destination-pattern 8003 and preference 0 because it has a higher precedence.
3	Unified CME notifies Unified CCX about the call arrival.

When Unified CCX server is down, the voice dial-peer with preference 0 disappears and leaves the voice dial-peer with preference 5 in Unified CME. If there is an incoming call to 8003, B-ACD is triggered as illustrated in Figure 3-3 and the table that follows.

Figure 3-3 One Voice Dial-Peer when Unified CCX is Down

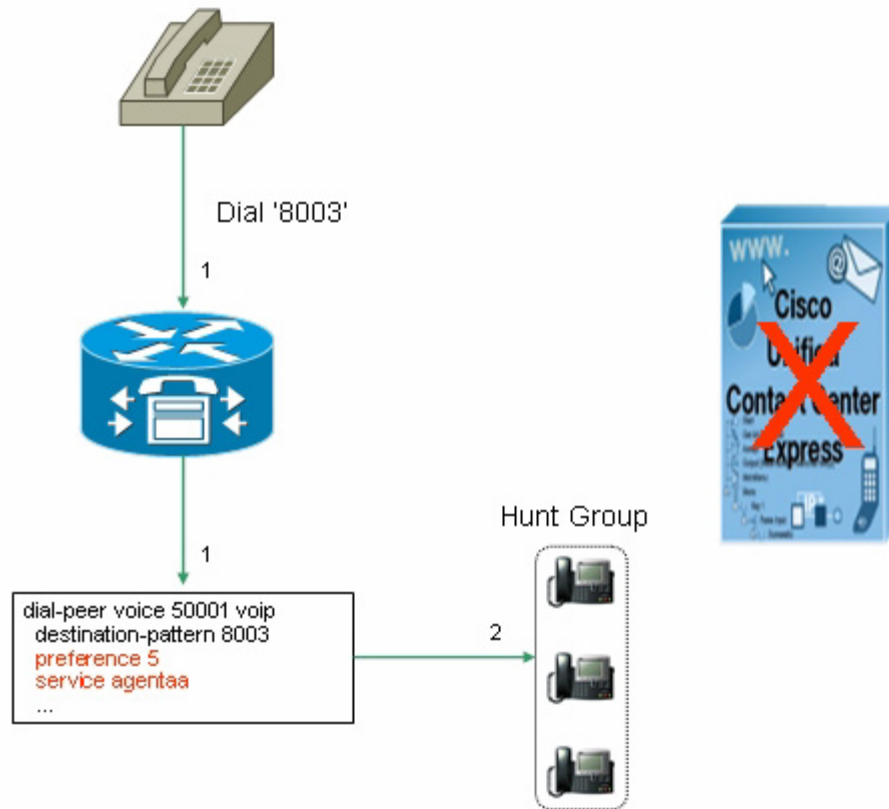

Step	Activity
1	Incoming call to dial-peer 8002 matches the dial-peer with destination-pattern 8003 in Unified CME, which is the B-ACD pilot number.
2	B-ACD runs, selects an agent from the hunt group and rings the phone.

When using B-ACD as backup for Unified CCX to handle call, be aware of the following:

- There will be no CDR or any kind of record for the incoming call written to Unified CCX database.
- Whenever B-ACD runs (regardless of whether Unified CCX is running), it shuts down the CallMonitor Module (CMM). You will have to manually re-enable CMM using CLI, otherwise CRS will not be notified if there is any incoming call. For detail information about enabling CMM using CLI, please refer to *Cisco Unified Communications Manager Express System Administrator Guide*.

For detail information about B-ACD, refer to *Cisco Unified CME B-ACD and Tcl Call-Handling Applications*, which is available at this URL:

http://www.cisco.com/en/US/products/sw/voicew/ps4625/products_configuration_guide_book09186a00805f22ca.html



CHAPTER 4

Cisco Unified Contact Center Express Deployment Models

This chapter discusses the deployment models that are available for this Unified CCX release. Use the Unified CCX Configuration & Ordering Tool to help you determine the number and types of servers required for any supported deployment model and call processing requirements (see [Chapter 6, “Sizing Cisco Unified Contact Center Express and Cisco Unified Communications Manager Servers”](#)). Before using that tool, it is a good idea to have a good understanding of what deployment model you desire.

Cisco Unified Communications Manager coresident with Unified CCX deployment is not supported in Unified Contact Center Express 5.0 because Cisco Unified Communications Manager operates on a Linux server. Expansion servers where the Database, Monitoring, or Recording components are running on separate servers also are not supported.

[Table 4-1](#) depicts the deployment models that are supported in Unified CCX 5.0. These models have no bearing on which specific server model is used. The minimum server model required is identified by the Cisco Unified Contact Center Express Configuration & Ordering Tool. This chapter provides general rules for design and considerations and limitations for each of these deployment models. This information allows an Unified CCX system planner or designer to understand what other similar deployment models are supported and to understand how to determine the best solution for a given set of requirements.



Note

The Recording and Monitoring components are automatically installed on the Unified CCX server. However, activating these components is only necessary if recording and monitoring will be performed. When a Recording component is activated on a server, the Monitoring component must also be activated. When deploying with high availability and with recording and monitoring, the Recording and Monitoring components on both servers must be activated.

Table 4-1 Cisco CRS 5.0 Deployment Models

Unified CCX Deployment Model	CRS Components on Server 1	CRS Components on Server 2
Single-Server Non-High Availability Deployment Model—Cisco Unified Communications Manager Integration	Engine, Database, Recording, Monitoring components	—
Two-Server High Availability Deployment Model—Unified Communications Manager Integration	Engine, Database, Recording, Monitoring components	Engine, Database, Recording, Monitoring components
Single-Server Non-High Availability Deployment Model—Unified Communications Manager Express Integration	Engine, Database, Recording, Monitoring components	—

Figure 4-1 depicts the deployment when integrating Unified CCX with Cisco Unified Communications Manager. In this deployment, optional Cisco Unified CCX components shown with an asterisk (*) can be added. These components are:

- Cisco Unified E-mail Interaction Manager and Cisco Unified Web Interaction Manager.
- For more details about deploying those components, refer to *Cisco Unified Web and E-Mail Interaction Manager Solution Reference Network Design (SRND) Guide for Unified Contact Center Express*, which it is available at this URL:
http://www.cisco.com/en/US/products/ps7236/products_implementation_design_guides_list.html
- Cisco Unified Work Force Management and Cisco Unified Quality Manager.

For related information, see the “Unified CCX General Rules for Design” section on page 4-5.

Figure 4-1 Deployment Model of Unified CCX integrated with Unified Communications Manager


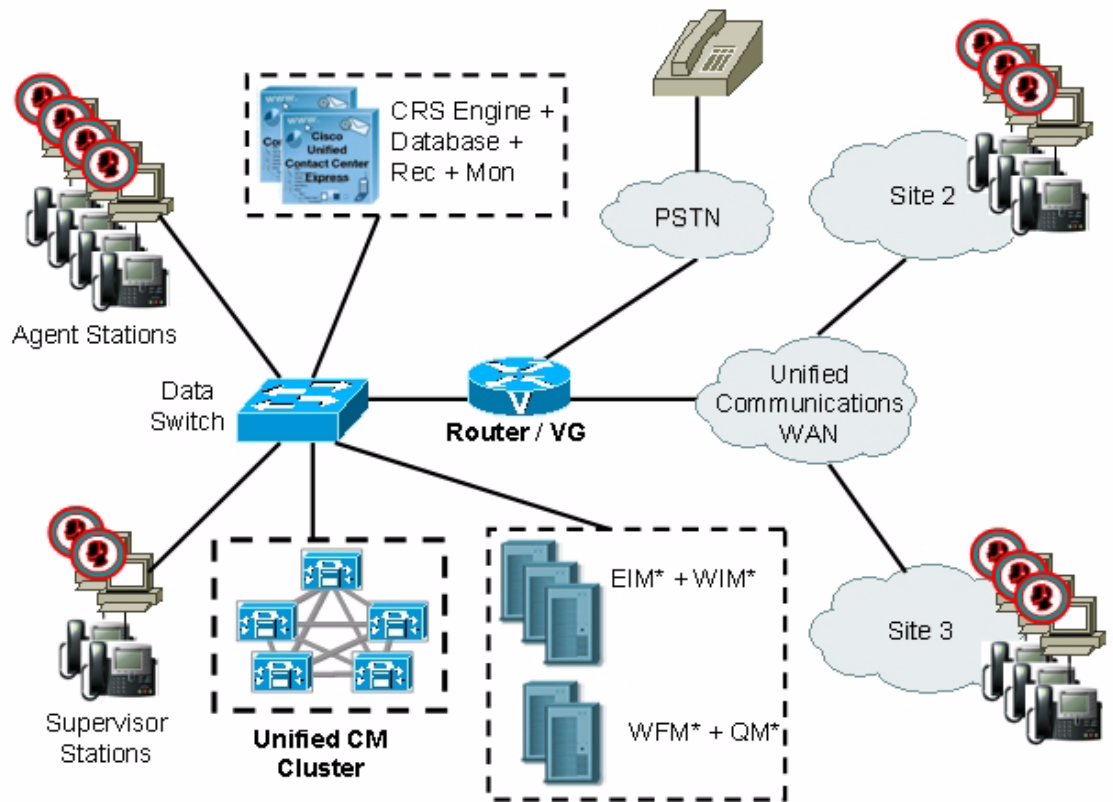


Figure 4-2 depicts the deployment when integrating Unified CCX with Cisco Unified Communications Manager Express. In this deployment, the optional Cisco Unified CCX components that can be added, shown with an asterisk (*), are Cisco Unified E-mail Interaction Manager and Cisco Unified Web Interaction Manager.

For additional details about deploying these components, refer to *Cisco Interaction Manager integration with Unified CCX SRND*.

Figure 4-2 Deployment Model of Unified CCX integrated with Unified CME

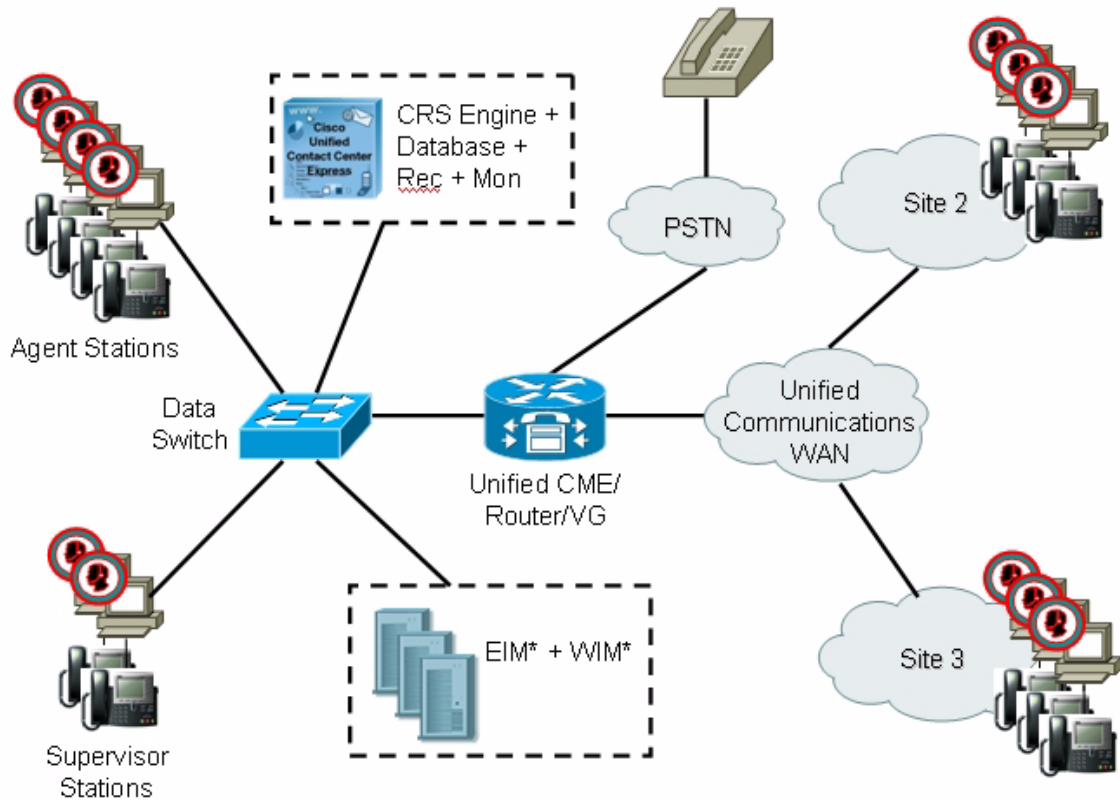

Note

In both deployment with Unified Communications Manager and with Unified CME, ASR and TTS can be added. ASR and TTS software is not provided by Cisco. This software must be purchased from a vendor such as Nuance, Scansoft, or IBM. These vendors can provide design and server sizing requirements for their software.

This chapter contains the following sections:

- [Unified CCX General Rules for Design, page 4-5](#)
- [Single-Server Non-High Availability Deployment Model—Cisco Unified Communications Manager Integration, page 4-6](#)
- [Two-Server High Availability Deployment Model—Unified Communications Manager Integration, page 4-6](#)
- [Single-Server Non-High Availability Deployment Model—Unified Communications Manager Express Integration, page 4-7](#)
- [Other Design Considerations, page 4-7](#)

Unified CCX General Rules for Design

When designing a Unified CCX deployment, the following rules apply:

- When deploying for high availability, the Unified CCX servers must be located in the same campus LAN and the round-trip delay between the Unified CCX servers should be less than 2 ms. The links between the Unified CCX servers must be highly available and the available bandwidth should always be considerably higher than the load, and there should be no steady-state congestion.

For additional information about LAN and campus infrastructure design, refer to *Cisco Unified Communications Solution Reference Network Design (SRND)* and to *Designing a Campus Network for High Availability SRND*, which are available at www.cisco.com/go/srnd.

**Note**

If the network connectivity is lost between the two CRS engines, both CRS engines become active (island mode). When the network connectivity is restored, both CRS servers become inactive for a few seconds to negotiate the CRS engine mastership, and all calls in queues and receiving call treatment are lost.

- The Cisco Unified Communications Manager servers running CTI Managers with which Unified CCX communicates must be located in the same campus LAN as the Unified CCX servers. The available bandwidth for these LAN links should always be considerably higher than the load, there should be no steady-state congestion, and the maximum round-trip delay between the servers should be less than 2 ms. Other Cisco Unified Communication Manager nodes within the same Cisco Unified Communications Manager cluster can be located across the WAN in a Cisco Unified Communications Manager cluster that is split over the WAN. In such deployments, the WAN requirements that are described in *Cisco Unified Communications SRND* must be satisfied.
- If recording is going to be used for a high availability deployment, the Recording component must be redundant.
- All agents for a Unified CCX deployment must be using phones that register to the same Cisco Unified Communications Manager cluster. Calls can be received from devices and callers on another Cisco Unified Communications Manager cluster (using inter-cluster trunks).
- If CIM is integrated with Unified CCX integrating with CIM, CIM servers must be located in the Campus LAN as the Unified CCX servers.
- All Unified CCX deployments must be configured using the Unified CCX Configuration & Ordering Tool to be supported. Only the MCS 7835 and 7845 models provide redundant power supplies, redundant fans, and redundant hot-swappable disk drives. For high availability deployment, use the MCS 7835 or the MCS 7845.

When deploying Cisco Interaction Manager with Unified CCX, consider the following guidelines:

- Cisco Interaction Manager and Unified CCX servers must be separate.
- The Cisco Interaction Manager servers must be located in the same Campus LAN as the Unified CCX servers. The maximum round-trip delay between the Cisco Interaction Manager servers and the Unified CCX servers should be less than 5 ms.
- Cisco Interaction Manager can be deployed on a single server or on multiple servers for larger deployments. Refer to *Cisco Interaction Manager integration with Unified CCX SRND* for more details.

When deploying Quality Management and Workforce Management with Unified CCX, consider the following guidelines:

- Quality Management and Workforce Management must be installed on separate servers from each other and CRS. No form of co-residency is supported in this release with any other software, such as installing on CRS or installing both Quality Management and Workforce Management on same server.
- WFO products do not provide redundancy. However, note that both Quality Management and Workforce Management do support redundant CRS environment and are able to switch to a secondary or backup system upon failure of the primary CRS system.
- Workforce Management and Quality Management servers should be installed on the same Campus LAN as the CRS servers and the CTI Managers that they are communicating with. The round-trip delay between all these servers should be less than 2 ms

Single-Server Non-High Availability Deployment Model—Cisco Unified Communications Manager Integration

The Single-Server Non-High Availability Deployment Model—Cisco Unified Communications Manager Integration is for small deployments that require only one or two simultaneous reporting sessions. The MCS 7845 will allow two reporting client sessions during operating hours. All other servers support one reporting client during operating hours. This deployment model places a single instance of all four CRS software components on the same server. This deployment model may use either MSDE (default) or SQL Server as the database. The MSDE database limits the number of simultaneously connected historical reporting clients to five and the maximum database size is 2 GB.

This deployment model can support silent monitoring and recording for agents at any WAN-connected site by using desktop monitoring. (Refer to *Cisco CRS Software and Hardware Compatibility Guide* for a list of phones that support desktop monitoring). It can also support SPAN port monitoring for agents on the same VLAN segment as the Unified CCX server. This deployment model does not incorporate additional remote Monitoring components, so silent monitoring and recording is not possible for agents who are using the Cisco IP Phone Agent at remote sites. Similarly, silent monitoring and recording is not possible for agents at remote sites who are using phones that do not support desktop monitoring.

This deployment model allows the CRS Engine to fail over to a backup CTI Manager if the primary CTI Manager fails. CTI ports and CTI route points should be grouped into device pools that have the same primary and secondary server list as those used for JTAPI communications with the CTI Managers.

Two-Server High Availability Deployment Model—Unified Communications Manager Integration

The Two-Server High Availability Deployment Model—Unified Communications Manager Integration is for small to medium-sized contact centers requiring high availability.

This deployment model incorporates redundant CRS Engine, Database, Recording, and Monitoring components. The Unified CCX servers and the Cisco Unified Communications Manager servers that are running CTI Managers with which Unified CCX communicates must be located in the same Campus LAN and the round-trip delay between these servers should be less than 2 ms.

SQL Server 2000 is required for high availability as SQL Server 2000 replication services are utilized to keep the databases synchronized. Historical reporting during operating hours is limited to 2 reporting clients on a 7845 and 1 on all other servers.

This deployment model can support silent monitoring and recording for agents at any WAN-connected site by using desktop monitoring. (Refer to *Cisco CRS Software and Hardware Compatibility Guide* for a list of phones that support desktop monitoring). It can also support SPAN port monitoring for agents on the same VLAN segment as the Unified CCX server. This deployment model provides redundancy for both recording and silent monitoring for all agents using desktop monitoring (regardless of location) or agents on the local VLAN using SPAN port monitoring. This deployment model does not incorporate additional remote Monitoring components, so silent monitoring and recording is not possible for agents who are using the Cisco IP Phone Agent at remote sites. Similarly, silent monitoring and recording is not possible for agents at remote sites who are using phones that do not support desktop monitoring.

This deployment model allows either CRS Engine component to fail over to a backup CTI Manager if the primary server fails. CTI Ports and CTI Route Points should be grouped into device pools that have the same primary and secondary server list as that used for JTAPI communications to the CTI Managers.

Single-Server Non-High Availability Deployment Model—Unified Communications Manager Express Integration

As shown in [Figure 4-2 on page 4-4](#), Unified CCX integration with Unified CME supports only the Single-Server Non-High Availability Deployment Model—Unified Communications Manager Express Integration. In this deployment model, the router and voice gateway functionalities must be located inside Unified CME. This deployment model places a single instance of all four Unified CCX software components on the same server. This deployment model can support two simultaneous reporting sessions during operating hours on all MCS hardware platforms. This deployment model may use either MSDE (default) or SQL server as the database. The MSDE database limits the number of simultaneously connected historical reporting clients to five and the maximum database size is 2 GB.

This deployment model can support silent monitoring and recording for agents at any WAN-connected site by using desktop monitoring. (Refer to *Cisco CRS Software and Hardware Compatibility Guide* for a list of phones that support desktop monitoring). It can also support SPAN port monitoring for agents on the same VLAN segment as the Unified CCX server. This deployment model does not incorporate additional remote Monitoring components, so silent monitoring and recording is not possible for agents who are using the Cisco IP Phone Agent at remote sites. Similarly, silent monitoring and recording is not possible for agents at remote sites who are using phones that do not support desktop monitoring.

Unified CCX does not support backup Unified CME. If Unified CME fails, Unified CCX will not be functional.

Other Design Considerations

Consider the following when designing your Unified CCX 5.0 system:

- High availability requires additional disk space, so historical call reporting capacity may be reduced. Historical call reporting capacity also depends upon BHCC, hours of operation per day, and days of operation per week. In some very high volume deployments with many agents, it may no longer be possible to retain a full 13 months of historical call reporting data. (This retention rate was assured in Cisco CRS 3.x releases)

- G.711 call recording requires about 1MB per minute. G.729 call recording requires about 256KB per minute.
- The following categories of data use hard disk space:
 - Windows Server OS, CRS Software, and SQL Server Database Management Software
 - CRS Logs
 - The CRS Database (comprised of 4 data stores)
 - Recording Files.

Systems planners and designers should attempt to estimate the impact of each in order to determine hard disk requirements. The Cisco Customer Response Solutions Installation Guide provides more information about disk size requirements for very large installations.

- The Cisco Unified Communications Manager sizing tool assumes devices are evenly distributed across all servers CTI Route Points be configured as part of a device pool that homes primarily to the same Cisco Unified Communications Manager Server as the primary CTI Manager being used, it may be required to run the Cisco Unified Communications Manager sizing tool on a per location or per server basis.
- The Cisco Unified Communications Manager QSIG path replacement feature is not supported for Unified CCX calls. For additional information about Unsupported Features in Cisco Unified Communications Manager, see the current release notes for Cisco Customer Response Solutions.
- Cisco Unified Communications Manager Forced Authorization Codes and Client Matter Codes are not allowed to be used on the same Cisco Unified Communications Manager cluster where Unified CCX is installed. This restriction is for any Cisco Unified Communications Manager phones and users— not just Unified CCX agents. The resolution to this is to deploy two separate Cisco Unified Communications Manager clusters. For details on why this is not supported, see the current Cisco CRS Release Notes.
- The Unified CCX Gateway PG can be added to any of these models. The PG process must run on the server or servers with the CRS Engine components.
- Sometimes new releases of Cisco Unified Communications Manager will not support Unified CCX immediately at Cisco Unified Communications Manager first customer ship (FCS) time. Some organizations may be early adopters of new Cisco Unified Communications Manager releases and may be slowed from migrating to new Cisco Unified Communications Manager releases and using new Cisco Unified Communications Manager features if Unified CCX is installed with that same Cisco Unified Communications Manager cluster. Therefore, in some scenarios, it may make sense to have a separate Cisco Unified Communications Manager cluster for Unified CCX.

Multiple CRS Clusters Integrated with a Single Cisco Unified Communications Manager Cluster

It is possible to integrate multiple CRS clusters with a single Cisco Unified Communications Manager cluster. Use the following guidelines when deploying this model:

- To determine if the number of CRS clusters is appropriate for your Unified Communications Manager cluster, use the Cisco Unified Communications Manager Capacity Tool. For more information, see [Chapter 6, “Sizing Cisco Unified Contact Center Express and Cisco Unified Communications Manager Servers.”](#)

- To determine if you need more than one CTI Manager, refer to *Cisco Unified Communications Solution Reference Network Design (SRND)*, available at www.cisco.com/go/srnd. For example, in Cisco Unified Communications Manager 5.1, up to 2,500 CTI devices are supported per CTI Manager.

If your deployment requires more than one CTI Manager, Cisco recommends that you load-balance CRS and other CTI applications across the various CTI Managers in the cluster to provide maximum resilience, performance, and redundancy.

For additional CTI Manager best practices, refer to *Cisco Unified Communications Solution Reference Network Design (SRND)*, available at www.cisco.com/go/srnd.

- If more than one primary subscriber is required to support your configuration, distribute all agents equally among the subscriber nodes. This configuration assumes that the busy-hour call attempts (BHCA) is uniform across all agents.
- Each CRS cluster is standalone and independent from other CRS clusters. There is no communication or synchronization between the CRS clusters. Agents should operate in only one CRS cluster.

Unified CM Telephony Triggers (CTI Route Points) and CTI ports should be different across CRS clusters.

- In the list of Resources in Cisco CRS Administration, each CRS cluster displays all the agents in the Cisco Unified Communications Manager cluster, even though the agents can operate and log in only to one CRS cluster.

This situation requires that the CRS Administrator be aware of which resources are associated with each cluster. The CRS Administrator can mitigate this situation by having a unique naming convention for Resources associated with a particular CRS cluster.

- This deployment is not intended to provide CRS redundancy across different CRS clusters. If a CRS cluster fails, the agents that operate in this cluster cannot operate in other CRS clusters. If another CRS cluster is configured to accept the calls that were originally sent to the CRS cluster that failed, there will be no report integration between the CRS clusters.
- This deployment does not change the characteristics and design recommendations of each individual CRS cluster. For example, within a CRS cluster, high availability and cold standby are still supported.



CHAPTER 5

Basics of Call Center Sizing

This chapter introduces the basic concepts involved in call center sizing


This chapter contains the following sections:

- [Terminology, page 5-1](#)
- [Preliminary Information Requirements, page 5-2](#)
- [Principal Design Considerations for Call Center Sizing, page 5-4](#)
- [Planning Resource Requirements for Call Center Sizing, page 5-5.](#)

Terminology

Figure 5-1 illustrates the common port types and how they map to Unified CCX.

Figure 5-1 Call Center Port Types

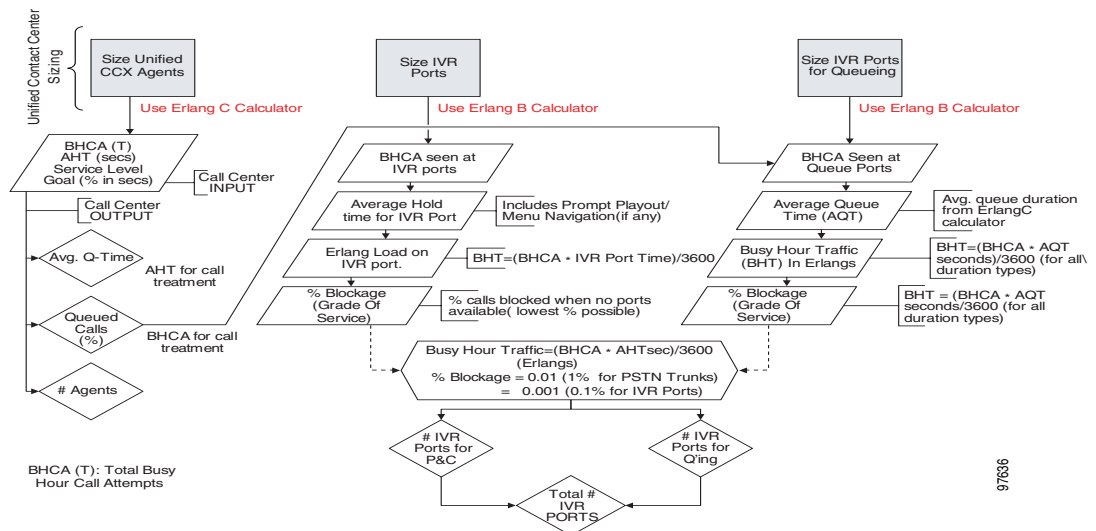

Call center sizing differentiates the port types as follows:

- **Gateway or PSTN trunk ports** — handle calls originating from the PSTN. They are purchased separately from Unified CCX.

- **Queue ports** — are IVR ports that queue calls (when no agents are available) prior to transferring the caller to an available agent. These ports are included at no additional cost with Unified CCX Standard or Enhanced, but they must be sized for proper capacity planning for the Unified CCX server. Refer to the Unified CCX Configuration and Ordering Tool for more details.
- **IVR ports** — are full-featured IVR ports with all the capabilities found in the standalone Cisco Unified IP IVR product, except that the Unified CCX IVR ports require Unified CCX Premium and do not support Cisco Intelligent Contact Management Enterprise (Unified ICME) integration.

If you want additional supporting features, such as automatic speech recognition (ASR), text-to-speech (TTS), e-mail notification, web server or client functionality, and database operations, you simply need to purchase the Premium package. Additional seats may also be purchased for IVR port licenses if the number of port licenses that come with the seat licenses is not sufficient.

The goal of the system architect is to determine the appropriate number and types of IVR ports to provision for the Unified CCX system. However, as shown in [Figure 5-1](#), the Unified CCX architecture differs slightly from the example TDM call center configuration in that IVR ports and queue ports (and P&C ports as well) are combined into one logical CTI port. Therefore, the call sizing approach in this document calculates trunk, IVR, and queue ports. The remaining sections of this chapter use the term *IVR port* to denote the combined queue port and IVR port (both full-service and P&C ports).

Preliminary Information Requirements

System designers are advised to create a sizing document to do the following:

- Scope out the preliminary configuration information for the Unified CCX server.
- Size the gateways for the system.

To determine the size of the call center, obtain answers to the following questions:

- How many IVR ports do you need?
- How many PSTN gateway trunk ports do you need?
- How many agents will answer incoming calls?

To answer these questions properly, you will need the sizing metrics and information listed in [Table 5-1](#).

Table 5-1 Call Center Sizing Metrics

Metric	Description
Average handle time (AHT)	Average duration (talk time) of a call plus after-call work time, which is the wrap-up time after the caller hangs up.
Average IVR port usage time	The total time for prompt playout and/or menu navigation (if any) in the Unified CCX script. This should not include the queue time the caller spends waiting in queue before an agent becomes available. Queue time is calculated using Erlang-C automatically as shown in Figure 5-2 .
Service level goal for agents	Percentage of calls answered by agents within a specific number of seconds.
Busy Hour Call Attempts (BHCA)	Average number of calls received in a busy hour.
Grade of service (% blockage) for gateway ports to the PSTN	Percentage of calls that get a busy tone (no gateway trunks available) out of the total BHCA.

All of the metrics in [Table 5-1](#) are basic call sizing metrics. Once this information is obtained, the number of gateway trunk ports, IVR ports, and agents can be calculated using the IPCC Resource Calculator available at: <http://tools.cisco.com/partner/ipccal/index.htm>.

The IPC Resource Calculator uses Erlang C for sizing agents, and Erlang B for sizing IVR ports. The output of this sizing process will provide you with the total number of Gateway trunk ports, IVR ports and total number of agents to size the Unified CCX system properly.

See [Figure 5-2](#) for an overview of the IP call center sizing process, and see the section on [Planning Resource Requirements for Call Center Sizing, page 5-5](#), for detailed sizing information for both IVR ports and Unified CCX agents.

**Note**

If the system being designed is a replacement for an existing ACD or an expansion to an installed Unified CCX or Unified IP IVR system, you might be able to use the historical reporting information from the existing system to arrive at the above metrics.

In addition, call sizing design considerations may vary if the call center is more self-service oriented.

Principal Design Considerations for Call Center Sizing

Figure 5-2 illustrates the principal steps and design considerations for sizing a call center.

Figure 5-2 Unified CCX Design Process – Call Center Sizing

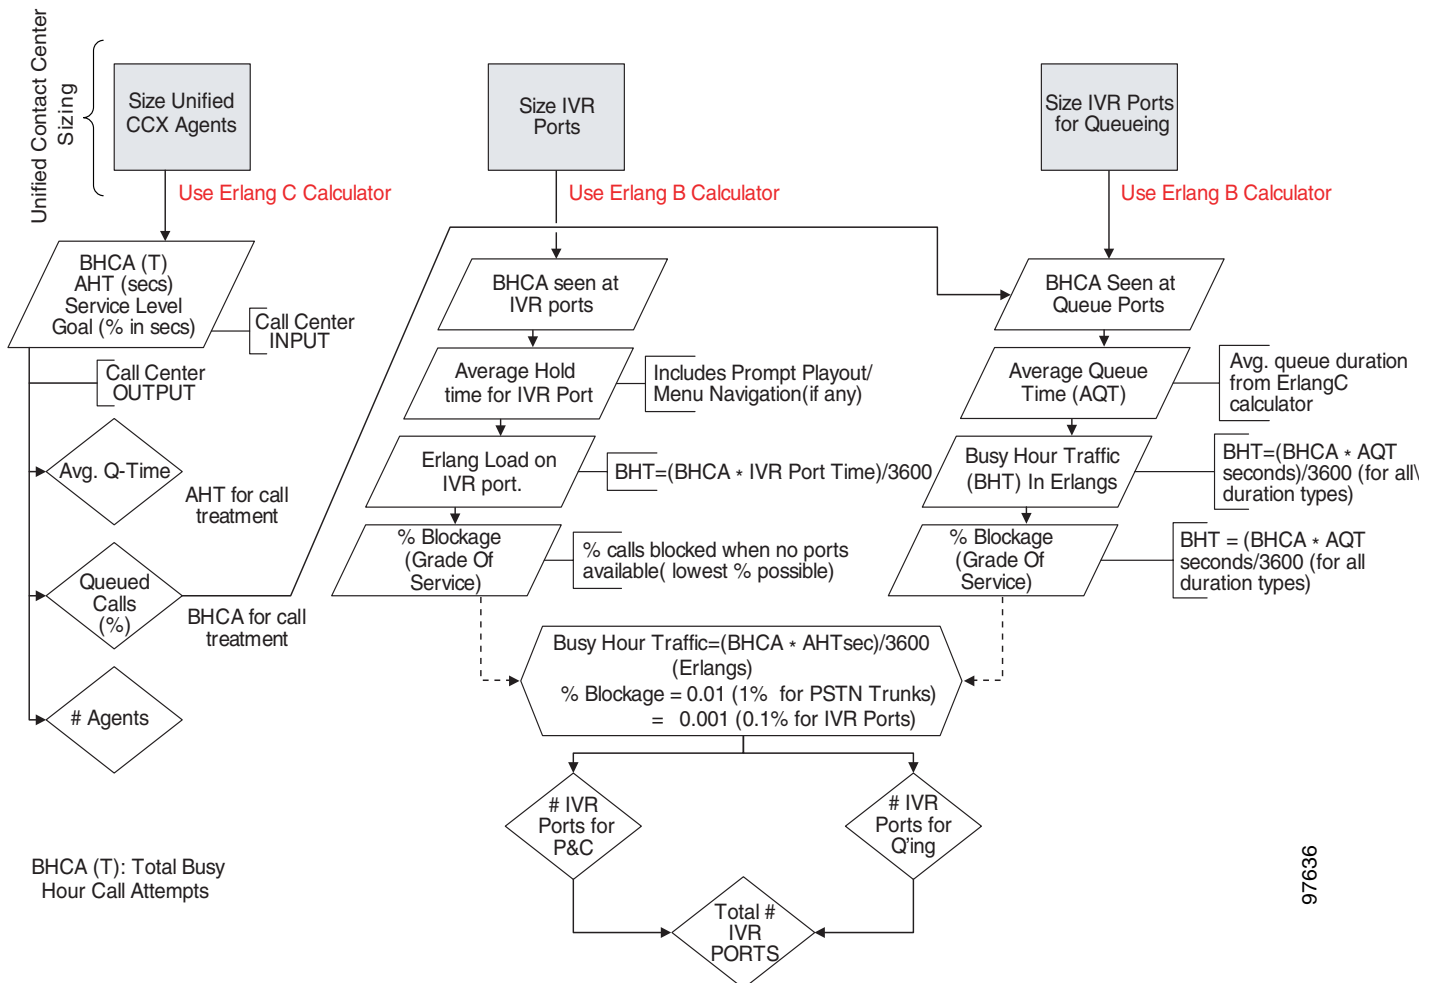


Figure 5-2 is a general overview of the design considerations for call sizing. For a detailed description of the call center sizing design process, refer to the section on sizing call center resources in the *Cisco Unified Contact Center Enterprise Solution Reference Network Design Guide*, available online at the following URL:

<http://www.cisco.com/go/srnd>

There are similar basic call center sizing considerations and steps for Unified CCE, and they also can be used in sizing a smaller contact center for Unified CCX. This call sizing approach will provide you with the minimum number of IVR ports to support the total BHCA.

In addition, you should include the following design considerations, specific to Unified CCX, in your call center sizing calculations:

- At a minimum, plan on enough capacity to replace your existing system. The replacement system should perform at least as well as the one it is replacing.
- After all of the Erlang (C and B) calculations are complete for the call center sizing, any changes in queue times or agents will affect the total number of trunks and IVR ports required for an Unified CCX solution.
- As you increase the size of the agent pool, very small changes in the average queue time and percentage of queued calls will affect the required number of gateway trunks and IVR ports.
- Even if you perform all of the calculations for a call center, there are still some variables that you cannot plan for but that will affect the ports needed on a Unified CCX system. For example, one or more agents could call in sick, and that would affect the port count and queue time for each call. Just two agents calling in sick could increase the port count by over 12%. This would affect the price of the system and, if not planned for, would affect the ability of the call center to meet caller requirements. Properly sizing call center resources is integral to designing an effective Unified CCX system.

**Note**

Not all of the Unified CCX system limits are available at the same time.

If all of the call sizing information is available, the next step is to apply Unified CCX sizing limits to the call center requirements. For this step, use the Unified CCX Configuration and Ordering Tool, available online at

http://www.cisco.com/en/US/partner/products/sw/custcosw/ps1846/prod_how_to_order.html

Planning Resource Requirements for Call Center Sizing

To assist you with planning resource requirements, this section illustrates how to size an Unified CCX Standard application with 25 agents.

Example of Sizing Unified CCX Standard Application with 25 Agents

This example is not intended to be a comprehensive contact center design example, but it illustrates how changing metrics such as BHCA, AHT, and Service Levels can affect provisioning of agents.

The following information applies to this example of Unified CCX Standard with 25 agents:

Metric	Metric Value
Busy Hour Call Attempts (BHCA)	800 calls in 60-minute interval
Service level goal	90% of all calls handled within 15 seconds
Average handle time (AHT)	90 seconds: <ul style="list-style-type: none"> • Average talk time = 90 seconds • Wrap-up time = 0 seconds
Wait before Abandon	120 seconds
Grade of service (% blockage) for gateway ports to the PSTN	1% (0.01)

Using the IPC Resource Calculator available at <http://tools.cisco.com/partner/ipccal/index.htm>, we can determine that 25 agents are needed for this system. Checking the Unified CCX Configuration and Ordering Tool indicates that all of these parameters fit within a single-server Unified CCX system.


Figure 4-3 provides a basic example of the IPC Standard Resource Calculator.

Figure 5-3 IPC Standard Resource Calculator Basic Example

Project Identification:	Basic Example		
Calls per interval (BHCA):	60 min	800	calls
Service Level Goal (SLG):	90 %	within 15 sec	0m 15s
Avg call talk time:	90 sec		1m 30s
Avg after call work time:	0 sec		0m 0s
Avg handle time (Agent calls):	90 sec		1m 30s
Avg Call treatment Time (IVR):	0 sec		0m 0s
Wait before abandon (Tolerance):	120 sec		2m 0s
Blockage % (PSTN Trunks):	1 %	of calls lost (Busy)	
Check to manually enter Agents	<input type="checkbox"/>		Agents
Recommended Agents: 25			
Calls completed (BHCC):	792 calls		8 Blocked calls
Calls answered within SLG:	92% within		15 sec
Calls answered beyond SLG:	8% beyond		15 sec
Queued calls:	19.3% 152 Q Calls		0.8 Erlangs
Calls answered immediately:	80.7% 639 calls		
Avg Queue Time(AQT):	17 sec		0m 17s
Avg Speed to Answer(ASA):	3 sec		0m 3s
Avg call duration:	93 sec		1m 33s
Agents utilization:	79%		
Calls exceeding Abandon Tolerance:	0%		0 Calls
PSTN Trunk Utilization:	66%		
Voice trunks required :	31 Trunks	T1/PRI	1.4 T1/PRI
IVR ports required for queuing:	5 IVR Ports		
IVR ports required for call treatment:	0 IVR Ports		
Sum of Required IVR Ports:	5		
<input type="button" value="Submit"/> <input type="button" value="Export"/>			

The IPC Resource Calculator also uses Erlang B and C to calculate the number of IVR ports needed for call treatment (prompt and collect) and queuing. An example of this is the default `icd.aef` script logic that is available with all the Cisco Unified CCX packages. Note in Figure 4-4 how the script logic allows the application developer to insert various delays in the script; these delays must be included in Average Call Treatment Time, (IVR) input to the IPC Resource Calculator.

Figure 5-4 Application Processing Time for Unified CCX

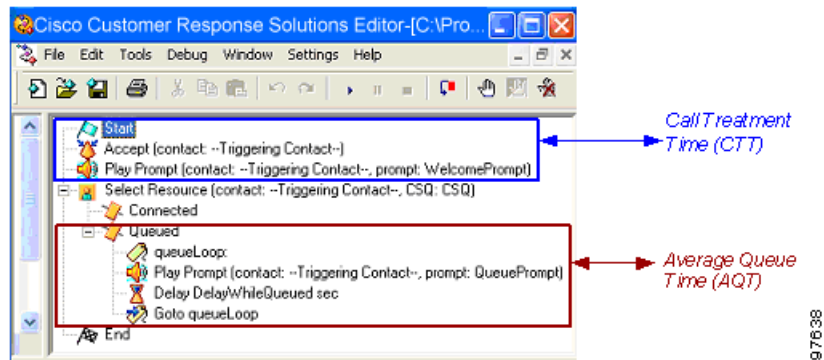

The following steps detail the procedure for calculating IVR ports for our example Unified CCX application:

-
- Step 1** Calculate the number of IVR ports required to handle IVR call treatment functionality:
- a. Estimate the average time the call is being processed by the Unified CCX script, from the time the initial call enters the application until the time the call is queued. This value is the call treatment time (CTT, also called Average IVR Delay). Using the default icd.aef script for our example, this value would be the time the welcome prompt is played. The welcome prompt used by this particular Unified CCX application was estimated at two seconds. (Note that a lengthy prompt/collect sequence for caller self-service will result in much longer CTT).
 - b. Now enter the CTT (Average IVR Delay) of 20 seconds into the IPC Resource Calculator, and notice that in this example ten IVR ports are required for call treatment.
- Step 2** Calculate the number of IVR Ports required to handle queuing functionality.
- In this case the IPC Resource Calculator has already performed the calculation from the previous inputs, yielding a value of six IVR ports required for queuing.
- Step 3** Calculate the total number of IVR Ports required.
- The IPC Resource Calculator automatically adds up all IVR ports required (queuing, call treatment and self service (using the advanced IPC Resource Calculator). In this example a total of fifteen IVR ports are required.
- Note at this point that the IPC Resource Calculator has also determined the number of Gateway Voice Trunks needed to support the required number of Agents and IVR ports. In this example, 36 PSTN trunks (DS0's) are required.

Figure 5-5 Standard Resource Calculator Call Treatment Example

Project Identification:	Call Treatment Example	
Calls per interval (BHCA):	60 min	800 calls
Service Level Goal (SLG):	90 % within	15 sec 0m 15s
Avg call talk time:	90 sec	1m 30s
Avg after call work time:	0 sec	0m 0s
Avg handle time (Agent calls):	90 sec	1m 30s
Avg Call treatment Time (IVR):	20 sec	0m 20s
Wait before abandon (Tolerance):	120 sec	2m 0s
Blockage % (PSTN Trunks):	1 %	of calls lost (Busy)
Check to manually enter Agents	<input type="checkbox"/>	Agents

Recommended Agents: 25	
Calls completed (BHCC):	792 calls 8 Blocked calls
Calls answered within SLG:	92% within 15 sec
Calls answered beyond SLG:	8% beyond 15 sec
Queued calls:	19.3% 152 Q Calls 0.8 Erlangs
Calls answered immediately:	80.7% 639 calls
Avg Queue Time(AQT):	17 sec 0m 17s
Avg Speed to Answer(ASA):	3 sec 0m 3s
Avg call duration:	113 sec 1m 53s
Agents utilization:	79%
Calls exceeding Abandon Tolerance:	0% 0 Calls
PSTN Trunk Utilization:	69%
Voice trunks required :	36 Trunks T1/PRI 1.7 T1/PRI
IVR ports required for queuing:	5 IVR Ports
IVR ports required for call treatment:	10 IVR Ports
Sum of Required IVR Ports:	15

Note that changes in BHCA, CCT, and service level will affect the overall number of ports and agents required in a call center. Each increase or decrease in call handling time will affect the number of ports much more dramatically than in a smaller call center.

For more gateway sizing guidance, refer to the *Cisco IP Telephony Solution Reference Network Design* documentation available online at www.cisco.com/go/srnd.



CHAPTER 6

Sizing Cisco Unified Contact Center Express and Cisco Unified Communications Manager Servers

This chapter helps you size the Cisco Unified Contact Center Express (Unified CCX) Server and the Cisco Unified Communications Manager Server.

This chapter contains the following sections:

- [Cisco A2Q Bid Assurance Requirements, page 6-1](#)
- [Sizing Tools, page 6-1](#)
- [Affect of Performance Criteria on the Unified CCX Server, page 6-2](#)
- [Impact of Performance Criteria on the Unified CM Server\(s\), page 6-2](#)

Cisco A2Q Bid Assurance Requirements

The Assessment to Quality (A2Q) process is a Cisco design review and deployment assessment initiative that identifies and solves solution issues before a deal gets booked. Cisco Customer Contact Business Unit (CCBU) requires that all new Unified CCX deals be submitted to the A2Q Contact Center team.

Please note the following requirements:

- The Cisco A2Q process must be followed for every Unified CCX deployment.
- Every Unified CCX deployment must use the Unified CCX Configuration & Ordering Tool. The tool will either automatically bid assure a configuration or will flag that a manual bid assurance review is required.
- Every Unified CCX configuration must be bid assured prior to making a final offer to a customer.

Sizing Tools

The Unified CCX Configuration and Ordering Tool for Unified CCX and Unified IP IVR 5.0 must be used to size Unified CCX and Unified IP IVR systems. Also, the Unified CM Capacity Tool (CMCT) is the only approved tool and must be used to properly size the Unified CM server(s). Before sizing the servers, first familiarize yourself with the on-line Help and frequently asked questions (FAQs) of the tools before using them to size your systems.

**Note**

Cisco recommends that you count outbound agents as inbound agents when performing sizing in CMCT.

For deployments with more than 50 agent phones, Cisco strongly recommends that you deploy a minimum of two subscriber servers and a combined TFTP publisher.

The Configuration and Ordering Tool for Unified CCX and Unified IP IVR 5.0 is available online at:

http://www.cisco.com/en/US/partner/products/sw/custcosw/ps1846/prod_how_to_order.html

Only the 5.0 version of the Unified CCX Configuration and Ordering Tool is valid for Unified CCX 5.0 configurations.

The Unified CM Capacity Tool is available on line for partner access to account for the capacity required in Unified CM servers to handle CTI and call processing for Unified CCX.

The capacity tool is available online at:

<http://www.cisco.com/partner/WWChannels/technologies/resources/CallManager/>

Affect of Performance Criteria on the Unified CCX Server

System performance criteria fall into two general categories:

- Unified CCX and Unified IP IVR components - Applications, SW versions, capabilities, server types, and options and quantities that your system requires.
- System usage - The average number of calls placed and received per hour, the average call length, the scripts being executed, grammar used for ASR, and so forth.

Effect of Performance Criteria

Each performance criterion can have an effect on the performance of the Unified CCX or Unified IP IVR system. In general, the more Unified CCX or Unified IP IVR components that you install and the heavier the system usage, the higher the demand on the server. However, the performance criteria can also interact in various non-linear ways to affect performance. The Configuration and Ordering Tool for Unified CCX and Unified IP IVR 5.0 can help you see and evaluate the effects of performance criteria on the Unified CCXs and Unified IP IVR server.

Impact of Performance Criteria on the Unified CM Server(s)

Similarly, Unified CM system performance is influenced by many criteria such as:

- Software release versions— Using the capacity tool, make sure to select the Cisco Unified CM software version with which Unified CCX will be working.
- The type and quantity of devices registered, such as:
 - CTI ports (IP IVR ports for queuing, call treatment and self service)
 - Gateway (GW) ports
 - Agent phones
 - Route points

- The load processed by these devices (calls per second)
- Application call flows
 - IVR self-service
 - Call treatment/Prompt and collect
 - Routing to agents, % transfers and conferences
- Special Unified CM configuration and services
 - Other non-Unified CCX devices—IP phones, GW ports, Unity ports, dial plan, and so forth.
 - Music on Hold (MOH)
 - Tracing levels—Unified CM CPU resource consumption varies depending on trace level enabled. Changing trace level from Default to Full on Unified CM can increase CPU consumption significantly under high loads. Changing tracing level from Default to No tracing can also decrease CPU consumption significantly at high loads (this is not a recommended configuration and would not be supported by Cisco TAC). CPU consumption due to default trace will vary based on load, Unified CM release, applications installed; call flow complexity, and so on.
- Server platform type

■ Impact of Performance Criteria on the Unified CM Server(s)



CHAPTER 7

Bandwidth, Security, and QoS Considerations

This chapter presents some design considerations for provisioning network bandwidth, providing security and access to corporate data stores, and ensuring Quality of Service (QoS) for Unified CCX applications.

This chapter contains the following sections:

- [Estimating Bandwidth Consumption, page 7-1](#)
- [Serviceability and Security, page 7-11](#)
- [QoS and Call Admission Control, page 7-12](#)
- [CAC and RSVP, page 7-13](#)

Estimating Bandwidth Consumption

Bandwidth plays a large role in deployments involving:

- The centralized call processing model (Unified CCX at the central site)
- Any call deployment model that uses call admission control or a gatekeeper

Remote Agent Traffic Profile

Remote Agent Traffic Profile Unified CCX signaling represents only a very small portion of control traffic (Agent/Supervisor Desktop to and from the CRS Server) in the network. For information on TCP ports and Differentiated Services Code Point (DSCP) marking for Unified CCX and CTI traffic, see the sections on [Serviceability and Security, page 7-11](#), and [QoS and Call Admission Control, page 7-12](#).

Bandwidth estimation becomes an issue when voice is included in the calculation. Because WAN links are usually the lowest-speed circuits in an IP Telephony network, particular attention must be given to reducing packet loss, delay, and jitter where voice traffic is sent across these links. G.729 is the preferred codec for use over the WAN because the G.729 method for sampling audio introduces the least latency (only 30 msec) in addition to any other delays caused by the network.

Where voice is included in bandwidth, system architects should consider the following factors:

- Total delay budget for latency (taking into account WAN latency, serialization delays for any local area network traversed, and any forwarding latency present in the network devices). The generally agreed-upon limit for total (one-way) latency for applications in a network is 150 milliseconds.

- Impact of delays inherent in the applications themselves. 8 seconds is the average Unified CCX agent login time with no WAN delay. This includes the exchange of approximately 1,000 messages between the agent application and various servers. The overall time to log in agents increases by approximately 30 seconds for each 30 milliseconds of WAN delay.
- Impact of routing protocols. For example, Enhanced Interior Gateway Routing Protocol (EIGRP) uses quick convergence times and conservative use of bandwidth. EIGRP convergence also has a negligible impact on call processing and Unified CCX agent logins.
- Method used for silently monitoring and recording agent calls. The method used dictates the bandwidth load on a given network link.

Silent Monitoring Bandwidth Usage

The silent monitoring feature of the CAD desktop software, which includes both listening to and recording agent calls, has the largest bandwidth requirements for the CAD product. Properly configuring this feature is especially important for remote agents who are connected to the main site by a WAN connection.

An agent's call can be listened to or recorded by the CAD software. To do this, a request is sent to a VoIP provider. The VoIP provider captures the voice streams representing the call (two voice streams per call) and sends them back to the requestor. The bandwidth requirements detailed in this section are for the network links between the requestor and provider.

Silent Monitoring Requestors

There are two possible requestors in the CAD software:

- Cisco Supervisor Desktop
- Recording service

Cisco Supervisor Desktops will send requests when the supervisor wishes to listen to an agent's call in real-time. The VoIP provider will capture the voice streams and send them back to the supervisor's desktop where they can be listened to over the desktop's speakers.

A Recording service will send requests when either a supervisor or agent wishes to record the call. The VoIP provider will send the voice streams and the Recording service will save the streams to disk so they can be listened to at a later time.

In Unified CCX 5.0, the Recording service is installed on the Unified CCX server.

Silent Monitoring Providers

There are also two possible VoIP providers in the CAD software:

- Cisco Agent Desktop
- VoIP Monitor service

The Cisco Agent Desktop application contains a service referred to as the Desktop Monitor service that runs on the agent's desktop. It is responsible for processing silent monitoring requests only for the agent logged into the CAD application on the desktop. It captures voice packets sent to the IP or soft phone associated with the logged in agent. The IP phone must be connected in series with the agent desktop on the network for this to work.

By default, this service is active on all agent desktops when the application is started. After initial installation of the CAD servers, all agents are already configured to use the Desktop Monitor service for the silent monitoring feature.


A VoIP Monitor service is able to handle multiple requests for silent monitoring simultaneously. It captures packets directly from the switch via the switch's Switched Port Analyzer (SPAN) configuration. In a deployment without high availability, Unified CCX 5.0 supports one VoIP Monitor service, which is installed on the Unified CCX server. When high availability is deployed, two VoIP Monitor services are installed, one on each Unified CCX server.

**Note**

IP Phone agents, who don't have a desktop, must be configured to use a VoIP Monitor service for the silent monitoring feature.

Figure 6-1 shows a representative Unified CCX installation supporting a remote office over a WAN. Both the main office and the remote office have a VoIP and Recording service on site.

Figure 7-1 Contact Center Representation

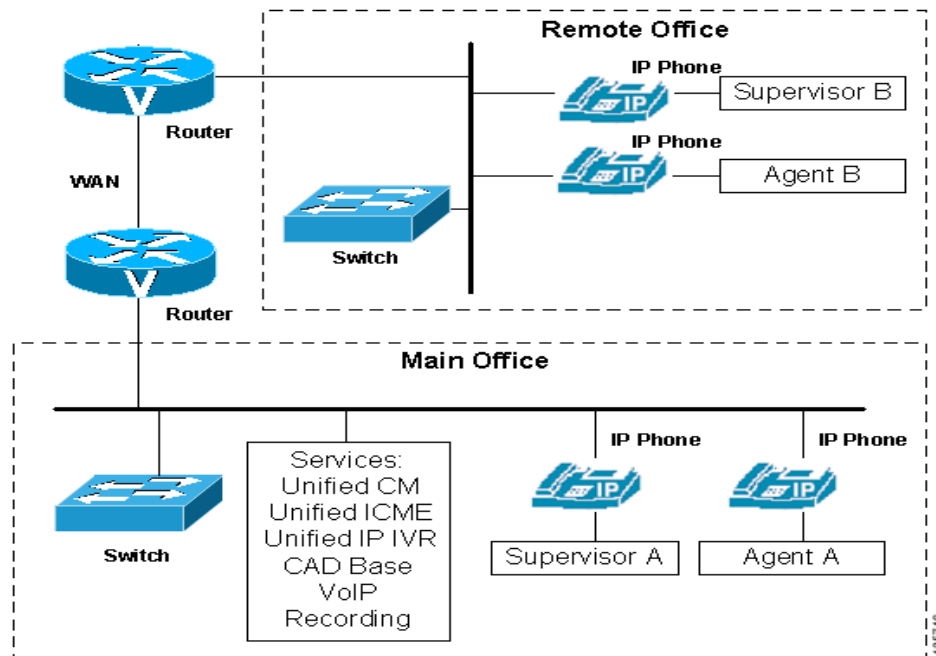

It is easy to see where the bandwidth will be required for the silent monitoring feature when you can locate the requestors and providers.

Regardless of who the requestor and VoIP provider are, the bandwidth requirement between these two points is the bandwidth of the IP call being monitored and/or recorded. You can think of each monitoring and/or recording session as being a new phone call (2 voice streams) for calculating bandwidth. Therefore, to calculate bandwidth to support the Silent Monitoring feature, you can use the same calculations used to provision the network to handle call traffic.

IP Call Bandwidth Usage

An IP phone call consists of two streams of data. One stream is sent from phone A to phone B. The other stream is sent from phone B to phone A. The voice data is encapsulated into packets that are sent over the network. The amount of data required to store a voice stream is dependent upon the CODEC used to encode the data. The CAD software can support both the G.711 and G.729 CODEC.

The voice data itself is transmitted over the network using the Real-Time Transport Protocol (RTP). The RTP protocol supports the idea of *silence suppression*. When silence suppression is used, no voice packets are sent over the network if there is not sound. Otherwise, even packets that contain silence are sent. This lowers the average required bandwidth for a call. Although CAD supports silence suppression, the lower bandwidth requirements for silence suppression should not be used when provisioning the network because the worst case scenario would be where there is not silence in the call, requiring the full call bandwidth as if silence suppression was not enabled.

When calculating bandwidth for an IP call, you must use the size of the RTP packet plus the additional overhead of the networking protocols used to transport the RTP data through the network.

For example, G.711 packets carrying 20 ms of speech data require 64 kbps (kilobytes per second) of network bandwidth per stream. These packets are encapsulated by four layers of networking protocols (RTP, UDP, IP, and Ethernet). Each of these protocols adds its own header information to the G.711 data. As a result, the G.711 data, once packed into an Ethernet frame, requires 87.2 kbps of bandwidth per data stream as it travels over the network. Since an IP phone call consists of two voice streams, in this example, a call would require 174.4 kbps.

The amount of voice data in a single packet also influences the size of the packet and bandwidth. The example above used packets containing 20 milliseconds of speech for its calculations, but this value can be changed in the Unified CM configuration for each supported CODEC. Configuring packets to contain more speech information reduces the number of packets sent over the network and reduces the bandwidth since there are fewer packets containing the additional networking headers, but the packet sizes increase. [Table 7-1](#) shows the bandwidth required for a phone call for the different combinations of CODEC and amount of speech per packet.

Table 7-1 Per-Call Packet Size Bandwidth Requirements

CODEC	Milliseconds of speech per packet	Bandwidth required (Kbps) for a call
G.711	10	220.8
G.711	20	174.4
G.711	30	159.0
G.729	10	108.8
G.729	20	62.4
G.729	30	47.0
G.729	40	39.2
G.729	50	34.6
G.729	60	31.4



Note

These calculations are based on G.711 using a sampling rate of 64 kbps speech encoding and the G.729 using 8kbps. This means one second of speech encoded into the G.711 CODEC requires 65,536 bits (or 8,192 bytes) to represent one second of sound.

For full-duplex connections, the bandwidth speed applies to both incoming and outgoing traffic. (For instance, for a 100-Mbps connection, there is 100 Mbps of upload bandwidth and 100 Mbps of download bandwidth.) Therefore, an IP phone call consumes the bandwidth equivalent of a single stream of data. In this scenario, a G.711 IP phone call with no silence suppression and containing 20 milliseconds of speech per packet requires 87.2 kbps (174.4 / 2) of the available bandwidth.

Table 7-2 and Table 7-3 display the percentage of total bandwidth available, based on the network connection, that is required for simultaneous monitoring sessions handled by a VoIP provider.

The following notes apply to the bandwidth requirements shown in Table 8-8 and Table 8-9:

- The bandwidth values are calculated based on the best speed of the indicated connections. A connection's true speed can differ from the maximum stated due to various factors.
- The bandwidth requirements are based on upload speed. Download speed affects only the incoming stream for the IP phone call.
- The values are based upon each voice packet containing 20 milliseconds of speech.
- The number of bytes in each packet include the entire Ethernet encapsulation.
- The data represents the CODECs without silence suppression. With silence suppression, the amount of bandwidth used may be lower.
- The data shown does not address the quality of the speech of the monitored call. If the bandwidth requirements approach the total bandwidth available and other applications must share access to the network, latency (packet delay) of the voice packets can affect the quality of the monitored speech. However, latency does not affect the quality of recorded speech.
- The data represents only the bandwidth required for monitoring and recording. It does not include the bandwidth requirements for other Cisco Agent Desktop modules as outlined in other sections of this document.

Table 7-2 Available Upload Bandwidth Percentage for Simultaneous Monitoring Sessions with G.711 CODEC

Number of Simultaneous Monitoring Sessions	Percentage of Available Bandwidth Required (No Silence Suppression)							
	100 Mbps	10 Mbps	1.544 Mbps	640 kbps	256 kbps	128 kbps	64 kbps	56 kbps
Call only	0.1	0.9	5.6	13.6	34.1	68.1	Not supported (NS) ¹	
1	0.3	2.6	16.8	40.9	NS	NS	NS	NS
2	0.4	4.4	28.1	68.1	NS	NS	NS	NS
3	0.6	6.1	39.3	95.4	NS	NS	NS	NS
4	0.8	7.8	50.5	NS	NS	NS	NS	NS
5	1.0	9.6	61.7	NS	NS	NS	NS	NS
6	1.1	11.3	72.9	NS	NS	NS	NS	NS
7	1.3	13.1	84.2	NS	NS	NS	NS	NS
8	1.5	14.8	95.4	NS	NS	NS	NS	NS
9	1.7	16.6	NS	NS	NS	NS	NS	NS
10	1.8	18.3	NS	NS	NS	NS	NS	NS

1. The bandwidth of the connection is not large enough to support the number of simultaneous monitoring sessions.

Table 7-3 Available Upload Bandwidth Percentage for Simultaneous Monitoring Sessions with G.729 CODEC

Number of Simultaneous Monitoring Sessions	Percentage of Available Bandwidth Required (No Silence Suppression)							
	100 Mbps	10 Mbps	1.544 Mbps	640 kbps	256 kbps	128 kbps	64 kbps	56 kbps
Call only	0.0	0.3	2.0	4.9	12.2	24.4	48.8	55.7
1	0.1	0.9	6.0	14.6	36.6	73.1	Not supported (NS) ¹	
2	0.2	1.6	10.0	24.4	60.9	NS	NS	NS
3	0.2	2.2	14.1	34.1	85.3	NS	NS	NS
4	0.3	2.8	18.1	43.9	NS	NS	NS	NS
5	0.3	3.4	22.1	53.6	NS	NS	NS	NS
6	0.4	4.1	26.1	63.4	NS	NS	NS	NS
7	0.5	4.7	30.1	73.1	NS	NS	NS	NS
8	0.5	5.3	34.1	82.9	NS	NS	NS	NS
9	0.6	5.9	38.1	92.6	NS	NS	NS	NS
10	0.7	6.6	42.2	NS	NS	NS	NS	NS

1. The bandwidth of the connection is not large enough to support the number of simultaneous monitoring sessions.

Bandwidth Requirements for VoIP Monitor Service

Although the bandwidth requirements are the same between the VoIP Monitor service and the Desktop Monitor service, the VoIP Monitor service can handle more simultaneous sessions (since it runs on the server). [Table 7-4](#) and [Table 7-5](#) expand upon the [Table 7-2](#) and [Table 7-3](#) by increasing the number of simultaneous sessions.

Table 7-4 Available Upload Bandwidth Percentage for Simultaneous Monitoring Sessions with G.711 CODEC

Number of Simultaneous Monitoring Sessions	Percentage of Available Bandwidth Required (No Silence Suppression)		
	100 Mbps	10 Mbps	1.544 Mbps
1	0.3	2.6	16.8
5	1.0	9.6	61.7
10	1.8	18.3	Not supported (NS) ¹
15	2.6	26.2	NS
20	3.5	34.9	NS
25	4.4	43.6	NS
30	5.2	52.3	NS
35	6.1	61.0	NS
40	7.0	69.8	NS
45	7.8	78.5	NS
50	8.7	87.2	NS

1. The bandwidth of the connection is not large enough to support the number of simultaneous monitoring sessions.

Table 7-5 Available Upload Bandwidth Percentage for Simultaneous Monitoring Sessions with G.711 CODEC

Number of Simultaneous Monitoring Sessions	Percentage of Available Bandwidth Required (No Silence Suppression)		
	100 Mbps	10 Mbps	1.544 Mbps
1	0.1	0.9	6.0
5	0.3	3.4	22.1
10	0.7	6.6	42.2
15	0.9	9.4	60.2
20	1.2	12.5	80.3
25	1.6	15.6	Not supported (NS) ¹
30	1.9	18.7	NS
35	2.2	21.8	NS
40	2.5	25.0	NS
45	2.8	28.1	NS
50	3.1	31.2	NS

1. The bandwidth of the connection is not large enough to support the number of simultaneous monitoring sessions.

CAD Desktop Applications Bandwidth Usage

The CAD desktop applications include the following:

- Cisco Agent Desktop
- Cisco Supervisor Desktop
- Cisco Desktop Administrator

These applications also require a certain amount of bandwidth, although far less than the Desktop Monitor service. In addition, the type of communication across the network is bursty. In general, bandwidth usage is low when the agents are not performing any actions. When features or actions are requested, the bandwidth increases for the time it takes to perform the action, which is usually less than one second, then drop down to the steady state level. From a provisioning standpoint, one must determine the probability of all the CAD agents performing a particular action at the same time. It might be more helpful to characterize the call center and determine the maximum number of simultaneous actions (in the worst case) to determine instantaneous bandwidth requirements, then determine what amount of delay is tolerable for a percentage of the requested actions.

For example, the raw bandwidth requirement for 300 CAD agents logging in simultaneously is about 4.5 Kilobytes/second and the login time is about 9 seconds (with no network delay) for each agent. If the WAN link did not have this much bandwidth, logins would take longer as packets were queued before being sent and received. If this caused the login attempts to take twice as long (18 seconds), would this delay be acceptable? If not, more bandwidth should be provisioned.

Each of these applications communicates with the base CAD services running on server machines. In addition, the agent desktop application communicates with the CTI server for call control actions and state changes. [Table 7-6](#) displays the types of messaging for each application.

Table 7-6 *Messaging Type By CAD Desktop Application*

Application Name	Message types
Cisco Agent Desktop	Login/Logoff Agent state changes Call control Call status Information Desktop Monitoring/Recording Chat messages Team Performance messages Report generation Real-time data refresh
Cisco Supervisor Desktop	Login/Logoff Agent state updates Call status updates Report generation Silent Monitoring Call Recording Call Playback Chat messages Team Performance messages Real-time data refresh
Cisco Desktop Administrator	Configuration information retrieval and storage Configuration data refresh

Cisco Agent Desktop Bandwidth Usage

CAD agents are able to login and logoff their agents, change their agent state, handle calls, and send reporting information to the base servers. The bandwidth requirements for these activities are fairly small but can add up when many agents are considered.

[Table 7-7](#) displays the average bandwidth requirements for different numbers of agents. This information is derived from bandwidth testing and extrapolation of bandwidth data. Since there are many variables that can affect bandwidth, a configuration that resulted in higher bandwidth usage was chosen to provide near worst-case scenarios. If the agent's WAN link meets or exceeds the bandwidth requirements shown in this table, Cisco Agent Desktop will be able to run without delays in message passing.

The configuration parameters that affect bandwidth and apply to tables 8-13 and 8-14 are shown below.

- Number of skills per agent: 10
- Number of agents per team: 20
- Number of teams: 50
- Number of agent state changes per agent per hour: 10 (does not count state changes due to handling calls)
- Calls per agent per hour: 60
- Team Performance Messages per team per hour: 8
- Chat messages sent/received per hour: 20
- Average chat message size (in bytes): 40
- Number of calls recorded per hour: 0

**Note**

The bandwidth requirements shown do not include the bandwidth of the RTP streams for the call, recording, or monitoring session.

Table 7-7 Average Bandwidth Requirements For Cisco Agent Desktop

Number of agents	Average Download Bandwidth (Kilobytes/second)	Average Upload Bandwidth (Kilobytes/second)
1	0.03	0.05
10	0.2	0.3
50	1.1	1.5
100	2.2	3.0
150	3.3	4.5
200	4.4	6.0
250	5.5	7.0
300	6.6	9.0

Cisco Agent Desktop provides a bandwidth calculator that can be used with both Unified CCX and Unified CCE. Additional information about the Cisco Agent Desktop Bandwidth Calculator is available at <http://www.cisco.com/univercd/cc/td/doc/product/icm/bandcalc/index.htm>.

Cisco Supervisor Desktop Bandwidth Usage

A Cisco Supervisor Desktop will receive events for all the agent's of the team that the supervisor is logged into. This information includes state changes, call handling, login/logoff, and so on. The more agents, skills, and calls there are, the more data will be sent to supervisors. In addition, particular reports are automatically refreshed periodically to provide real-time data while the supervisor is viewing the report. Refreshing reports requires additional bandwidth.

Table 7-8 uses the same basic configuration parameters used to determine the bandwidth numbers in Table 7-7, with the following differences:

- The calculations are based on 1 supervisor per 10 agents
- The Team Agent Statistics Report is viewed
- The Team Skill Statistics Report is viewed

Table 7-8 Bandwidth Requirements For Cisco Supervisor Desktop

Number of agents	Average Download Bandwidth (Kilobytes/second)	Average Upload Bandwidth (Kilobytes/second)
1	0.05	0.05
10	0.05	0.05
50	0.2	0.2
100	0.5	0.5
150	0.7	0.7
200	1.0	1.0

Table 7-8 *Bandwidth Requirements For Cisco Supervisor Desktop*

Number of agents	Average Download Bandwidth (Kilobytes/second)	Average Upload Bandwidth (Kilobytes/second)
250	1.2	1.2
300	1.4	1.5

Cisco Desktop Administrator Bandwidth Usage

The bandwidth requirements for CDA are very small and are only seen when an administrator is actively changing configurations. In general, the bandwidth used by CDA is negligible from a provisioning standpoint.

Remote Agent Traffic Profile

Unified CCX signaling represents only a very small portion of control traffic (Unified CM CTI and ICD subsystems) in the network. For information on TCP ports and Differentiated Services Code Point (DSCP) marking for Unified CCX ICD and CTI traffic, see the sections on [Serviceability and Security, page 7-11](#), and [QoS and Call Admission Control, page 7-12](#).

Bandwidth estimation becomes an issue when voice is included in the calculation. Because WAN links are usually the lowest-speed circuits in an IP Telephony network, particular attention must be given to reducing packet loss, delay, and jitter where voice traffic is sent across these links. G.729 is the preferred codec for use over the WAN because the G.729 method for sampling audio introduces the least latency (only 30 milliseconds) in addition to any other delays caused by the network.

Where voice is included in bandwidth, system architects should consider the following factors:

- Total delay budget for latency (taking into account WAN latency, serialization delays for any local area network traversed, and any forwarding latency present in the network devices). The generally agreed-upon limit for total (one-way) latency for applications in a network is 150 milliseconds.
- Impact of delays inherent in the applications themselves. 25 seconds is the initial Unified CCX agent login setup time with no WAN delay. The overall time to log in agents and base delay adds approximately 30 seconds of delay per 30 milliseconds of WAN delay.
- Impact of routing protocols. For example, Enhanced Interior Gateway Routing Protocol (EIGRP) uses quick convergence times and conservative use of bandwidth. EIGRP convergence also has a negligible impact on call processing and Unified CCX agent logins.

Use Table 6-9 to estimate the number of Unified CCX agents that can be maintained across the WAN (with IP Telephony QoS enabled). These numbers are derived from testing where an entire call session to Unified CCX agents, including G.729 RTP streams, is sent across the WAN. Approximately 30% of bandwidth is provisioned for voice. Voice drops are more of an issue when you are running RTP in conjunction with Cisco Agent Desktop and other background traffic across the WAN. These voice drops might occur with a specific number of agents at a certain link speed, and those possible scenarios are denoted by the entry N/A (not applicable) in Table 6-9.

Table 7-9 *Remote Agents Supported by Cisco Unified CCX Across a WAN Link*

Frame Relay	128 KB	256 KB	512 KB	768 KB	T1
G.729	3	7	15	25	38
G. 711	N/A	N/A	N/A	N/A	14

In remote agent deployments, QoS mechanisms should be used to optimize WAN bandwidth utilization. Advanced queuing and scheduling techniques should be used in distribution and core areas as well. For information on QoS traffic classification, see [QoS and Call Admission Control, page 7-12](#). For provisioning guidelines for centralized call processing deployments, refer to the *Cisco IP Telephony Solution Reference Network Design* documentation, available online at www.cisco.com/go/srnd.

Serviceability and Security


Security can be implemented on many levels. Applications security is clearly dependent upon security implemented at the infrastructure level. For more details on security at the network infrastructure level, refer to security design considerations in the *Cisco IP Telephony Solution Reference Network Design* documentation, available online at

<http://www.cisco.com/warp/public/779/largeent/it/ese/srnd.html>

Corporate Data Access

Aside from call routing, Unified CCX or Unified IP IVR scripts often process enterprise data from existing corporate data stores such as a database or a corporate directory server for functions such as account authorization and order status. Often, these data stores already exist and share data with other enterprise applications. [Figure 7-2](#) shows an example of a network where voice and data components reside in separate VLANs and are separated by a firewall.

Figure 7-2 Unified CCX Accessing Data Stores

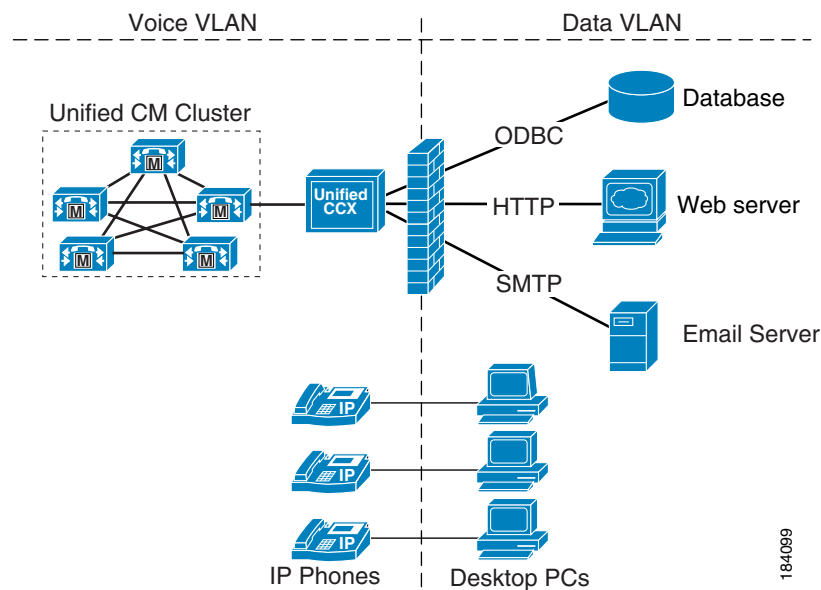

Unified CCX can communicate with these external sources through its subsystems, provided Network Address Translation (NAT) is not used.

Port Utilization for Product Revisions

For a list of the TCP and UCP ports used by Cisco CRS 5.0(1), including Unified IP IVR and Unified CCX, see the Port Utilization Guide, which is accessible from the following web page:

http://www.cisco.com/en/US/partner/products/sw/custcosw/ps1846/products_installation_and_configuration_guides_list.html

Ping, NAT, PAT, and Reverse DNS Lookups

The following configurations and information are required for the CAD software to work properly.

The Cisco Agent Desktop application uses the TCP Ping command to verify that it can communicate with the active VoIP servers. This is done even if no agents are configured to use a VoIP Monitor service for the silent monitoring feature. If Ping is disabled on the machine running a CAD VoIP Monitor Server, the silent monitoring feature will not work properly.

There are certain CAD modules that rely upon reverse DNS lookups. If this feature is turned off on the machines running CAD services, there will be a loss of some functionality and errors will be generated and logged.

Network Address Translation (NAT) is only supported between the Cisco Agent Desktop and the CRS servers. Port Address Translation (PAT) is not supported.

QoS and Call Admission Control

Quality of Service (QoS) becomes an issue when more voice and application-related traffic is added to an already growing amount of data traffic on your network. Accordingly, Unified CCX and time-sensitive traffic such as voice need higher QoS guarantees than less time-sensitive traffic such as file transfers or emails (particularly if you are using a converged network).

QoS should be used to assign different qualities to data streams to preserve Unified CCX mission-critical and voice traffic. The following are some examples of available QoS mechanisms:

- Packet classification and usage policies applied at the edge of the network, such as Policy Based Routing (PBR) and Committed Access Rate (CAR).
- End-to-end queuing mechanisms, such as Low Latency Queuing (LLQ). Because voice is susceptible to increased latency and jitter on low-speed links, Link Fragmentation and Interleaving (LFI) can also be used to reduce delay and jitter by subdividing large datagrams and interleaving low-delay traffic with the resulting smaller packets.
- Scheduling mechanisms such as Traffic Shaping to optimize bandwidth utilization on output links.

Classifying Unified CCX and Application-Related Traffic

Table 7-10 and the following section list TCP ports and DSCP markings for use in prioritizing Unified CCX and Unified CM mission-critical CTI traffic. The performance criteria used in classifying such traffic should include:

- No packet drops on the outbound or inbound interface of the WAN edge router
- Voice (G.729) loss under 1%
- One-way voice delay under 150 msec

A detailed description of QoS is not within the scope of this design guide. For QoS design recommendations, refer to the Quality of Service design guide available online at <http://www.cisco.com/go/srnd>

Table 7-10 QoS Classifications for Unified CCX Interfaces

Unified CCX Component	Interface / Protocol	Port	DSCP Marking
CTI messaging between Unified CCX Unified CM Telephony subsystem and Unified CM (both directions)	CTIQBE	TCP 2748	CS3
HTTP (CRS administration page and IPPA interface)	HTTP	TCP 6293	AF21
AXL to Unified CM for User configuration and authentication (SSL)	SOAP AXL	TCP 8433	AF21
E-mail	SMTP	TCP 25	CS0
Messaging data between Unified CCX and Cisco Agent Desktop	CTI	TCP 42027	CS3

QoS Considerations for CAD software

The most important network traffic for quality of service consideration in the CAD software is the voice streams sent between VoIP requestors and providers. The processes that send and receive these voice streams have been set to have higher priorities than other processing threads. This helps assure that there will be no delays in processing these voice streams. However, The voice streams themselves contain no QoS markings. These markings are stripped off when the voice streams are captured by the VoIP provider's software. The networking components used to send these data streams (switches, routers, gateways) should be configured with the appropriate QoS settings to ensure the delivery of these voice streams to meet the intended QoS requirements.

CAC and RSVP

Unified CM supports Resource-Reservation Protocol (RSVP) between endpoints within a cluster. RSVP is a protocol used for Call Admission Control (CAC) and is used by the routers in the network to reserve bandwidth for calls. The bandwidth being controlled is only for the voice streams, call signalling traffic is not part of CAC.

Before RSVP, each Unified CM cluster maintained its own calculation of how many active calls were traversing between locations in order to calculate bandwidth usage. If more than one Unified CM cluster shared the same link, bandwidth would have to be carved out and dedicated for each cluster, and this led to inefficient use of available bandwidth. RSVP also enables customers to deploy complex network topology while Location-based CAC is limited to a hub-and-spoke type of topology.

RSVP solves this problem by tracing the path between two RSVP Agents that reside on the same LAN and the IP Phones. A software MTP or transcoder resource that runs on Cisco IOS routers can be RSVP Agents. The RSVP Agents are controlled by Unified CM and are inserted into the media stream between the two IP phones when a call is made. The RSVP Agent of the originating IP Phone will traverse the network to the destination IP Phone's RSVP Agent, and reserve bandwidth. Since the network routers (and not Unified CM) are keeping track of bandwidth usage, multiple phone calls can traverse the same RSVP controlled link even if the calls are controlled by multiple Unified CMs.


For more information, see the RSVP chapter in *Cisco Unified Communications Solution Reference Network Design (SRND)*.

Unified CCX selects a call center agent independent of the mechanism, using either RSVP or Location-based CAC; that is, Unified CCX routes a call to an available agent even though the agent phone might not be able to receive the call due to lack of bandwidth. Thus, proper sizing of bandwidth between sites is very important.

For any call transfer, there are moments when two calls are active. If any of the active calls traverses between sites, then CAC is used. Even when the original call is placed on hold during a transfer, that call still takes up the same amount of bandwidth just like an active call.


In [Figure 7-3](#) and [Figure 7-4](#), the voice gateway and agents are at a remote site, while the Unified CCX server is at a data center site. A call from PSTN reaches the voice gateway at the remote site and connects to CRS at the data center. This takes one call bandwidth over the WAN link, which is represented by the caller stream. Once an agent is available and selected at the remote site, CRS transfers the call to the agent.

Figure 7-3 Call from PSTN to Unified CCX Server to Agent

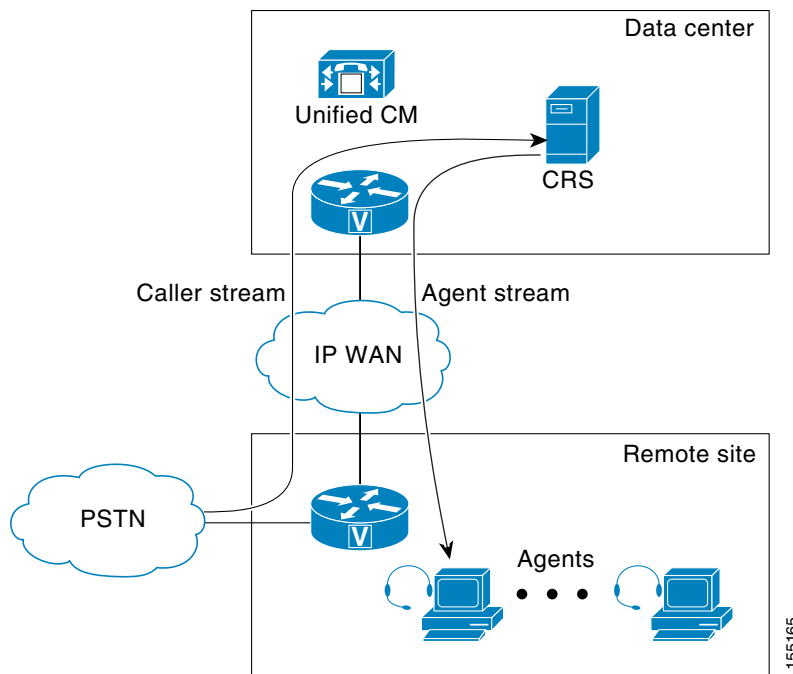

During the transfer, before the agent picks up the call, there is another call setup between CRS and the agent phone. It takes up another call bandwidth over the WAN, and is represented by the agent stream in [Figure 6-3](#). Once the agent picks up the call, the voice traffic is between the voice gateway and the agent phone, which are both at the remote site. At that time, no bandwidth is reserved over the WAN; see [Figure 6-4](#). This example shows how call bandwidth is reserved in a contact center call that is eventually routed to an agent. Depending on where the voice gateway, the agents, and the Unified CCX server are located, proper WAN bandwidth should be provisioned.

Figure 7-4 After Agent Picks Up Call

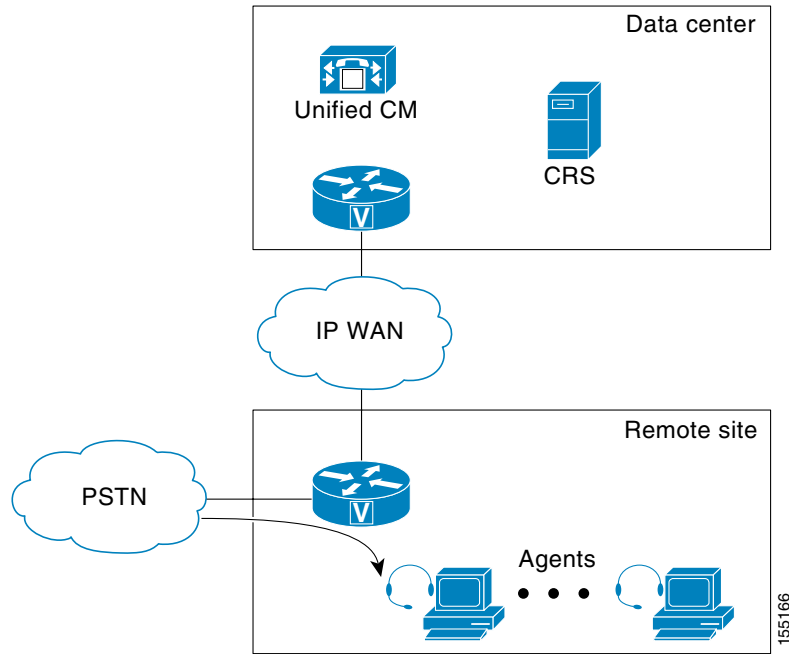



APPENDIX A

Server Capacities and Limits

Table A-1 provides a list of capacity limits when deploying CRS.

Table A-1 Capacity Limits

	MCS-7845, Unified Communications Manager Deployment	All Supported Servers, Unified CME Deployment
Maximum number of inbound agents	300	50
Maximum number of outbound agents	300	Not supported
Maximum number of supervisors	32	10
Maximum number of IVR ports	300	50

This table shows absolute limits. Reaching the limits for multiple criteria in a specific configuration might not be possible. Use the Configuration and Ordering tool to see the actual limits for your configuration and to validate your configuration. This tool is available at:

http://www.cisco.com/en/US/partner/products/sw/custcosw/ps1846/prod_how_to_order.html

The Configuration and Ordering tool also contains tables with more detailed server capacities and limits. Use the numbers in this tool as the final authority on capacities and limits.

The Configuration and Ordering Tool is available to Cisco partners only. If you are not a Cisco partner, you can find some capacity limits in *Getting Started with Cisco Unified Contact Center Express*. For more details and to validate your configuration, contact your Cisco sales engineer or Cisco partner to access this tool.



APPENDIX **B**

Voice Over IP Monitoring

Monitoring and recording of agent calls can be supported by two different methods in this release of Unified CCX:

- Via the traditional VoIP monitor Service: captures packets directly from an IP network switch via the switch's Switched Port Analyzer (SPAN) configuration. Design considerations for the traditional SPAN-based VoIP monitor Service are provided at the end of this appendix (see [Design Considerations for SPAN-Based Services, page B-1](#)).
- Via the Cisco Agent Desktop, also known as Endpoint monitoring or the Desktop Monitoring Service: The agent's IP phone repeats RTP packets to the agent's PC. When a supervisor wants to monitor/record the agent, the supervisor application sends a message to the agent desktop to forward the RTP packets to the supervisor, who can then monitor the agent/caller conversation via the sound card on his or her PC. This method requires the agent to use the Cisco Agent Desktop (not the IP Phone Agent) and a phone that supports desktop monitoring. For a list of phones that support desktop monitoring, refer to *Cisco CRS Software and Hardware Compatibility Guide*, which is available at:

http://www.cisco.com/en/US/products/sw/custcosw/ps1846/products_device_support_tables_list.html

Design considerations for the new Desktop (Endpoint) Monitoring Service are provided in [Chapter 7, "Bandwidth, Security, and QoS Considerations."](#)

Design Considerations for SPAN-Based Services

The traditional SPAN-based VoIP service allows the IP traffic from one or more ports to be copied and sent to a single destination port.

Be aware of these factors when configuring traditional SPAN-based VoIP monitor services:

- If you are using a second network card in the VoIP monitor, make sure that the network card used by the CRS Engine has a higher binding order than the one used by VoIP monitor services. Refer to *Cisco CAD Installation Guide* for detailed information about setting network card binding order.
- The following switches do NOT support SPAN sessions: 1700, 2100, 2800, 2948G-L3, 4840G
- Local SPANs (LSPANs) are SPANs where all the source ports and the destination port are physically located on the same switch. Remote SPANs (RSPANs) can include source ports that are physically located on another switch. The following switches do NOT support RSPAN (although they may be

an intermediate switch in an RSPAN configuration): 1200, 1900, 2820, 2900, 2900XL, 2926GS, 2926F, 2926T, 2948G, 2950, 2980G, 3000, 3100, 3200, 3500XL, 3524-PWR XL, 3508GL XL, 3550, 5000, 5002, 5500, 5505, 5509

- Some switches do not allow the destination port of a SPAN configuration to act as a normal network connection. The only traffic that can flow through this port is the traffic copied from the SPAN source ports; this requires the computer running the VoIP monitor service to have two network connections (NICs) to function properly. The following switches do NOT support normal network traffic on SPAN destination ports: 2950, 3000, 3100, 3200, 3550
- In some configurations, the VoIP Monitor service can receive duplicate voice packets, which causes poor speech quality. To avoid this, only Ingress packets to a port are sent to the VoIP monitor service. This is a setting for SPAN, which the following switches do NOT support: 1900, 2820, 2900, 2900XL, 3000, 3100, 3200, 3500XL
- In some switches, SPAN cannot use VLANs as sources, which is known as VSPAN. In that case, SPAN must designate individual ports to use for monitoring. The following switches do NOT support VSPAN: 1200, 1900, 2820, 2900XL, 2950, 3000, 3100, 3200, 3500XL, 3524-PWR XL

For more information, refer to the *Voice Over IP Monitoring Best Practices Deployment Guide*.

Table B-1 shows the limits of the number of SPAN and RSPAN sessions that can exist on a switch:

Table B-1 SPAN AND RSPAN Switch-Based Session Limits

Switch Model	Maximum SPAN Sessions Allowed
1200	1
1900	1
2820	1
2900	1
2900XL	1
2926GS	5
2926GL	5
2926T	5
2926F	5
2948G	5
2950	1
2980G	5
3000	1
3100	1
3200	1
3500XL	1
3524-PWR XL	1
3508GL XL	1
3550	2
3750	2
4003	5

Table B-1 SPAN AND RSPAN Switch-Based Session Limits (continued)

Switch Model	Maximum SPAN Sessions Allowed
4006	5
2912G	5
5000	5
5002	5
5500	5
5505	5
5509	5
6006	30
6009	30
6506	30
6509	30
6513	30



APPENDIX **C**

Cisco Unified Contact Center Express Integration with LDAP Server

Unified CCX 4.5 and 5.0 remove the direct dependency on the Lightweight Directory Access Protocol (LDAP) directory on Cisco Unified Communications Manager (Unified CM). Cisco CRS configurations are no longer stored in the LDAP directory; instead, Unified CCX 5.0 moves the configuration that used to be stored in the LDAP directory to a local datastore or repository on the Cisco CRS server. Moreover, CRS accesses the user information from Unified CM via the Unified CM Administrative XML Layer (AXL) API. User authentication is also done via the Unified CM AXL API.

Unified CCX supports Microsoft Active Directory (AD) and Netscape Directory (ND). However, since the integration is done on the Unified CM LDAP configuration, the user information is downloaded from the LDAP directory to the Unified CM local database, which in turn is synched down to Cisco CRS periodically via the AXL API. User authentication requests are sent to Unified CM via the AXL API and then relayed to the external LDAP directory service if configured.

Because user authentication requires access to a user database in the LDAP server, if the LDAP server is down or unavailable, you cannot access the CRS Administration web interface and agents cannot log in. Thus, install a redundant LDAP server to provide high availability. Unified CM allows you to configure multiple LDAP servers to provide redundancy.

Cisco CRS-specific users for Unified CM Telephony and RmCm subsystems are now created under the Cisco Unified Communications Manager Application User Group. Thus, these users are under the control of Unified CM and can be created by Cisco CRS via the AXL API. This allows the CRS auto provisioning feature to work seamlessly without requiring manual access the LDAP directory configuration tool.

In scenarios where multiple Cisco CRS systems are configured on the same Unified CM cluster, each Cisco CRS system has visibility to all Resources on the Unified CM cluster. Any user who has been assigned an ICD extension in Unified CM will be listed as a Resource in CRS Administration for each Cisco CRS system. Since a Resource can only be associated with one CRS system, this requires that the Administrator be aware of which resources are associated with each system. The Administrator can mitigate the confusion by having a unique naming convention for Resources associated with a particular Cisco CRS system.

Since Cisco CRS synchronizes with the Unified CM database for user information every 10 minutes, a Unified CM cluster with multiple Cisco CRS systems will take longer to synchronize and generate more traffic that could impact the network and server performance.

For more information about LDAP integration on Unified CM, refer to *Cisco Unified Communications Solution Reference Network Design (SRND)*.

For more information about directory access and best practices, please refer to the directory access and integration topic in *Cisco Unified Communications Solution Reference Network Design (SRND)* at:

www.cisco.com/go/srnd



INDEX

A

- A2Q bid assurance [6-1](#)
- accessing corporate data stores [7-11](#)
- Adherence service [2-19](#)
- Administrative XML Layer
 - See* AXL
- agents
 - service level goal [5-2](#)
 - traffic profile [7-1](#)
- AHT [5-2](#)
- architecture, for Cisco Unified Communications Manager Express (Unified CME) deployment [3-2](#)
- ASR
 - resource allocation [2-22](#)
 - servers [2-22](#)
- audience for this guide [vii](#)
- Automatic Call Distribution (ACD) [1-5](#)
- Automatic Speech Recognition (ASR) [2-22](#)
- average handle time (AHT) [5-2](#)

B

- bandwidth
 - by codec [7-5](#)
 - estimating [7-1](#)
 - for desktop applications [7-7](#)
 - for VoIP Monitor Service [7-6](#)
 - IP Phone call usage [7-4](#)
 - per-call packet size requirements [7-4](#)
 - silent monitoring usage [7-2](#)
- Basic ACD [3-5](#)
- BHCA [5-2](#)

- bid assurance, A2Q requirements [6-1](#)
- blocked calls [5-2](#)
- Busy Hour Call Attempts (BHCA) [5-2](#)

C

- CAC [7-12](#)
- call admission control (CAC) [7-12](#)
- call blockage [5-2](#)
- call center sizing
 - considerations [5-1](#)
 - principal steps and design considerations [5-4](#)
- call flow example [2-3](#)
- call recording, disk space requirement [4-8](#)
- Campaign Manager [2-13](#)
- capacity, of Unified CCX [A-1](#)
- Catalyst switches, max SPAN sessions allowed [B-2](#)
- Cisco Agent Desktop [1-13](#)
- Cisco Desktop Services [1-13](#)
- Cisco Interaction Manager [2-16](#)
- Cisco IP IVR [vii](#)
- Cisco QM [vii](#)
- Cisco Supervisor Desktop [1-18](#)
- Cisco TelePresence Virtual Agent [2-11](#)
- Cisco Unified CCX Outbound Preview Dialer (Outbound)
 - features [1-21](#)
 - licensed components [1-20](#)
 - overview [1-20, 2-12](#)
- Cisco Unified Communications Manager
 - deploying with CRS [4-2](#)
- Cisco Unified Communications Manager cluster, deploying with CRS [4-8](#)

Cisco Unified Communications Manager Express (Unified CME)

- architecture [3-2](#)
- Basic ACD [3-5](#)
- call processing [3-2](#)
- CRS components for [3-4](#)
- fault tolerance [3-5](#)
- functionality [3-2](#)
- monitoring and recording [3-4](#)
- overview [3-1](#)

Cisco Unified Email Interaction Manager (EIM)

- features [1-22](#)
- licensed components [1-21](#)
- overview [1-21](#)

Cisco Unified Preview Outbound Dialer Express (Outbound)

- components [2-13](#)
- deployment guidelines [2-16](#)
- process for outbound call [2-13](#)
- scalability [2-14](#)

Cisco Unified Preview Outbound Dialer Express (Unified OUTDX)

- call flow [2-14](#)
- high availability [2-14](#)

Cisco Unified Web Interaction Manager (EIM)

- overview [1-22](#)

Cisco Unified Web Interaction Manager (WIM)

- features [1-23](#)
- licensed components [1-22](#)

Cisco Unified Wireless IP Phone 7920 [2-9](#)classification of traffic [7-12](#)

codec

- G.711 [7-4](#)
- G.729 [7-4](#)

cold standby [2-28](#)Committed Access Rate (CAR) [7-12](#)compatibility [2-29](#)Computer Telephony Integration (CTI) [1-11](#)Config Datastore (CDS) [2-13](#)Configuration and Ordering Tool [5-5](#)contact center, representation [7-3](#)corporate data stores [7-11](#)CRS clusters, integrating with Unified Communications Manager cluster [4-8](#)CRS Engine, functions [2-5](#)CSD Record Viewer [2-8](#)CTI Server [2-13](#)CTI service [2-21](#)**D**database redundancy [2-26](#)data store access [7-11](#)

data stores

- agent [2-6](#)
- configuration [2-6](#)
- historical [2-6](#)
- repository [2-6](#)

deploying CRS, guidelines [4-5](#)

deployment model

- components in [4-2](#)
- design considerations [4-7](#)
- overview [4-1](#)

Single-Server Non-High Availability Deployment Model—Cisco Unified Communications Manager Integration [4-6](#)

Single-Server Non-High Availability Deployment Model—Unified Communications Manager Express Integration [4-7](#)

Two-Server High Availability Deployment Model—Unified Communications Manager Integration [4-6](#)

Unified CME [4-3](#)

with Unified Communications Manager [4-2](#)

desktops

- Cisco Agent Desktop [2-5](#)
- Cisco Supervisor Desktop [2-5](#)

destination ports, SPAN configuration [B-2](#)Dialer [2-13](#)

directories

- DC [2-3](#)

Microsoft Active Directory [2-3](#)
 Netscape iPlanet [2-3](#)
 directory services, Netscape Directory [C-1](#)
 disaster recovery [2-28](#)
 disk space use [4-8](#)
 DNS lookups [7-12](#)
 DSCP markings [7-12](#)

E

end-to-end queuing [7-12](#)
 Erlang calculators [5-3, 5-5](#)
 examples
 Sizing Unified CCX Standard Application with 25 Agents [5-5](#)
 Standard Resource Calculator Basic Example [5-6](#)
 Standard Resource Calculator Call Treatment Example [5-8](#)

F

fault tolerance [2-25](#)
 Cisco Unified Communications Manager Express (Unified CME) [3-5](#)
 CRS Engine [2-25](#)

G

grade of service [5-2](#)

H

high availability [2-25, 2-27, 2-28, 4-7](#)
 Historical Reporting [1-12](#)
 historical reports [2-5](#)

I

Inbound Voice
 components [1-5](#)
 licensed components [1-4](#)
 overview [1-3](#)
 interactive voice response (IVR) [1-9](#)
 interfaces [7-13](#)
 IPPA [1-17](#)
 IP Phone Agent (IPPA)
 SPAN port server [2-8](#)
 IVR
 average port usage time [5-2](#)
 ports [5-2, 5-5](#)
 sizing ports [5-5](#)
 IVR ports [1-4](#)

J

JTAPI
 user [2-3](#)

L

LSPAN [B-1](#)

M

managing the Unified CCX system [2-5](#)
 Media Resource Control Protocol (MRCP) [2-22](#)
 monitoring
 desktop [2-7](#)
 monitoring and recording [3-4](#)
 monitoring and recording redundancy [2-27](#)
 Monitoring Server [2-6](#)

NNAT [7-12](#)Network Address Translation (NAT) [7-12](#)

NIC

 on VoIP monitor server [B-2](#) processing packets [2-7](#)

OOOC (Odysoft ODBC Collector) Service [2-20](#)

Ppackaging, of Unified CCX. [1-2](#)percent blockage [5-2](#)

performance criteria

 categories [6-2](#) effects of [6-2](#)Ping, used by CAD [7-12](#)Policy Based Routing (PBR) [7-12](#)Port Address Translation (PAT) [7-12](#)

ports

 gateway [5-1](#) interfaces [7-13](#) IVR [5-2](#) protocols [7-13](#) PSTN [5-1](#) queue [5-2](#) sizing [5-5](#) utilization [7-12](#)preliminary information [5-2](#)protocols [7-12, 7-13](#)

provisioning

(See sizing)

PSTN [5-1](#)

Q

QoS

 and Call Admission Control [7-12](#) classifications for Unified CCX interfaces [7-13](#) considerations for CAD [7-13](#)

Quality Management

 features [1-24](#) licensed components [1-23](#) overview [1-23, 2-20](#)

Quality of Service

See QoSQuality of Service (QoS) [7-12](#)queue ports [5-2](#)

Rreal-time reports [2-5](#)Recording Server [2-6](#)

redundancy

 database [2-26](#) monitoring and recording [2-27](#) overview [2-25](#)remote agent [7-1](#)Remote Agent Traffic Profile [7-1](#)remote supervisory monitoring [2-8](#)

reports

 historical [2-5](#) real-time [2-5](#)Resource Manager [2-13](#)resource requirements [5-5](#)RSPAN [B-1](#)RTP streams [2-7](#)

Sscope of this guide [vii](#)security [7-11](#)

servers

- sizing [6-1](#)

serviceability [7-11](#)

service level [5-2](#)

Session Initiation Protocol (SIP) [2-10](#)

silent monitoring

- bandwidth usage [7-2](#)
- providers [7-2](#)
- requestors [7-2](#)

Single-Server Non-High Availability Deployment Model—Cisco Unified Communications Manager Integration [4-6](#)

Single-Server Non-High Availability Deployment Model—Unified Communications Manager Express Integration [4-7](#)

SIP phones [2-10](#)

sizing

- call center [5-1](#)
- Configuration and Ordering Tool [5-5](#)
- document [5-2](#)
- example calculations [5-5](#)
- IVR ports [5-5](#)
- servers [6-1](#)
- Unified CCX server [6-1](#)

sizing tools

- Configuration & Ordering Tool [6-1](#)
- descriptions [6-1](#)

software components

- CRS Engine [2-5](#)
- Database [2-5](#)
- Monitoring [2-5](#)
- overview [2-5](#)
- Recording [2-5](#)

source ports, SPAN configuration [B-2](#)

SPAN [B-1](#)

- port monitor server [2-8](#)

Sync Server [2-19](#)

Sync service [2-21](#)

T

TCP ports [7-12](#)

terminology [5-1](#)

Text-to-Speech (TTS) [2-22](#)

traffic classification [7-12](#)

Traffic Shaping [7-12](#)

TTS

- resources [2-22](#)

Two-Server High Availability Deployment Model—Unified Communications Manager Integration [4-6](#)

U

Unified CCX

- capacity [A-1](#)
- Configuration and Ordering Tool [5-5](#)
- deployment model [4-1](#)
- interfaces [7-13](#)
- overview [1-1](#)
- packaging [1-2](#)
- protocols [7-13](#)
- sizing the server [6-1](#)
- solution architecture [2-1](#)

Unified CCX Gateway PG [2-22](#)

Unified CM

- sizing tool [6-2](#)
- system performance [6-2](#)

Unified CME

- deploying with CRS [4-3](#)

Unified CM Telephony subsystem [2-2](#)

Unified CM Telephony trigger [2-2](#)

Unified ICME software, integration with Unified CCX [2-22](#)

upgrading [2-28](#)

V

Voice over IP monitoring [B-1](#)

VSPAN [B-2](#)

W

Wireless Access Point (WAP) [2-9](#)

Workforce Management [2-18](#)

 features [1-25](#)

 licensed components [1-25](#)

 overview [1-25](#)

Workforce Optimization

 deployment guidelines [2-21](#)