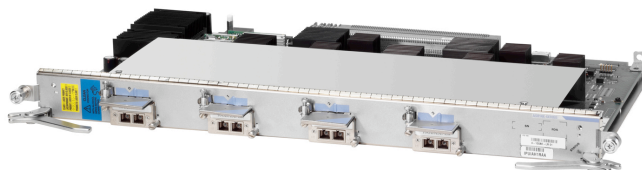


## Cisco CRS-1 Series 4 port 10 Gigabit Ethernet Interface Module

The Cisco® CRS-1 Carrier Routing System is the industry's first carrier router offering continuous system operation, unprecedented service flexibility, and system longevity. The Cisco CRS-1 is powered by Cisco IOS® XR Software—a unique self-healing, distributed operating system. As part of a video-enabled IP Next-Generation Network (NGN), the Cisco CRS-1 Series delivers continuous, always-on operation that easily scales to support the massive bandwidth requirements of visual networking experiences such as high-definition IPTV and Cisco TelePresence. These services demand a platform that delivers predictable forwarding performance and efficient, intelligent fabric-based multicast replication. The Cisco CRS-1 Series enables the Internet and NGNs to handle the approaching zettabyte era of carrier IP communications while protecting network investments for decades to come.

### Product Overview

The Cisco CRS-1 Series 4-Port 10 Gigabit Ethernet Interface Module (Figure 1) provides four line-rate, IEEE 802.3-compliant 10 Gigabit Ethernet interfaces. Physical connections can be made using modular XENPAK pluggable optics. DWDM wavelengths are supported with the proper XENPAK, enabling the Cisco CRS-1 Series router to be directly connected into an optical filter module, such as the Cisco ONS 15454 reconfigurable optical add-drop multiplexer (ROADM). This allows service providers to increase efficiencies, improve reliability, and reduce operational and capital costs through elimination of expensive and bulky optical transponder equipment, even as video-based applications rapidly increase traffic in their DWDM networks.

**Figure 1.** Cisco CRS-1 Series 4-Port 10 Gigabit Ethernet Interface Module

### Features and Benefits

- Four line-rate 10 Gigabit Ethernet full duplex interfaces
- Per-port flexibility for optical reach – selected using the appropriate XENPAK pluggable optical modules
- Compatible with all Cisco CRS-1 Series chassis
- Supports in-use insertion and removal without the need to power down the chassis
- Simple configuration, monitoring, and maintenance

### Product Specifications

**Table 1.** Product Specifications

Feature	Description
<b>Chassis Compatibility</b>	Compatible with all Cisco CRS-1 chassis Requires one of the following forwarding engines: FP40, MSC, or MSC-B.
<b>Software Compatibility</b>	Cisco IOS XR Software Release 3.8.1 or later
<b>Port Density</b>	Four ports of 10 Gigabit Ethernet per card
<b>Ethernet</b>	Encapsulations: ARPA, IEEE 802.2/SAP, IEEE 802.3/SNAP IEEE 802.x flow control 802.1q VLAN support, jumbo frames IEEE 802.1p tagging Source/destination MAC accounting and VLAN accounting
<b>Reliability and Availability</b>	Online insertion and removal (OIR) without affecting system traffic Field-replaceable XENPAK optical modules
<b>Network Management</b>	Cisco IOS XR Software command-line interface (CLI) Simple Network Management Protocol (SNMP) Extensible Markup Language (XML) interface
<b>Physical Dimensions</b>	Occupies one PLIM slot Weight: 8.3 lb (3.8 kg) Height: 20.6 in. (52.2 cm) Depth: 11.2 in. (28.4 cm) Width: 1.8 in. (4.49 cm)

Feature	Description
Power	150W
Environmental Conditions	<p><b>Storage temperature:</b> –40 to 70°C (–40 to 158°F)</p> <p><b>Operating temperature:</b>  Normal: 5 to 40°C (41 to 104°F)  Short-term: –5 to 50°C (23 to 122°F)</p> <p><b>Relative Humidity:</b>  Normal: 5% to 85%  Short-term: 5% to 90% but not to exceed 0.024 kg water/kg of dry air</p> <p>Short-term refers to a period of not more than 96 consecutive hours and a total of not more than 15 days in 1 year. (This refers to a total of 360 hours in any given year, but no more than 15 occurrences during that 1-year period.)</p>

## Approvals and Compliance

**Table 2.** Compliance and Agency Approvals

Feature	Description
Safety Standards	<ul style="list-style-type: none"> <li>UL/CSA/IEC/EN 60950-1</li> <li>IEC/EN 60825 Laser Safety</li> <li>ACA TS001</li> <li>AS/NZS 60950</li> <li>FDA – Code of Federal Regulations Laser Safety</li> </ul>
EMI	<ul style="list-style-type: none"> <li>FCC Class A</li> <li>ICES 003 Class A</li> <li>AS/NZS 3548 Class A</li> <li>CISPR 22 (EN55022) Class A</li> <li>VCCI Class A</li> <li>BSMI Class A</li> <li>IEC/EN 61000-3-2: Power Line Harmonics</li> <li>IEC/EN 61000-3-3: Voltage Fluctuations and Flicker</li> </ul>
Immunity (Basic Standards)	<ul style="list-style-type: none"> <li>IEC/EN-61000-4-2: Electrostatic Discharge Immunity (8 kV Contact, 15 kV Air)</li> <li>IEC/EN-61000-4-3: Radiated Immunity (10 V/m)</li> <li>IEC/EN-61000-4-4: Electrical Fast Transient Immunity (2 kV Power, 1 kV Signal)</li> <li>IEC/EN-61000-4-5: Surge AC Port (4 kV CM, 2 kV DM)</li> <li>IEC/EN-61000-4-5: Signal Ports (1 kV)</li> <li>IEC/EN-61000-4-5: Surge DC Port (1 kV)</li> <li>IEC/EN-61000-4-6: Immunity to Conducted Disturbances (10 Vrms)</li> <li>IEC/EN-61000-4-8: Power Frequency Magnetic Field Immunity (30 A/m)</li> <li>IEC/EN-61000-4-11: Voltage DIPS, Short Interruptions, and Voltage Variations</li> </ul>
ETSI and EN	<ul style="list-style-type: none"> <li>EN300 386: Telecommunications Network Equipment (EMC)</li> <li>EN55022: Information Technology Equipment (Emissions)</li> <li>EN55024: Information Technology Equipment (Immunity)</li> <li>EN50082-1/EN-61000-6-1: Generic Immunity Standard</li> </ul>
Network Equipment Building Systems (NEBS)	<p>This product is designed to meet the following requirements (qualification in progress):</p> <ul style="list-style-type: none"> <li>SR-3580: NEBS Criteria Levels (Level 3)</li> <li>GR-1089-CORE: NEBS EMC and Safety</li> <li>GR-63-CORE: NEBS Physical Protection</li> </ul>

## Additional Specifications

**Table 3.** Additional Specifications

Parameter	DWDM 1530.33-1560.61 nm	Long Reach 1310 nm (LR+)	Extended Reach 1550 nm (ER+)
Connector Type	SC	SC	SC
Target Distance	80 km	10 km	40 km
Transmitter			

Parameter	DWDM 1530.33-1560.61 nm	Long Reach 1310 nm (LR+)	Extended Reach 1550 nm (ER+)
Power out (maximum)	3 dBm	0.5 dBm	4 dBm
Power out (minimum)	-1.0 dBm	-8.2 dBm	-4.7 dBm
<b>Receiver</b>			
P (RMax) (overload)	-7.0 dBm	0.5 dBm	-1.0 dBm
P (RMin) (sensitivity)	-24.0 dBm	-14.4 dBm	-15.8 dBm
<b>Optical Link</b>			
Fiber type	G.652 (SMF)	G.652 (single-mode fiber [SMF])	G.652 (SMF)
Optical path penalty	3.0 dB	3.2 dB	4.1 dB
Compliance	IEEE 802.3ae 10GBASE	IEEE 802.3ae 10GBASE-LR	IEEE 802.3ae 10GBASE-ER

## Ordering Information

To place an order, visit: [Cisco Ordering Home Page](#).

**Table 4.** Ordering Information

Product Part Number	Product Name
4-10GE(=)	Cisco CRS-1 Series 4x10GE Interface Card
XENPAK-10GB-LR+(=)	XENPAK 10GBASE-LR+ Optics Module
XENPAK-10GB-ER+(=)	XENPAK 10GBASE-ER+ Optics Module
DWDM-XENPAK-60.61= to DWDM-XENPAK-30.33=	XENPAK 10GBASE DWDM Modules (32 ITU 100-GHz wavelengths)

## Service and Support

Cisco offers numerous innovative services programs to accelerate customer success. These programs are delivered through a unique combination of people, processes, tools, and partners, resulting in high levels of customer satisfaction. Cisco services help you to protect your network investment, optimize network operations, and prepare the network for new applications to extend network intelligence and the power of your business. For more information about Cisco services, see [Cisco Technical Support Services](#) or [Cisco Advanced Services](#).

## For More Information

For more information about the Cisco CRS-1 Series 4-Port 10 Gigabit Ethernet Interface Module, contact your local account representative or visit: [www.cisco.com/go/crs](http://www.cisco.com/go/crs)



**Americas Headquarters**  
Cisco Systems, Inc.  
170 West Tasman Drive  
San Jose, CA 95134-1706  
USA  
[www.cisco.com](http://www.cisco.com)  
Tel: 408 526-4000  
800 553-NETS (6387)  
Fax: 408 527-0883

**Asia Pacific Headquarters**  
Cisco Systems, Inc.  
168 Robinson Road  
#28-01 Capital Tower  
Singapore 068912  
[www.cisco.com](http://www.cisco.com)  
Tel: +65 6317 7777  
Fax: +65 6317 7799

**Europe Headquarters**  
Cisco Systems International BV  
Haarlerbergpark  
Haarlerbergweg 13-19  
1101 CH Amsterdam  
The Netherlands  
[www-europe.cisco.com](http://www-europe.cisco.com)  
Tel: +31 0 800 020 0791  
Fax: +31 0 20 357 1100

Cisco has more than 200 offices worldwide. Addresses, phone numbers, and fax numbers are listed on the Cisco Website at [www.cisco.com/go/offices](http://www.cisco.com/go/offices).

©2007 Cisco Systems, Inc. All rights reserved. CCVP, the Cisco logo, and the Cisco Square Bridge logo are trademarks of Cisco Systems, Inc.; Changing the Way We Work, Live, Play, and Learn is a service mark of Cisco Systems, Inc.; and Access Registrar, Aironet, BPX, Catalyst, CCDA, CCDP, CCIE, CCIP, CCNA, CCNP, CCSP, Cisco, the Cisco Certified Internetwork Expert logo, Cisco IOS, Cisco Press, Cisco Systems, Cisco Systems Capital, the Cisco Systems logo, Cisco Unity, Enterprise/Solver, EtherChannel, EtherFast, EtherSwitch, Fast Step, Follow Me Browsing, FormShare, GigaDrive, HomeLink, Internet Quotient, IOS, iPhone, IP/TV, iQ Expertise, the iQ logo, iQ Net Readiness Scorecard, iQuick Study, LightStream, Linksys, MeetingPlace, MGX, Networking Academy, Network Registrar, Packet, PIX, ProConnect, ScriptShare, SMARTnet, StackWise, The Fastest Way to Increase Your Internet Quotient, and TransPath are registered trademarks of Cisco Systems, Inc. and/or its affiliates in the United States and certain other countries.

All other trademarks mentioned in this document or Website are the property of their respective owners. The use of the word partner does not imply a partnership relationship between Cisco and any other company. (0705R)