

Ø^ÙfÙ^ÙŠÙ† ØÙ...Ø§ÙŠØ© Ø¥Ø·Ø§Ø± Ø§Ù,,Ø¥Ø-Ø§Ø±Ø© (MFP) Ø¹Ù,,Ù% Ù†Ù,Ø·Ø© Ù^Øµ^Ù,, Ù,,Ø§Ø³Ù,,ÙfÙŠØ©

Ø§Ù,,Ù†Ø-Ù◆

ØÙ...Ø§ÙŠØ© Ø¥Ø·Ø§Ø± Ø§Ù,,Ø¥Ø-Ø§Ø±Ø© (MFP) Ù†ÙŠ Ù...ÙŠØ²Ø© Ù,,Ø§Ø³Ù,,ÙfÙŠØ© Ø²ÙŠØ- Ù...Ù† Ø²Ø£Ù...ÙŠÙ† Ø¥Ø·Ø§Ø±Ø§Ø² Ø§Ù,,Ø¥Ø-Ø§Ø±Ø©. Ù^Ø§Ù,,Ù...Ø¹ÙŠØ§Ø± Ø§Ù,,Ù,,Ø§Ø³Ù,,ÙfÙŠ Ø§Ù,,Ø©Ø§ØµØ·Ù† Ù†Ù^ IEEE 802.11w-2009 Ø£Ù^ Protected Management Frame (PMF) Ø§Ù,,Ø²ÙŠ ÙŠÙ†Ø-Ù◆ Ø¥Ù,,Ù% Ø²Ù^Ù◆ÙŠØ± Ø³Ø±ÙŠØ© Ø§Ù,,Ø²ÙŠØ±Ø§Ø² Ø§Ù,,Ø©Ø§ØµØ© Ø²Ø¥Ø·Ø§Ø±Ø§Ø² Ø§Ù,,Ø¥Ø-Ø§Ø±Ø© Ù^ØÙ...Ø§ÙŠØ© Ø§Ù,,Ø§Ø²ØµØ§Ù,, Ø§Ù,,Ù,,Ø§Ø³Ù,,ÙfÙŠ. Ù,,Ø§ Ø²Ø¹Ù...Ù,, Ù†Ø²Ù† Ø§Ù,,Ù...ÙŠØ²Ø© Ø¥Ù,,Ø§ Ù◆ÙŠ Ø§Ù,,Ø© Ø²Ù...ÙfÙŠÙ† ÙfÙ,, Ù...Ù† Ù†Ù,Ø·Ø© Ø§Ù,,Ù^ØµÙ^Ù,, Ù^Ø§Ù,,Ø¹Ù...ÙŠÙ,, Ù,, MFP.

Ù†Ù†Ø§Ù† Ù,ÙŠÙ^Ø- Ù...Ø¹ÙŠÙ†Ø© Ù...Ù◆Ø±Ù^Ø¶Ø© Ø¹Ù,,Ù% Ø²Ø¹Ø¶ Ø§Ù,,Ø£Ø-Ù†Ø²Ø© Ø§Ù,,Ø¹Ù...ÙŠÙ,,Ø© Ø§Ù,,Ù,,Ø§Ø³Ù,,ÙfÙŠØ© Ù,,Ù,,Ø§Ø²ØµØ§Ù,, Ø²Ø£Ø-Ù†Ø²Ø© Ø§Ù,,Ø²Ù†ÙŠØ© Ø§Ù,,Ø£Ø³Ø§Ø³ÙŠØ© Ø§Ù,,Ø²ÙŠ Ø²Ø¹Ù... MFP. Ø²Ø¶ÙŠÙ◆ MFP Ù...Ø-Ù...Ù^Ø¹Ø© Ø·Ù^ÙŠÙ,,Ø© Ù...Ù† Ø¹Ù†Ø§ØµØ± Ø§Ù,,Ù...Ø¹Ù,,Ù^Ù...Ø§Ø² Ù,,ÙfÙ,, Ø·Ù,,Ø² Ø²ØÙ,ÙŠÙ, Ø£Ù^ Ù...Ù†Ø§Ø±Ø© SSID. Ø²Ø¹Ø¶ Ø§Ù,,Ø¹Ù...Ù,,Ø§Ø¶; Ø§Ù,,Ù,,Ø§Ø³Ù,,ÙfÙŠÙŠÙ† Ù...Ø«Ù,, Ø§Ù,,Ù...Ø³Ø§Ø¹Ø-ÙŠÙ† Ø§Ù,,Ø±Ù,Ù...ÙŠÙŠÙ† Ø§Ù,,Ø²ØµÙŠÙŠÙ† (PDA) Ù^Ø§Ù,,Ù†Ù^Ø§Ø²Ù◆ Ø§Ù,,Ø²ÙfÙŠØ© Ù^Ø§Ù,,Ù...Ø§Ø³Ø§Ø² Ø§Ù,,Ø¶Ù^Ø|ÙŠØ© Ù,,Ù,,Ø±Ù...Ø² Ø§Ù,,Ø²ÙŠØ·ÙŠ Ù^Ù...Ø§ Ø¥Ù,,Ù% Ø²Ù,,Ùf Ù,,Ø²ÙŠÙ†Ù... Ø²Ø§ÙfØ±Ø© Ù...ØØ-Ù^Ø-Ø© Ù^Ù^ØØ-Ø© Ù...Ø¹Ø§Ù,,Ø-Ø© Ù...Ø±ÙfØ²ÙŠØ© (CPU) Ø²Ù% Ù,,Ø§ Ø²ÙfÙ^Ù† Ù,Ø§Ø²Ø±Ø§ Ø¹Ù,,Ù% Ù...Ø¹Ø§Ù,,Ø-Ø© Ù†Ø²Ù† Ø§Ù,,Ø·Ù,,Ø² Ø§Ø² Ø£Ù^ Ø£Ø-Ù†Ø²Ø© Ø§Ù,,Ø¥Ø±Ø²Ø§Ø². Ù^Ù†Ø²ÙŠØ-Ø© Ù,,Ø²Ù,,ÙfØ£ Ø²Ù◆Ø²Ù,, Ù◆ÙŠ Ø±Ø²ÙŠØ© Ù...Ø¹Ø±Ù◆ Ù...Ø-Ù...Ù^Ø¹Ø© Ø§Ù,,Ø©Ø-Ù...Ø© (SSID) Ø²Ø§Ù,,ÙfØ§Ù...Ù,,Ø£ Ø£Ù^ ÙŠØ²Ø¹Ø²Ø± Ø¹Ù,,ÙŠÙf Ø§Ù,,Ø§Ù,,Ø²Ø±Ø§Ù† Ø²Ø£Ø-Ù†Ø²Ø© Ø§Ù,,Ø²Ù†ÙŠØ© Ø§Ù,,Ø£Ø³Ø§Ø³ÙŠØ© Ù†Ø²Ù† Ø²Ø³Ø²Ø²Ø¹Ø-Ù... Ø²Ø·Ø§Ø²Ù, Ø¥Ù...ÙfØ§Ù†ÙŠØ§Ø² SSID. Ù†Ø²Ø§ Ø¥ØµØ²Ø§Ø± Ù,,ÙŠØ³ Ø©Ø§Øµ Ø¥Ù,,Ù% MFP. Ù^ÙŠØØ²Ø« Ø²Ù,,Ùf Ø£ÙŠØ¶Ø§ Ù...Ø¹ Ø£ÙŠ SSID ÙŠØ²Ù^ÙŠ Ø¹Ù,,Ù% Ø¹Ù†Ø§ØµØ± Ù...Ø¹Ù,,Ù^Ù...Ø§Ø² Ù...Ø²Ø¹Ø-Ø© (IEs). ÙŠÙ^ØµÙ% Ø²Ø§Ø¶Ù...Ø§ Ø²Ø§Ø©Ø²Ø²Ø± SSIDs Ø§Ù,,Ø²ÙŠ Ø²Ù... Ø²Ù...ÙfÙŠÙ† MFP Ø¹Ù,,ÙŠÙ†Ø§ Ù◆ÙŠ Ø§Ù,,Ø²ÙŠØ|Ø© Ø²Ø§Ø³Ø²Ø©Ø²Ù... ÙfØ§Ù◆Ø© Ø£Ù†Ù^Ø§Ø¹ Ø§Ù,,Ø¹Ù...Ù,,Ø§Ø¶; Ø§Ù,,Ù...Ø²Ø§ØØ© Ù,,Ø²ÙŠÙf Ù,Ø²Ù,, Ù†Ø²Ø±Ù†Ø§ Ù◆ÙŠ Ø§Ù,,Ù^Ù,Ø² Ø§Ù,,Ù◆Ø¹Ù,,ÙŠ.

Ø²Ù,Ø-Ù... Ù†Ø²Ù† Ø§Ù,,Ù...Ù,Ø§Ù,,Ø© Ø²Ù,,ÙŠÙ...Ø§Ø² Ø²Ù,, ÙfÙŠÙ◆ÙŠØ© Ø²ÙfÙ^ÙŠÙ† MFP Ø¹Ù,,Ù% Ù†Ù,Ø·Ø© Ø§Ù,,Ù^ØµÙ^Ù,, Ø§Ù,,Ù,,Ø§Ø³Ù,,ÙfÙŠØ© (WAP).

Ù...Ù,,Ø§ØØ,Ø©: Ù,Ø- ÙŠØ-Ø¹Ù... Ø§Ù,,Ø¹Ù...ÙŠÙ,, Ø§Ù,,Ù,,Ø§Ø³Ù,,ÙfÙŠ Ø£Ù^ Ù†Ø,Ø§Ù... Ø§Ù,,Ø²Ø²ÙŠÙ,, Ù†Ø²Ù† Ø§Ù,,Ù...ÙŠØ²Ø© Ø£Ù^ Ù,,Ø§ ÙŠØ-Ø¹Ù...Ù†Ø§. Ù,,Ù,,Øµ^Ù,, Ø¹Ù,,Ù% Ø§Ù,,Ù...Ø²ÙŠØ- Ù...Ù† Ø§Ù,,Ø²Ù◆Ø§ØµÙŠÙ,,Ø£ Ø±Ø§Ø-Ø¹ Ø§Ù,,Ø-Ù†Ø© Ø§Ù,,Ù...ØµÙ†Ø¹Ø© Ù,,Ø-Ù†Ø§Ø² Ø§Ù,,Ù,,Ø§Ø³Ù,,ÙfÙŠ Ø£Ù^ Ù†Ø,Ø§Ù... Ø§Ù,,Ø²Ø²ÙŠÙ,, Ù,,Ø²ÙŠÙf.

Ø§Ù,,Ø£Ø-Ù‡Ø²Ø© Ø§Ù,,Ù,Ø§Ø-Ù,,Ø© Ù,,Ù,,ØªØ·Ø-ÙŠÙ,

WAP100 Series - WAP150 •

WAP300 Series - WAP361ØCE WAP371 •

WAP500 Series •

Ø¥ØØ-Ø§Ø± Ø§Ù,,Ø-Ø±Ø§Ù...Ø-


1.2.1.3 - WAP371ØCE WAP551ØCE WAP561 •

1.0.0.16 - WAP150ØCE WAP361ØCE WAP571ØCE WAP571E •

ØªÙfÙ^ÙŠÙ‡ MFP Ø¹Ù,,Ù% WAP


Ù‡Ø§Ù...: ØªØ£ÙfØ- Ù...Ù‡ ØªÙfÙ^ÙŠÙ‡ Ø-Ø-ÙfØªÙf Ø§Ù,,Ù,,Ø§Ø³Ù,,ÙfÙŠØ© Ù,Ø-Ù,, Ù...ØªØ§Ø-Ø¹Ø© Ø©Ø·Ù-Ø§Øª Ø§Ù,,ØªÙfÙ^ÙŠÙ‡.

Ø§Ù,,Ø©Ø·Ù-Ø© 1. Ø³Ø-Ù,, Ø§Ù,,Ø-Ø©Ù-Ù,, Ø¥Ù,,Ù% Ø§Ù,,Ø£Ø-Ø§Ø© Ø§Ù,,Ù...Ø³Ø§Ø¹Ø-Ø© Ø§Ù,,Ù...Ø³ØªÙ‡Ø-Ø© Ø¥Ù,,Ù% Ø§Ù,,Ù-ÙŠØ- Ù,,Ù‡Ù,Ø-Ø© Ø§Ù,,Ù-Øµ^Ù,, Ø«Ù... Ø£Ø®Øª± Ù,,Ø§Ø³Ù,,ÙfÙŠ > Ø-Ø-ÙfØ§Øª.

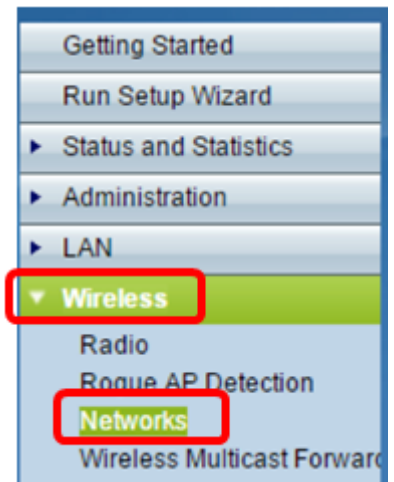


Ø§Ù,,Ø©Ø·Ù-Ø© 2. Ù-ÙŠ Ù...Ù‡Ø-Ù,Ø© Ø§Ù,,Ø±Ø§Ø-ÙŠÙ^ Ø-ØµÙ-Ø© Ø§Ù,,Ø-Ø-ÙfØ§ØªØCE Ø§Ù‡Ù,Ø± Ù,,Ø§Ø®ØªÙŠØ§Ø± Ø±Ø§Ø-ÙŠÙ^ ØÙŠØ« ÙŠØªÙ... ØªÙfÙ^ÙŠÙ‡ Ù...Ø¹Ø±Ù- Ù...Ø-Ù...Ù-Ø¹Ø© Ø§Ù,,Ø®Ø-Ù...Ø© (SSID). Ù,Ø- ØªØ®ØªÙ,,Ù- Ø£Ø-Ù‡Ø²Ø© Ø§Ù,,Ø±Ø§Ø-ÙŠÙ^ ØªØ-Ø¹Ø§ Ù,,Ù‡Ù...Ù-Ø-Ø- WAP Ø§Ù,,Ø-ÙŠ ØªÙ...Ù,,ÙfÙ‡. Ù-ÙŠ Ù‡Ø-Ø§ Ø§Ù,,Ù...Ø«Ø§Ù,,ØCE ÙŠØªÙ... Ø¥Ø®ØªÙŠØ§Ø± Ø§Ù,,Ø±Ø§Ø-ÙŠÙ^ 2 (5 Ø-ÙŠØ-Ø§Ù‡ÙŠØ±Øª²).

Ù...Ù,,Ø§ØØ,Ø©: Ø¥Ø-Ø§ ÙfØ§Ù‡ Ù,,Ø-ÙŠÙf WAP551ØCE Ù-Ù,Ù... Ø-Ø§Ù,,ØªØ®Ø-ÙŠ Ø¥Ù,,Ù% Ø§Ù,,Ø©Ø·Ù-Ø© 3. WAP551 Ù‡ÙŠ Ù‡Ù,Ø-Ø© Ù-Øµ^Ù,, Ù-Ø±Ø-ÙŠØ© Ø§Ù,,Ù‡Ø-Ø§Ù,,.

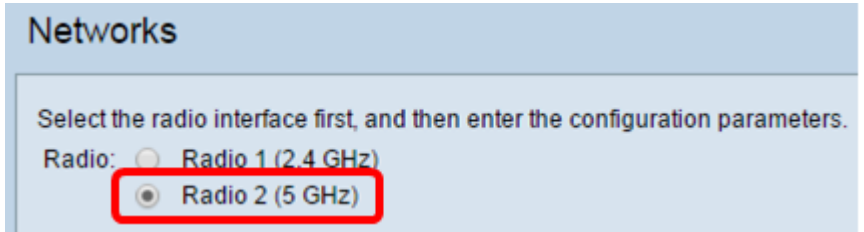


Step 3. Select the radio interface first, and then enter the configuration parameters. (SSIDs) Select the radio interface first, and then enter the configuration parameters. (SSIDs) Select the radio interface first, and then enter the configuration parameters. (SSIDs)

Step 4. Select the radio interface first, and then enter the configuration parameters. (SSIDs) Select the radio interface first, and then enter the configuration parameters. (SSIDs) Select the radio interface first, and then enter the configuration parameters. (SSIDs)

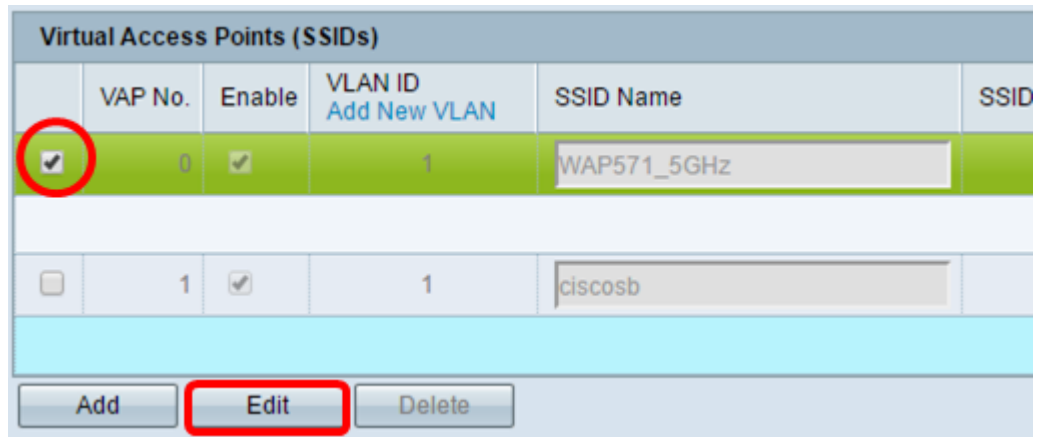

Step 4. Select the radio interface first, and then enter the configuration parameters. (SSIDs) Select the radio interface first, and then enter the configuration parameters. (SSIDs) Select the radio interface first, and then enter the configuration parameters. (SSIDs)

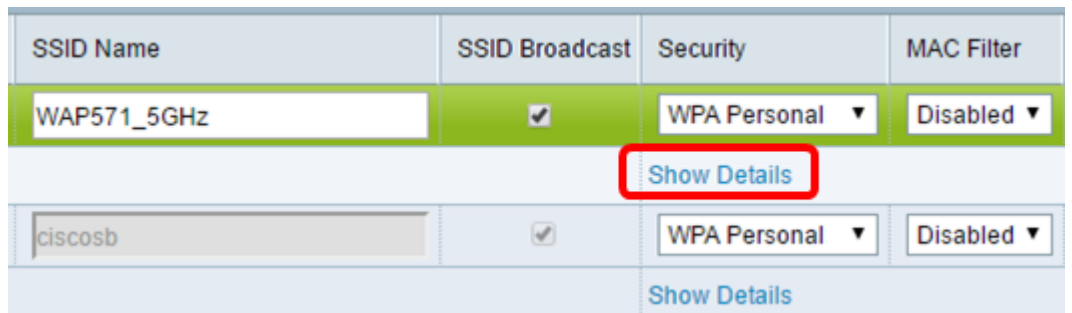

Step 5. Select the radio interface first, and then enter the configuration parameters. (SSIDs) Select the radio interface first, and then enter the configuration parameters. (SSIDs) Select the radio interface first, and then enter the configuration parameters. (SSIDs)

Security	MAC Filter	Channel Isolation
WPA Personal ▼	Disabled ▼	<input checked="" type="checkbox"/>

Hidden Details

WPA Versions: WPA-TKIP WPA2-AES

Key: (Range: 8 - 63 Characters)

Show Key as Clear Text

Key Strength Meter: Weak

Broadcast Key Refresh Rate Sec (Range: 0 - 86400, 0 = Disable)

MFP: Not Required Capable Required

Ø§Ù,,Ø@Ø·Ù`Ø© 6. (Ø¥Ø@ØªÙŠØ§Ø±ÙŠ) Ø¥Ø°Ø§ ÙfØ§Ù† Ø@Ø§Ù†Ø© Ø§Ù,,Ø§Ø@ØªÙŠØ§Ø± WPA-TKIP Ù...ØØ-Ø-Ø§ Ù◊ÙŠ Ù...Ù†Ø·Ù,Ø© WPA Ø§Ù,,Ø¥ØµØ¯Ø§Ø±Ø§ØªØ£ Ù◊Ù,Ù... Ø`Ø¥Ù,,Ø°Ø§Ø¡ Ø§Ù,,ØªØ£Ø´ÙŠØ± Ù,,Ø¥Ø,Ù†Ø§Ø± Ø@ÙŠØ§Ø±Ø§Øª MFP. Ù,,Ø§ ÙŠØ-Ø¹Ù... Ø£Ù...Ø§Ù† WPA-TKIP Ù...ÙŠØ²Ø© MFP.

Security	MAC Filter	Channel Isolation	Be
WPA Personal ▼	Disabled ▼	<input checked="" type="checkbox"/>	

Hidden Details

WPA Versions: WPA-TKIP WPA2-AES

Key: (Range: 8 - 63 Characters)

Show Key as Clear Text

Key Strength Meter: Weak

Broadcast Key Refresh Rate Sec (Range: 0 - 86400, 0 = Disable)

Ø§Ù,,Ø@Ø·Ù`Ø© 7. Ù◊ÙŠ Ù...Ù†Ø·Ù,Ø© MFPØ£ ØØ-Ø- Ø@Ø§Ù†Ø© Ø§Ù,,Ø§Ø@ØªÙŠØ§Ø± MFP Ø§Ù,,Ù...Ø·Ù,,Ù`Ø`Ø©.

Key Strength Meter: Weak

Broadcast Key Refresh Rate Sec (Range: 0 - 86400, 0 = Disable)

MFP: Not Required Capable Required

Ø§Ù,,Ø@ÙŠØ§Ø±Ø§Øª Ù‡ÙŠ:

Ø°ÙŠØ± Ù...Ø·Ù,,Ù`Ø`ª€” ØªØ¹Ø·ÙŠÙ,, Ø-Ø¹Ù... Ø§Ù,,Ø¹Ù...ÙŠÙ,, Ù,, MFP. •

Ø¥Ù...ÙfØ§Ù†ÙŠØ©ª€” ØªØ³Ù...Ø Ù,,ÙfÙ,, Ù...Ù† Ø§Ù,,Ø£Ø-Ù‡Ø²Ø© Ø§Ù,,Ù,Ø§Ø-Ù,,Ø© Ù,,Ù,,ØªÙ`ØµŠÙ,, Ù...ØªØ¹Ø-Ø§Ù,,Ø·Ø·Ù,Ø§Øª (MFP) Ù`Ø§Ù,,Ø¹Ù...Ù,,Ø§Ø¡ Ø§Ù,,Ø°ÙŠÙ† Ù,,Ø§ ÙŠØ-Ø¹Ù...Ù`Ù† MFP Ø-Ø§Ù,,Ø§Ù†Ø¶Ù...Ø§Ù... Ø¥Ù,,Ù% Ø§Ù,,Ø-Ø·ÙfØ©. Ù‡Ø°Ø§ Ù‡Ù` Ø¥Ø¹Ø-Ø§Ø- MFP Ø§Ù,,Ø§Ù◊ØªØ±Ø§Ø¶ÙŠ Ø¹Ù,,Ù% WAP.

Ù...Ø·Ù,,Ù`Ø` - Ù,,Ø§ ÙŠØ³Ù...Ø Ù,,Ù,,Ø¹Ù...Ù,,Ø§Ø¡ Ø-Ø§Ù,,Ø§Ù,,ØªØ±Ø§Ù† Ø¥Ù,,Ø§ •

Ø¥Ø°Ø§ ØªÙ... Ø§Ù,,ØªÙ Ø§ÙÙ^Ø¶ Ø¹Ù,,Ù% MFP. Ø¥Ø°Ø§ ÙfØ§ÙÙ+Øª Ø§Ù,,Ø£Ø-Ù±Ø²Ø© Ù,,Ø§ ØªØ-Ø¹Ù... MFPØ£ Ù,,Ø§ Ù§Ø³Ù...Ø Ù,,Ù±Ø§ Ø¨Ø§Ù,,Ø§ÙÙ+Ø¶Ù...Ø§ÙÙ... Ø¥Ù,,Ù% Ø§ÙÙ,,Ø´Ø¨ ÙfØ©.

Ø§Ù,,Ø®Ø-Ù´Ø© 8. Ø-Ù,,Ø-Ù,,Ø© ØÙØ.

Networks


Select the radio interface first, and then enter the configuration parameters.

Radio: Radio 1 (5 GHz) Radio 2 (2.4 GHz)

Virtual Access Points (SSIDs)					
	VAP No.	Enable	VLAN ID Add New VLAN	SSID Name	SSID
<input checked="" type="checkbox"/>	0	<input checked="" type="checkbox"/>	1	WAP571_5GHz	
<input type="checkbox"/>	1	<input checked="" type="checkbox"/>	1	ciscosb	

Ø§Ù,,Ø®Ø-Ù´Ø© 9. Ø-Ù...Ø-Ø±Ø- Ø,Ù±Ù´Ø± Ø§ÙÙ,,Ø¥Ø-Ø§Ø± Ø§ÙÙ,,Ù...Ù±Ø«Ù,, Ù,,Ù,,ØªØ£ÙfÙ§Ø-Ø£ Ø§ÙÙ±Ù,,Ø± ÙØÙ^Ù,, Ù...Ù´Ø§ÙÙØÙ,,.

Confirm ✖

 Your wireless settings are about to be updated. You may be disconnected.

Ù§Ø-Ø¨ Ø£ÙÙ+ ØªÙfÙ´Ù´ Ù,,Ø- Ø§ÙÙ+ØªÙ±Ù§Øª Ø§ÙÙ,,Ø£ÙÙ+ Ù...Ù± ØªÙ±Ù§Ø:Ø© MFP Ø¹Ù,,Ù% Ù´Ù,,Ø-Ø© Ø§ÙÙ,,Ù´Ø¶Ù,, Ø§ÙÙ,,Ø®Ø§Ø®© Ø¨Ùf.

Ø´Ø§Ù‡Ø- Ù...Ù,Ø·Ø¹ Ù◊ÙšØ-ÙšÙ^ ÙšØªØ¹Ù,,Ù,
Ø¨ Ù‡Ø°Ù‡ Ø§Ù,,Ù...Ù,Ø§Ù,,Ø©...

Ø§Ù‡Ù,Ø± Ù‡Ù‡Ø§ Ù,,Ø¹Ø±Ø¶ Tech Talks (Ø§Ù,,Ù...ØØ§Ø-Ø«Ø§Øª
Ø§Ù,,ØªÙ,Ù‡ÙšØ©) Ø§Ù,,Ø£Ø®Ø±Ù‰ Ù...Ù‡ Cisco

ةمچرتل هذه ل و ح

ةلأل تاي نقتل ن م ة و مچ م ادخت ساب دن تسمل اذ ه Cisco ت مچرت
ملاعلاء نأ عي مچ ي ف ن ي م دخت سمل ل معد ي و تح م مي دقت ل ة ي رش ب ل و
امك ة ق ي قد ن و ك ت ن ل ة ي ل ة مچرت ل ض ف أن ة ظ حال م ي ج ر ي . ة ص ا خ ل م ه ت غ ل ب
Cisco ي ل خ ت . ف ر ت ح م مچرت م ا ه م د ق ي ي ت ل ا ة ي ف ا ر ت ح ا ل ا ة مچرت ل ا ع م ل ا ح ل ا و ه
ي ل ا م ئ ا د ع و ج ر ل ا ب ي ص و ت و ت ا مچرت ل ا ه ذ ه ة ق د ن ع ا ه ت ي ل و ئ س م Cisco
Systems (ر ف و ت م ط ب ا ر ل ا) ي ل ص أ ل ا ي ز ي ل ج ن إ ل ا دن تسمل ا