


Telephone Adapter with 1 FXS and 1 FXO Port

PRODUCT DATA

ATA Solution with a PSTN Gateway

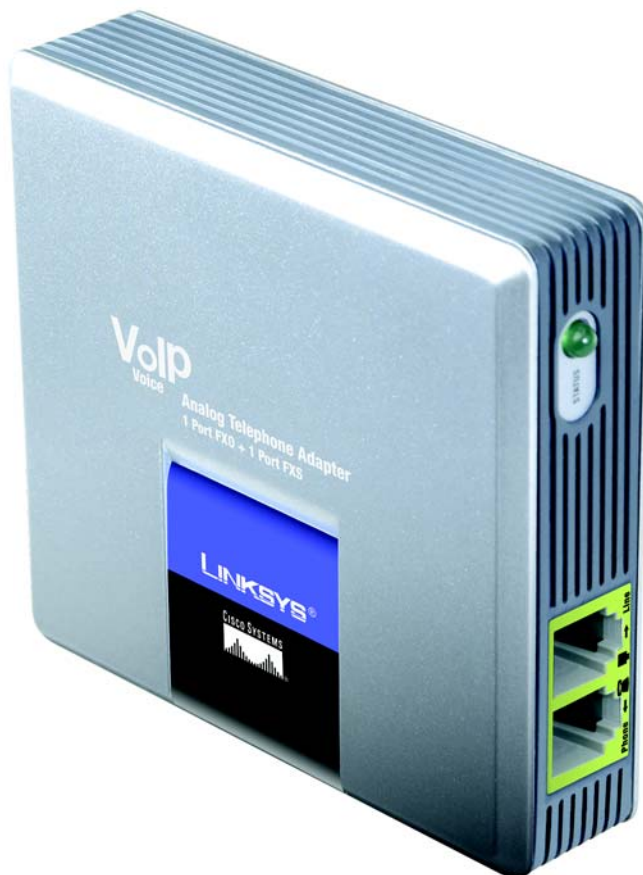

Toll Quality Voice and Carrier-Grade Feature Support

The SPA3000 delivers clear, high-quality voice communication in a variety of network conditions. Excellent voice quality in challenging, changeable IP network environments is made possible via our advanced implementation of standard voice coding algorithms. The SPA3000 is interoperable with common telephony equipment like facsimile, voicemail, PBX/KTS and interactive voice response systems.

Large-Scale Deployment and Management

The SPA3000 offers all the key features and capabilities with which service providers can provide customized services to their subscribers. The SPA3000 can be remotely provisioned and supports dynamic, in-service software upgrades. A secure profile upload saves providers the time, expense and hassle of managing and pre-configuring or re-configuring customer premise equipment (CPE) for deployment.

Ironclad Security

The SPA3000 supports secure, encryption-based methods for communication, provisioning and servicing.

Features

Telephony

- VoIP to PSTN (USA) Service Call Origination and Termination
- PSTN (USA) to VoIP Service Call Origination and Termination
- Single or Dual Stage Dialing
- Service Authentication via PIN, Digest, Caller ID (Bellcore Type 1)
- Per Call Authentication and Associated Routing
- Least Cost Routing Support
- Impedance Agnostics - 8 Settings
- Call Waiting, Cancel Call Waiting, Call Waiting Caller ID Detection (Bellcore Type 1)
- Caller ID with Name/Number (Multi-national Variants)
- Caller ID Blocking
- Call Forwarding to PSTN or VoIP Service: No answer, Busy, All
- Do Not Disturb
- Call Transfer
- Three-way Conference Calling with Local Mixing
- Message Waiting Indication - Visual and Tone Based
- Call Return
- Call Back on Busy
- Call Blocking with Toll Restriction
- Delayed Disconnect
- Distinctive Ringing - Calling and Called Number
- Off-hook Warning Tone
- Selective/Anonymous Call Rejection
- Hot line and Warm Line Calling
- Speed Dialing of 8 Numbers/Addresses
- Music on Hold

SPA Specific

- Forward Calls to VoIP service - Selective, Authenticated, All
- Forward Calls to PSTN service - Selective, Authenticated, All
- PSTN Line Sharing with Multiple Extensions
- Automatic PSTN Fallback (Loss of Power or IP Service to Unit - with Quiescence to Normal Operations)
- Advanced Inbound and Outbound Call Routing
- Single Stage and Two Stage Dialing
- Independent Configurable Dial Plans - Up to 8
- Force PSTN Disconnection
- Sequential Dialing Support

VoIP to PSTN Authentication and Routing

- VoIP to PSTN Gateway Enable/Disable
- VoIP Caller Auth Method (None, PIN, HTTP Digest)
- VoIP PIN Max Retry Setting
- One Stage Dialing Enable/Disable
- VoIP Caller ID Pattern Matching
- VoIP Access Allowed Caller List (No Further Authentication)
- VoIP Caller PIN and Associated Dial Plan

PSTN to VoIP Authentication and Features

- PSTN to VoIP Gateway Enable/Disable
- Caller Auth Method: None, PIN, Caller ID
- Ring Through to FXS Enable/Disable
- Ring Through Tone - Configurable
- Caller ID (Bellcore 1) for VoIP Service Access
- Caller ID Enable/Disable
- PIN Max Retry Settings
- Access Allowed Caller List (No Further Authentication)
- Caller PIN and Associated Dial Plan
- Least Cost Routing (via Outbound VoIP - Line1 Dial Plan)

PRODUCT DATA

Model No. **SPA3000**

Regulatory Compliance Security

Documentation

Package Contents

Environmental

FXO Behavior

- VoIP Answer Delay Timer
- PSTN Answer Delay Timer
- VoIP PIN Digit Time-Out Timer
- PSTN PIN Digit Time-Out Timer
- PSTN-to-VoIP Call Max Dur Timer
- VoIP-to PSTN Call Max Dur Timer
- PSTN Ring Through Delay Timer
- PSTN Dialing Delay Timer
- VoIP DIG Refresh Interval Timer
- PSTN Ring Time-out Timer

PSTN Disconnection Detection

- CPC (Removal of Tip/Ring Voltage Momentarily)
- Polarity Reversal
- Long Silence (Configurable Time Setting)
- Disconnect Tone (e.g. Reorder Tone)

International Control

- FXO Port Impedance - Configurable to 16 settings
- Ring Frequency - Configurable
- SPA to PSTN and PSTN to SPA Gain Settings
- Ring Frequency - Maximum Setting
- Ring Validation Time Setting
- Tip/Ring Voltage Adjustment Setting
- Ring Indication Delay Setting
- Operational Loop Current Minimum Value
- Ring Time-out Setting
- On-Hook Speed Setting
- Ringer Impedance Setting
- Line-in-Use Voltage Setting

- FCC (Part 15 Class B and Part 68) , CE , ICES-003

- Password Protected System Reset to Factory Default
- Password Protected Admin and User Access Authority
- Provisioning/Configuration/Authentication: HTTPS with Factory Installed Client Certificate
- HTTP Digest - Encrypted Authentication via MD5 (RFC 1321)
- Up to 256-bit AES Encryption

- Quick-Start Installation and Configuration Guide
- User Guide
- Administration Guide - Service Providers Only
- Provisioning Guide - Service Providers Only

- 1 - SPA3000 Phone Adapter Unit
- 1 - 5v Power Adapter - 1.8m (6 ft) Cord
- 1 - RJ45 Ethernet Cable - 1.8m (6 ft) Cord
- 1 - RJ11 Telephone Cable - 1.8m (6 ft) Cord

Dimensions	4.05 x 1.1. x 3.75 in (102.87 x 27.94 x 95.25 mm) W x H x D
Unit Weight	2.15 lb (0.975 kg)
Operating Temp.	41°~113°F (5°~45°C)
Storage Temp.	-13°~185°F (-25°~85°C)
Operating Humidity	10~90% Non-condensing
Storage Humidity	10~90% Non-Condensing

PRODUCT DATA

Model No. **SPA3000**

Specifications

Model	SPA-3000 * Note: Many specifications are programmable within a defined range or list of options. Please see the SPA Administration Guide for details. The configuration profile is uploaded to the SPA3000 at the time of provisioning.
Data Networking	MAC Address (IEEE 802.3) IPv4 - Internet Protocol v4 (RFC 791) upgradeable to v6 (RFC 1883) ARP - Address Resolution Protocol DNS - A Record (RFC 1706), SRV Record (RFC 2782) DHCP Client - Dynamic Host Configuration Protocol (RFC 2131) ICMP - Internet Control Message Protocol (RFC792) TCP - Transmission Control Protocol (RFC793) UDP - User Datagram Protocol (RFC768) RTP - Real Time Protocol (RFC 1889) (RFC 1890) RTCP - Real Time Control Protocol (RFC 1889) DiffServ (RFC 2475), Type of Service - TOS (RFC 791/1349) SNTP - Simple Network Time Protocol (RFC 2030)
Voice Gateway	SIPv2: Session Initiation Protocol v2 (RFC 3261, 3262, 3263, 3264) SIP Proxy Redundancy - Dynamic via DNS SRV, A Records Re-registration with Primary SIP Proxy Server SIP Support in Network Address Translation Networks - NAT (incl. STUN) Secure (Encrypted) Calling via Pre-Standard Implementation of Secure RTP Codec Name Assignment
Voice Algorithms	G.711 (A-law and μ -law), G.726 (16/24/32/40 kbps), G.729 A, G.723.1 (6.3 kbps, 5.3 kbps) Dynamic Payload Adjustable Audio Frames per Packet
Fax Capability	Fax Tone Detection and Pass-Through (Using .711) DTMF: In-band & Out-of-band (RFC 2833) (SIP Info) Flexible Dial Plan Support with Interdigit Timers and IP Dialing Call Progress Tone Generation Jitter Buffer - Adaptive Frame Loss Concealment Full Duplex Audio Echo Cancellation (G.165/G.168) VAD - Voice Activity Detection with Silence Suppression Attenuation / Gain Adjustments Flash Hook Timer MWI - Message Waiting Indicator Tones VMWI - via FSK Polarity Control Hook Flash Event Signaling Caller ID Generation (Name & Number) - Bellcore, DTMF, ETSI Music on Hold Client Streaming Audio Server - up to 10 sessions
Provisioning, Administration & Maintenance:	Web Browser Administration & Configuration via Integrated Web Server Telephone Key Pad Configuration with Interactive Voice Prompts Automated Provisioning & Upgrade via HTTPS, HTTP, TFTP Asynchronous Notification of Upgrade Availability via SIP NOTIFY Non-intrusive, In-Service Upgrades Report Generation & Event Logging Stats in BYE Message Syslog & Debug Server Records - Per Line Configurable
Physical Interfaces:	1 10baseT RJ-45 Ethernet Port (IEEE 802.3) 1 RJ-11 FXS Phone Ports - For Analog Circuit Telephone Device (Tip/Ring) 1 RJ-11 FXO Phone Ports - For a Telco or PBX Connection
FXS: Subscriber Line Interface Circuit (SLIC):	Ring Voltage: 40-55 VRMS Configurable I* Ring Frequency: 10 Hz - 40 Hz I* Ring Waveform: Trapezoidal and Sinusoidal I* Maximum Ringer Load: 3 REN On-hook/off-hook Characteristics: On-hook voltage (tip/ring): -50 V NOMINAL Off-hook current: 25 mA min Terminating Impedance: 8 Configurable Settings including North America 600 ohms, European CTR21
Power Supply:	DC Input Voltage: +5 VDC at 2.0 A Max. Power Consumption: 5 Watts Switching Type (100-240v) Automatic Power Adapter: 100-240v - 50-60Hz (26-34VA) AC Input, 1.8m cord
Indicator Lights/LED:	LAN Activity/Link LED, Status LED (In-Use, Provisioning, Idle, Alert)

The SPA3000 features the same VoIP adapter functionality found in the SPA1000 and SPA2002 with an additional benefit of an integrated connection for legacy telephone network "hop-on, hop-off" applications. SPA3000 users will be able to leverage their broadband phone service connections more than ever by automatically routing local calls from cell phones and land lines to VoIP service providers and vice versa. If power is lost to the unit or Internet service is down, calls can be redirected to a traditional carrier via the FXO interface.

A user calling from a land line or mobile phone will be able to reduce and even eliminate international and long distance telephone charges by first calling their SPA3000 via a local phone number. The advanced authentication and call routing intelligence programmed into the SPA3000 will connect the caller via the Internet to the far end destination. Using the SPA3000 at the far end, calls can be answered immediately or further processed as a local call to any legacy land line or mobile phone.

The SPA3000 supports one RJ11 POTS (Plain Old Telephone Service) FXS port for connection to existing analog phones and fax machines. The SPA3000 also supports one PSTN FXO port connection to a Telco or PBX circuit. The SPA3000 includes an RJ45 Ethernet interface for connection to a home or office LAN. The SPA3000 FXS and FXO lines can be independently configured via software controlled by the service provider or the end user.

Installed by the end user and remotely provisioned, configured and maintained by the service provider, each SPA3000 converts voice traffic into data packets for transmission over an IP network. The SPA3000 can be used in consumer and business IP telephony service offerings including full-featured IP Centrex. The SPA3000 delivers clear sounding voice and reliable fax calling using international standards for voice and data networking.

Linksys Phone Adapter Comparison Chart

SPA Model	Service Lines	Active Calls	3-Way Conferences	PSTN (FXO) Connection
SPA1001	2	2	1	0
SPA2002	2	4	2	0
SPA2100	2	4	2	0
SPA3000	2	3	1	1

Linksys
A Division of Cisco Systems, Inc.
18582 Teller Avenue
Irvine, CA 92612 USA

E-mail: sales@linksys.com
support@linksys.com

Web:<http://www.linksys.com>

Linksys products are available in more than 50 countries, supported by 12 Linksys Regional Offices throughout the world. For a complete list of local Linksys Sales and Technical Support contacts, visit our Worldwide Web Site at www.linksys.com.

Specifications are subject to change without notice. Linksys is a registered trademark or trademark of Cisco Systems, Inc. and/or its affiliates in the U.S. and certain other countries. Copyright © 2006 Cisco Systems, Inc. All rights reserved. Other brands and product names are trademarks or registered trademarks of their respective holders.