

# SPEC<sup>®</sup> CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS C220 M4 (Intel Xeon E5-2699 v4, 2.20 GHz)

SPECfp<sup>®</sup>\_rate2006 = Not Run

SPECfp\_rate\_base2006 = 1100

CPU2006 license: 9019


Test sponsor: Cisco Systems

Tested by: Cisco Systems

Test date: Mar-2016

Hardware Availability: Mar-2016

Software Availability: Dec-2015

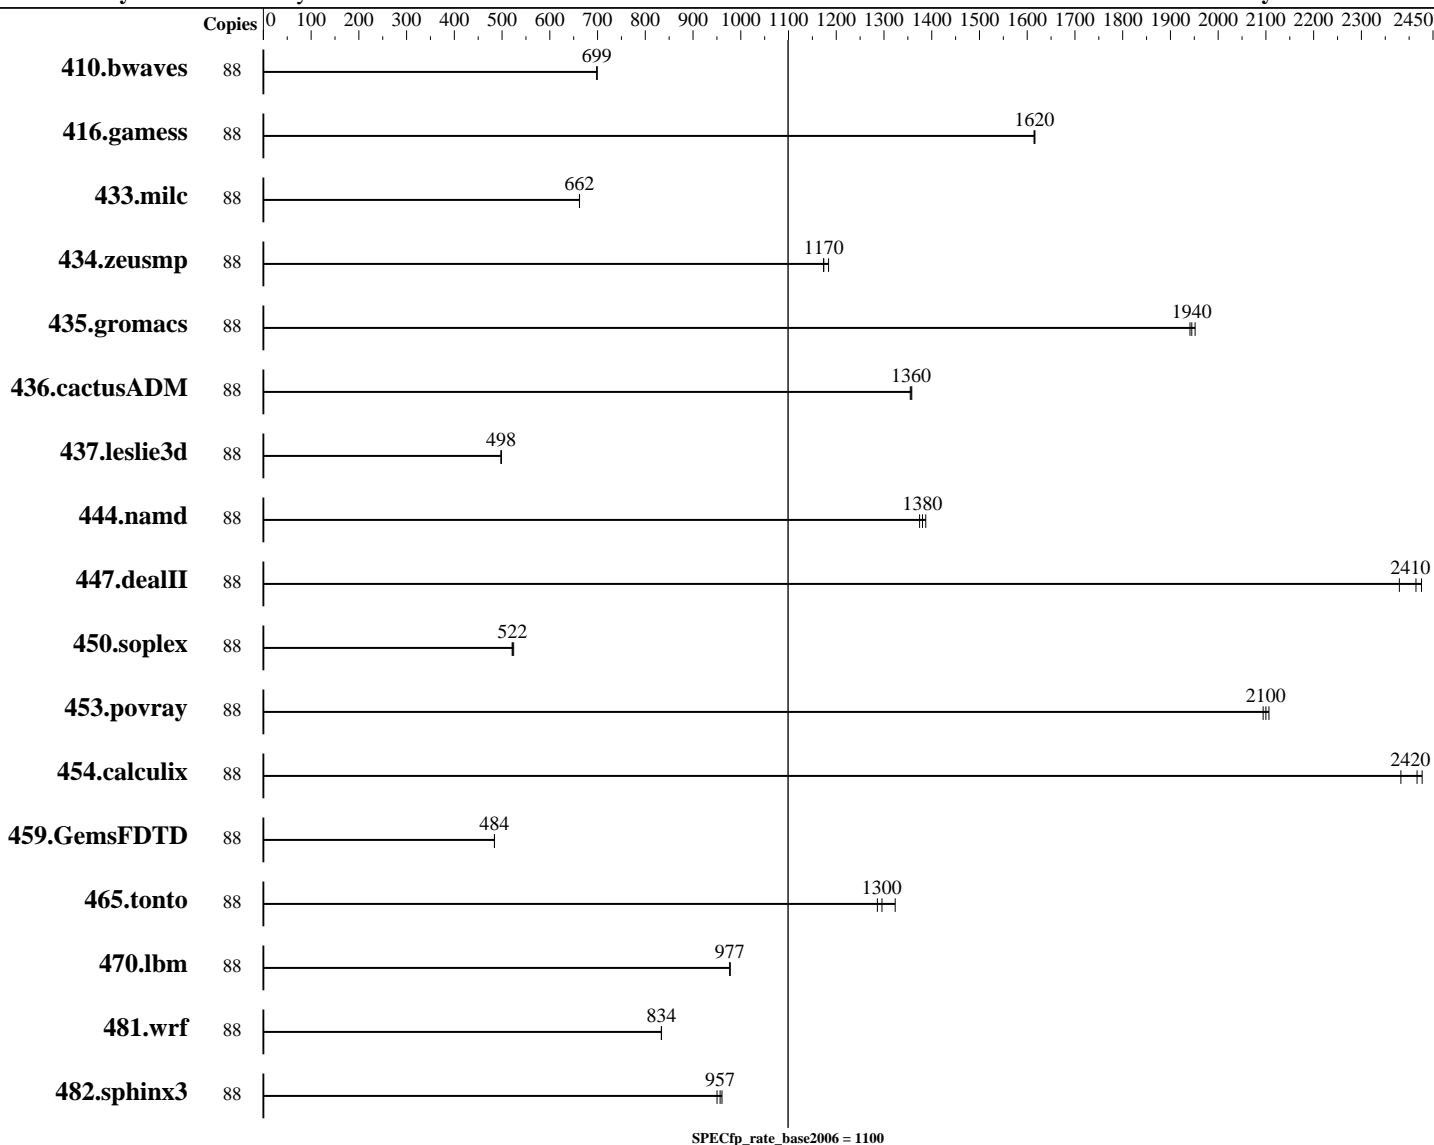

### Hardware

CPU Name: Intel Xeon E5-2699 v4  
 CPU Characteristics: Intel Turbo Boost Technology up to 3.60 GHz  
 CPU MHz: 2200  
 FPU: Integrated  
 CPU(s) enabled: 44 cores, 2 chips, 22 cores/chip, 2 threads/core  
 CPU(s) orderable: 1,2 chips  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 MB I+D on chip per core

Continued on next page

### Software

Operating System: SUSE Linux Enterprise Server 12 SP1 (x86\_64) 3.12.49-11-default  
 Compiler: C/C++: Version 16.0.0.105 of Intel C++ Studio XE for Linux;  
 Fortran: Version 16.0.0.105 of Intel Fortran Studio XE for Linux  
 Auto Parallel: No  
 File System: ext4  
 System State: Run level 3 (multi-user)

Continued on next page

# SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS C220 M4 (Intel Xeon E5-2699 v4, 2.20 GHz)

SPECfp\_rate2006 = Not Run

SPECfp\_rate\_base2006 = 1100

CPU2006 license: 9019

Test sponsor: Cisco Systems

Tested by: Cisco Systems

Test date: Mar-2016

Hardware Availability: Mar-2016

Software Availability: Dec-2015

L3 Cache: 55 MB I+D on chip per chip  
Other Cache: None  
Memory: 256 GB (16 x 16 GB 2Rx4 PC4-2400T-R, ECC)  
Disk Subsystem: 1 x 400 GB SSD SAS  
Other Hardware: None

Base Pointers: 32/64-bit  
Peak Pointers: 32/64-bit  
Other Software: None

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	88	1712	699	1711	699	<u>1712</u>	<u>699</u>							
416.gamess	88	<u>1067</u>	<u>1620</u>	1066	1620	1067	1610							
433.milc	88	<u>1220</u>	<u>662</u>	1220	662	1220	662							
434.zeusmp	88	682	1170	<u>682</u>	<u>1170</u>	676	1180							
435.gromacs	88	322	1950	<u>323</u>	<u>1940</u>	324	1940							
436.cactusADM	88	<u>775</u>	<u>1360</u>	776	1360	774	1360							
437.leslie3d	88	1662	498	<u>1660</u>	<u>498</u>	1660	498							
444.namd	88	509	1390	<u>511</u>	<u>1380</u>	513	1370							
447.dealII	88	<u>417</u>	<u>2410</u>	423	2380	415	2430							
450.soplex	88	1400	524	<u>1406</u>	<u>522</u>	1409	521							
453.povray	88	<u>223</u>	<u>2100</u>	224	2090	222	2110							
454.calculix	88	<u>300</u>	<u>2420</u>	305	2380	299	2430							
459.GemsFDTD	88	<u>1929</u>	<u>484</u>	1929	484	1929	484							
465.tonto	88	<u>668</u>	<u>1300</u>	673	1290	654	1320							
470.lbm	88	1237	978	1237	977	<u>1237</u>	<u>977</u>							
481.wrf	88	1179	834	1179	834	<u>1179</u>	<u>834</u>							
482.sphinx3	88	<u>1793</u>	<u>957</u>	1785	961	1805	950							

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Platform Notes

CPU performance set to Enterprise  
Power Technology set to Performance  
Energy Performance BIAS setting set to Balanced Performance

Continued on next page

# SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS C220 M4 (Intel Xeon E5-2699 v4, 2.20 GHz)

SPECfp\_rate2006 = Not Run

SPECfp\_rate\_base2006 = 1100

**CPU2006 license:** 9019

**Test sponsor:** Cisco Systems

**Tested by:** Cisco Systems

**Test date:** Mar-2016

**Hardware Availability:** Mar-2016

**Software Availability:** Dec-2015

## Platform Notes (Continued)

```
Memory RAS configuration set to Maximum Performance
Memory Power Saving Mode set to Disabled
Sysinfo program /opt/cpu2006-1.2/config/sysinfo.rev6914
$Rev: 6914 $ $Date:: 2014-06-25 #$ e3fbb8667b5a285932ceab81e28219e1
running on linux-ivn4 Mon Mar 14 15:32:00 2016
```

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see: <http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

```
From /proc/cpuinfo
model name : Intel(R) Xeon(R) CPU E5-2699 v4 @ 2.20GHz
 2 "physical id"s (chips)
 88 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
cpu cores : 22
siblings : 44
physical 0: cores 0 1 2 3 4 5 8 9 10 11 12 16 17 18 19 20 21 24 25 26 27
28
physical 1: cores 0 1 2 3 4 5 8 9 10 11 12 16 17 18 19 20 21 24 25 26 27
28
cache size : 28160 KB
```

```
From /proc/meminfo
MemTotal: 264559100 kB
HugePages_Total: 0
Hugepagesize: 2048 kB
```

```
From /etc/*release* /etc/*version*
SuSE-release:
SUSE Linux Enterprise Server 12 (x86_64)
VERSION = 12
PATCHLEVEL = 1
# This file is deprecated and will be removed in a future service pack or
release.
# Please check /etc/os-release for details about this release.
os-release:
NAME="SLES"
VERSION="12-SP1"
VERSION_ID="12.1"
PRETTY_NAME="SUSE Linux Enterprise Server 12 SP1"
ID="sles"
ANSI_COLOR="0;32"
CPE_NAME="cpe:/o:suse:sles:12:sp1"
```

```
uname -a:
Linux linux-ivn4 3.12.49-11-default #1 SMP Wed Nov 11 20:52:43 UTC 2015
(8d714a0) x86_64 x86_64 x86_64 GNU/Linux
```

```
run-level 3 Mar 14 15:28
```

Continued on next page

# SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS C220 M4 (Intel Xeon E5-2699 v4, 2.20 GHz)

SPECfp\_rate2006 = Not Run

SPECfp\_rate\_base2006 = 1100

CPU2006 license: 9019

Test sponsor: Cisco Systems

Tested by: Cisco Systems

Test date: Mar-2016

Hardware Availability: Mar-2016

Software Availability: Dec-2015

## Platform Notes (Continued)

SPEC is set to: /opt/cpu2006-1.2

```
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sda1       ext4  366G   53G  312G  15% /
```

Additional information from dmidecode:

Warning: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS Cisco Systems, Inc. C220M4.2.0.9.41.021820161009 02/18/2016

Memory:

16x 0xCE00 M393A2G40EB1-CRC 16 GB 2 rank 2400 MHz

8x NO DIMM NO DIMM

(End of data from sysinfo program)

## General Notes

Environment variables set by runspec before the start of the run:

```
LD_LIBRARY_PATH = "/opt/cpu2006-1.2/libs/32:/opt/cpu2006-1.2/libs/64:/opt/cpu2006-1.2/sh"
```

Binaries compiled on a system with 1x Intel Core i5-4670K CPU + 32GB memory using RedHat EL 7.1

Transparent Huge Pages enabled with:

```
echo always > /sys/kernel/mm/transparent_hugepage/enabled
```

Filesystem page cache cleared with:

```
echo 1 > /proc/sys/vm/drop_caches
```

runspec command invoked through numactl i.e.:

```
numactl --interleave=all runspec <etc>
```

## Base Compiler Invocation

C benchmarks:

```
icc -m64
```

C++ benchmarks:

```
icpc -m64
```

Fortran benchmarks:

```
ifort -m64
```

Benchmarks using both Fortran and C:

```
icc -m64 ifort -m64
```

# SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS C220 M4 (Intel Xeon E5-2699 v4, 2.20 GHz)

SPECfp\_rate2006 = Not Run

SPECfp\_rate\_base2006 = 1100

CPU2006 license: 9019

Test sponsor: Cisco Systems

Tested by: Cisco Systems

Test date: Mar-2016

Hardware Availability: Mar-2016

Software Availability: Dec-2015

## Base Portability Flags

```
410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64
```

## Base Optimization Flags

C benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32
-ansi-alias -opt-mem-layout-trans=3
```

C++ benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32
-ansi-alias -opt-mem-layout-trans=3
```

Fortran benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch
```

Benchmarks using both Fortran and C:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32
-ansi-alias -opt-mem-layout-trans=3
```

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.  
Report generated on Mon Mar 21 12:05:58 2016 by SPEC CPU2006 PS/PDF formatter v6401.