

# SPEC® OMPG2012 Result

Copyright 2012-2014 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS C220 M4 (Intel Xeon E5-2699 v3 @ 2.30 GHz)

SPECompG\_peak2012 = 10.3

SPECompG\_base2012 = 9.67

OMP2012 license:9019


Test sponsor: Cisco Systems

Tested by: Cisco Systems

Test date: Aug-2014

Hardware Availability: Sep-2014

Software Availability: Jun-2013

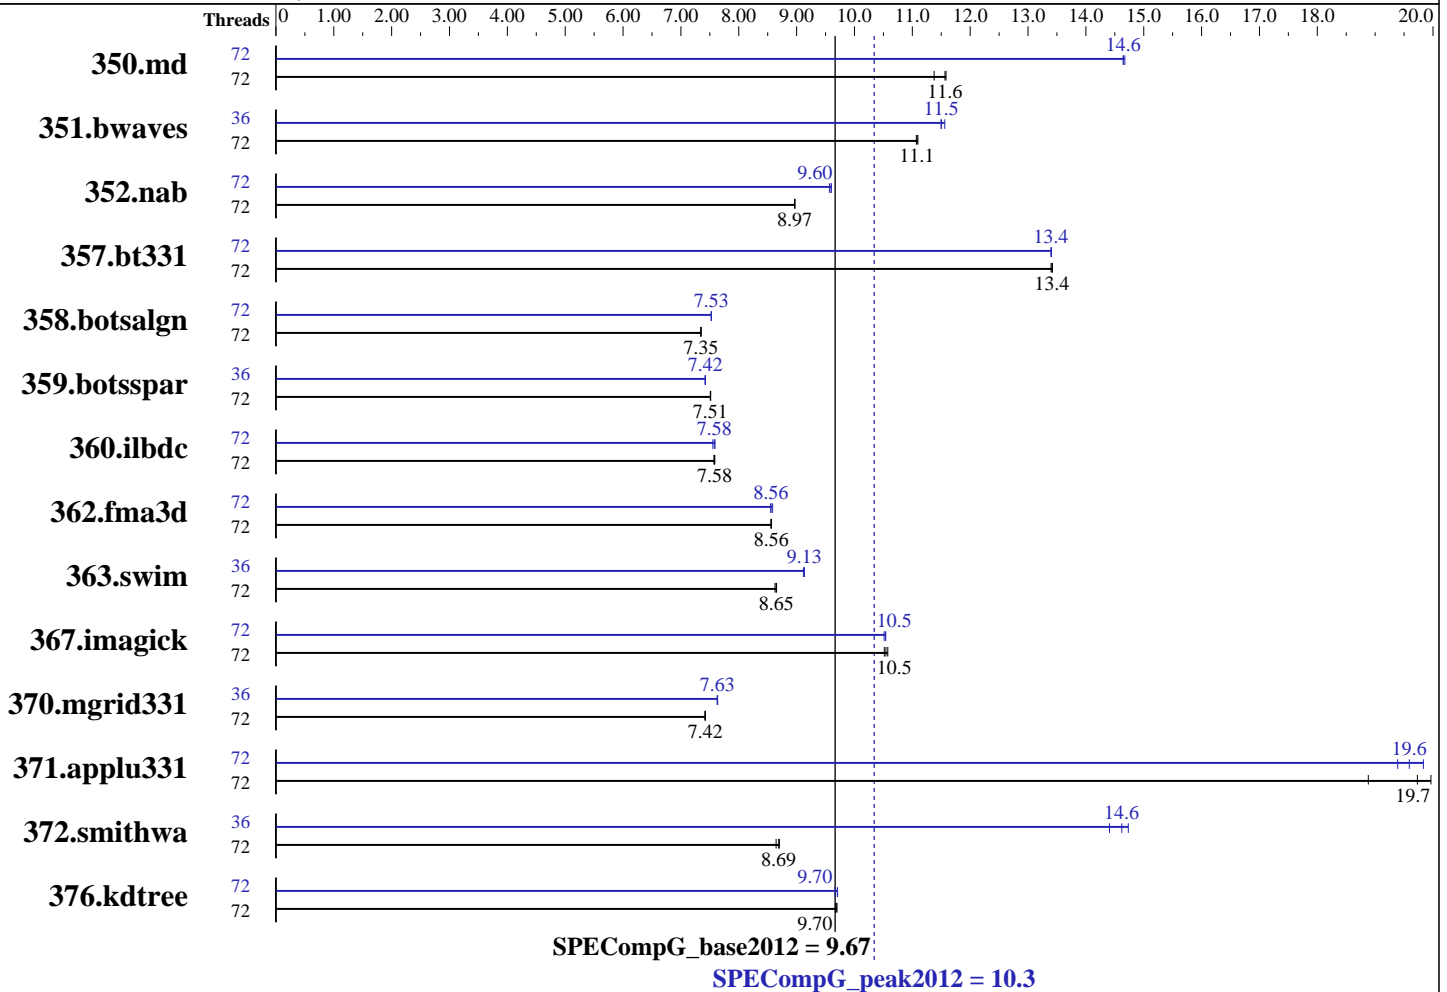

### Hardware

CPU Name: Intel Xeon E5-2699 v3  
 CPU Characteristics: Intel Turbo Boost Technology up to 3.6 GHz  
 CPU MHz: 2300  
 CPU MHz Maximum: 3600  
 FPU: Integrated  
 CPU(s) enabled: 36 cores, 2 chips, 18 cores/chip, 2 threads/core  
 CPU(s) orderable: 1,2 chips  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core  
 L3 Cache: 45 MB I+D on chip per chip  
 Other Cache: None  
 Memory: 256 GB (16 x 16 GB 2Rx4 PC4-17000R-15, ECC)  
 Disk Subsystem: 1 X 300GB SAS, 15K RPM  
 Other Hardware: --  
 Base Threads Run: 72  
 Minimum Peak Threads: 36

### Software

Operating System: SUSE Linux Enterprise Server 11 SP3 (x86\_64)  
 Compiler: C/C++/Fortran: Version 13.1.3 of Intel Composer XE for Linux Build 20130607  
 Auto Parallel: No  
 File System: ext3  
 System State: Default  
 Base Pointers: 64-bit  
 Peak Pointers: 64-bit  
 Other Software: Kernel 3.0.76-0.11-default

Continued on next page

# SPEC OMPG2012 Result

Copyright 2012-2014 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS C220 M4 (Intel Xeon E5-2699 v3 @ 2.30 GHz)

SPECompG\_peak2012 = 10.3

SPECompG\_base2012 = 9.67

OMP2012 license:9019

Test sponsor: Cisco Systems

Tested by: Cisco Systems

Test date: Aug-2014

Hardware Availability: Sep-2014

Software Availability: Jun-2013

Maximum Peak Threads: 72

## Results Table

Benchmark	Base							Peak						
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
350.md	72	<b>400</b>	<b>11.6</b>	400	11.6	407	11.4	72	<b>316</b>	<b>14.6</b>	316	14.6	316	14.7
351.bwaves	72	408	11.1	<b>409</b>	<b>11.1</b>	409	11.1	36	<b>394</b>	<b>11.5</b>	392	11.6	394	11.5
352.nab	72	<b>434</b>	<b>8.97</b>	434	8.97	434	8.97	72	405	9.60	407	9.57	<b>405</b>	<b>9.60</b>
357.bt331	72	<b>353</b>	<b>13.4</b>	353	13.4	354	13.4	72	354	13.4	354	13.4	<b>354</b>	<b>13.4</b>
358.botsalgn	72	592	7.35	592	7.35	<b>592</b>	<b>7.35</b>	72	<b>578</b>	<b>7.53</b>	578	7.53	578	7.53
359.botsspar	72	699	7.52	<b>699</b>	<b>7.51</b>	699	7.51	36	708	7.42	707	7.42	<b>707</b>	<b>7.42</b>
360.ilbdc	72	<b>469</b>	<b>7.58</b>	469	7.58	470	7.57	72	469	7.59	471	7.55	<b>470</b>	<b>7.58</b>
362.fma3d	72	444	8.57	444	8.55	<b>444</b>	<b>8.56</b>	72	<b>444</b>	<b>8.56</b>	444	8.55	443	8.59
363.swim	72	<b>524</b>	<b>8.65</b>	523	8.65	525	8.63	36	496	9.14	<b>496</b>	<b>9.13</b>	497	9.12
367.imagick	72	665	10.6	<b>667</b>	<b>10.5</b>	669	10.5	72	667	10.5	669	10.5	<b>667</b>	<b>10.5</b>
370.mgrid331	72	<b>596</b>	<b>7.42</b>	596	7.42	596	7.42	36	579	7.64	579	7.63	<b>579</b>	<b>7.63</b>
371.applu331	72	<b>307</b>	<b>19.7</b>	321	18.9	304	20.0	72	313	19.4	306	19.8	<b>309</b>	<b>19.6</b>
372.smithwa	72	620	8.65	<b>617</b>	<b>8.69</b>	616	8.70	36	<b>367</b>	<b>14.6</b>	372	14.4	364	14.7
376.kdtree	72	<b>464</b>	<b>9.70</b>	464	9.70	465	9.67	72	466	9.66	464	9.71	<b>464</b>	<b>9.70</b>

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Platform Notes

```
Sysinfo program /opt/omp2012/Docs/sysinfo
$Rev: 395 $ $Date:: 2012-07-25 #$ 8f8c0fe9e19c658963a1e67685e50647
running on speccompsles Mon Aug 25 09:20:41 2014
```

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:  
<http://www.spec.org/omp2012/Docs/config.html#sysinfo>

```
From /proc/cpuinfo
model name : Intel(R) Xeon(R) CPU E5-2699 v3 @ 2.30GHz
 2 "physical id"s (chips)
 72 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
cpu cores : 18
siblings : 36
physical 0: cores 0 1 2 3 4 8 9 10 11 16 17 18 19 20 24 25 26 27
physical 1: cores 0 1 2 3 4 8 9 10 11 16 17 18 19 20 24 25 26 27
cache size : 46080 KB
```

```
From /proc/meminfo
MemTotal: 264567956 kB
```

Continued on next page

# SPEC OMPG2012 Result

Copyright 2012-2014 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS C220 M4 (Intel Xeon E5-2699 v3 @ 2.30 GHz)

SPECompG\_peak2012 = 10.3

SPECompG\_base2012 = 9.67

OMP2012 license:9019

Test sponsor: Cisco Systems

Tested by: Cisco Systems

Test date: Aug-2014

Hardware Availability: Sep-2014

Software Availability: Jun-2013

## Platform Notes (Continued)

HugePages\_Total: 0  
Hugepagesize: 2048 kB

```
/usr/bin/lsb_release -d  
SUSE Linux Enterprise Server 11 (x86_64)
```

```
From /etc/*release* /etc/*version*  
SuSE-release:  
SUSE Linux Enterprise Server 11 (x86_64)  
VERSION = 11  
PATCHLEVEL = 3
```

```
uname -a:  
Linux speccompsles 3.0.76-0.11-default #1 SMP Fri Jun 14 08:21:43 UTC 2013  
(ccab990) x86_64 x86_64 x86_64 GNU/Linux
```

```
run-level 3 Aug 25 09:05 last=S
```

```
SPEC is set to: /opt/omp2012  
Filesystem      Type  Size  Used Avail Use% Mounted on  
/dev/sdal       ext3  275G  154G  107G   60% /
```

```
Additional information from dmidecode:  
BIOS Cisco Systems, Inc. C220M4.2.0.2.67.072320142036 07/23/2014  
Memory:  
16x 0xCE00 M393A2G40DB0-CPB 16 GB 2133 MHz  
8x NO DIMM NO DIMM
```

(End of data from sysinfo program)

## General Notes

=====  
BIOS settings notes:

```
Intel Turbo Boost Technology (Turbo) : Enabled  
Transparent Huge Pages enabled with:  
echo always > /sys/kernel/mm/transparent_hugepage/enabled  
CPU performance set to HPC  
Processor Power State C6 set to Disabled  
Power Technology set to Custom  
Memory RAS configuration set to Maximum Performance  
Energy Performance BIAS setting set to Balanced Performance  
Cluster on Die set to Disabled
```

```
=====  
General OMP Library Settings  
ENV_KMP_LIBRARY=turnaround  
ENV_KMP_STACKSIZE=186M  
ENV_KMP_BLOCKTIME=infinite  
ENV_OMP_DYNAMIC=FALSE  
ENV_OMP_NESTED=FALSE  
ENV_OMP_WAIT_POLICY=ACTIVE
```

Continued on next page

# SPEC OMPG2012 Result

Copyright 2012-2014 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS C220 M4 (Intel Xeon E5-2699 v3 @ 2.30 GHz)

SPECompG\_peak2012 = 10.3

SPECompG\_base2012 = 9.67

OMP2012 license:9019

Test sponsor: Cisco Systems

Tested by: Cisco Systems

Test date: Aug-2014

Hardware Availability: Sep-2014

Software Availability: Jun-2013

## General Notes (Continued)

=====  
General base OMP Library Settings

ENV\_KMP\_AFFINITY=compact,0

=====  
General peak OMP Library Settings

ENV\_KMP\_AFFINITY=compact,0

=====  
Per benchmark peak OMP Library Settings

=====  
351.bwaves:peak:

ENV\_KMP\_AFFINITY=compact,1

ENV\_OMP\_SCHEDULE=static,1

=====  
362.fma3d:peak:

ENV\_KMP\_AFFINITY=compact,1

ENV\_OMP\_SCHEDULE=guided

=====  
ENV\_OMP\_SCHEDULE=static,1

=====  
363.swim:peak:

ENV\_KMP\_AFFINITY=compact,1

=====  
372.smithwa:peak:

ENV\_KMP\_AFFINITY=compact,1

## Base Compiler Invocation

C benchmarks:

icc

C++ benchmarks:

icpc

Fortran benchmarks:

ifort

## Base Portability Flags

350.md: -FR

Continued on next page

Standard Performance Evaluation Corporation

info@spec.org

http://www.spec.org/

Page 4

# SPEC OMPG2012 Result

Copyright 2012-2014 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS C220 M4 (Intel Xeon E5-2699 v3 @ 2.30 GHz)

SPECompG\_peak2012 = 10.3

SPECompG\_base2012 = 9.67

OMP2012 license:9019

Test sponsor: Cisco Systems

Tested by: Cisco Systems

Test date: Aug-2014

Hardware Availability: Sep-2014

Software Availability: Jun-2013

## Base Portability Flags (Continued)

357.bt331: -mmodel=medium  
363.swim: -mmodel=medium  
367.imagick: -std=c99

## Base Optimization Flags

C benchmarks:  
-O3 -openmp -ipo -xAVX -ansi-alias

C++ benchmarks:  
-O3 -openmp -ipo -xAVX -ansi-alias

Fortran benchmarks:  
-O3 -openmp -ipo -xAVX -align array64byte

## Peak Compiler Invocation

C benchmarks:  
icc

C++ benchmarks:  
icpc

Fortran benchmarks:  
ifort

## Peak Portability Flags

350.md: -FR  
357.bt331: -mmodel=medium  
363.swim: -mmodel=medium  
367.imagick: -std=c99

## Peak Optimization Flags

C benchmarks:  
352.nab: -O3 -openmp -ipo -xAVX -fno-alias -opt-malloc-options=1  
-opt-calloc -fp-model fast=2 -no-prec-div -no-prec-sqrt  
-ansi-alias

Continued on next page

# SPEC OMPG2012 Result

Copyright 2012-2014 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS C220 M4 (Intel Xeon E5-2699 v3 @ 2.30 GHz)

SPECompG\_peak2012 = 10.3

SPECompG\_base2012 = 9.67

OMP2012 license:9019

Test sponsor: Cisco Systems

Tested by: Cisco Systems

Test date: Aug-2014

Hardware Availability: Sep-2014

Software Availability: Jun-2013

## Peak Optimization Flags (Continued)

358.botsalgn: -O3 -openmp -ipo -xSSE4.2 -fno-alias -ansi-alias

359.botsspar: -O3 -openmp -ipo -xAVX -fno-alias -ansi-alias

367.imagick: -O2 -openmp -ipo -xAVX -ansi-alias

372.smithwa: -O2 -openmp -ipo -xSSE4.2 -fno-alias  
-opt-streaming-stores always -opt-malloc-options=1  
-ansi-alias

C++ benchmarks:

-O3 -openmp -ipo -xAVX -fno-alias -ansi-alias

Fortran benchmarks:

350.md: -O2 -openmp -ipo -xAVX -fno-alias -opt-malloc-options=1  
-fp-model fast=2 -no-prec-div -no-prec-sqrt  
-align array64byte

351.bwaves: -O3 -openmp -ipo -xAVX -fno-alias -fp-model fast=2  
-no-prec-div -no-prec-sqrt -align array64byte

357.bt331: Same as 351.bwaves

360.ilbdc: -O3 -openmp -ipo -xAVX -opt-malloc-options=1  
-align array64byte

362.fma3d: -O3 -openmp -ipo -xAVX -fno-alias -align array64byte

363.swim: -O3 -openmp -ipo -xSSE4.2 -fno-alias  
-opt-streaming-stores always -opt-malloc-options=3  
-align array64byte

370.mgrid331: -O2 -openmp -ipo -xSSE4.2 -fno-alias  
-opt-malloc-options=3 -align array64byte

371.applu331: -O2 -openmp -ipo -xAVX -align array64byte

SPEC is a registered trademark of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC OMP2012 v1.0.  
Report generated on Tue Aug 26 07:52:59 2014 by SPEC OMP2012 PS/PDF formatter v1890.