



Cisco UCS XE130c M8 Compute Node



CISCO SYSTEMS
170 WEST TASMAN DR.
SAN JOSE, CA, 95134
WWW.CISCO.COM

PUBLICATION HISTORY

REV A.01 NOVEMBER 05, 2025

OVERVIEW	3
DETAILED VIEWS	4
Cisco UCS XE130c M8 Compute Node Front View	4
COMPUTE NODE STANDARD CAPABILITIES and FEATURES	6
CONFIGURING the Cisco UCS XE130c M8 Compute Node	8
STEP 1 CHOOSE BASE CISCO UCS XE130c M8 COMPUTE NODE SKU	9
STEP 2 CHOOSE AI INTENT (REQUIRED)	10
STEP 3 SELECT MEMORY (REQUIRED)	11
Memory configurations and mixing rules	13
STEP 4 CHOOSE GPUs (OPTIONAL)	14
STEP 5 SELECT M.2 BOOT RAID CONTROLLER and SATA SSDs (OPTIONAL)	15
STEP 6 SELECT RISERS (REQUIRED)	17
STEP 7 SELECT DRIVES (OPTIONAL)	18
STEP 8 SELECT OPTION CARD(s) (OPTIONAL)	19
STEP 9 CHOOSE OPTIONAL TRUSTED PLATFORM MODULE	20
STEP 10 SELECT OPERATING SYSTEM AND THIRD PARTY SOFTWARE	21
SUPPLEMENT MATERIAL	29
System Board	29
TECHNICAL SPECIFICATIONS	30
Dimensions and Weight	30
Environmental Specifications	30
System Requirements	30
Power Specifications	31

OVERVIEW

Cisco Unified Edge brings together computing, storage, routing, switching, and security into a single configurable solution to help IT organizations simplify the deployment, operations, and lifecycle management of edge infrastructure at global scale. Cisco Unified Edge is a fully integrated, edge-optimized, AI-ready, and SaaS managed platform, engineered to deliver a superior user experience with unprecedented visibility, consistency, and control for a host of edge use cases.

Cisco Unified Edge is a modular edge platform, with a 3RU, short-depth, multi-mountable chassis with features to operate in extended temperature range (5°C to 45°C), maintain a quiet acoustic profile (40s dBA at 25°C and 20% PWM), and offer protection against high particulate environments, allowing deployments in a wide range of physical spaces.

The Cisco UCS XE130c M8 is a family of 1RU, half-width compute nodes; up to five Cisco UCS XE130c M8 compute nodes can be housed inside a Cisco UCS XE9305 chassis. It delivers enterprise class, performance, versatility and density but in a compact edge-optimized form factor. Powered by the Intel® Xeon® 6 SoC processors with Performance-Cores and available in two riser configurations (“Storage-Optimized” and “IO-Optimized”), the Cisco UCS XE130c M8 offers industry-leading adaptability at the edge, supporting a variety of PCIe accelerators (such as GPUs) and adaptors, and integrated networking with two front-panel 1/10 Gbps NICs and two rear-facing 25 Gbps NICs connecting to the in-chassis network mid-plane. This versatility enables the Cisco UCS XE130c M8 as a building block in the deployment of a wide range of workloads including bare-metal servers, virtualization, containers, and AI/ML.

NOTE: All options listed in the spec Sheet are compatible with Intersight Managed Mode configurations. For firmware requirements for all components in Intersight Managed Mode [see Supported Systems](#).

Figure 1 Front View of Cisco UCS XE130c M8 Compute Node

Four Drive Configuration



Three Drive Configuration




DETAILED VIEWS

Cisco UCS XE130c M8 Compute Node Front View

Figure 3 & *Figure 3* is a front view of the Cisco UCS XE130c M8 Compute Node.

Figure 2 Cisco UCS XE130c M8 Compute Node Front View with four drive configuration

When Selected Storage Riser with four drive configuration

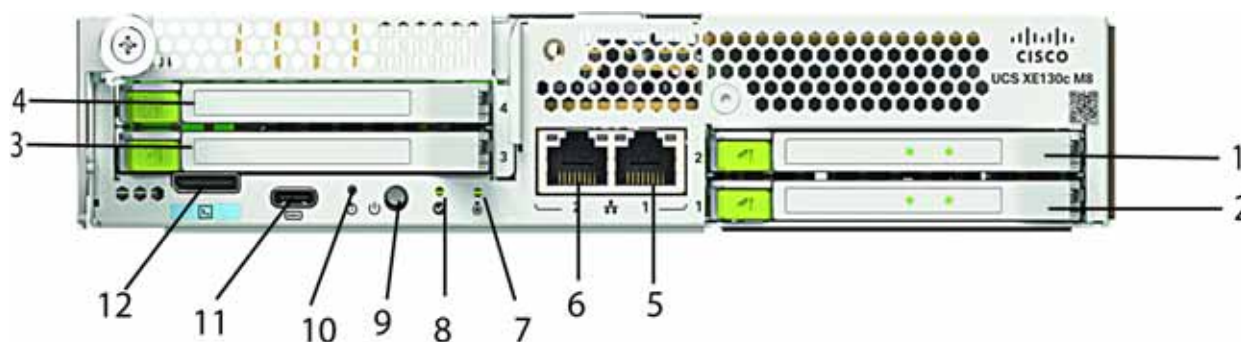


1	Drive Bay 1 (shown populated)	7	Status LED
2	Drive Bay 2 (shown populated)	8	Network activity LED
3	Drive Bay 3 (shown populated)	9	Power button/LED
4	Drive Bay 3 (shown populated)	10	Locate button/LED
5	RJ45 Connector	11	USB-C console
6	RJ45 Connector	12	OCuLink console port ¹

Notes:

1. An adapter cable (PID UCSX-C-DEBUGCBL) is required to connect the OCuLink port to the transition serial USB and video (SUV) octopus cable.

Figure 3 Cisco UCS XE130c M8 Compute Node Front View with three drive configuration

When Selected Storage Riser with three drive configuration

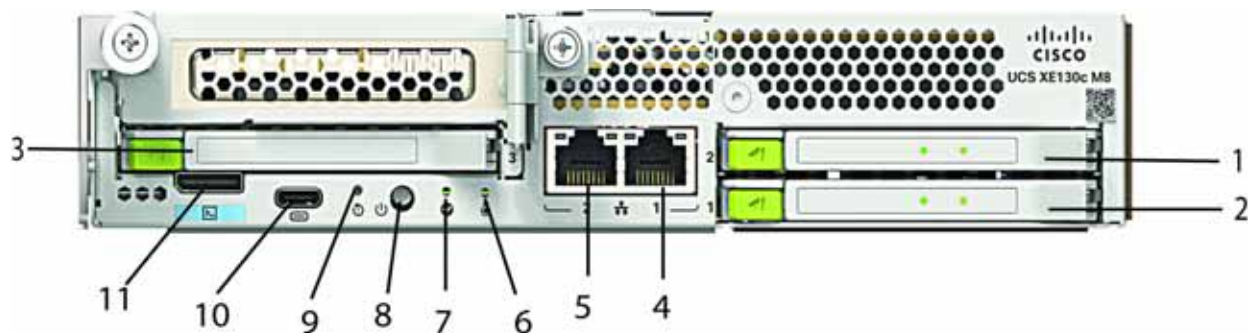

1	Drive Bay 1 (shown populated)	7	Network activity LED
2	Drive Bay 2 (shown populated)	8	Power button/LED
3	Drive Bay 3 (shown populated)	9	Locate button/LED
4	RJ45 Connector	10	USB-C console
5	RJ45 Connector	11	OCuLink console port ¹
6	Status LED	-	-

Notes:

1. An adapter cable (PID UCSX-C-DEBUGCBL) is required to connect the OCuLink port to the transition serial USB and video (SUV) octopus cable.

COMPUTE NODE STANDARD CAPABILITIES and FEATURES

Table 1 lists the capabilities and features of the base Cisco UCS XE130c M8 Compute Node. Details about how to configure the compute node for a listed feature or capability (for example, GPUs number of processors, drives, or amount of memory) are provided in [CONFIGURING the Cisco UCS XE130c M8 Compute Node on page 8](#)

Table 1 Capabilities and Features

Capability/Feature	Description
Form Factor and Chassis	■ 1RU-high and half-width compute node. ■ The Cisco UCS XE130c M8 compute node mounts in a Cisco UCS XE9305 chassis.
CPU	One Intel® Xeon® 6 SoC with P-Cores Processor, with 12, 20 or 32 physical cores.
Memory	■ 8 total DDR5 DIMM Slots, at up to 6400 MT/s RDIMMs ■ Up to 768GB of main memory with eight 96 GB DDR5-6400 DIMMs.
GPU	■ One dedicated PCIe Gen5 GPU slot for a HHHL GPU
Networking	■ Two rear-facing integrated 25 Gbps uplink ports connecting via chassis mid-plane to the embedded switches on both Cisco UCS XE chassis management controllers. ■ Two front-facing integrated 10 Gbps RJ45 host ports.
Storage	There are two types of flash storage options simultaneously available in the Cisco UCS XE130c M8 compute node: ■ Internal M.2 SSDs: Up to two M.2 SSDs protected by hardware RAID 1 ■ Front-Facing E3.S NVMe Drives: • Storage-Optimized” configuration: up to four E3.S NVMe drive slots • IO-Optimized” configuration: up to three E3.S NVMe drive slots
PCIe Adapter	■ One PCIe Gen5 slot for a HHHL PCIe adapter requires IO-optimized configuration.
Front Panel Interfaces	■ One KVM connector ■ One USB-C port
Power subsystem	Power is supplied from the Cisco UCS XE9305 chassis power supplies. The Cisco UCS XE130c M8 Compute Node consumes a maximum of 425W.
Fans	Integrated in the Cisco UCS XE9305 chassis.
Integrated management processor	■ The built-in Cisco Integrated Management Controller enables monitoring of Cisco UCS XE130c M8 Compute Node inventory, health, and system event logs. ■ ASPEED AST2600

Table 1 Capabilities and Features (*continued*)

Capability/Feature	Description
Firmware standards	■ UEFI Spec 2.9 ■ ACPI 6.5 ■ SMBIOS Ver 3.7
Front Indicators	■ Power button and indicator ■ System activity indicator ■ Location button and indicator
Management	■ Cisco Intersight software (SaaS, Virtual Appliance and Private Virtual Appliance)¹
Security	■ The server supports an optional trusted platform module (TPM). Additional features include a secure boot FPGA and ACT2 anti-counterfeit provisions.

Notes:

1. Virtual Appliance and Private Virtual Appliance available post FCS.

CONFIGURING the Cisco UCS XE130c M8 Compute Node

Follow these steps to configure the Cisco UCS XE130c M8 Compute Node:

- *STEP 1 CHOOSE BASE CISCO UCS XE130c M8 COMPUTE NODE SKU, page 9*
- *STEP 2 CHOOSE AI INTENT (REQUIRED), page 10*
- *STEP 3 SELECT MEMORY (REQUIRED), page 11*
- *STEP 4 CHOOSE GPUS (OPTIONAL), page 14*
- *STEP 5 SELECT M.2 BOOT RAID CONTROLLER and SATA SSDs (OPTIONAL), page 15*
- *STEP 6 SELECT RISERS (REQUIRED), page 16*
- *STEP 7 SELECT DRIVES (OPTIONAL), page 17*
- *STEP 8 SELECT OPTION CARD(s) (OPTIONAL), page 18*
- *STEP 9 CHOOSE OPTIONAL TRUSTED PLATFORM MODULE, page 19*
- *STEP 10 SELECT OPERATING SYSTEM AND THIRD PARTY SOFTWARE, page 20*

STEP 1 CHOOSE BASE CISCO UCS XE130c M8 COMPUTE NODE SKU

Top Level ordering product ID (PID) of the Cisco UCS XE130c M8 Compute Node as shown in [Table 2](#)

Table 2 Top level ordering PID

Product ID (PID)	Description
UCSX-E-M8-MLB	Unified Edge Chassis and Node MLB

Select the product ID (PID) of the Cisco UCS XE130c M8 Compute Node as shown in [Table 3](#).



NOTE:

- The CPU core count is part of the SKU and cannot be changed. Choose nodes based on the desired CPU core count and the number of sleds.
- For UCSXE-130C-M8-12, UCSXE-130C-M8-20, UCSXE-130C-M8-32 (non-stand alone nodes): These are required selections, multi-select, with a minimum of 1 (out of 3 sleds) and a maximum of 5 total compute nodes per chassis.

Table 3 PID of the Base Cisco UCS XE130c M8 Compute Node

Product ID (PID)	Description
UCSX-E-130C-M8-12	Cisco UCS XE130c M8 12-Core 1U Compute Node without memory, risers, drives, GPUs, or adapters (ordered as a UCS XE9305 chassis option)
UCSX-E-130C-M8-20	Cisco UCS XE130c M8 20-Core 1U Compute Node without memory, risers, drives, GPUs, or adapters (ordered as a UCS XE9305 chassis option)
UCSX-E-130C-M8-32	Cisco UCS XE130c M8 32-Core 1U Compute Node without memory, risers, drives, GPUs, or adapters (ordered as a UCS XE9305 chassis option)
UCSX-E-130C-M8-12-U	Cisco UCS XE130c M8 12-Core 1U Compute Node without memory, risers, drives, GPUs, or adapters (ordered standalone)
UCSX-E-130C-M8-20-U	Cisco UCS XE130c M8 20-Core 1U Compute Node without memory, risers, drives, GPUs, or adapters (ordered standalone)
UCSX-E-130C-M8-32-U	Cisco UCS XE130c M8 32-Core 1U Compute Node without memory, risers, drives, GPUs, or adapters (ordered standalone)

A base Cisco UCS XE130c M8 Compute Node ordered in [Table 3](#) does not include any components or options. They must be selected during product ordering.

Please follow the steps on the following pages to order components such as the following, which are required in a functional compute node:

- GPU
- Memory
- Risers
- Drives
- TPM

STEP 2 CHOOSE AI INTENT (REQUIRED)

Select AI Intent

The available AI Intent options are listed in [Table 4](#)



NOTE: For stand-alone (-U) compute nodes, a required AI Intent must be selected to define the primary use case.

Table 4 Available AI Intent

GPU Product ID (PID)	PID Description
COMPUTE-AI	Compute Artificial Intelligence Use Case
COMPUTE-OTHER	Compute Other Use Case


STEP 3 SELECT MEMORY (REQUIRED)

The [Table 5](#) below describes the main memory DIMM features supported on the server.

Table 5 Server Main Memory Features

Memory server technologies	Description
	DIMM
Intel® Xeon® CPU generation	Intel® Xeon® 6 SoC with P-Cores Processor
DDR5 memory clock speed	Up to 6400 MT/s 1DPC; Up to 5200 MT/s 2DPC
Operational voltage	1.1 Volts
DRAM fab density	16Gb and 24Gb
Memory type	RDIMM (Registered DDR5 DIMM)
Memory DRAM DIMM organization	Two memory DIMM channels per CPU; up to 2 DIMMs Per Channel
Maximum number of DRAM DIMM per server	8 (1-Socket)
DRAM DIMM Densities and Ranks	16GB 1Rx8, 32GB 1Rx4, 48GB 1Rx4, 64GB 2Rx4, 96GB 2Rx4
Maximum system memory capacity	768GB (8x96GB)

Figure 4 XE130c M8 Memory Organization Block Diagram

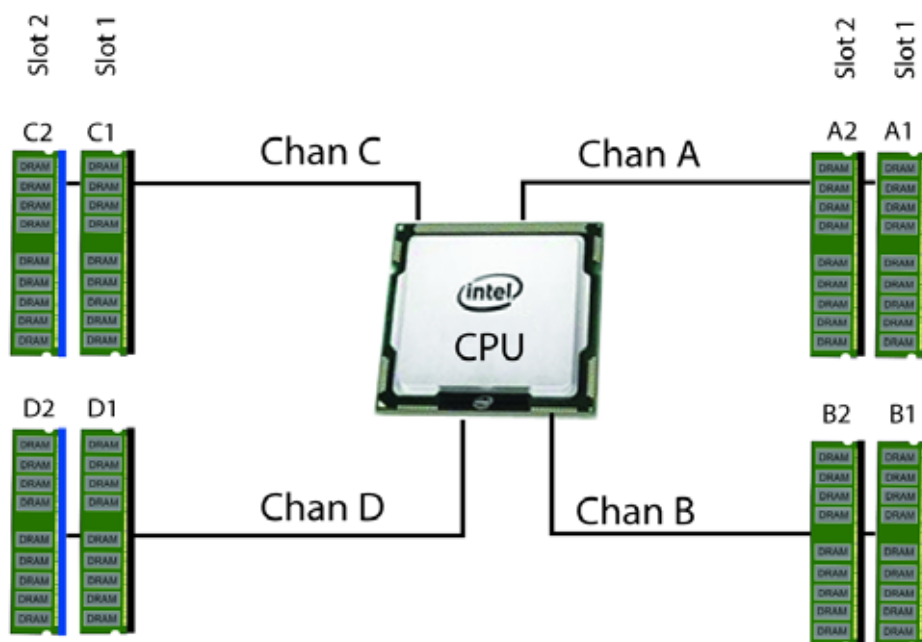

2 memory channels per CPU and up to 2 DIMMs per channel
8 DIMMS in total (Single CPU)

Select DIMMs

Select the memory configuration and whether or not you want the memory mirroring option. The available memory DIMMs and mirroring option are listed in [Table 6](#).



NOTE: When memory mirroring is enabled, the memory subsystem simultaneously writes identical data to two channels. If a memory read from one of the channels returns incorrect data due to an uncorrectable memory error, the system automatically retrieves the data from the other channel. A transient or soft error in one channel does not affect the mirrored data, and operation continues unless there is a simultaneous error in exactly the same location on a DIMM and its mirrored DIMM. Memory mirroring reduces the amount of memory available to the operating system by 50% because only one of the two populated channels provides data.

Table 6 Memory Options

Product ID (PID)	PID Description	Ranks/DIMM
DDR5-6400 MT/s Cisco Memory PIDs list		
UCSXE-MRX16G1RE5	16GB RDIMM 1Rx8 1.1Volts (16Gb)	1
UCSXE-MRX32G1RE5	32GB RDIMM 1Rx4 1.1Volts (16Gb)	1
UCSXE-MRX48G1RF5	48GB RDIMM 1Rx4 1.1Volts (24Gb)	1
UCSXE-MRX64G2RE5	64GB RDIMM 2Rx4 1.1Volts (16Gb)	2
UCSXE-MRX96G2RF5	96GB RDIMM 2Rx4 1.1Volts (24Gb)	2
Memory Mirroring Option		
N01-MMIRRORD	Memory mirroring option	
Accessories/spare included with Memory configuration:		
■ UCS-DDR5-BLK¹ is auto included for the unpopulated DIMM slots		

Notes:

1. Any empty DIMM slot must be populated with a DIMM blank to maintain proper cooling airflow.

Memory configurations and mixing rules

- **Golden Rule:** Memory on every CPU socket shall be configured identically. Unbalanced populations are unsupported. Mixing different DIMM densities within the channel or across the channel is not supported.
- For full details on supported memory configuration, see the [UCS XE130C M8 Memory Guide](#).

STEP 4 CHOOSE GPUs (OPTIONAL)

Select GPU

The available Compute node GPU options are listed in [Table 7](#)

**NOTE:**

- GPU selection is optional, with a maximum of 1 GPU per compute node.
- Selecting a GPU will require the necessary NVIDIA AI Enterprise (NVAIE) software license. For a complete list of supported GPUs, please refer to the Hardware and Software Compatibility List (HCL)

Table 7 Available GPU Card

GPU Product ID (PID)	PID Description
UCSXE-GPU-L4	NVIDIA L4:70W, 24GB, 1-slot HHL GPU

STEP 5 SELECT M.2 BOOT RAID CONTROLLER and SATA SSDs (OPTIONAL)

- **Select Cisco M.2 drives:** Order two matching M.2 drives. This connector accepts the boot-optimized RAID controller (see [Table 9](#)). Each boot-optimized RAID controller can accommodate two M.2 drives shown in [Table 8](#).



NOTE:

- Each boot-optimized RAID controller can accommodate two M.2 drives shown in [Table 8](#). The boot-optimized RAID controller plugs into the motherboard.
- It is recommended that M.2 drives be used as boot-only devices.
- M.2 drives support UEFI boot mode only; legacy boot mode is not supported.
- If M.2 drives are selected, a minimum of 2 drives are required. Drives must be selected in quantities of 0 or 2 (QTY 1 is not allowed). Mixing of different M.2 SATA SSD capacities is not allowed within a single compute node.
- M.2 drives are optional as E3.S NVMe drives can also be used for booting

Table 8 M.2 Drives

Product ID (PID)	PID Description
UCSX-E-M2-240G	240GB 2.5in M.2 SATA Micron G2 SSD
UCSX-E-M2-480G	480GB 2.5in M.2 SATA Micron G2 SSD
UCSX-E-M2-960G	960GB 2.5in M.2 SATA Micron G2 SSD
UCSX-E-M22400A1V	240GB M.2 Boot Solidigm S4520 SATA 1X SSD
UCSX-E-M24800A1V	480GB M.2 Boot Solidigm S4520 SATA 1X SSD

- **Cisco 6GB/s SATA Boot-Optimized M.2 RAID Controller (included):** Boot-Optimized RAID controller (UCSX-M2I-HWRD-FPS) for hardware RAID across two SATA M.2 storage modules. The Boot-Optimized RAID controller plugs into the motherboard and the M.2 SATA drives plug into the Boot-Optimized RAID controller.



NOTE:

- The UCSXE-M2-HWRD2 is auto included with the server configuration if M.2 drives are selected.
- The UCSXE-M2-HWRD2 controller supports RAID 1 and JBOD mode is only available with M.2 SATA SSDs listed in [Table 8](#).
- Cisco Intersight is supported for configuring of volumes and monitoring of the controller and installed SATA M.2 drives
- Hot-plug replacement is not supported. The compute node must be powered off to replace.

Table 9 M.2 RAID Controller

Product ID (PID)	PID Description
UCSX-E-M2-HWRD2	M.2 RAID Controller for UCS XE-Series Compute Nodes

STEP 6 SELECT RISERS (REQUIRED)

The riser PIDs are listed in [Table 10](#).

Table 10 PIDs of the Risers

Product ID (PID)	Description	Approved Configurations
Storage Riser		
UCSX-1U-E3S-2L	Left E3.S 2-Drive Riser Assembly for UCS XE9305 Chassis (4-drive back plane)	When the UCSX-1U-E3S-1L storage riser is included in the server configuration, the UCSX-1U-PCI-L IO riser is also required
UCSX-1U-E3S-1L	Left E3.S 1-Drive Riser Assembly for UCS XE9305 Chassis (3-drive back plane)	
IO Riser		
UCSX-1U-PCI-L	Left PCIe Riser for UCS XE9305 Chassis	When the UCSX-1U-PCI-L IO riser is chosen for the server configuration, the UCSX-1U-E3S-1L storage riser must also be selected

STEP 7 SELECT DRIVES (OPTIONAL)

The standard disk drive features are:

- E3.S 1 NVMe Drives
- Hot-pluggable
- Drives come mounted in sleds

Select Drives

The available drives listed [Table 11](#)



NOTE:

- E3.S drives are optional if M.2 boot drives are selected.
- If M.2 boot drives are NOT selected, a minimum of 1 E3.S drive is required.
- The maximum number of E3.S drives is 4 for If the UCSXE-1U-E3S-2L riser is selected.
- If the UCSXE-1U-PCI-L (Left PCIe Riser) is selected, the maximum number of E3.S drives is 3.

Table 11 Available E3.S 1T NVMe Drives

Product ID (PID)	PID Description	Speed	Capacity
UCSXE-NVE11T6K1P	1.6TB E3.S1T KCD8XPJE HgPerf HgEnd Gen5 3X NVMe (SIE SCEF)	3X	1.6 TB
UCSXE-NVE13T2K1P	3.2TB E3.S1T KCD8XPJE HgPerf HgEnd Gen5 3X NVMe (SIE SCEF)	3X	3.2 TB
UCSXE-NVE16T4K1P	6.4TB E3.S1T KCD8XPJE HgPerf HgEnd Gen5 3X NVMe (SIE SCEF)	3X	6.4 TB
UCSXE-NVE112T8K1P	12.8TB E3.S1T KCD8XPJE HgPerf HgEnd Gen5 3X NVMe (SIE SCEF)	3X	12.8 TB
UCSXE-NVE11T9K1V	1.9TB E3.S1T KCD8XPJE HgPerf MedEnd Gen5 1X NVMe (SIE SCEF)	1X	1.9 TB
UCSXE-NVE13T8K1V	3.8TB E3.S1T KCD8XPJE HgPerf MedEnd Gen5 1X NVMe (SIE SCEF)	1X	3.8 TB
UCSXE-NVE17T6K1V	7.6TB E3.S1T KCD8XPJE HgPerf MedEnd Gen5 1X NVMe (SIE SCEF)	1X	7.6 TB
UCSXE-NVE115T3K1V	15.3TB E3.S1T KCD8XPJE HgPerf MedEnd Gen5 1X NVMe (SIE SCEF)	1X	15.3 TB
Accessories/spare included with drives			
■ UCSXE-E3S1T-F is included for any unpopulated front storage device bays.			

STEP 8 SELECT OPTION CARD(S) (OPTIONAL)

For up-to-date server compatibility, please check the Hardware and Software compatibility list (HCL) at <https://ucshcltool.cloudapps.cisco.com/public/>.

The standard PCIe card offerings are:

- Network Interface Cards (NICs)
- Host Bus Adapter (HBA)

Select Option Cards

The available option cards are listed in [Table 12](#).



NOTE:

- PCIe Adapter selection is optional, with a maximum of 1 PCIe Adapter per compute node.
- Selection of a PCIe Adapter requires the UCSXE-1U-PCI-L (Left PCIe Riser) to be selected.

Table 12 Available PCIe Option Cards

Product ID (PID)	PID Description	Location	Card Size ¹
Network Interface Cards (NICs)			
1GbE NICs			
UCSX-E-P-IQ1GC	Cisco-Intel I710-T4L 4x1GBASE-T NIC	Left PCIe riser (S2)	HHHL, SS
10GbE NICs			
UCSX-E-P-ID10GC	Cisco-Intel X710T2LG 2x10GBE RJ45 PCIe NIC	Left PCIe riser (S2)	HHHL, SS
UCSX-E-P-IQ10GC	Cisco-Intel X710T4LG 4x10GBE RJ45 PCIe NIC	Left PCIe riser (S2)	HHHL, SS
25GbE NICs			
UCSX-E-P-I8D25GF	Cisco-Intel E810XXVDA2 2x25/10GBE SFP28 PCIe NIC	Left PCIe riser (S2)	HHHL, SS
100GbE NICs			
UCSX-E-P-I8D100GF	Cisco-Intel E810CQDA2 2x100 GbE QSFP28 PCIe NIC	Left PCIe riser (S2)	HHHL, SS
HBA			
UCSX-E-P-Q7D64GF	Cisco-QLogic QLE2872 2x 16/32/64GFC Gen 7 Enhanced PCIe HBA	Left PCIe riser (S2)	HHHL, SS

Notes:

1. HHHL = half-height, half-length; FHHL = full-height, half-length; SS = single-slot; DS = double-slot. SFF = small form factor.

STEP 9 CHOOSE OPTIONAL TRUSTED PLATFORM MODULE

Trusted Platform Module (TPM) is a computer chip or microcontroller that can securely store artifacts used to authenticate the platform or Cisco UCS XE130c M8 Compute Node. These artifacts can include passwords, certificates, or encryption keys. A TPM can also be used to store platform measurements that help ensure that the platform remains trustworthy. Authentication (ensuring that the platform can prove that it is what it claims to be) and attestation (a process helping to prove that a platform is trustworthy and has not been breached) are necessary steps to ensure safer computing in all environments.

Table 13 Available TPM Option

Product ID (PID)	Description
UCSX-TPM-002D	TPM 2.0 TCG FIPS140-2 CC+ Cert M7 Intel MSW2022 Compliant



NOTE:

- TPM selection is optional, with a maximum of 1 TPM per compute node.
- The TPM module used in this system conforms to TPM v2.0 as defined by the Trusted Computing Group (TCG).
- TPM installation is supported after-factory. However, a TPM installs with a one-way screw and cannot be replaced, upgraded, or moved to another compute node. If a Cisco UCS XE130c M8 Compute Node with a TPM is returned, the replacement unit must be ordered with a new TPM. If there is no existing TPM in the Cisco UCS XE130c M8 Compute Node, you can install a TPM 2.0. Refer to the following document for Installation location and instructions:

STEP 10 SELECT OPERATING SYSTEM AND THIRD PARTY SOFTWARE



NOTE:

- See this link for operating system guidance:
<https://ucshcltool.cloudapps.cisco.com/public/>

Table 14 Operating System

Product ID (PID)	PID Description
Microsoft Windows Server	
MSWS-22-ST16C	Windows Server 2022 Standard (16 Cores/2 VMs)
MSWS-22-ST16C-RM	Windows Server 2022 Stan (16 Cores/2 VMs) Rec Media DVD Only
MSWS-22-STA2C	Windows Server 2022 Standard - Additional 2 Cores
MSWS-22-ST16C-NS	Windows Server 2022 Standard (16 Cores/2 VMs) - No Cisco SVC
MSWS-22-ST16C-RM	Windows Server 2022 Stan (16 Cores/2 VMs) Rec Media DVD Only
MSWS-22-STA2C-NS	Windows Server 2022 Stan - Additional 2 Cores - No Cisco SVC
MSWS-22-DC16C	Windows Server 2022 Data Center (16 Cores/Unlimited VMs)
MSWS-22-DC16C-RM	Windows Server 2022 DC (16Cores/Unlim VM) Rec Media DVD Only
MSWS-22-DCA2C	Windows Server 2022 Data Center - Additional 2 Cores
MSWS-22-DC16C-NS	Windows Server 2022 DC (16 Cores/Unlim VMs) - No Cisco SVC
MSWS-22-DC16C-RM	Windows Server 2022 DC (16Cores/Unlim VM) Rec Media DVD Only
MSWS-22-DCA2C-NS	Windows Server 2022 DC - Additional 2 Cores - No Cisco SVC
MSWS-25-ST16C	Windows Server 2025 Standard (16 Cores/2 VMs)
MSWS-25-ST16C-RM	Windows Server 2025 Stan (16 Cores/2 VMs) Rec Media DVD Only
MSWS-25-STA2C	Windows Server 2025 Standard - Additional 2 Cores
MSWS-25-STA4C	Windows Server 2025 Standard - Additional 4 Cores
MSWS-25-STA16C	Windows Server 2025 Standard - Additional 16 Cores
MSWS-25-ST16C-NS	Windows Server 2025 Standard (16 Cores/2 VMs) - No Cisco SVC
MSWS-25-ST16C-RM	Windows Server 2025 Stan (16 Cores/2 VMs) Rec Media DVD Only
MSWS-25-STA2C-NS	Windows Server 2025 Stan - Additional 2 Cores - No Cisco SVC
MSWS-25-STA4C-NS	Windows Server 2025 Stan - Additional 4 Cores- No Cisco SVC
MSWS-25-STA16C-NS	Windows Server 2025 Stand - Additional 16 Cores- No Cisco SVC
MSWS-25-ST24C	Windows Server 2025 Standard (24 Cores)

Table 14 Operating System (*continued*)

Product ID (PID)	PID Description
MSWS-25-ST16C-RM	Windows Server 2025 Stan (16 Cores/2 VMs) Rec Media DVD Only
MSWS-25-STA2C	Windows Server 2025 Standard - Additional 2 Cores
MSWS-25-STA4C	Windows Server 2025 Standard - Additional 4 Cores
MSWS-25-STA16C	Windows Server 2025 Standard - Additional 16 Cores
MSWS-25-ST24C-NS	Windows Server 2025 Standard (24 Cores) - No Cisco SVC
MSWS-25-ST16C-RM	Windows Server 2025 Stan (16 Cores/2 VMs) Rec Media DVD Only
MSWS-25-STA2C-NS	Windows Server 2025 Stan - Additional 2 Cores - No Cisco SVC
MSWS-25-STA4C-NS	Windows Server 2025 Stan - Additional 4 Cores- No Cisco SVC
MSWS-25-STA16C-NS	Windows Server 2025 Stand - Additional 16 Cores- No Cisco SVC
MSWS-25-DC16C	Windows Server 2025 Data Center (16 Cores/Unlimited VMs)
MSWS-25-DC16C-RM	Windows Server 2025 DC (16Cores/Unlim VM) Rec Media DVD Only
MSWS-25-DCA2C	Windows Server 2025 Data Center - Additional 2 Cores
MSWS-25-DCA4C	Windows Server 2025 Data Center - Additional 4 Cores
MSWS-25-DCA16C	Windows Server 2025 Data Center - Additional 16 Cores
MSWS-25-DC16C-NS	Windows Server 2025 DC (16 Cores/Unlim VMs) - No Cisco SVC
MSWS-25-DC16C-RM	Windows Server 2025 DC (16Cores/Unlim VM) Rec Media DVD Only
MSWS-25-DCA2C-NS	Windows Server 2025 DC - Additional 2 Cores - No Cisco SVC
MSWS-25-DCA4C-NS	Windows Server 2025 DC - Additional 4 Cores- No Cisco SVC
MSWS-25-DCA16C-NS	Windows Server 2025 DC - Additional 16 Cores- No Cisco SVC
MSWS-25-DC24C	Windows Server 2025 Data Center (24 Cores)
MSWS-25-DC16C-RM	Windows Server 2025 DC (16Cores/Unlim VM) Rec Media DVD Only
MSWS-25-DCA2C	Windows Server 2025 Data Center - Additional 2 Cores
MSWS-25-DCA4C	Windows Server 2025 Data Center - Additional 4 Cores
MSWS-25-DCA16C	Windows Server 2025 Data Center - Additional 16 Cores
MSWS-25-DC24C-NS	Windows Server 2025 DC (24 Cores) - No Cisco SVC
MSWS-25-DC16C-RM	Windows Server 2025 DC (16Cores/Unlim VM) Rec Media DVD Only
MSWS-25-DCA2C-NS	Windows Server 2025 DC - Additional 2 Cores - No Cisco SVC
MSWS-25-DCA4C-NS	Windows Server 2025 DC - Additional 4 Cores- No Cisco SVC
MSWS-25-DCA16C-NS	Windows Server 2025 DC - Additional 16 Cores- No Cisco SVC

Table 14 Operating System (*continued*)

Product ID (PID)	PID Description
Red Hat	
RHEL-2S2V-1A	Red Hat Enterprise Linux (1-2 CPU,1-2 VN); 1-Yr Support Req
RHEL-2S-RS-1A	RHEL Resilent Storage (1-2 CPU); 1-Yr Support Req
RHEL-2S-HA-1A	RHEL High Availability (1-2 CPU); 1-Yr Support Req
RHEL-2S2V-3A	Red Hat Enterprise Linux (1-2 CPU,1-2 VN); 3-Yr Support Req
RHEL-2S-RS-3A	RHEL Resilent Storage (1-2 CPU); 3-Yr Support Req
RHEL-2S-HA-3A	RHEL High Availability (1-2 CPU); 3-Yr Support Req
RHEL-2S2V-5A	Red Hat Enterprise Linux (1-2 CPU,1-2 VN); 5-Yr Support Req
RHEL-2S-RS-5A	RHEL Resilent Storage (1-2 CPU); 5-Yr Support Req
RHEL-2S-HA-5A	RHEL High Availability (1-2 CPU); 5-Yr Support Req
RHEL-VDC-2SUV-1A	RHEL for Virt Datacenters (1-2 CPU, Unlim VN) 1 Yr Supp Req
RHEL-2S-RS-1A	RHEL Resilent Storage (1-2 CPU); 1-Yr Support Req
RHEL-2S-HA-1A	RHEL High Availability (1-2 CPU); 1-Yr Support Req
RHEL-VDC-2SUV-3A	RHEL for Virt Datacenters (1-2 CPU, Unlim VN) 3 Yr Supp Req
RHEL-2S-RS-3A	RHEL Resilent Storage (1-2 CPU); 3-Yr Support Req
RHEL-2S-HA-3A	RHEL High Availability (1-2 CPU); 3-Yr Support Req
RHEL-VDC-2SUV-5A	RHEL for Virt Datacenters (1-2 CPU, Unlim VN) 5 Yr Supp Req
RHEL-2S-RS-5A	RHEL Resilent Storage (1-2 CPU); 5-Yr Support Req
RHEL-2S-HA-5A	RHEL High Availability (1-2 CPU); 5-Yr Support Req
Red Hat Ent Linux/ High Avail/ Res Strg/ Scal	
RHEL-2S2V-1S	Red Hat Enterprise Linux (1-2 CPU,1-2 VN); Prem 1-Yr SnS
RHEL-2S2V-1YR	Red Hat Enterprise Linux (1-2 CPU,1-2 VN);Premium 24x7 - 1Yr
RHEL-2S2V-3S	Red Hat Enterprise Linux (1-2 CPU,1-2 VN); Prem 3-Yr SnS
RHEL-2S2V-3YR	Red Hat Enterprise Linux (1-2 CPU,1-2 VN);Premium 24x7 - 3Yr
RHEL-2S-HA-1S	RHEL High Availability (1-2 CPU); Premium 1-yr SnS
RHEL-2S-HA-1YR	RHEL High Availability (1-2 CPU); Premium 24x7 - 1 Year
RHEL-2S-HA-3S	RHEL High Availability (1-2 CPU); Premium 3-yr SnS
RHEL-2S-HA-3YR	RHEL High Availability (1-2 CPU); Premium 24x7 - 3 Year
RHEL-2S-RS-1S	RHEL Resilent Storage (1-2 CPU); Premium 1-yr SnS

Table 14 Operating System (*continued*)

Product ID (PID)	PID Description
RHEL-2S-RS-1YR	RHEL Resilent Storage (1-2 CPU); Premium 24x7 - 1 Year
RHEL-2S-RS-3S	RHEL Resilent Storage (1-2 CPU); Premium 3-yr SnS
RHEL-2S-RS-3YR	RHEL Resilent Storage (1-2 CPU); Premium 24x7 - 3 Year
RHEL-VDC-2SUV-1S	RHEL for Virt Datacenters (1-2 CPU, Unlim VN) 1 Yr SnS Req'd
RHEL-VDC-2SUV1YR	RHEL for Virtual Datacenters Premium 24x7 - 1 Yr SnS
RHEL-VDC-2SUV-3S	RHEL for Virt Datacenters (1-2 CPU, Unlim VN) 3 Yr SnS Req'd
RHEL-VDC-2SUV3YR	RHEL for Virtual Datacenters Premium 24x7 - 3 Yr SnS
Red Hat SAP	
RHEL-SAP-2S2V-1S	RHEL for SAP Apps (1-2 CPU, 1-2 VN); Prem 1-Yr SnS
RHEL-SAP-2S2V1YR	RHEL for SAP Apps (1-2 CPU, 1-2 VN); Premium 24x7 - 1-Yr
RHEL-SAP-2S2V-3S	RHEL for SAP Apps (1-2 CPU, 1-2 VN); Prem 3-Yr SnS
RHEL-SAP-2S2V3YR	RHEL for SAP Apps (1-2 CPU, 1-2 VN); Premium 24x7 - 3-Yr
RHEL-SAPSP-3S	RHEL SAP Solutions Premium - License with 3 Years of SnS
RHEL-SAPSS-3S	RHEL SAP Solutions Standard - License with 3 Years of SnS
SUSE	
SLES-2S2V-1S	SUSE Linux Enterprise Svr (1-2 CPU,1-2 VM); Prio 1-Yr SnS
SLES-2S2V-1YR	SUSE Linux Entp Svr (1-2 CPU,1-2 VM); Prio SnS 24x7 - 1 Year
SLES-2S2V-3S	SUSE Linux Enterprise Svr (1-2 CPU,1-2 VM); Prio 3-Yr SnS
SLES-2S2V-3YR	SUSE Linux Entp Svr (1-2 CPU,1-2 VM); Prio SnS 24x7 - 3 Year
SLES-2S2V-5S	SUSE Linux Enterprise Svr (1-2 CPU,1-2 VM); Prio 5-Yr SnS
SLES-2S2V-5YR	SUSE Linux Entp Svr (1-2 CPU,1-2 VM); Prio SnS 24x7 - 5 Year
SLES-2S-HA-1S	SUSE Linux High Availability Ext (1-2 CPU); 1Yr SnS
SLES-2S-HA-1YR	SUSE Linux High Avail Ext (1-2 CPU); Inherited SnS - 1 Year
SLES-2S-HA-3S	SUSE Linux High Availability Ext (1-2 CPU); 3Yr SnS
SLES-2S-HA-3YR	SUSE Linux High Avail Ext (1-2 CPU); Inherited SnS - 3 Year
SLES-2S-HA-5S	SUSE Linux High Availability Ext (1-2 CPU); 5Yr SnS
SLES-2S-HA-5YR	SUSE Linux High Avail Ext (1-2 CPU); Inherited SnS - 1 Year
SLES-2S-GC-1S	SUSE Linux GEO Clustering for HA (1-2 CPU); 1Yr Sns
SLES-2S-GC-1YR	SUSE Linux Geo Clustering (1-2 CPU); Inherited SnS - 1 Year

Table 14 Operating System (*continued*)

Product ID (PID)	PID Description
SLES-2S-GC-3S	SUSE Linux GEO Clustering for HA (1-2 CPU); 3Yr SnS
SLES-2S-GC-3YR	SUSE Linux Geo Clustering (1-2 CPU); Inherited SnS - 3 Year
SLES-2S-GC-5S	SUSE Linux GEO Clustering for HA (1-2 CPU); 5Yr SnS
SLES-2S-GC-5YR	SUSE Linux Geo Clustering (1-2 CPU); Inherited SnS - 5 Year
SLES-2S-LP-1S	SUSE Linux Live Patching Add-on (1-2 CPU); 1Yr SnS Required
SLES-2S-LP-1YR	SUSE Linux Live Patching Add-on (1-2 CPU); Inherited SnS 1 Yr
SLES-2S-LP-3S	SUSE Linux Live Patching Add-on (1-2 CPU); 3Yr SnS Required
SLES-2S-LP-3YR	SUSE Linux Live Patching Add-on (1-2 CPU); Inherited SnS 3 Yr
SLES-2SUV-1S	SUSE Linux Enterprise Svr (1-2 CPU,Unl VM) LP; Prio 1Y SnS
SLES-2SUV-1YR	SUSE Linux Entp Svr (1-2 CPU,Unl VM) LP; Prio SnS 24x7 - 1Y
SLES-2SUV-3S	SUSE Linux Enterprise Svr (1-2 CPU,Unl VM) LP; Prio 3Y SnS
SLES-2SUV-3YR	SUSE Linux Entp Svr (1-2 CPU,Unl VM) LP; Prio SnS 24x7 - 3Y
SLES-2SUV-5S	SUSE Linux Enterprise Svr (1-2 CPU,Unl VM) LP; Prio 5Y SnS
SLES-2SUV-5YR	SUSE Linux Entp Svr (1-2 CPU,Unl VM) LP; Prio SnS 24x7 - 5Y
SLES-2S2V-1A	SUSE Linux Enterprise Svr (1-2 CPU,1-2 VM); 1-Yr Support Req'd
SLES-2S2V-3A	SUSE Linux Enterprise Svr (1-2 CPU,1-2 VM); 3-Yr Support Req'd
SLES-2S2V-5A	SUSE Linux Enterprise Svr (1-2 CPU,1-2 VM); 5-Yr Support Req'd
SLES-2S-LP-1A	SUSE Linux Live Patching Add-on (1-2 CPU); 1Yr Support Req
SLES-2S-LP-3A	SUSE Linux Live Patching Add-on (1-2 CPU); 3Yr Support Req
SLES-2SUV-1A	SUSE Linux Enterprise Svr (1-2 CPU,Unl VM) LP; D1Y Supp Req
SLES-2SUV-3A	SUSE Linux Enterprise Svr (1-2 CPU,Unl VM) LP; D3Y Supp Req
SLES-2SUV-5A	SUSE Linux Enterprise Svr (1-2 CPU,Unl VM) LP; D5Y Supp Req
SLES and SAP	
SLES-SAP-2S2V-1S	SLES for SAP Apps (1-2 CPU, 1-2 VM); Priority 1-Yr SnS
SLES-SAP-2S2V1YR	SUSE for SAP Apps; (1-2 CPU,1-2 VM); Prio SnS 24x7 - 1 Year
SLES-SAP-2S2V-3S	SLES for SAP Apps (1-2 CPU, 1-2 VM); Priority 3-Yr SnS
SLES-SAP-2S2V3YR	SUSE for SAP Apps; (1-2 CPU,1-2 VM); Prio SnS 24x7 - 3 Year
SLES-SAP-2S2V-5S	SLES for SAP Apps (1-2 CPU, 1-2 VM); Priority 5-Yr SnS
SLES-SAP-2S2V5YR	SUSE for SAP Apps; (1-2 CPU,1-2 VM); Prio SnS 24x7 - 5 Year

Table 14 Operating System (*continued*)

Product ID (PID)	PID Description
SLES-SAP2SUV-1S	SLES for SAP Apps (1-2 CPU, Unl VM) LP; Priority 3Y SnS
SLES-SAP2SUV-1YR	SUSE for SAP Apps; (1-2 CPU,Unl VM) LP; Prio SnS 24x7 - 1Y
SLES-SAP2SUV-3S	SLES for SAP Apps (1-2 CPU, Unl VM) LP; Priority 3Y SnS
SLES-SAP2SUV-3YR	SUSE for SAP Apps; (1-2 CPU,Unl VM) LP; Prio SnS 24x7 - 3Y
SLES-SAP2SUV-5S	SLES for SAP Apps (1-2 CPU, Unl VM) LP; Priority 3Y SnS
SLES-SAP2SUV-5YR	SUSE for SAP Apps; (1-2 CPU,Unl VM) LP; Prio SnS 24x7 - 5Y
SLES-SAP-2S2V-1A	SLES for SAP Apps (1-2 CPU, 1-2 VM); 1-Yr Support Req
SLES-SAP-2S2V-3A	SLES for SAP Apps (1-2 CPU, 1-2 VM); 3-Yr Support Req
SLES-SAP-2S2V-5A	SLES for SAP Apps (1-2 CPU, 1-2 VM); 5-Yr Support Req
SLES-SAP2SUV-1A	SLES for SAP Apps w/ HA (1-2 CPU, Unl VM) LP; 1Y Supp Req
SLES-SAP2SUV-3A	SLES for SAP Apps w/ HA (1-2 CPU, Unl VM) LP; 3Y Supp Req
SLES-SAP2SUV-5A	SLES for SAP Apps w/ HA (1-2 CPU, Unl VM) LP; 5Y Supp Req

Table 15 3rd Party Software-RedHat

Product ID (PID)	PID Description
Red Hat OpenShift	
RH-OKE-B-P1S	OpenShift Kubernetes Eng(BM),Prem 1Y SnS Req(1-2 CPU-64core)
RH-OKE-B-P1Y	OpenShiftKubernetesEngine(BM),Prem1YSnS(1-2 CPUupto64cores)
RH-OKE-B-P3S	OpenShiftKubernetesEngine(BM),Prem 3YSnS Req(1-2 CPU-64core)
RH-OKE-B-P3Y	OpenShiftKubernetesEngine(BM),Prem 3YSnS(1-2CPUupto64cores)
RH-OCP-B-P1S	OpenShiftContainerPlatform(BM),Prem 1YSnS Req(1-2CPU-64core)
RH-OCP-B-P1Y	OpenShiftContainerPlatform(BM),Prem1YrSnS(1-2CPUupto64cores)
RH-OCP-B-P3S	OpenShiftContainerPlatform(BM),Prem 3YSnS Req(1-2CPU-64core)
RH-OCP-B-P3Y	OpenShiftContainerPlatform(BM),Prem3YSnS(1-2CPUupto64cores)
RH-OPP-B-P1S	OpenShift Platform Plus(BM),Prem 1Y SnS Req(1-2 CPU-64cores)
RH-OPP-B-P1Y	OpenShiftPlatformPlus(BM),Prem1YSnS(1-2CPU upto 64cores)
RH-OPP-B-P3S	OpenShift Platform Plus(BM),Prem 3Y SnS Req(1-2 CPU-64cores)
RH-OPP-B-P3Y	OpenShiftPlatformPlus(BM),Prem3YSnS(1-2CPU upto 64cores)
RH-OPPDF-B-P1S	OPP and ODF Adv (BM), Prem 1Y SnS Req (1-2CPU upto 64cores)

Table 15 3rd Party Software-RedHat

Product ID (PID)	PID Description
RH-OPPDF-B-P1Y	OPP and ODF Adv (BM), Prem 1-Yr SnS (1-2CPU upto 64cores)
RH-OPPDF-B-P3S	OPP and ODF Adv (BM), Prem 3Y SnS Req (1-2CPU upto 64cores)
RH-OPPDF-B-P3Y	OPP and ODF Adv (BM), Prem 3-Yr SnS (1-2CPU upto 64cores)
RH-ACM-B-P1S	AdvancedClusterMgmt for OKE(BM),Prem 1YSnSReq(1-2CPU-64core)
RH-ACM-B-P1Y	AdvancedClusterMgmtforOKE(BM),Prem1YSnS(1-2CPU upto 64cores)
RH-ACM-B-P3S	AdvancedClusterMgmt for OKE(BM),Prem 3YSnSReq(1-2CPU-64core)
RH-ACM-B-P3Y	AdvancedClusterMgmtforOKE(BM),Prem3YSnS(1-2CPU upto 64cores)
RH-OAI-B-P1S	OpenShift AI (BM), Prem 1Y SnS Req (1-2 CPU upto 64 cores)
RH-OAI-B-P1Y	OpenShift AI (BM), Prem 1-Yr SnS (1-2 CPU upto 64 cores)
RH-OAI-B-P3S	OpenShift AI (BM), Prem 3Y SnS Req (1-2 CPU upto 64 cores)
RH-OAI-B-P3Y	OpenShift AI (BM), Prem 3-Yr SnS (1-2 CPU upto 64 cores)
RH-OCP-V-P1S	OpenShift Container Platform,Prem 1Y SnS Req(2core or 4vCPU)
RH-OCP-V-P1Y	OpenShiftContainerPlatform,Prem1YSnS(2 cores or 4vCPUs)
RH-OCP-V-P3S	OpenShift Container Platform,Prem 3Y SnS Req(2core or 4vCPU)
RH-OCP-V-P3Y	OpenShiftContainerPlatform,Prem3YSnS(2cores or 4vCPUs)
RH-OPP-V-P1S	OpenShift Platform Plus,Prem 1Y SnS Req(2 cores or 4vCPUs)
RH-OPP-V-P1Y	OpenShift Platform Plus, Prem 1Y SnS (2 cores or 4vCPUs)
RH-OPP-V-P3S	OpenShift Platform Plus,Prem 3Y SnS Req(2 cores or 4vCPUs)
RH-OPP-V-P3Y	OpenShift Platform Plus, Prem 3Y SnS (2 cores or 4vCPUs)
RH-OPPDF-V-P1S	OpenShiftPlatformPlus & ODFAdv,Prem 1YSnSReq(2core or 4vCPU)
RH-OPPDF-V-P1Y	OpenShiftPlatformPlus and ODFAdv,Prem1YSnS(2cores or 4vCPUs)
RH-OPPDF-V-P3S	OpenShiftPlatformPlus & ODFAdv,Prem 3YSnSReq(2core or 4vCPU)
RH-OPPDF-V-P3Y	OpenShiftPlatformPlus and ODFAdv,Prem3YSnS(2cores or 4vCPUs)
RH-OAI-V-P1S	OpenShift AI, Prem 1Y SnS Req (2 cores or 4vCPUs)
RH-OAI-V-P1Y	OpenShift AI, Prem 1-Yr SnS (2 cores or 4vCPUs)
RH-OAI-V-P3S	OpenShift AI, Prem 3Y SnS Req (2 cores or 4vCPUs)
RH-OAI-V-P3Y	OpenShift AI, Prem 3-Yr SnS (2 cores or 4vCPUs)
Red Hat Ansible	
RH-AAP-1UCS-P1S	Ansible Automation Platform,Prem 1Y SnS Req(One UCS Server)

Table 15 3rd Party Software-RedHat


Product ID (PID)	PID Description
RH-AAP-1UCS-P1Y	Ansible Automation Platform, Prem 1Y SnS (One UCS Server)
RH-AAP-1UCS-P3S	Ansible Automation Platform,Prem 3Y SnS Req(One UCS Server)
RH-AAP-1UCS-P3Y	Ansible Automation Platform, Prem 3Y SnS (One UCS Server)
RH-AAP-100EP-P1S	Ansible Automation Platform,Prem 1Y SnS Req(100 End Points)
RH-AAP-100EP-P1Y	Ansible Automation Platform, Prem 1Y Sns (100 End Points)
RH-AAP-100EP-P3S	Ansible Automation Platform,Prem 3Y SnS Req(100 End Points)
RH-AAP-100EP-P3Y	Ansible Automation Platform, Prem 3Y SnS (100 End Points)

SUPPLIMENT MATERIAL

System Board

A top view of the Cisco UCS XE130c M8 Compute Node system board is shown in [Figure 5](#).

Figure 5 Cisco UCS XE130c M8 Compute Node System Board

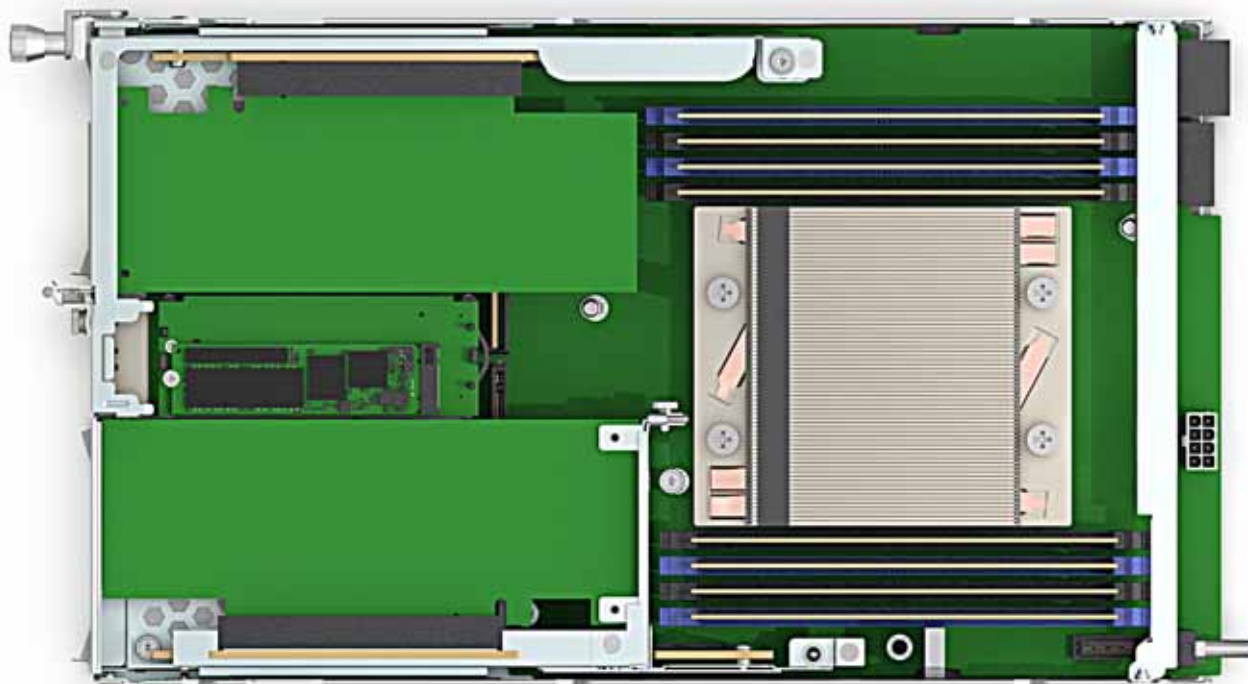

TECHNICAL SPECIFICATIONS

Dimensions and Weight

Table 16 Cisco UCS XE130c M8 Compute Node Dimensions and Weight

Parameter	Value
Height	1.61 in. (41 mm)
Width	8.19 in. (208 mm)
Depth	13.86 in. (352 mm)
Weight	■ Minimally configured node weight: 6.61 lbs. (3.0 kg) ■ Fully configured compute node weight: 8.82 lbs. (4.0 kg)

Environmental Specifications

Table 17 Cisco UCS XE130c M8 Compute Node Environmental Specifications

Parameter	Value
Operating temperature	23° to 113°F (-5° to 45°C)
Non-operating temperature	-40° to 185°F (-40° to 85°C)
Operating humidity	5% to 85% noncondensing
Non-operating humidity	5% to 93% noncondensing
Operating altitude	0 to 10,000 ft (0 to 3000m); maximum ambient temperature decreases by 1°C per 300m
Non-operating altitude	40,000 ft (12,000m)

System Requirements

Table 18 System Requirements

Parameter	Value
Cisco Unified Edge Chassis	Cisco UCS XE9305 Chassis
Cisco Intersight	Intersight Managed Mode (minimum Essentials license per server)

Power Specifications

For configuration-specific power specifications, use the Cisco UCS Power Calculator at:

<http://ucspowercalc.cisco.com>



NOTE: The Cisco UCS XE130c Server Node has a power cap of 1300 Watts for all combinations of components (CPUs, DIMMs, drives, and so on). Also, the ambient temperature must be less than 35 °C (95 °F).



Americas Headquarters
Cisco Systems, Inc.
San Jose, CA

Asia Pacific Headquarters
Cisco Systems (USA) Pte. Ltd.
Singapore

Europe Headquarters
Cisco Systems International BV Amsterdam,
The Netherlands

Cisco has more than 200 offices worldwide. Addresses, phone numbers, and fax numbers are listed on the Cisco Website at www.cisco.com/go/offices.

Cisco and the Cisco Logo are trademarks of Cisco Systems, Inc. and/or its affiliates in the U.S. and other countries. A listing of Cisco's trademarks can be found at www.cisco.com/go/trademarks. Third party trademarks mentioned are the property of their respective owners. The use of the word partner does not imply a partnership relationship between Cisco and any other company. (1005R)