

## Quantum RF – QAM Modulator/Upconverter

### Description

The Quantum RF modulator/upconverter is the next step in building compact solutions for modulation in the digital headend. The module handles the complete QAM modulation process, from ASI input to RF output.


Space is used to the full extent, 8 modulators can be housed in a 4u chassis. The RF up-conversion is performed by the latest generation up-converter, low phase noise and optimized output stability is hereby guaranteed.

The available management interface allows for centralized, remote management of the QAM modulators' settings and alarms using ROSA, Scientific-Atlanta's Management System. The same interface can be used by third party management systems.



### Features

- QAM modulator module with RF output
- Complies fully with ITU-T J.83 standards, annex A (DVB), B (OpenCable) and C (Japan)
- Fully agile from 45 to 860 MHz @ 61 dBmV
- Bit-stuffing on/off and PCR re-stamping
- Static PID filtering
- NIT update
- Supports 16 to 256 QAM constellations
- Excellent MER (> 40 dB in RF)
- ASI input with active loop-through
- IF out @ 44, 36.15 or 36.65 MHz
- IF & RF test point on front
- Hot-swappable
- Compact design allows up to 8 modules in 4RU chassis
- Self cooled modules, racks are stackable
- User-friendly front panel control
- Full remote control and diagnostics with ROSA management system
- Software programmable relay contact
- Backup task and automatic level alignment available via ROSA

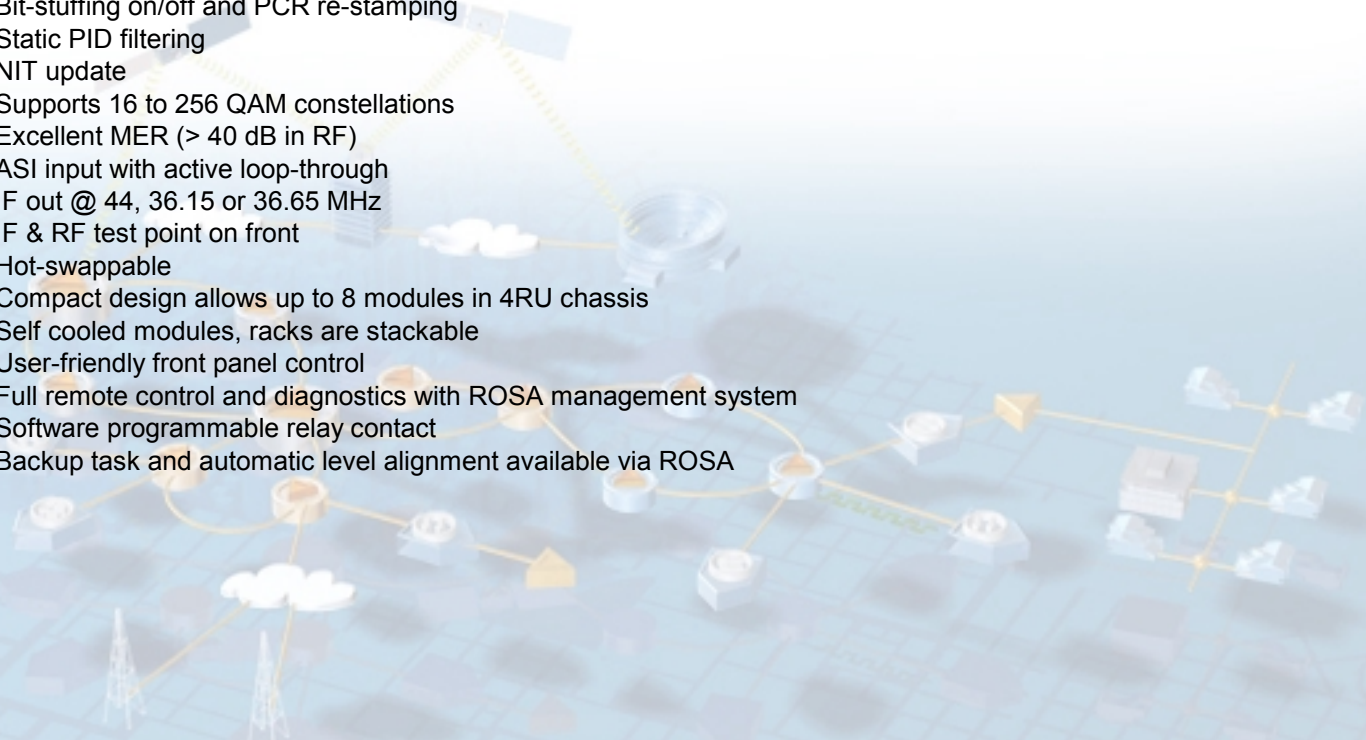

# Quantum RF – QAM Modulator

## Specifications

<b>Electrical Specifications</b>	
ASI input (standard)	
Connector	BNC, 75Ω
Interface type	Asynchronous Serial Interface (according to EN 50083-9)
Packet format	Auto detection (188 / 204 byte packets non-channel encoded)
Bit rate	1 to 215 Mbit/s (min. 1 Mbit/s payload)
Syntax	SPTS or MPTS (according to ISO/IEC 13818) with DVB SI (as per ETSIprETS300 468 & ETR211)
RF output	
Connector	F-type, 75 Ω or BNC, 75 Ω
Frequency	45 to 870 MHz
Bandwidth	8, 7 or 6 MHz
Level	50 to 61dBmV in 0.2 dB steps
Return loss	> 12 dB in channel
Frequency stability	±6 ppm
IF output	
Connector	F-type, 75 Ω or BNC, 75 Ω or BNC, 50 Ω
Frequency	ITU-T Annex B&C versions F <sub>c</sub> = 44 MHz ITU-T Annex A version BW 7 ≤ MHz : F <sub>c</sub> = 36.65 MHz BW 7 > MHz : F <sub>c</sub> = 36.15 MHz
Level	40 dBmV
Return loss	≥ 18 dB
Relay contact	
Connector	3-pins (quick disconnect)
Contacts	Common, normal open and normal closed
Contact type	Relay
Alarms	Software configurable

<b>Remote Control</b> <i>(separate connectors per unit for AC versions)</i>	
Connector	
- DC version	9-pins male Sub D - one common connector on the rack
- AC version	9-pins male Sub D - separate connector per unit
Physical layer	RS 485
Protocol	RCDS over RS 485
Speed	Up to 19.2 kbaud

# Quantum RF – QAM Modulator

## Specifications - continued

<b>Signal Specifications</b>	
Channel encoding	Scrambling, Reed-Solomon, Trellis and Interleaving of According to ITU-T Annex A, B or C
EVM (before equalizer)	≤ 2 % RMS (at RF)
MER (after equalizer)	≥ 40 dB (at RF)
BER	≤ 5.10 <sup>-9</sup> (pre FEC and @256 QAM)
Packet format	Auto detection: 188 / 204 byte packets (non-channel encoded)
SNR	≥ 50 dB in band
Bandwidth	6 MHz or 7 to 8 MHz
QAM constellations	ITU-T annex A and C: 16, 32, 64, 128, 128-alt and 256 ITU-T annex B: 64 and 256
Supported input bit rate	Up to 215 Mbit/s
Symbol rate	1 to 7 Ms/s (ITU-A Annex A) and 1 to 5.5 Ms/s (ITU-B Annex B & ITU-C Annex C)
PID range filtering	Selectable
NIT update	Selectable, ITU-T Annex A&C only

<b>Environmental Specifications</b>	
Operating temperature	+32°F 122°F (0 to 50°C)
Storage temperature	-4°F to +158°F (-20° to 70°C)
Power supply (nominal)	
Ac version	100 to 240 Vac or
DC version	-36 to -58 Vdc
Power consumption (nominal)	< 30 W

<b>Mechanical Specifications</b>	
Height	7.0 " / 177 mm
Width	2.12 " / 54 mm
Depth	17.9 " / 455 mm
Weight	Approx. 4.41 lbs / 2.0 kg

<b>Quantum RF sub rack</b>	
4RU 19" rack capable of holding up to 8 QUANTUM RF modules	
Main and backup power input per 4 modules (DC type only) *	
Each module switches to auxiliary power input in case of main power loss *	
RS 485 communication port connector *	

\*: DC type only



Scientific-Atlanta and the Scientific-Atlanta logo are registered trademarks of Scientific-Atlanta, Inc. Specifications and product availability are subject to change without notice.  
© 2003 Scientific-Atlanta, Inc. All rights reserved.

Europe & Asia  
+32 56 445 000 or +49-6173-928-0  
[www.saeurope.com](http://www.saeurope.com)  
North America  
1-800-722-2009 or 770-236-6900  
[www.scientificatlanta.com](http://www.scientificatlanta.com)

8986695 Rev A  
February 2003