




Cisco Catalyst Fixed Switches Selection Guide

Quickly identify the recommended Cisco Catalyst Layer 2 and 3 fixed-configuration switch using this easy-to-follow selection guide.

Cisco Catalyst Switches: Layer 2 and 3 Fixed-Configuration Switches

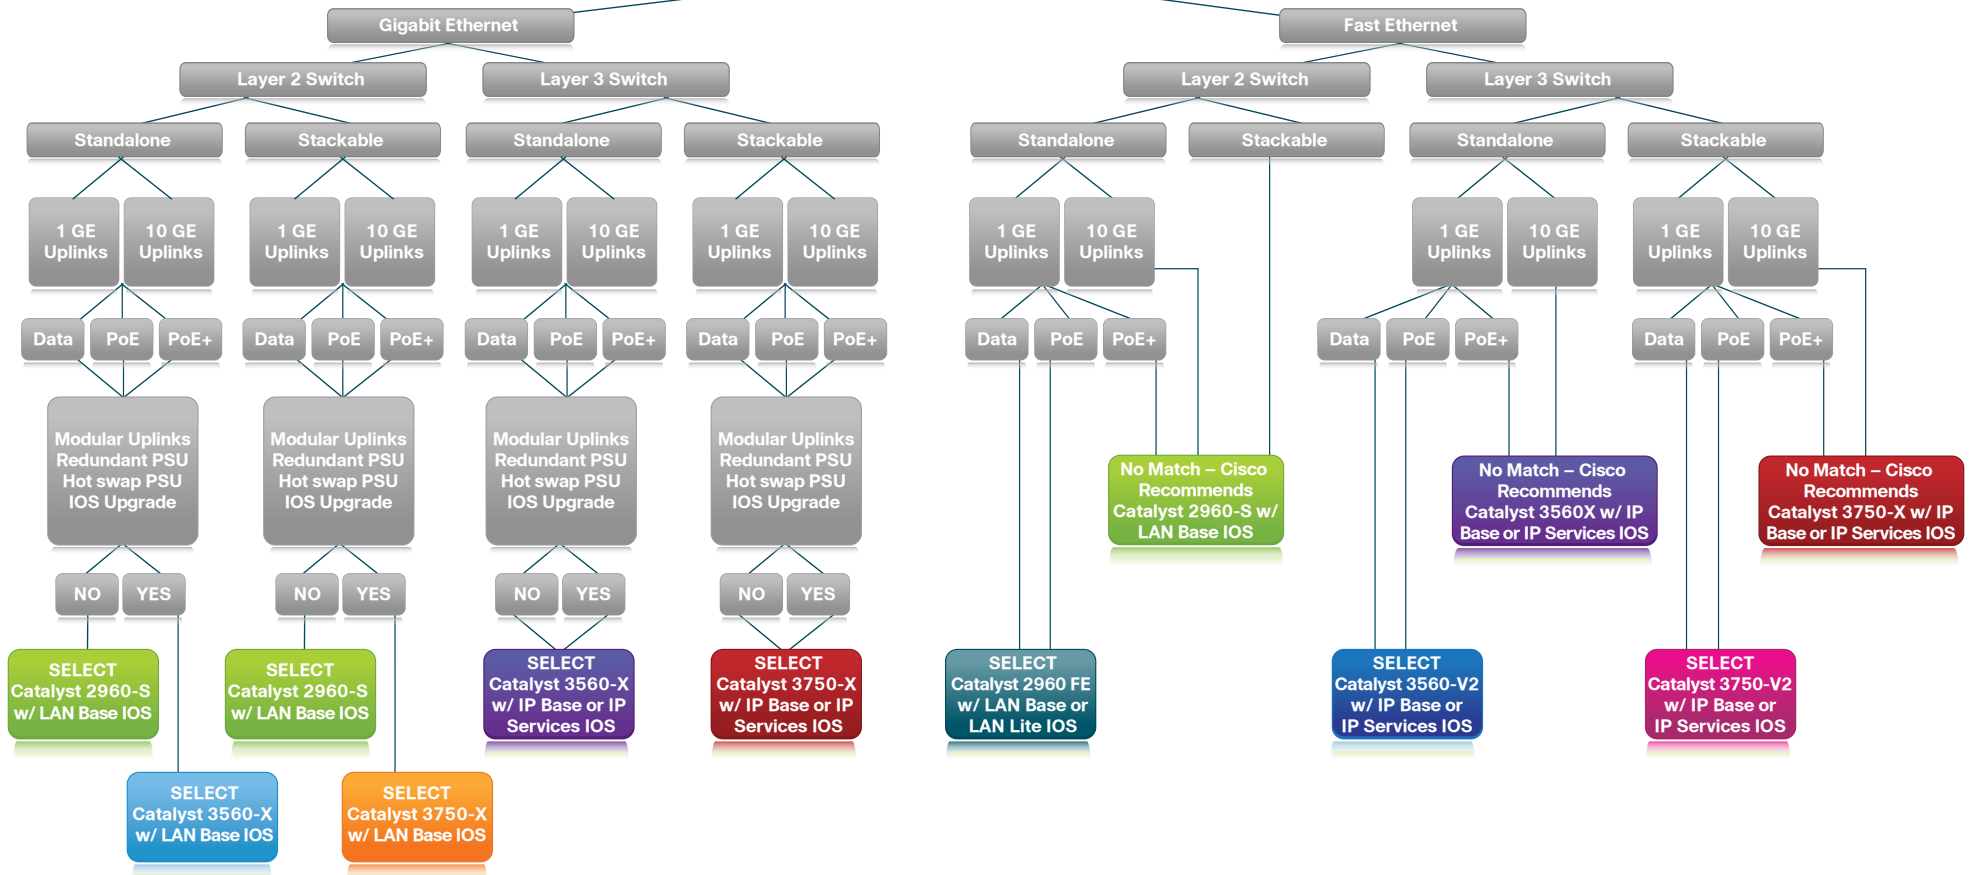

Cisco recommends the Catalyst 3K-X for those customers that require-

- Improved resiliency such as modular uplinks, StackPower, hot swap of power supplies and full redundancy
- Future proofing and investment protection such as IOS upgrade, uplink upgrade and full PoE+ support
- Full depth of BN services for video (Medianet), security (TrustSec), and energy management (EnergyWise)



Cisco Catalyst Layer 2 and Layer 3 Fixed-Configuration Product Guide

Catalyst Series: 2960, 3560-V2, 3750-V2, 2960-S, 3560-X, 3750-X

Layer 2 Fast Ethernet Switches - Catalyst 2960 Series									
Catalyst 2960	# of Access Ports	Uplinks	PoE (15.4W)	PoE Power	PoE+ (30W)	Stackable	Cisco IOS		
WS-C2960-48PST-L	48 Ethernet 10/100 PoE ports	2 X 1 GE SFP and 2 X 10/100/1000 ports	24	370W	NO	Standalone	LAN Base		
WS-C2960-24PC-L	24 Ethernet 10/100 PoE ports	2 dual-purpose (10/100/1000 or SFP)	24	370W			LAN Base		
WS-C2960-24LT-L	24 Ethernet 10/100 (8 PoE ports)	2 x 10/100/1000 ports	8	123W			LAN Base		
WS-C2960-24TC-L	24 Ethernet 10/100 ports	2 dual-purpose ports	-	-			LAN Base		
WS-C2960-48TC-L	48 Ethernet 10/100 ports	2 dual-purpose (10/100/1000 or SFP)	-	-			LAN Base		
WS-C2960-24TT-L	24 Ethernet 10/100 ports	2 x 10/100/1000 ports	-	-			LAN Base		
WS-C2960-48TT-L	48 Ethernet 10/100 ports	2 x 10/100/1000 ports	-	-			LAN Base		
Model	Description	Uplinks	PoE (15.4W)	PoE Power	PoE+ (30W)	Stackable	Cisco IOS		
WS-C2960-24-S	24 Ethernet 10/100	None	-	-	NO	Standalone	LAN Lite		
WS-C2960-48PST-S	48 Ethernet 10/100 PoE ports	2 X 1 GE SFP and 2 X 10/100/1000 ports	24	370W			LAN Lite		
WS-C2960-24PC-S	24 Ethernet 10/100 PoE ports	2 dual-purpose ports (10/100/1000 or SFP)	24	370W			LAN Lite		
WS-C2960-24LC-S	24 Ethernet 10/100 (8 PoE ports)	2 dual-purpose ports (10/100/1000 or SFP)	8	123W			LAN Lite		
WS-C2960-24TC-S	24 Ethernet 10/100	2 dual-purpose ports (10/100/1000 or SFP)	-	-			LAN Lite		
WS-C2960-48TC-S	48 Ethernet 10/100	2 dual-purpose ports (10/100/1000 or SFP)	-	-			LAN Lite		
WS-C2960-48TT-S	48 Ethernet 10/100	2 x 10/100/1000 ports	-	-			LAN Lite		
Layer 2 Fast Ethernet Switches - Catalyst 2960 Compact Switches									
Model	# of Access Ports	Uplinks	PoE (15.4W)	PoE Power			PoE+ (30W)	Stackable	Cisco IOS
WS-C2960-8TC-L	8 Ethernet 10/100 ports; no fan	1 dual-purpose (10/100/1000 or SFP)	-	-			NO	Standalone	LAN Base
WS-C2960PD-8TT-L	8 Ethernet 10/100 ports; no fan	1 X 10/100/1000 PoE input port	-	-	LAN Base				
WS-C2960-8TC-S	8 Ethernet 10/100; no fan	1 dual-purpose (10/100/1000 or SFP)	-	-	LAN Lite				
Layer 2 Gigabit Ethernet Switches - Catalyst 2960 Compact Switches									
WS-C2960G-8TC-L	7 Ethernet 10/100/1000; no fan	1 dual-purpose (10/100/1000 or SFP)	-	-	NO	Standalone	LAN Base		

Layer 3 Fast Ethernet Switches - Catalyst 3560-V2 Series							
Catalyst 3560-V2	# of Access Ports	Uplinks	PoE (15.4W)	PoE Power	PoE+ (30W)	Stackable	Cisco IOS
WS-C3560V2-24PS-E	24 Ethernet 10/100 PoE ports	2 x 1 GE SFP	24	370W	NO	Standalone	IP Services
WS-C3560V2-24PS-S	24 Ethernet 10/100 PoE ports	2 x 1 GE SFP	24	370W			IP Base
WS-C3560V2-24TS-E	24 Ethernet 10/100 ports	2 x 1 GE SFP	-	-			IP Services
WS-C3560V2-24TS-S	24 Ethernet 10/100 ports	2 x 1 GE SFP	-	-			IP Base
WS-C3560V2-48PS-E	48 Ethernet 10/100 PoE ports	4 x 1 GE SFP	24	370W			IP Services
WS-C3560V2-48PS-S	48 Ethernet 10/100 PoE ports	4 x 1 GE SFP	24	370W			IP Base
WS-C3560V2-48TS-E	48 Ethernet 10/100 ports	4 x 1 GE SFP	-	-			IP Services
WS-C3560V2-48TS-S	48 Ethernet 10/100 ports	4 x 1 GE SFP	-	-			IP Base
WS-C3560-8PC-S	8 Ethernet 10/100 PoE ports; no fan	1 GE dual purpose	8	123W			IP Base
WS-C3560-12PS-S	12 Ethernet 10/100 PoE ports; no fan	1 GE dual purpose	8	123W			IP Base

Layer 3 Fast Ethernet Switches - Catalyst 3750-V2 Series									
Catalyst 3750-V2	# of Access Ports	Uplinks	PoE (15.4W)	PoE Power	PoE+ (30W)	Stackable	Cisco IOS		
WS-C3750V2-24PS-E	24 Ethernet 10/100 PoE ports	2 x 1 GE SFP	24	370W	NO	Stackable (up to nine switches)	IP Services		
WS-C3750V2-24PS-S	24 Ethernet 10/100 PoE ports	2 x 1 GE SFP	24	370W			IP Base		
WS-C3750V2-24TS-E	24 Ethernet 10/100 ports	2 x 1 GE SFP	-	-			IP Services		
WS-C3750V2-24TS-S	24 Ethernet 10/100 ports	2 x 1 GE SFP	-	-			IP Base		
WS-C3750V2-48PS-E	48 Ethernet 10/100 PoE ports	4 x 1 GE SFP	24	370W			IP Services		
WS-C3750V2-48PS-S	48 Ethernet 10/100 PoE ports	4 x 1 GE SFP	24	370W			IP Base		
WS-C3750V2-48TS-E	48 Ethernet 10/100 ports	4 x 1 GE SFP	-	-			IP Services		
WS-C3750V2-48TS-S	48 Ethernet 10/100 ports	4 x 1 GE SFP	-	-			IP Base		
Cisco StackWise Cables (All C3750 Models include CAB-STACK-50CM=)									
CAB-STACK-50CM=	StackWise 50CM Cable								
CAB-STACK-1M=	StackWise 1MCable								
CAB-STACK-3M=	StackWise 3M Cable								

Layer 2 Gigabit Ethernet Switches - Catalyst 2960-S Series							
Model	Access Ports	Uplinks	PoE (15.4W)	PoE/PoE+ Power	PoE+ (30W)	Stackable	Cisco IOS
WS-C2960S-48FPD-L	48 10/100/1000 PoE+	2x (1G or 10G) Uplinks	48	740W	YES	FlexStack Optional (up to four switches)	LAN Base
WS-C2960S-48LPD-L	48 10/100/1000 PoE+	2x (1G or 10G) Uplinks	24	370W			LAN Base
WS-C2960S-24PD-L	24 10/100/1000 PoE+	2x (1G or 10G) Uplinks	24	370W			LAN Base
WS-C2960S-48TD-L	48 10/100/1000	2x (1G or 10G) Uplinks	-	-	LAN Base		
WS-C2960S-24TD-L	24 10/100/1000	2x (1G or 10G) Uplinks	-	-	NO	LAN Base	
Model	Access Ports	Uplinks	PoE (15.4W)	PoE/PoE+ Power	PoE+ (30W)	Stackable	Cisco IOS
WS-C2960S-48FPS-L	48 10/100/1000 PoE+	4x 1G Uplinks	48	740W	YES	FlexStack Optional (up to four switches)	LAN Base
WS-C2960S-48LPS-L	48 10/100/1000 PoE+	4x 1G Uplinks	24	370W			LAN Base
WS-C2960S-24PS-L	24 10/100/1000 PoE+	4x 1G Uplinks	24	370W			LAN Base
WS-C2960S-48TS-L	48 10/100/1000	4x 1G Uplinks	-	-	NO		LAN Base
WS-C2960S-24TS-L	24 10/100/1000	4x 1G Uplinks	-	-	NO	LAN Base	
Catalyst 2960-S Series GE Switch 1G Uplinks LAN Lite (No Stacking)							
Model	Access Ports	Uplinks	PoE (15.4W)	PoE/PoE+ Power	PoE+ (30W)	Stackable	Cisco IOS
WS-C2960S-48TS-S	48 10/100/1000	2x 1G Uplinks	-	-	NO	Standalone	LAN Lite
WS-C2960S-24TS-S	24 10/100/1000	2x 1G Uplinks	-	-			LAN Lite
FlexStack Stacking Module - requires one module per switch (includes Stacking cable CAB-STK-E-0.5M=)							
C2960S-STACK	Cisco FlexStack stacking module						
Cisco FlexStack Stacking Cables for Catalyst 2960-S Series							
CAB-STK-E-0.5M=	Cisco FlexStack 50cm stacking cable						
CAB-STK-E-1M=	Cisco FlexStack 1m stacking cable						
CAB-STK-E-3M=	Cisco FlexStack 3m stacking cable						

Layer 2 / 3 Gigabit Ethernet Switches - Catalyst 3750-X Series						Default PoE/PoE+ Power - Order 2nd power supply to support additional PoE/PoE+ ports		
Catalyst 3750-X Series	# of Access Ports	Optional Uplinks	PoE (15.4W)	PoE/PoE+ Power	PoE+ (30W)	Stackable	Cisco IOS	
WS-C3750X-24T-L	24 10/100/1000 Ethernet ports, 350W AC	Choice of 4 x 1 GE or 2 x 10 GE Links (Ordered Separately)	-	-	NO	Stackable Optional (up to nine switches)	LAN Base	
WS-C3750X-48T-L	48 10/100/1000 Ethernet ports, 350W AC		-	-			LAN Base	
WS-C3750X-24P-L	24 10/100/1000 Ethernet PoE+ ports, 715W AC		28	435W			LAN Base	
WS-C3750X-48P-L	48 10/100/1000 Ethernet PoE+ ports, 715W AC		28	435W	YES		LAN Base	
WS-C3750X-48PF-L	48 10/100/1000 Ethernet PoE+ ports, 1100W		48	800W	NO		LAN Base	
WS-C3750X-24T-S	24 10/100/1000 Ethernet ports, 350W AC		-	-	IP Base			
WS-C3750X-48T-S	48 10/100/1000 Ethernet ports, 350W AC		-	-	IP Base			
WS-C3750X-24P-S	24 10/100/1000 Ethernet PoE+ ports, 715W AC		28	435W	YES	IP Base		
WS-C3750X-48P-S	48 10/100/1000 Ethernet PoE+ ports, 715W AC		28	435W		IP Base		
WS-C3750X-48PF-S	48 10/100/1000 Ethernet PoE+ ports, 1100W		48	800W		IP Base		
Network Modules 3750-X Series (Order choice of 1 GE or 10 GE Uplinks Separately)								
C3KX-NM-1G=	Catalyst 3K-X 1G Network Module Spare							
C3KX-NM-10G=	Catalyst 3K-X 10G Network Module Spare							
C3KX-NM-BLANK=	Catalyst 3K-X Network Module Blank Spare							
Power Supplies and Fan for the Catalyst 3750-X Series								
C3KX-PWR-350WAC=	Catalyst 3K-X 350W AC Power Supply							
C3KX-PWR-715WAC=	Catalyst 3K-X 715W AC Power Supply							
C3KX-PWR-1100WAC=	Catalyst 3K-X 1100W AC Power Supply							
C3KX-PWR-440WDC=	Catalyst 3K-X 440W DC Power Supply							
C3KX-PS-BLANK=	Catalyst 3K-X Power Supply Blank Spare							
C3KX-FAN-23CFM=	Catalyst 3K-X Fan Module Spare							
StackWise Cables (All Catalyst 3750 Models include CAB-STACK-50CM=)								
CAB-STACK-50CM=	Cisco StackWise 50CM Stacking Cable							
CAB-STACK-1M=	Cisco StackWise 1M Stacking Cable							
CAB-STACK-3M=	Cisco StackWise 3M Stacking Cable							
StackPower Cables (Catalyst 3750 Models with IP Base include CAB-SPWR-30CM=)								
CAB-SPWR-30CM=	C3750X Stack Power Cable 30 CM Spare							
CAB-SPWR-150CM=	C3750X Stack Power Cable 150 CM Spare							

Layer 2 / 3 Gigabit Ethernet Switches - Catalyst 3560-X Series						Default PoE/PoE+ Power - Order 2nd power supply to support additional PoE/PoE+ ports		
Catalyst 3560-X Series	# of Access Ports	Optional Uplinks	PoE (15.4W)	PoE/PoE+ Power	PoE+ (30W)	Stackable	Cisco IOS	
WS-C3560X-24T-L	24 10/100/1000 Ethernet ports, 350W AC	Choice of 4 x 1 GE or 2 x 10 GE Links (Ordered Separately)	-	-	NO	Standalone	LAN Base	
WS-C3560X-48T-L	48 10/100/1000 Ethernet ports, 350W AC		-	-			LAN Base	
WS-C3560X-24P-L	24 10/100/1000 Ethernet PoE+ ports, 715W AC		28	435W			LAN Base	
WS-C3560X-48P-L	48 10/100/1000 Ethernet PoE+ ports, 715W AC		28	435W	YES		LAN Base	
WS-C3560X-48PF-L	48 10/100/1000 Ethernet PoE+ ports, 1100W		48	800W	NO		LAN Base	
WS-C3560X-24T-S	24 10/100/1000 Ethernet ports, 350W AC		-	-	IP Base			
WS-C3560X-48T-S	48 10/100/1000 Ethernet ports, 350W AC		-	-	IP Base			
WS-C3560X-24P-S	24 10/100/1000 Ethernet PoE+ ports, 715W AC		28	435W	YES	IP Base		
WS-C3560X-48P-S	48 10/100/1000 Ethernet PoE+ ports, 715W AC		28	435W		IP Base		
WS-C3560X-48PF-S	48 10/100/1000 Ethernet PoE+ ports, 1100W		48	800W		IP Base		
Network Modules 3560-X Series (Order choice of 1 GE or 10 GE Uplinks Separately)								
C3KX-NM-1G=	Catalyst 3K-X 1G Network Module Spare							
C3KX-NM-10G=	Catalyst 3K-X 10G Network Module Spare							
C3KX-NM-BLANK=	Catalyst 3K-X Network Module Blank Spare							
Power Supplies and Fan for the Catalyst 3560-X Series								
C3KX-PWR-350WAC=	Catalyst 3K-X 350W AC Power Supply							
C3KX-PWR-715WAC=	Catalyst 3K-X 715W AC Power Supply							
C3KX-PWR-1100WAC=	Catalyst 3K-X 1100W AC Power Supply							
C3KX-PWR-440WDC=	Catalyst 3K-X 440W DC Power Supply							
C3KX-PS-BLANK=	Catalyst 3K-X Power Supply Blank Spare							
C3KX-FAN-23CFM=	Catalyst 3K-X Fan Module Spare							

NOTE: Please refer to the Pricing Tool for IOS Upgrade options and models

Cisco Catalyst 2960 and 2960-S Series Only			Catalyst 3X-X Series Only		All Catalyst 3K Series	
Functions	LAN Lite	LAN Base	Functions	LAN Base	IP Base	IP Services
Layer 2	<ul style="list-style-type: none"> Entry-level access Layer 2 Basic Layer 2 access features, including 802.1Q trunking, (M)STP, STP extensions, Cisco Discovery Protocol, DTP, UDLD, VTPv2, PAGP/ LACP, LLDP, storm control and LLDP-MED 	<ul style="list-style-type: none"> Enterprise Access Layer 2 deployments, including FlexLinks and VTPv3 <p>Wide range of Layer 2 access features for enterprise</p>	Layer 2+	<ul style="list-style-type: none"> Enterprise access Layer 2 Wide range of Layer 2 access features for enterprise deployments 	<ul style="list-style-type: none"> Complete Access Layer 2 Supports all Cisco Catalyst 2000 and Catalyst 3000 Layer 2 features, including hot standby protocols; supports Cisco StackPower™ technology (Cisco Catalyst 3750-X) 	
Layer 3	<ul style="list-style-type: none"> No routing support Support for Layer 3 management interface 	<ul style="list-style-type: none"> Static routing support Support for SVIs with up to 16 IPv4 routes 	Layer 3	<ul style="list-style-type: none"> No routing support Support for SVI with no IP routing support 	<ul style="list-style-type: none"> Enterprise access Layer 3 RIP, static and PIM stub, EIGRP Stub, OSPF for routed access 	<ul style="list-style-type: none"> Complete access Layer 3 OSPF, EIGRP, BGP, IS-IS VRF-lite, WCCP, and PBR
Manageability	<ul style="list-style-type: none"> Entry-level manageability Express setup, Cisco Device Manager, RMON, SPAN, TDR, SNMPv3 (with cryptography), Auto Smart Ports, and Smart Install client 	<ul style="list-style-type: none"> Basic manageability Support for a wider range of MIBs, IP SLA Responder, and RSPAN 	Manageability	<ul style="list-style-type: none"> Basic manageability Support for a wide range of MIBs, IP SLA Responder, and RSPAN 	<ul style="list-style-type: none"> Enterprise access Layer 3 Gold-Lite, EEM and Smart Install Director 	<ul style="list-style-type: none"> Complete access Layer 3 EEM and IP SLA Initiator
Security	<ul style="list-style-type: none"> Entry-level access security SSH v2 server, SSL, HTTPS, SCP, TACACS+, RADIUS, port security, 802.1x (with guest VLAN), MAB, private VLAN edge, NAC, and DHCP snooping 	<ul style="list-style-type: none"> Enterprise access security IPSG, DAI, ACLs, Cisco Identity 4.0, 802.1x features, and RACLs 	Security	<ul style="list-style-type: none"> Enterprise access security DHCP Snooping, IPSG, DAI, ACLs, Cisco Identity 4.0, NAC and 802.1x features 	<ul style="list-style-type: none"> Complete access security Router and VLAN ACLs, private VLANs, complete identity and security, TrustSec SXP, and IEEE 802.1AE (Cisco Catalyst 3560-X and Catalyst 3750-X) 	
QoS	<ul style="list-style-type: none"> Entry-level access QoS Port CoS Trust and Override, Ingress and egress queuing, scheduling, Priority Queuing, and SRR 	<ul style="list-style-type: none"> Enterprise access QoS Ingress policing, Trust Boundary, AutoQoS, and DSCP mapping 	QoS	<ul style="list-style-type: none"> Enterprise access QoS Ingress policing, Trust Boundary, AutoQoS, and DSCP mapping 	<ul style="list-style-type: none"> Complete access QoS Support for all Cisco Catalyst 2000 and Catalyst 3000 QoS features, including per-VLAN policies 	
IP Services feature set includes all IP Base features. IP Base feature set includes all LAN Base features						
		Limited Lifetime Warranty #	Enhanced LLW #		Software Update Policy	
		Catalyst 3K, 3K-G, 3K-E and C2960	Catalyst 3K-X and C2960-S		All Catalyst 3K and 2K Series	
		<ul style="list-style-type: none"> 5 years on Power Supplies and Fans; Lifetime on switch 	<ul style="list-style-type: none"> Limited Lifetime Warranty PLUS 		<ul style="list-style-type: none"> Unlimited FREE updates to the latest IOS release within the same IOS service level (e.g. LAN Base to LAN Base, IP Base to IP Base) 	
		<ul style="list-style-type: none"> 10 Business Days Advanced Hardware Replacement 	<ul style="list-style-type: none"> Next Business Day Advanced Hardware Replacement 		<ul style="list-style-type: none"> Applicable to LAN Lite, LAN Base and IP Base Images. No service contract is required 	
		<ul style="list-style-type: none"> Hardware Warranty ends five years after product reaches End-of-Sale 	<ul style="list-style-type: none"> 90-Days TAC Support (Mon-Fri, 8 AM-5 PM) 		<ul style="list-style-type: none"> IP Services IOS service level requires a service contract 	
			<ul style="list-style-type: none"> Hardware Warranty ends five years after product reaches End-of-Sale 		<ul style="list-style-type: none"> Software enhancements end 6-12 months after product reaches End-of-sale 	
					<ul style="list-style-type: none"> Software upgrade to the next IOS service level (e.g.) LAN Base to IP Base, IP Base to IP Services) is a chargeable upgrade at additional cost 	



Americas Headquarters
Cisco Systems, Inc.
170 West Tasman Drive
San Jose, CA 95134-1706
USA
www.cisco.com
Tel: 408 526-4000
800 553-NETS (6387)
Fax: 408 527-0883

Asia Pacific Headquarters
Cisco Systems, Inc.
168 Robinson Road
#28-01 Capital Tower
Singapore 068912
www.cisco.com
Tel: +65 6317 7777
Fax: +65 6317 7799

Europe Headquarters
Cisco Systems International BV
Haarlerbergpark
Haarlerbergweg 13-19
1101 CH Amsterdam
The Netherlands
www-europe.cisco.com
Tel: +31 0 800 020 0791
Fax: +31 0 20 357 1100

Cisco has more than 200 offices worldwide. Addresses, phone numbers, and fax numbers are listed on the Cisco Website at www.cisco.com/go/offices.



©2010 Cisco Systems, Inc. All rights reserved. CCVP, the Cisco logo, and the Cisco Square Bridge logo are trademarks of Cisco Systems, Inc.; Changing the Way We Work, Live, Play, and Learn is a service mark of Cisco Systems, Inc.; and Access Registrar, Alronet, BPX, Catalyst, CCDA, CCDP, CCIE, CCIP, CCNA, CCNP, CCSP, Cisco, the Cisco Certified Internetwork Expert logo, Cisco IOS, Cisco Press, Cisco Systems, Cisco Systems Capital, the Cisco Systems logo, Cisco Unity, Enterprise/Solver, EtherChannel, EtherFast, EtherSwitch, Fast Step, Follow Me Browsing, FormShare, GigaDrive, GigaStack, HomeLink, Internet Quotient, IOS, IP/TV, iQ Expertise, the iQ logo, iQ Net Readiness Scorecard, iQuick Study, LightStream, Linksys, MeetingPlace, MGX, Networking Academy, Network Registrar, Packet, PIX, ProConnect, RateMUX, ScriptShare, SlideCast, SMARTnet, StackWise, The Fastest Way to Increase Your Internet Quotient, and TransPath are registered trademarks of Cisco Systems, Inc. and/or its affiliates in the United States and certain other countries.

All other trademarks mentioned in this document or Website are the property of their respective owners. The use of the word partner does not imply a partnership relationship between Cisco and any other company. (0609R)