



# STEALTHWATCH® FLOWSENSOR™ 4010


**First Ship Date:** 3/2015  
**Final Ship Date:** Currently Shipping

The StealthWatch FlowSensor 4010 has the following general configuration. Your model may look slightly different.

## Front



## Back

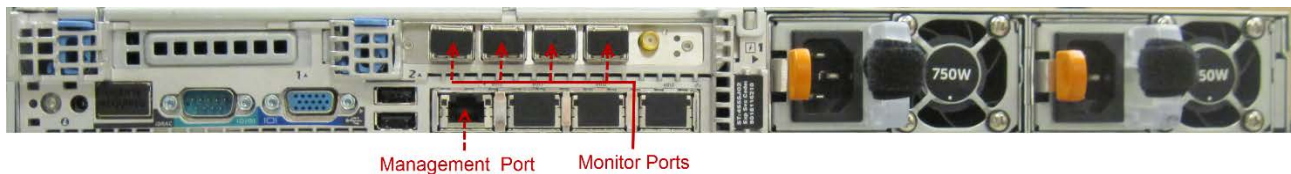

## Specifications

Hardware Platform	Hardware Generation
R630	13G
Network	Storage
<b>Management Port:</b> 1; 10/100/1000 copper <b>Monitor Ports:</b> 4; 10 GB; fiber optic; rated to monitor 20 Gbps total <b>Console Port:</b> Serial, KVM <b>GBIC:</b> SFP+ 10GBASE-SR 10G	300 GB (RAID-1 Redundant)
Rack Units (Mountable)	Weight
1U, Stackable Sliding Ready Rails	41 pounds (18.6 kg)
Dimensions	Power
<b>Height:</b> 1.68 inches (4.3 cm) <b>Width:</b> 18.99 inches (48.24 cm) with rack latches 17.08 inches (43.4 cm) without rack latches <b>Depth:</b> 27.8 inches (70.67 cm) with power supply and bezel 28.6 inches (72.53 cm) without power supplies and bezel	Redundant 750 W AC, 50/60 Hz Auto Ranging (100V to 240V)
- continued -	



Shipping Dimensions	Shipping Weight
<b>Height:</b> 11 inches (27.9 cm) <b>Width:</b> 24 inches (61 cm) <b>Depth:</b> 36 inches (91.4 cm)	65 pounds (29.5 kg)
Temperature	Heat Dissipation
<b>Operating:</b> 50° F to 95° F (10° C to 35° C) at 10% to 80% relative humidity, with 78.8° F (26° C) maximum dew point  <b>Note:</b> For altitudes above 2,952 feet, the maximum allowable dry bulb temperature is derated at 1° F (-17° C) per 550 feet (1.67 m).  <b>Storage:</b> -40° F to 149° F (-40° C to 65° C) with a maximum temperature gradation of 68° F (20° C) per hour	2,891 BTU per hour maximum
Humidity (Relative)	Altitude
<b>Operating:</b> 10% to 80% (non-condensing) at a maximum wet bulb temperature of 84.2° F (29° C) <b>Storage:</b> 5% to 95% (non-condensing) at a maximum wet bulb temperature of 100.4° F (38° C)	<b>Operating:</b> -50 feet to 10,000 feet (-15.2 meters to 3,048 meters) <b>Storage:</b> -50 feet to 35,000 feet (-15.2 meters to 10,668 meters)
Vibration	Shock
<b>Operating Maximum:</b> 0.26 Grms at 5-350 Hz in all orientations <b>Storage Maximum:</b> 1.87 Grms at 10-500 Hz for 15 minutes (all six sides tested)	<b>Operating Maximum:</b> One shock pulse in the positive z-axis of 31 G for 2.6 ms in all operation orientations <b>Storage Maximum:</b> Six consecutively executed shock pulse in the positive and negative x, y, and z axes (one pulse on each side of the system of 71 G for up to 2 minutes.
Regulatory Compliance	
<ul style="list-style-type: none"> <li>• FCC (U.S. only) Class A</li> <li>• DOC (Canada) Class A</li> <li>• VCCI Class A</li> <li>• UL 1950</li> <li>• CSA 950</li> <li>• CE Mark (EN 55022 Class A, EN 55024, EN 61000-3-2, EN 61000-3-3, EN 60950)</li> </ul>	
Please call for a complete list.	



Americas Headquarters  
Cisco Systems, Inc.  
San Jose, CA

Asia Pacific Headquarters  
Cisco Systems (USA) Pte. Ltd.  
Singapore

Europe Headquarters  
Cisco Systems International BV Amsterdam,  
The Netherlands

Cisco has more than 200 offices worldwide. Addresses, phone numbers, and fax numbers are listed on the Cisco Website at [www.cisco.com/go/offices](http://www.cisco.com/go/offices).

Cisco and the Cisco logo are trademarks or registered trademarks of Cisco and/or its affiliates in the U.S. and other countries. To view a list of Cisco trademarks, go to this URL: [www.cisco.com/go/trademarks](http://www.cisco.com/go/trademarks). Third party trademarks mentioned are the property of their respective owners. The use of the word partner does not imply a partnership relationship between Cisco and any other company. (1110R)