

SPA500S يئاقللتلا بلطالا مكحت ةدحو ةفاضل SPA500 Series IP Phone فتاهب ةلصتتملا

فدهلا

ةلصتتم SPA500S Attendant قيبطت مكحت ةدحو ةفاضل ةيفيك لاقملا اذه حرشي
Cisco (CCA) نيوكت دعاسم مادختساب SPA500 Series IP فتاهب

ةدحو ديزت IP فتاهب اهليصوت متي ةعسوت ةدحو يه يئاقللتلا بلطالا مكحت ةدحو
نكمي SPA500S مادختساب IP فتاهل اهنبيعت نكمي يتلا تاقحللملا ددع نم عيسوتلا
كرتشم طخ وادي داع دادتما: ةئيه يلع تاقحللملا نيوكت نكمي. اي فاضل ادادتما 32 ةفاضل
لاصتلال لباقي لخال لاصتلا طخ واخلخال لاصتلا طخ واةشغت واةعاس واةشاش طخ واة

نلو UC500 ةلسلسلا نم ةدحوملا لاصتالا ةزهجأ عم SPA500DS ذفنم لمعي نل: ةطحالم
UC320 دحوملا لاصتالا زاهج عم ال لمعي

قيبطتلال ةلباقلا ةزهجال


- UC500 ةلسلس زاهج
- SPA500S Attendant Console يئاقللتلا بلطالا مكحت ةدحو

جماربال رادصل


- [UC540] 8.6.0 رادصلال
- [Cisco] نيوكت دعاسم [v3.2(1)
- [SPA 509G IP Phone] SPA50X-30X-7-4-9c تنرتنلال لوكوتورب فتاه

SPA500S يئاقللتلا بلطالا مكحت ةدحو ةفاضل

ةلسلس زاهج صاخلا Cisco (CCA) نيوكت دعاسم يلا لوخدلا ليحستب مق 1. ةوطخال
حتف متي. فتاهو نومدختسم > دادتما/نومدختسم > فتاه > نيوكت رتخاو UC500
فتاهو لاول نومدختسملا ةحفص:

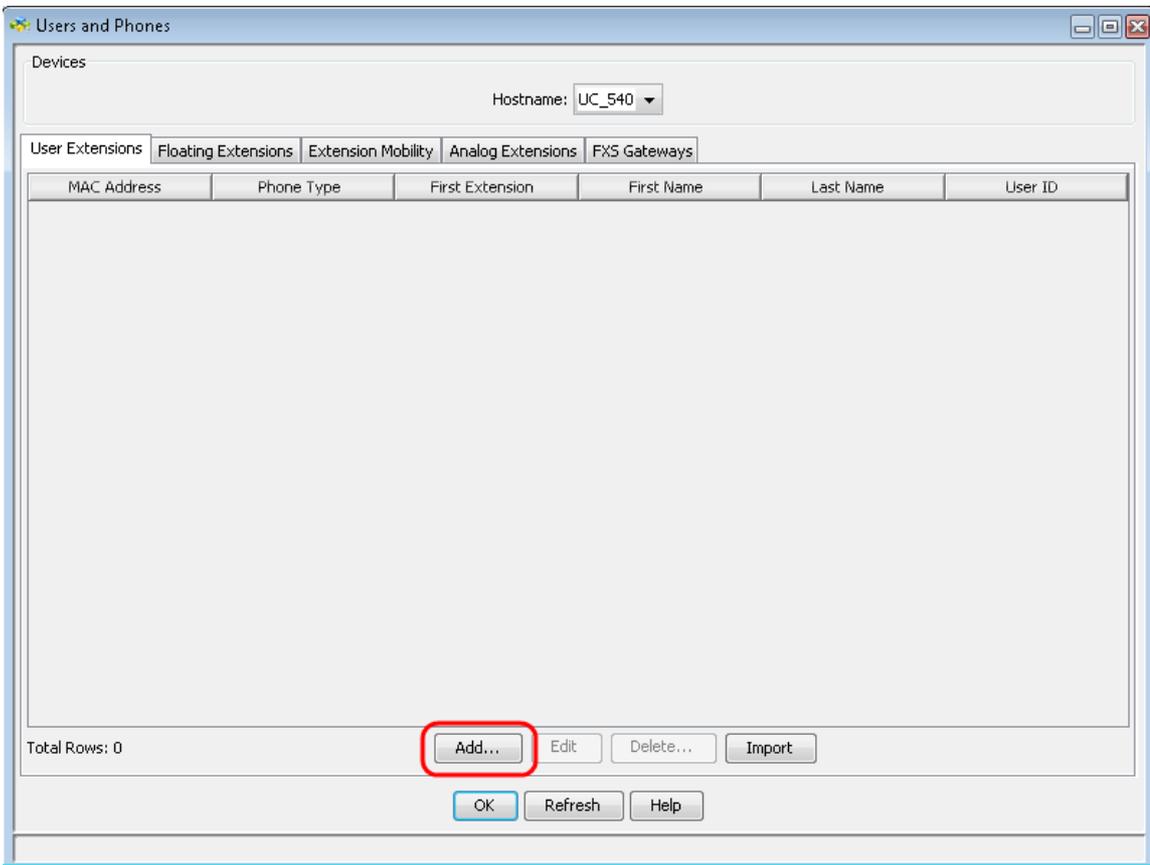

ديج فتاه ة فاضال ة فاضال قوف رقنا فت او هل او مدخت س م ل ة ح ف ص ي ف 2 ة و ط خ ل ل

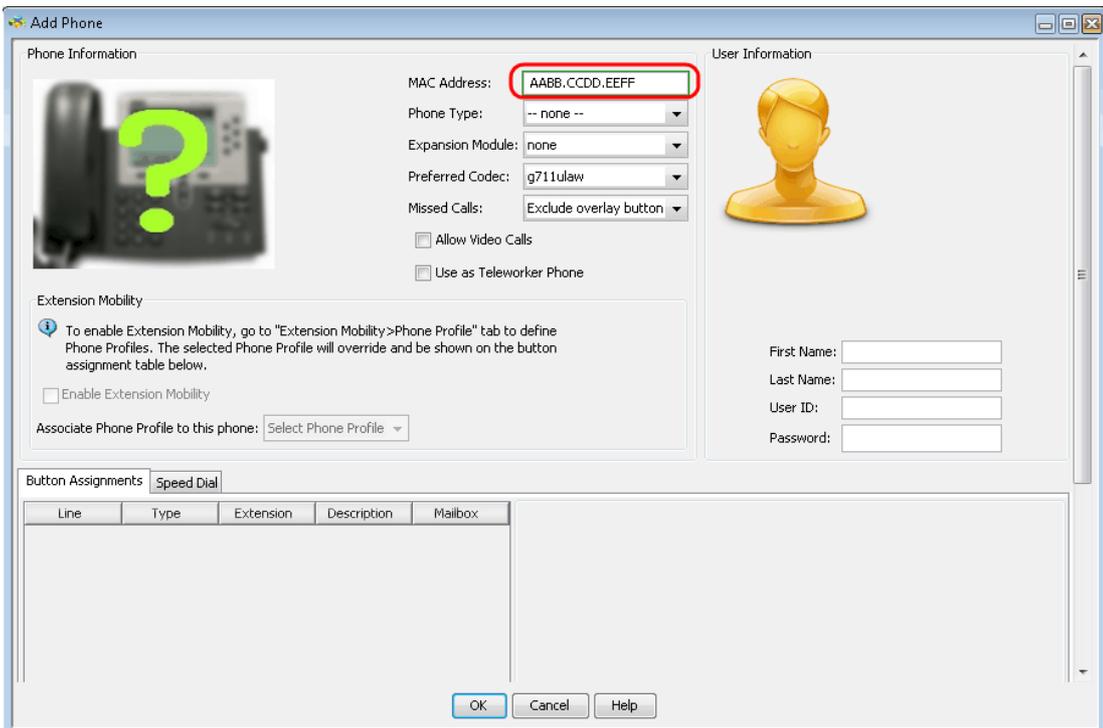

MAC ن ا و ن ع ل ق ح ي ف IP فت ا ه ل MAC ن ا و ن ع ل خ د ا ، فت ا ه ة فاضال ة ح ف ص ي ف 3 ة و ط خ ل ل

Add Phone

Phone Information

MAC Address:

Phone Type:

Expansion Module:

Preferred Codec:

Missed Calls:

Allow Video Call

Use as Teleworker Phone

User Information



First Name:

Last Name:

User ID:

Password:

Extension Mobility

To enable Extension Mobility, go to "Extension Mobility>Phone Profile" tab to define Phone Profiles. The selected Phone Profile will override and be shown on the button assignment table below.

Enable Extension Mobility

Associate Phone Profile to this phone:

Button Assignments **Speed Dial**

Line	Type	Extension	Description	Mailbox

OK Cancel Help

IP. فتاه زارط رتخأ، فتاهال عون ةلدسنملا ةمئاقلا نم 4. ةوطخلال

Add Phone

Phone Information

MAC Address:

Phone Type:

Expansion Module:

Preferred Codec:

Missed Calls:

Use as Teleworker Phone

User Information



First Name:

Last Name:

User ID:

Password:

Extension Mobility

To enable Extension Mobility, go to "Extension Mobility>Phone Profile" tab to define Phone Profiles. The selected Phone Profile will override and be shown on the button assignment table below.

Enable Extension Mobility

Associate Phone Profile to this phone:

Button Assignments **Speed Dial**

Line	Type	Extension	Description	Mailbox
1	Normal			<input type="checkbox"/>
2	None	n/a	n/a	<input type="checkbox"/>
3	None	n/a	n/a	<input type="checkbox"/>
4	None	n/a	n/a	<input type="checkbox"/>
5	None	n/a	n/a	<input type="checkbox"/>
6	None	n/a	n/a	<input type="checkbox"/>

OK Cancel Help

ةلدصتملا ةدحو رتخأ، "ءيسوتلا ةدحو" ةلدسنملا ةمئاقلا في 5. ةوطخلال
 ةلدسلس نم IP فتاهب SPA500.

Edit Phone

To enable Extension Mobility, go to "Extension Mobility>Phone Profile" tab to define Phone Profiles. The selected Phone Profile will override and be shown on the button assignment table below.

Enable Extension Mobility

Associate Phone Profile to this phone:

First Name:
 Last Name:
 User ID:
 Password:

Button Assignments **Speed Dial**

Line	Type	Extension	Description	Mailbox
5	Whisper Int...			<input type="checkbox"/>
6	Share	251		<input type="checkbox"/>
7	Normal			<input type="checkbox"/>
8	None	n/a	n/a	<input type="checkbox"/>
9	None	n/a	n/a	<input type="checkbox"/>
10	None	n/a	n/a	<input type="checkbox"/>
11	None	n/a	n/a	<input type="checkbox"/>
12	None	n/a	n/a	<input type="checkbox"/>
13	None	n/a	n/a	<input type="checkbox"/>
14	None	n/a	n/a	<input type="checkbox"/>
15	None	n/a	n/a	<input type="checkbox"/>
16	None	n/a	n/a	<input type="checkbox"/>
17	None	n/a	n/a	<input type="checkbox"/>
18	None	n/a	n/a	<input type="checkbox"/>

Total Rows: 18

Button 7

Button Type:

Parameters:

Extension:
 Button Label:
 Description:

Dual Line Overlay Intercom

Enable Voicemail

Block Restricted Numbers

Permissions:

Call Forward Busy:
 Call Forward No Answer:
 CFNA Timeout (seconds):
 PSTN Number:

OK Cancel Help

وه امك اهنىوك ت نكمي و رارزالا نم ديزملا ةفاضل ىرتل لفسأل ريرمتلاب مق 6 ةوطخلا بولطم.

ةمچرتل هذه لوج

ةللأل تاي نقتل نمة ومة مادختساب دن تسمل اذة Cisco تمةرت
ملاعلاء انء مء مء نمة دختسمل معد ى وتحم مء دقتل ةر شبل او
امك ةق قء نوك ت نل ةللأل ةمچرت لصف أن ةظحال مء ءرء. ةصاأل مء تءل ب
Cisco ةللخت. فرتحم مچرت مء مء دقء ةللأل ةل فارتحال ةمچرتل عم لاعل او
ىل إلمءءء ءوچرلاب ةصوء و تاملرتل هذه ةقء نء اهءل وئس م Cisco
Systems (رفوتم طبارل) ةل صأل ةل ءل ءنل دن تسمل