

رادارلل امومع ةصصخملا زتره ايج 5 ددرت ب Wi-Fi ةكبش تاددرت ين اديملا معدلا ةرادا مدختست
ىل ا دلب نم DFS تاونق فلختت .س قطلا رادارو ،ةلئاسلا تالاصتال او ،يركس عل رادارلا لثم
Wi-Fi تاونق ددع ةدايز يه DFS تاونق مادختسال ةيسئرا ةدئاللا .رخأ

DFS شادحأ لچس هبنت لئغش تب موقتو DFS ةانق Meraki لوصو ةطقن ي ا مدختست
ىل رهظي يذلا هبنتلل ةشاشلا ةطقل ىل ا عجرا . Meraki MR Access Point ىل ع هبنتلا او
زاهللا:

Radar event pattern detected on channel 116

This AP recorded 11 radar events
across 1 channel between Jan 12
00:40 and Jan 13 00:40 CST:

- Ch. 116: 11 events


Please refer to the [event log](#) for
more details.



DFS جذومن ش دح

نيوكتلا

ةكبش لل يطيطختلا مسرلا

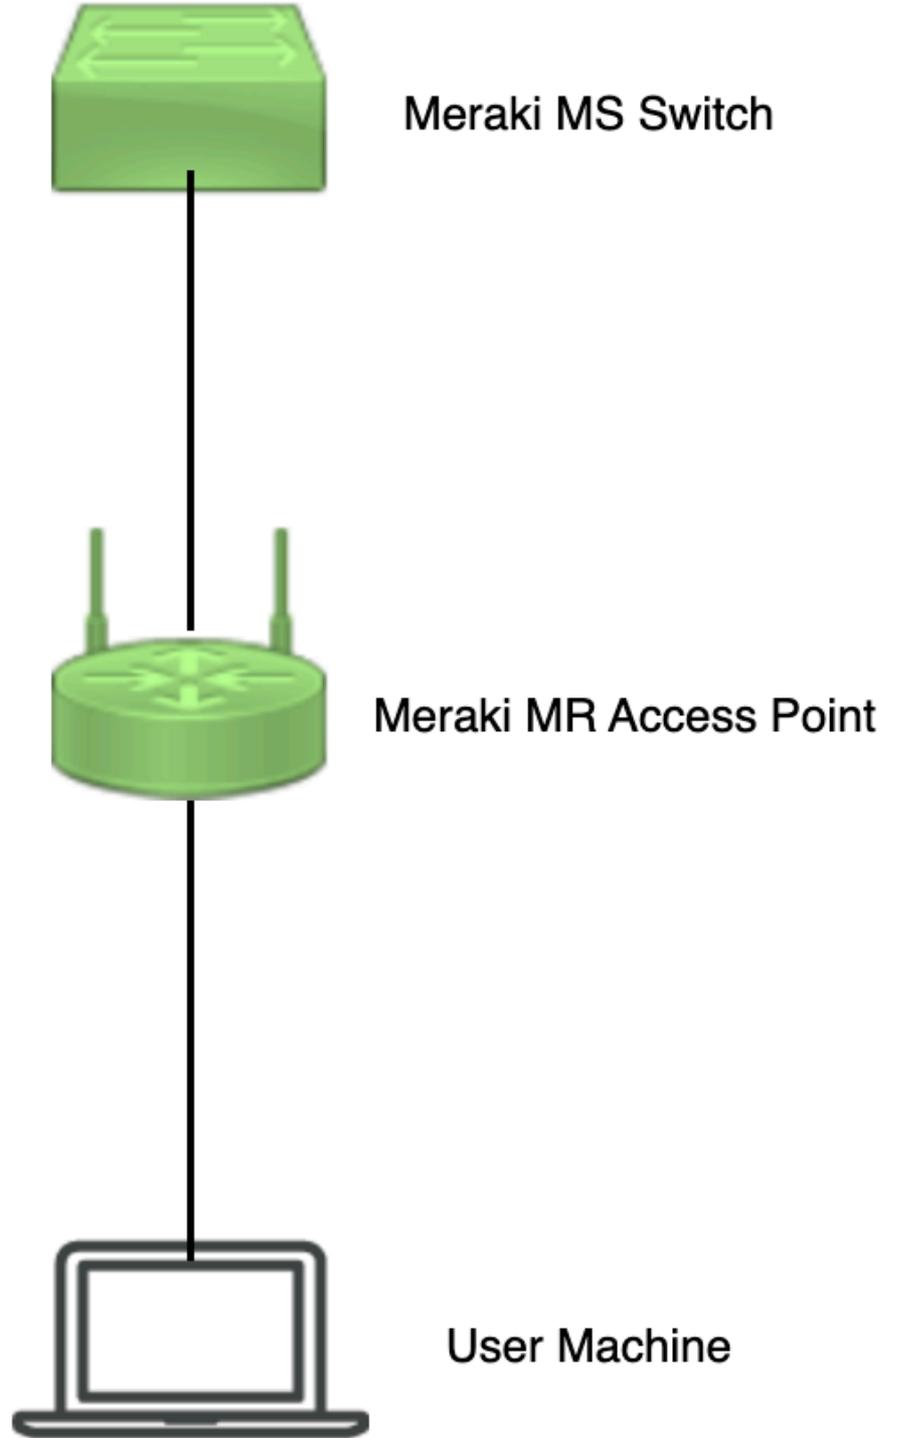

ةكبش لل يطيطختلا مسرلا

اهحالصإو عاطخألا فاشكتساو ةحصللا نم ققحتلا

1. DFS ةانق دادعإ نم ققحتلا

#	Name	Connectivity	Alerts	Channels	Configuration status	Model	Status
1	AP3	■	DFS event pattern	1, 128	Up to date	MRS56	●
2	AP4	■	DFS event pattern	11, 116	Up to date	MRS56	●
3	AP1	■	DFS event pattern	6, 116	Up to date	MRS56	●

DFS ثدح طمن تامولعم ةحول هبنت

3. ققحتلا لچس نم ققحتلا DFS ثدح فاشتك مت

Meraki Dashboard > Network (دح) ره اظلا راسملا يف فاشتكم ل DFS ثدح لچس نم ققحتلا نكمي (دح) Network-Wide > Event Log. مة (ةيكلسال لوصو ةطقن عم عقوم ةكبش يا

This network is bound to the configuration template [Small_Site](#)

Event log for access points

Access point: Any Client: Any Before: 01/19/2023 01:53 (CST)

Event type include: DFS event detected x Event type ignore: None

Search Reset filters


Download as

Time (CST)	Access point	SSID	Client	Event type	Details
Jan 19 01:45:54	-AP1			DFS event detected	channel: 116, radio: 1
Jan 19 01:26:37	-AP2			DFS event detected	channel: 128, radio: 1
Jan 19 01:21:55	-AP4			DFS event detected	channel: 116, radio: 1
Jan 19 01:15:35	-AP1			DFS event detected	channel: 116, radio: 1
Jan 19 00:56:18	-AP3			DFS event detected	channel: 128, radio: 1
Jan 19 00:51:37	-AP4			DFS event detected	channel: 116, radio: 1
Jan 19 00:40:17	-AP1			DFS event detected	channel: 116, radio: 1
Jan 19 00:21:00	-AP3			DFS event detected	channel: 128, radio: 1
Jan 19 00:15:58	-AP4			DFS event detected	channel: 116, radio: 1
Jan 19 00:09:59	-AP1			DFS event detected	channel: 116, radio: 1


4. اهال صاوي ناديملا معدلا ةرادا ثدح اطاخ فاشتك سا

في نيوكتلا ريغت عم اريس لچس ل دع ي DFS ثدح فشكو هبنت نع DFS طمن فشك ره اظلا راسملا ل ا عرا . ةيكلسال ل لوصولا ةطقن ل و ودارلا فيرعت فلم

بلق وا ةيكلسال لوصو ةطقن عم عقوم ةكبش يا (دح) Meraki Dashboard > Network (دح) ل لقتنا (دح) Wireless > Radio Setting > RF Profile مة (ةيكلسال لوصو ةطقن نيوكت هبنت نيوكت (ةكبش ل و ةيكلسال لوصولا ةطقن ب ق فرملا فيصوت ل > 5 GHz Radio Setting > Channel Assignment Method.

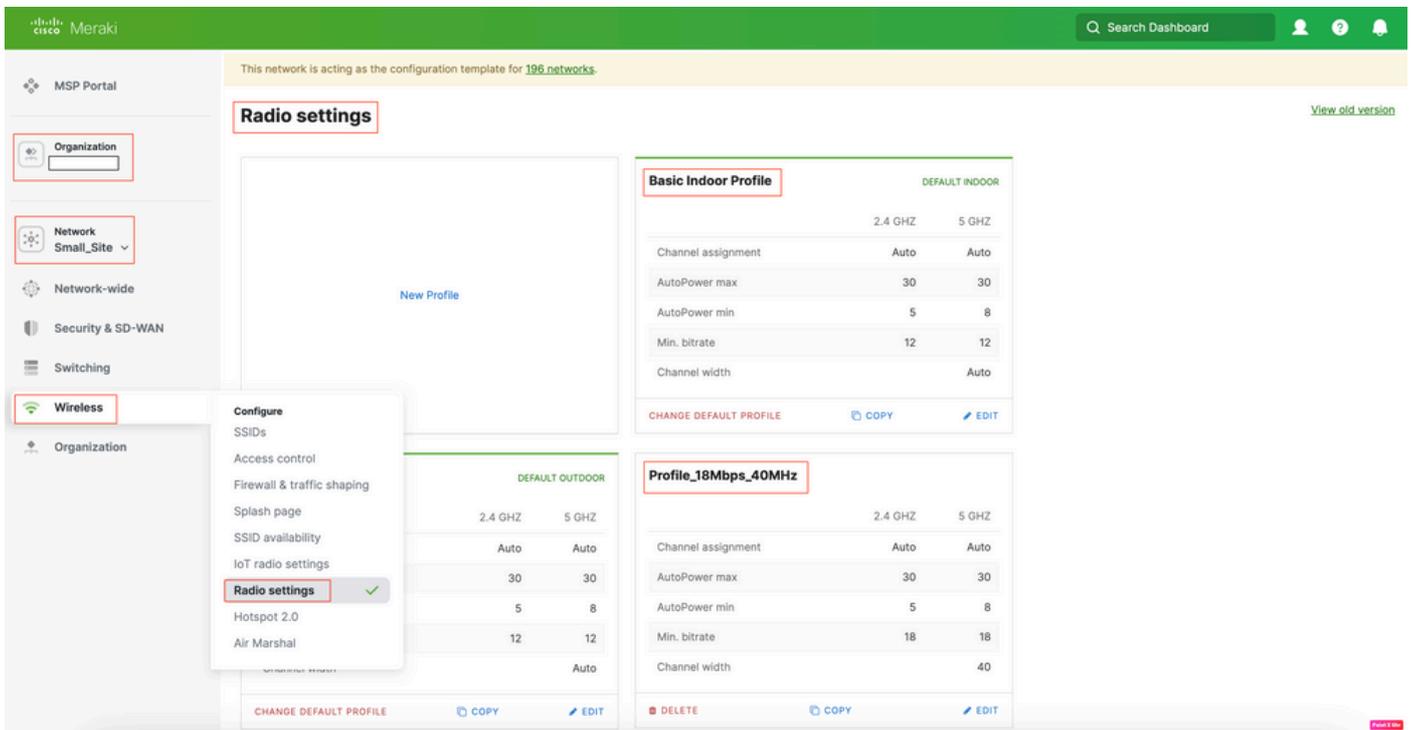

DFS ج 1 دادع | ديدحت

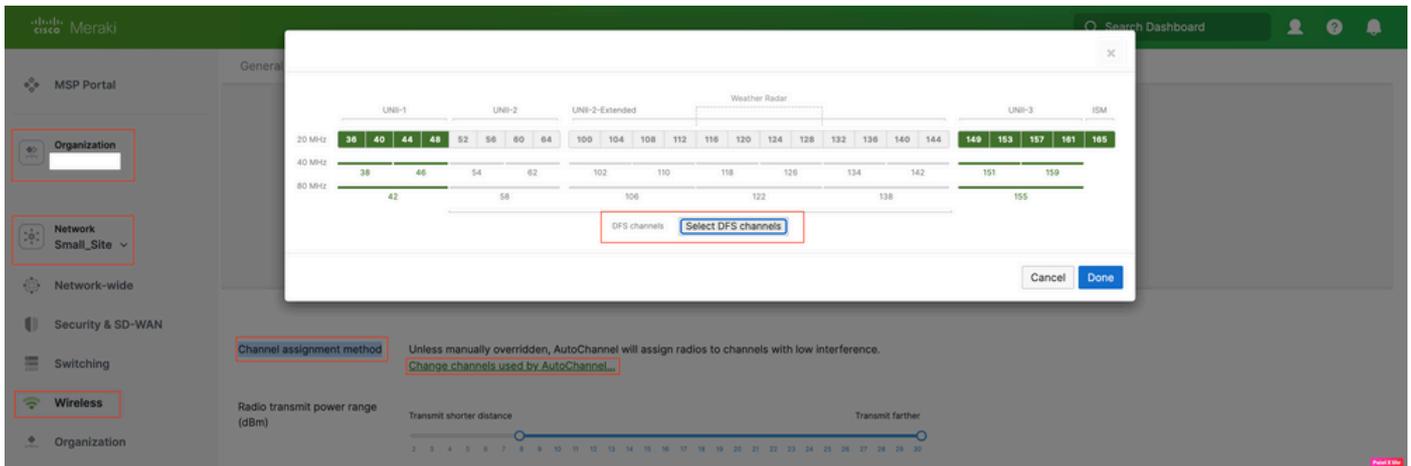

DFS DeSelect 2 دادع |

ةلص تاذا تاملول عم

- Meraki نم (DFS) يكل سالللا يكي مان يدا ددرت لا ديدحت
- Cisco Systems - تادنت سمل او م عدلا ل الك ةينقت

ةمچرتل هذه ل و ح

ةلأل تاي نقتل ن م ة و مچ م ادخت ساب دن تسم ل ا اذ ه Cisco ت مچرت
م ل ا ل ا ا ن ا ع مچ م ف ن م دخت س م ل م عد و ت م م م دقت ل ة م ش ب ل و
م ك ة ق ي ق د ن و ك ت ن ل ة ل ا ة مچرت ل ض ف ا ن ا ة ظ ح ا ل م م چ ر ي . ة ص ا خ ل م ه ت غ ل ب
Cisco ي ل خ ت . ف ر ت م م مچرت م ا ه م د ق ي ي ت ل ا ة ي ف ا ر ت ح ا ل ا ة مچرت ل ا م ل ا ح ل ا و ه
ل ا ا م ا د ا د ع و چ ر ل ا ب ي ص و ت و ت ا مچرت ل ا ه ذ ه ة ق د ن ع ا ه ت ي ل و ئ س م Cisco
Systems (ر ف و ت م ط ب ا ر ل ا) ي ل ص ا ل ا ي ز ي ل چ ن ا ل ا دن ت س م ل ا