



SAImet Package 1.0.0.3 Installation and Configuration Guide

Introduction

The Metadata Extraction Tool (MET) is contained in Cisco's® SAI^{met} software package. The SAI^{met} package is installed on the Digital Network Control System (DNCS) and is used to help support video-on-demand (VOD) on the Cisco Videoscape™ Voyager Vantage (Vantage) platform.

Purpose

This document provides instructions to provision Arris VOD services for Vantage version 3.3 clients. This document describes the DNCS configuration required to provide these services, as well as providing installation instructions for the SAI^{met} package on the DNCS. This package is required to provide catalog and metadata services through the SQLite database from the Arris back-office to the client Broadcast File System (BFS).

Audience

This document is written for service providers, headend operators, and support engineers who are responsible for running and maintaining the Vantage product.

Document Version

This is the first formal release of this document.

In This Document

■ Metadata Extraction Tool Description.....	3
■ Configure the BFS.....	5
■ Configure the Arris CMM VOD Server.....	10
■ Install the SAImet Package.....	12
■ Configure the MET Interfaces.....	14
■ Configure svcadm for MET Program IDs	17
■ Add Arris Servers to the /etc/hosts File.....	18
■ Restart the metasm Process and Verify the Files.....	19
■ Edit the config.ini File	20
■ Add the Subscription VOD Package.....	23

Metadata Extraction Tool Description

The Metadata Delivery System (MDS) is the source of all Arris VOD metadata for the customer-premises equipment (CPE). This includes providing all additions, updates, and deletions for all required metadata elements.


Upon startup, the MDS reads and caches several pre-defined configuration files. These files contain the TCP IP address and port of the Arris VOD publisher, the SQLite database schema details, and the Arris-to-Media Suite database field mappings. Subsequently, the MDS will utilize the Arris VOD publisher IP address and port, retrieved from the configuration file, to establish a persistent TCP connection with the publisher. While this connection's underlying network protocol is TCP, the MDS will accommodate an HTTP-like XML-based application layer publisher/subscriber protocol, as set forth by the Arris VOD publisher specifications. Accordingly, the MDS will issue a subscription request to the publisher that contains the list of metadata-on-demand (MOD) names for which it wants to register (receive updates).

Upon successful subscription, the VOD publisher returns a complete list of metadata for each MOD name specified by the MDS. After receiving this initial complete list of metadata, all subsequent data received from the Arris VOD publisher will be updates -- additions, modifications, and deletions. Upon successful retrieval of the complete list of MOD metadata or any metadata modifications, the MDS will parse the recovered stream. Initially, this entails the separation of the HTTP-like headers from the actual XML message content. Once the XML message is identified and secured, it is also parsed so as to acquire those metadata elements to be transformed into MediaSuite-compatible entities.

Next, and in accordance with the database schema and field mappings contained in the aforementioned configuration files, the resultant MediaSuite entities will be inserted into an SQLite database file. Using the current DNCS BFS server API, this file will then be placed on an in-band BFS carousel to be consumed by the CPE devices.

In addition to the delivery of the database files, a category hierarchy file (CHF), and a summary file (SF) are also placed on an in-band and out-of-band BFS carousel. The CHF should contain all of the categories to be encountered by the client during metadata processing, while the SF will contain information describing the previously created SQLite database files. The following diagram depicts the entire process flow required by the MDS portion of the MET subsystem.

MET High-Level Diagram

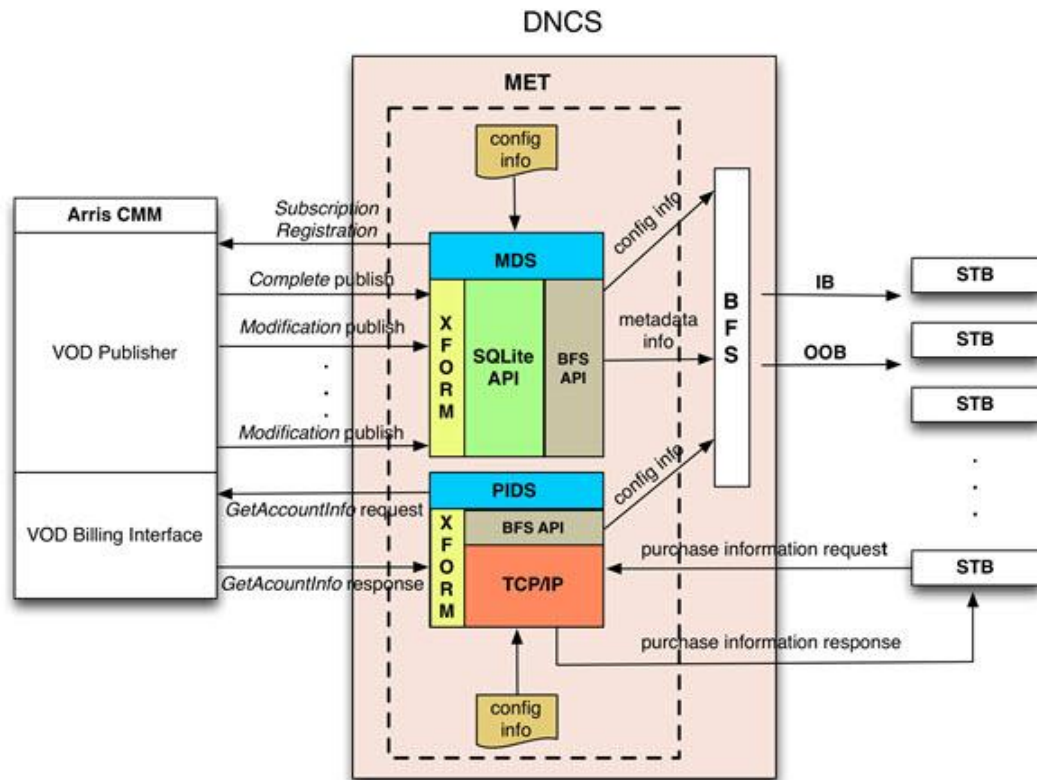


Configure the BFS

Note: Some of the screen-captured images in this section reference the *AllSites* site. *AllSites* sites pertain to those systems that have an RNCS. The *AllSites* designation will not appear if your system does not have an RNCS.

Add the BFS Sources

Follow this outline to add the **met_ib** and **met_oob** BFS sources to the DNCS. Configure the sources as depicted in the screen-captured images.

- 1 Access the BFS Administration window.

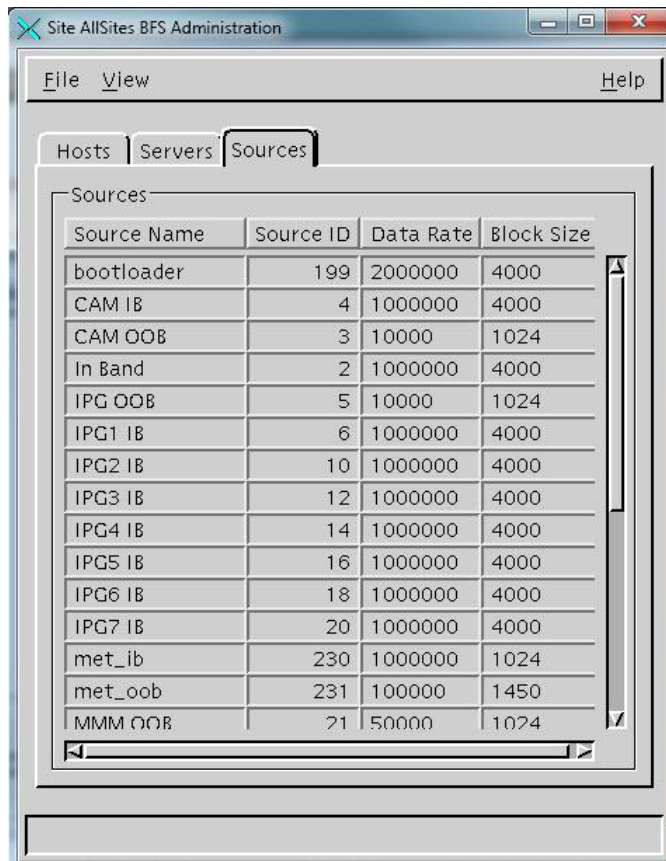

The screenshot shows the 'Site AllSites BFS Administration' window with the 'Sources' tab selected. The window contains a table with the following data:

Source Name	Source ID	Data Rate	Block Size
bootloader	199	2000000	4000
CAM IB	4	1000000	4000
CAM OOB	3	10000	1024
In Band	2	1000000	4000
IPG OOB	5	10000	1024
IPG1 IB	6	1000000	4000
IPG2 IB	10	1000000	4000
IPG3 IB	12	1000000	4000
IPG4 IB	14	1000000	4000
IPG5 IB	16	1000000	4000
IPG6 IB	18	1000000	4000
IPG7 IB	20	1000000	4000
met_ib	230	1000000	1024
met_oob	231	100000	1450
MMM OOB	21	50000	1024

Configure the BFS

2 Add the **met_ib** Source.

Set Up BFS Source

Source Name: **met_ib**

Source ID: **230**

Source Type: BFS Bootloader

Transport Type: ASI In-band Out-of-band

Data Rate: **1.00** Mbps

Block Size: **1024** bytes

Indication Interval: **100** msec

Data Pump: run stop

Available Hosts

Selected Hosts


AllSitesHost

Add >>

<< Remove


Save Cancel Help

3 Add the **met_oob** Source.

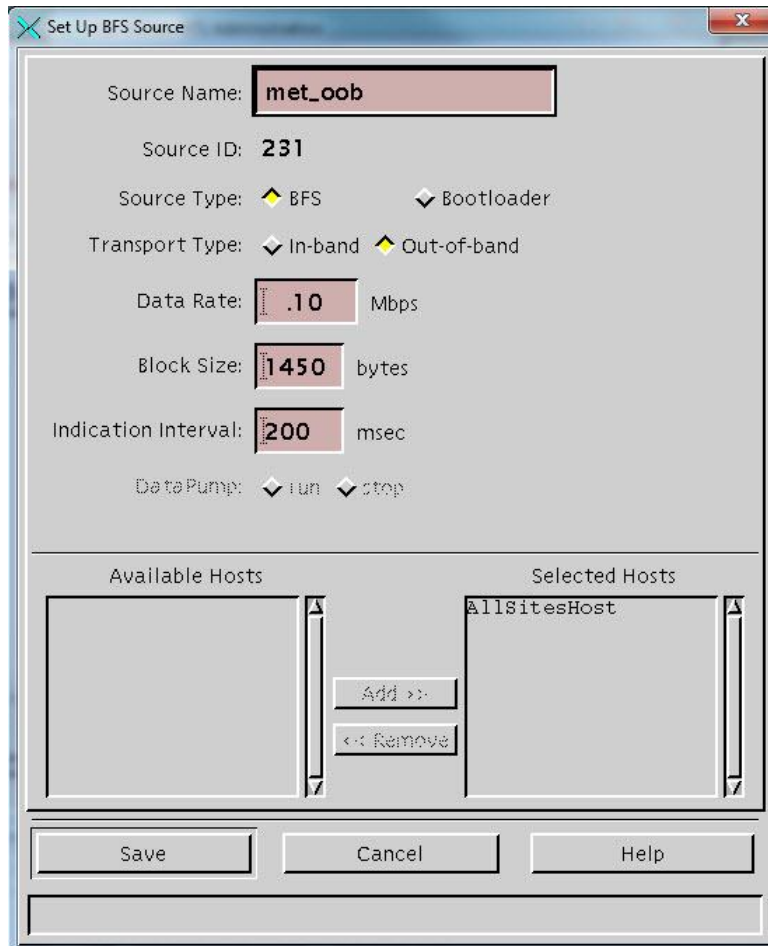

Add the BFS Server


Add the **vod** BFS server from the Authorize BFS Server window.

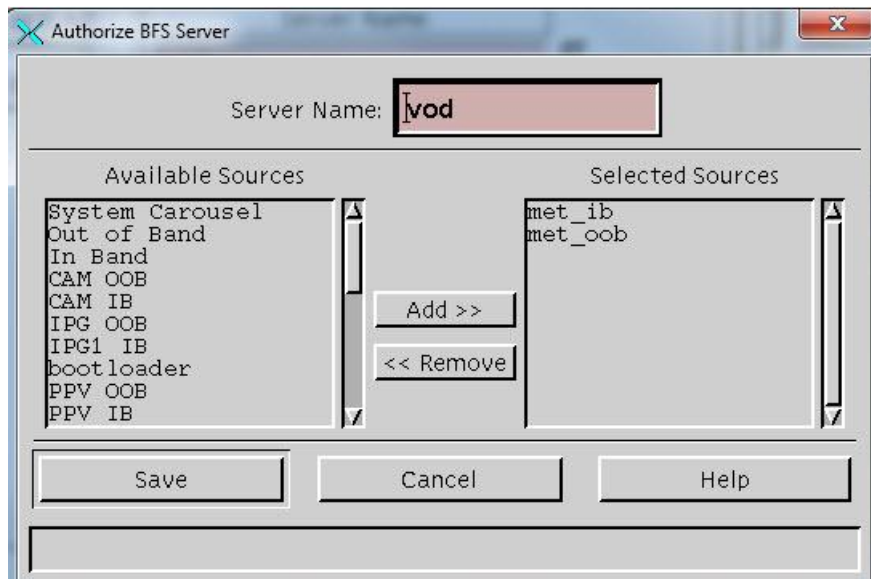


Add the vod Cabinet and vod Files

Follow this outline to add the **vod** cabinet and the **met_ib** and **met_oob** files.

Note: The files shown in the Broadcast File Server List (immediately following) are populated by the MET during publishing for set-top box (STB) metadata and catalog consumption.

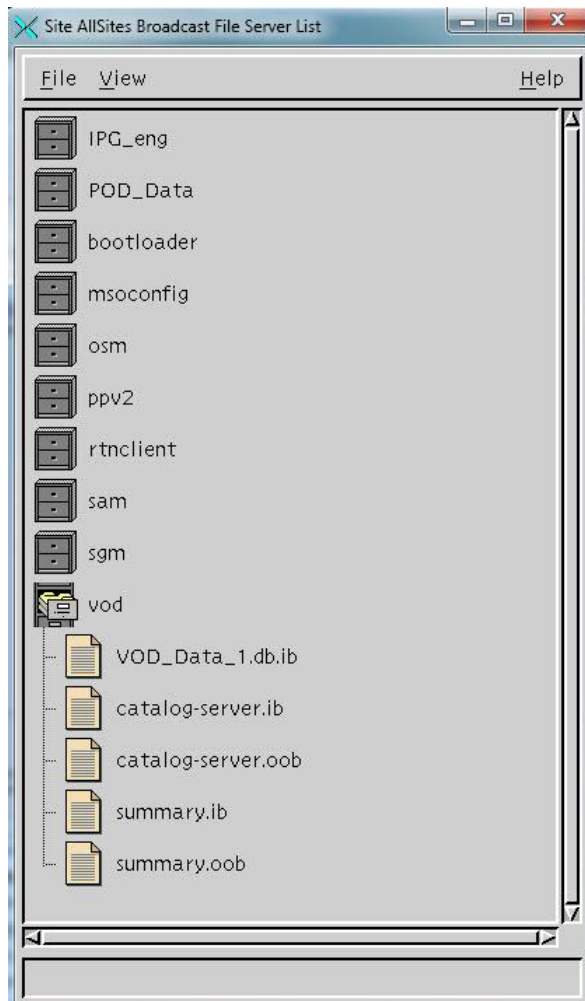

Add met_ib Files

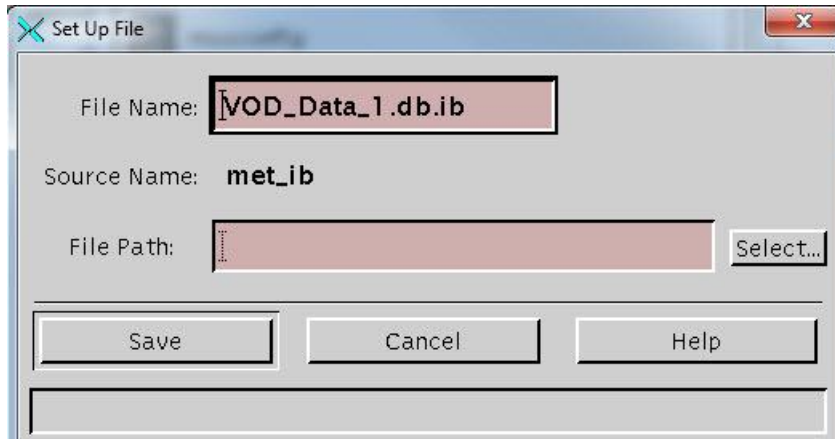

A screenshot of a 'Set Up File' dialog box. The 'File Name' field contains 'VOD_Data_1.db.ib'. The 'Source Name' is 'met_ib'. The 'File Path' field is empty with a 'Select...' button to its right. At the bottom are 'Save', 'Cancel', and 'Help' buttons.


File Name: **VOD_Data_1.db.ib**

Source Name: **met_ib**

File Path: **Select...**

Save **Cancel** **Help**

Add met_oob Files

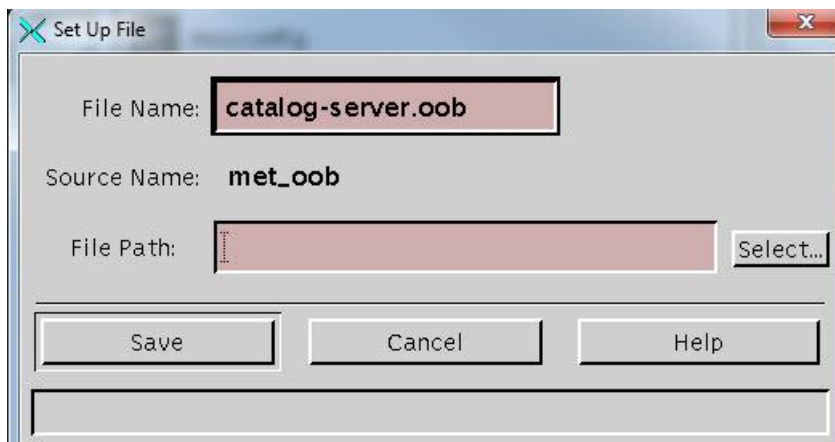

A screenshot of a 'Set Up File' dialog box. The 'File Name' field contains 'catalog-server.oob'. The 'Source Name' is 'met_oob'. The 'File Path' field is empty with a 'Select...' button to its right. At the bottom are 'Save', 'Cancel', and 'Help' buttons.

File Name: **catalog-server.oob**

Source Name: **met_oob**

File Path: **Select...**

Save **Cancel** **Help**

Configure the Arris CMM VOD Server

- 1 Log onto the Arris CMM server and navigate to **Export Views**.
- 2 Verify the catalog and folder structure.

Note: The screenshots that follow depict a typical Dashboard, Export View window and Categories window of an Arris back-office. Consider these as references for this document when you configure the MET and the config.ini file on the DNCS. The actual folder structure will vary, depending upon site specifics and customer preference.

ARRIS
ConvergeMedia™
Management Console

Main Dashboard

Edge Resource Manager Health

Name	IP
svtlab-svdlab-erm	172.200.4.10

Last Updated 2013-03-25 13:26 EDT

Quarantined Content

License Window	Quarantined
0 Post-Window	0 Today
3 In-Window	0 Yesterday
0 Within 7 days	3 Earlier
0 Later	

Advanced Search

Last Updated 2013-03-25 13:26 EDT

VOD Session Manager Health

Name	IP
svtlab-svdlab-vodsm	172.200.4.10

Last Updated 2013-03-25 13:26 EDT

Video Server Resource Manager Health

Name	IP
svtlab-svdlab-Mini-vsrm	172.200.4.10

Last Updated 2013-03-25 13:26 EDT

STB Requests

	Total	Unique STB	Unique Account
All STB Requests	0	0	0
Successful STB Requests	0	0	0
STB Requests with Errors	0	0	0
STB Request Success Rate	0.00%	0.00%	0.00%

Last Updated 2013-03-25 13:26 EDT

Service Groups Near Bandwidth Capacity

Service Groups Above Threshold: 0

Service Group	Bandwidth Usage
1	0%

Advanced Search

Last Updated 2013-03-25 13:26 EDT

VOD Run Rate Codes

Stream Run Rate: 100%

Last 24 hours

Last Updated 2013-03-25 13:26 EDT

ARRIS
ConvergeMedia™
Management Console

svtlab - svtlab-cpm - Export View

Last Update

New Export View

Items 1 - 8 of 8

Export View	Subscriber Name	Authentication String	Last Export Date
<input type="checkbox"/>	cinemax	arris	2013-03-25 06:15:30
<input type="checkbox"/>	eventsandspecials	arris	2013-03-24 06:15:30
<input type="checkbox"/>	hbo	arris	2013-03-25 06:15:30
<input type="checkbox"/>	movies	arris	2013-03-25 06:15:30
<input type="checkbox"/>	showtime	arris	2013-03-25 06:15:30
<input type="checkbox"/>	sports	arris	2013-03-24 06:15:30
<input type="checkbox"/>	svtlab	arris	2013-03-25 06:15:30
<input type="checkbox"/>	vod	arris	2013-03-25 06:15:30



The screenshot shows the Arris ConvergeMedia Management Console interface. The left sidebar contains a navigation menu with options like All Deployments, Dashboard, Alert Center, Activities, Reports, User Administration, Configuration, svtlab, Management Console, Metadata Management Services, nODA - svtlab-svtlab-mia, Metadata, Assets, Categories, Subscription Packages, Export Views, Wizards, Session and Resource Managers, and User Guide. The main content area is titled 'svtlab - svtlab-cpm - Categories' and shows a 'New Category' button and a list of categories. The 'Category Tree' is expanded to show the following structure:

- Barker
- Cinemax
 - Cinemax On Demand (76 Assets)
- Events & Specials
 - Local Events (78 Assets)
- HBO
 - HBO On Demand
 - A Little Curious (78 Assets)
 - Crashbox (78 Assets)
 - Game of Thrones (78 Assets)
 - Veep (78 Assets)
- Movies
- Showtime
- Sports Free
- VOD

* Category names in red will not be exported to public.

Important:

- Detail on how to configure the Arris server software and interfaces for MET communication is beyond the scope of this document. Cisco expects that the vendor will handle these details upon installation.
- Much of the Arris configuration is done through the configuration files. Contact Arris if you need to change the service group, set up additional GQAM modulators, or change or add channels that you would like to appear on the STB.

Install the SAI met Package

Follow these instructions to install the SAI met package on the DNCS.

- 1 Log on as **root** user on the DNCS.
- 2 Insert the CD that contains the SAI met software into the DVD drive of the DNCS. The DNCS mounts the CD.
- 3 Type the following command and press **Enter** to confirm that the DNCS mounted the CD.

```
df -k | grep cdrom
```

Result: Output similar to the following should appear.

```
/vol/dev/dsk/c0t0d0/met-1.0.0.x    5804    5804        0    100%
/cdrom/met-1.0.0.x
```

- 4 Type the following command and press **Enter** to change to the /cdrom/cdrom0 directory.

```
cd /cdrom/cdrom0
```

- 5 Type the following command and press **Enter** to verify the contents of the CD.

```
ls
```

Result: Output should show the SAI met package.

- 6 Type the following command and press **Enter** to install the SAI met package.

```
install_pkg
```

Result: The installation begins.

```
Checking the system, please wait...
```

```
*****
```

```
This script will install the following packages on "roger":
```

```
SAI met          MET 07-06-12
                  1.0.0.0
```

```
*****
```

```
Are you SURE you want to continue? [y,n,?,q]
```

- 7 Type **y** and press **Enter** to continue.

```
Installing SAI met package on roger...
```

```
Processing package instance <SAI met> from </cdrom/met-1.0.0.0>
```

```
MET 07-06-12(SunOS_sparc) 1.0.0.0
```

```
## Executing checkinstall script.
```

```
*****
```

```
Copyright (c) 1998-2012 Cisco Systems, Inc.
```

```
All Rights Reserved
```

```
This product is protected by copyright and distributed under
licenses restricting copying, distribution and decompilation.
```

```
*****
```

```
Using </dvs> as the package base directory.
```

```
## Processing package information.
```

```
## Processing system information.
```

```
9 package pathnames are already properly installed.
```

```
Installing MET 07-06-12 as <SAI met>
```

```
## Executing preinstall script.
```

```
Adding met:700 group.
```

```
Adding met:700 account.
```

```

64 blocks
passwd: password information changed for met
passwd: password information changed for met
## Installing part 1 of 1.
/dvs/met/bin/metcfg
/dvs/met/bin/metmds
/dvs/met/bin/metpids
/dvs/met/bin/metsm
/dvs/met/lib/libMetlib.so
/etc/CiscoProcessInfo.d/SAImet.txt
/lib/svc/method/svc-metsm
/var/svc/manifest/application/metsm.xml
[ verifying class <none> ]
/dvs/met/etc/metdb.sql <attribute change only>
## checking common configuration files
/dvs/met/etc/MetConfig.xml preserved
[ verifying class <preserve> ]
Modifying /etc/inet/services
Modifying /etc/logadm.conf
Modifying /etc/syslog.conf
[ verifying class <sed> ]
## Executing postinstall script.
passwd: password information changed for met
Installation of <SAImet> was successful.
For more SAIMet package installation messages refer to:
/var/sadm/system/logs/SAImet_1.0.0.0_install.log
# pwd
/cdrom/met-1.0.0.0

```

- 8 Examine the log file (`/var/sadm/system/logs/SAImet_1.0.0.0_install.log`) for any error messages.
- 9 Were there any errors?
 - If **yes**, troubleshoot the error(s) or contact Cisco Services for assistance.
 - If **no**, continue with step 10.
- 10 Follow these instructions to eject the CD.
 - a Type **cd /** and press **Enter**.
 - b Type **eject** and press **Enter**.

Configure the MET Interfaces

- 1 Type the following command and press **Enter** to switch from root user to met user.

```
su - met
```

- 2 Type the following command and press **Enter** to change to the /dvs/met/etc directory.

```
cd /dvs/met/etc/
```

- 3 Type the following command and press **Enter** to confirm the contents of the directory.

```
ls
```

Example: Output should be similar to the following.

```
onfigODA.ini  MetConfig.xml  metdb.sql.orig  metism.pid
```

- 4 Edit the MetConfig.xml file with a text editor such that the items marked in bold (in the following example) match the Arris back-office and DNCS configuration.

Note: This view describes the catalog and folder structure for the BFS SQLite database. The config.ini file is updated with the UID such that the client will reflect the catalog in the user interface.

```
<?xml version="1.0" encoding="UTF-8"?>
<Met syslog="local6">
  <BFS ibsrcid="230" oobsrcid="231"/>
  <MDS pubIP="arriscmm" pubport="4537" threads="5" debug="true"
mms="10000" gzip="false" cti="3" ctic="20" mti="120">
    <MOD name="cinemax" authstr="arris"/>
    <MOD name="eventsandspecials" authstr="arris"/>
    <MOD name="hbo" authstr="arris"/>
    <MOD name="movies" authstr="arris"/>
    <MOD name="showtime" authstr="arris"/>
    <MOD name="sports" authstr="arris"/>
    <MOD name="vod" authstr="arris"/>
  </MDS>
  <PIDS eamIP="arriscmm" eamport="6100" pubIP="arriscmm"
pubport="6101" threads="5" debug="true" pers="false" rti="10" >
    <CatalogServer IP="10.253.3.1" service="metpids" />
  </PIDS>
</Met>
```

Field Descriptions

The following table lists the field descriptions in the file used in step 4.

Attribute	Description
Met::syslog	Facility to be used when logging syslog messages. This facility should be configured for the MET in the /etc/syslog.conf file with the following entry: local6.debug /var/log/metLog.
Met::MDS::pubIP	Arris publisher IP address or host name.
Met::MDS::pubport	Arris publisher port.
Met::MDS::BFS::ibsrcid	BFS in-band source ID.
Met::MDS::BFS::oobsrcid	BFS out-of-band source ID.
Met::MDS::threads	Number of transformation worker threads to be created.
Met::MDS::debug	Debug mode enabled (true) or disabled (false).
Met::MDS::mms	Maximum Merge Size - the maximum number of assets allowed in a merged database file.
Met::MDS::gzip	Compress all BFS files (true) or do not compress BFS files (false).
Met::MDS::cti	Complete Time Interval - time in seconds between MDS metadata modification checks when waiting on PublisherModInfoCompleteRequest messages.
Met::MDS::ctic	Complete Time Interval Count - when waiting on PublisherModInfoCompleteRequest messages, this is the number of CTI second intervals after which all modified MOD/ODA metadata should be merged and submitted to BFS.
Met::MDS::mti	Modified Time Interval - when in receipt of PublisherModInfoModificationRequest messages, this is the interval between MDS metadata modification checks as well as database file merge and submittal to BFS. If no metadata has changed, then file merging and submittal to BFS should not take place.
Met::MDS::MOD::name	MOD/ODA name to which the MDS must subscribe.
Met::MDS::MOD::authstr	Authorization string to be used when registering to subscribe to the specified MOD/ODA.
Met::PIDS::eamIP	Arris Entitlement and Account Manager (EAM) IP address or host name.
Met::PIDS::eamport	Arris EAM port.
Met::PIDS::threads	Number of client connection threads to be created.
Met::PIDS::debug	Debug mode enabled (true) or disabled (false).

Configure the MET Interfaces

Attribute	Description
Met::PIDS::pers	Maintain persistent Arris EAM connection (true) or not (false).
Met::PIDS::rti	EAM response timeout interval – time in seconds for which the PIDS should wait for a response from the Arris EAM.
Met::PIDS::CatalogServer::IP	IP address of the PIDS server. This information will be sent to the client population via IB and OOB BFS.
Met::PIDS::CatalogServer::service	Service name to be found in the /etc/services file specifying the PIDS service port.

Configure svcadm for MET Program IDs

- 1 Type the following command and press **Enter** to become **root** user.
`su - root`
- 2 Open the `/etc/services` file with a text editor.
- 3 Add the following line to the end of the file.
`metpids 34599/tcp metpids`
- 4 Save the file and close the editor.

Add Arris Servers to the /etc/hosts File

- 1 Open the /etc/hosts file with a text editor.
- 2 Add the cmm (management) and xms (VOD pump) IP addresses to the hosts file.

Example:

```
#ARRIS SERVERS  
172.200.4.10 arriscmm  
172.200.4.20 xms
```

- 3 Save the file and close the editor.

Restart the metasm Process and Verify the Files

- 1 As **root** user, type the following command and press **Enter** to restart the metasm process.

```
svcadm restart metasm
```

- 2 Type the following command and press **Enter** to watch the process restart and publish.

```
tail -f /var/log/met.log
```

- 3 Type the following command and press **Enter** to switch to the `dvs/dvsFiles/BFS/DNCS/vod` file.

```
cd /dvs/dvsFiles/BFS/DNCS/vod
```

- 4 Type the following command and press **Enter** to verify that all files updated.

```
ls -la
```

Example: Output should be similar to the following example.

```
total 102
drwxr-xr-x  2 dnscs dnscs  512 Feb  4 16:22 .
drwxr-xr-x 21 dnscs dnscs  512 Feb  6 13:23 ..
-rwxr-x---  1 dnscs dnscs   31 Jan 29 15:13 catalog-server.ib
-rwxr-x---  1 dnscs dnscs   31 Jan 29 15:13 catalog-server.oob
-rwxr-x---  1 dnscs dnscs  95 Feb  4 16:22 summary.ib
-rwxr-x---  1 dnscs dnscs  95 Feb  4 16:22 summary.oob
-rwxr-x---  1 dnscs dnscs 46080 Feb  4 16:22 VOD_Data_1.db.ib
```

- 5 Type the following command and press **Enter**.

```
cd /dvs/met/etc
```

- 6 Open the `configODA.ini` file with an editor and examine the file for UIDs.

Note: This is a file that is generated through the MDS. This file is generated upon successful login to the Arris publisher and the subsequent retrieval of metadata. The UIDs that appear in the file need to be added to the `config.ini` file.

Sample contents of `configODA.ini` file:

```
[vod]
names=vod,movies,hbo,cinemax,showtime,sports,eventsandspecials
uids=10127,10128,10129,10130,10440,10446,10449
```

Edit the config.ini File

- 1 On the DNCS, change directories to **msoconfig**.
- 2 Type **ls** and press **Enter** to confirm the presence of the rtn directory.
Expected output:
`dns rtn`
- 3 Type the following command and press **Enter**.
`cd rtn`
- 4 Type **ls** and press **Enter** to examine the contents of the rtn directory.
Expected output:
`0 1`
- 5 Type the following command and press **Enter**.
`cd 0`
- 6 Type **ls** and press **Enter** to examine the contents of the rtn directory.
Expected output:
`config.ini globalconfig.txt stagingdefaults.txt`
- 7 Open the config.ini file with a text editor.
- 8 Examine the contents of the file. The items marked in bold will need to be added for Arris and Vantage version 3.3.

```
#
# This is an example of the config.ini file, AKA non user unified settings
#
# Each variable below
#
# CA entries
#
[cam]
# cisco_ca=0
cisco_ca=1
widevine=0
cablecard_host=1
# widevine=1
# clear=0
clear=1
default=cablecard_host
recording_mode=cisco_ca
# recording_mode=clear
# recording_mode=same_as_live
[cisco_ca]
entitlements=powerkey
```

```

# entitlements=softcas
#
# startup entries
#
# reboot? by default do NOT reboot
# uncommenting either value will cause the STB to obey that setting
[reboot]
# disable=0
# disable=1
# time is hour of the day, 0-23, e.g. 3 = 3:00 AM
# time only makes sense if reboot is ENABLED
# time=3
#
#
#
#
[moca]
enable_moca_by_service=1
moca_service_name=_MRDV

#Any change to this section would reboot the system

[vod]
uids=10128,10127,10129,10130,10440,10446,10449
samids=12,13,14,15,16,17,18
types=VOD,VOD,SVOD,SVOD,SVOD,VOD,VOD

#types=VOD,sVOD,Svod,SVOD,SvoD,svod,svOd,svod,SVOD,vod,SvoD
posterartpath=/bfs/rtnclient/posterart
#names=Rogers-On-Demand,Anime-Network-OnDemand,NFL-Network-On-
Demand,OMNI-Plus-On-Demand,Citytv-On-Demand,WWE-On-Demand,HBO-
Canada-On-Demand,GLOBAL-On-Demand,Treehouse-On-Demand,MPIX-On-
Demand,HGTV On Demand
#contextIds=25601,25632,25605,25625,25606,25607,25608,25618,25619,25624,25623
,25622,25603
#SamIds=329,349,366,367,368,369,370,379,380,371,372,373,381
#dcns=598,590,591,600,592,593,595,806,805,599,597,596,594
#eids=233,4,17,51,17,17,17,233,233,57,61,107,233
#eids=233,7,107,61,57,51,4
#assetGenericFieldId=1
#assetGenericId=1
#folderGenericFieldId=2

```

Edit the config.ini File

```
#folderGenericId=2  
#nightly_bfs_trigger=3  
#nightly_clear_trigger=5  
  
#
```

Add the Subscription VOD Package

Use the Set Up Package window on the DNCS to add the Subscription VOD package.

Set Up Package

Package Name: **ARRIS_CINE**

EID: 7 (hex)

Duration: Unlimited Limited

Start Date: MM/DD/YY

Start Time: HH:MM:SS AM

Length: days hours minutes

Pay Per View

Right To Copy: Allowed

Impulse Pay Per View

Preview Buy Window Purchase Modes

Start Date: MM/DD/YY

Start Time: HH:MM:SS AM

Duration: hours minutes

Allow Event Extension

Save Cancel Help

For More Information

If you have additional technical questions, call Cisco Services at 770 236-2200 or 866 787-3866 for assistance. Follow the menu options to speak with a service engineer.



Cisco Systems, Inc.
5030 Sugarloaf Parkway, Box 465447
Lawrenceville, GA 30042

678 277-1120
800 553-6387
www.cisco.com

Cisco and the Cisco logo are trademarks or registered trademarks of Cisco and/or its affiliates in the U.S. and other countries. To view a list of Cisco trademarks, go to this URL:

www.cisco.com/go/trademarks.

Third party trademarks mentioned are the property of their respective owners.

The use of the word partner does not imply a partnership relationship between Cisco and any other company. (1110R)

Product and service availability are subject to change without notice.

© 2013 Cisco and/or its affiliates. All rights reserved.

March 2013

Part Number OL-29312-01