


# Cisco Digital Content Manager Series Multi-Format Processor Card

One of the products within the Cisco<sup>®</sup> Digital Content Manager (DCM) Solution, dedicated to providing state-of-the-art audio and video to subscribers, is the Cisco DCM Series Multi-Format Processor (MFP) Card (Figures 1 and 2). With home networks and consumer devices relied on for video content by millions, Cisco has engineered every component to enhance the customer experience. The Cisco DCM Series MFP Card provides high-density, high-quality advanced processing of MPEG-2 and H.264 advanced video coding (AVC), high definition (HD) and standard definition (SD) video, and audio with low power usage. The Cisco DCM Series MFP Card with Cisco DCM AnyRes technology supports multiple-screen transcoding and is a truly converged processing solution for all screens.

**Figure 1.** Cisco DCM Series Multi Format Processor Card - Dual Layer

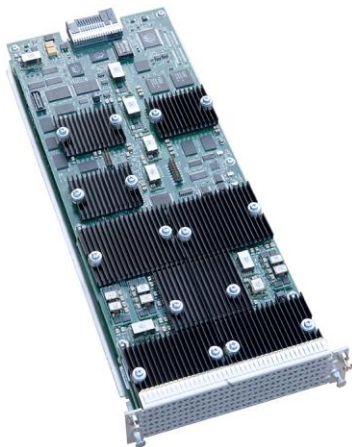

The Cisco DCM Series MFP Card helps provide high reliability and excellent video quality for the next generation of IP-based headend deployments, large and small. With the flexibility of Asynchronous Serial Interface (ASI), IP, satellite, or Advanced Television Systems Committee (ATSC) off-air inputs, along with ASI or IP outputs, this Cisco DCM Card can be placed at multiple points in the content acquisition subsystem, processing up to 144 SD or 48 HD channels in a 2RU appliance.

**Figure 2.** Cisco DCM Series Multi Format Processor Card - Dual Layer



---

## Main Features and Benefits

### Any-to-Any Processing

- Transcoding and rate-changing of MPEG-2 and H.264, HD, and SD services in single-program and multiprogram transport streams
- Transcoding any input to multiple H.264 adaptive bit rate (ABR) resolutions
- Transcoding of HD services to SD video, regardless of the codec
- Logo insertion of up to 3 logos per channel
- Insertion of Encoder Boundary Points (EBP) according to CableLabs® OpenCable™ specification
- Transcoding of audio services between MPEG-1 layer II, Dolby Digital (AC-3), Dolby Digital Plus (EAC-3), and Advanced Audio Coding (AAC) formats
- Automatic real-time audio leveling
- Statistical remultiplexing of mixed MPEG-2, H.264, HD, and SD video on a single card
- Combined MPEG-2, H.264, HD, SD, and ABR processing on a single card for investment enhancement

### High-Density Processing

- Adds transcoding for up to 72 SD or 24 HD programs to the Cisco DCM Series D9900 and D9901 chassis
- Adds transcoding for up to 144 SD or 48 HD programs to the Cisco DCM Series D9902 chassis
- Allows up to 300 ABR output profiles to be added per 2RU chassis
- Ad insertion for any screen

### Premium Picture Quality Processing

- Advanced filtering capabilities: Motion Compensated Temporal Filtering (MCTF) and pre-deblocking filtering to remove noise and macro-blocking artifacts from video sources
- Adds premium quality transcoding for up to 24 SD or 12 HD programs to the Cisco DCM Series D9902 chassis

### Flexible Modular Design

- The Cisco DCM Series MFP Card fits into any application slot of a Cisco DCM Series 1RU or 2RU chassis
- Combined with existing application cards and I/O cards, such as ASI, Gigabit Ethernet, satellite, and terrestrial, the Cisco DCM Series MFP Card supports truly converged applications
- Functionality is software activated by a flexible electronic licensing program

### Adaptability

- Flexible use in both the 1RU and 2RU Cisco DCM Series chassis
- Built-in support for all application cards built to date

### Fast, Easy Setup and Configuration

- The Cisco DCM Series MFP Card is fully integrated in an easy-to-use HTML-only web user interface, allowing drag-and-drop service configuration.

## Product Specifications

Table 1 provides product specifications for the Cisco DCM Series MFP Card.

**Table 1.** Product Specifications

Feature	Description
<b>Physical and Power</b>	
<b>Physical specifications</b>	<p>Single-layer MFP card (DCM-MFP-S) that occupies 1 slot in Cisco DCM Series chassis:</p> <ul style="list-style-type: none"> <li>• Height: 39.5 mm/1.54 in</li> <li>• Width: 145 mm/5.70 in</li> <li>• Depth: 365 mm/14.37 in</li> <li>• Weight: 1.120 kg/2.47 lb</li> </ul> <p>Dual-layer MFP card (DCM-MFP) that occupies 1 slot in the Cisco DCM D9902 2RU chassis:</p> <ul style="list-style-type: none"> <li>• Height: 39.5 mm/1.54 in</li> <li>• Width: 145 mm/5.70 in</li> <li>• Depth: 365 mm/14.37 in</li> <li>• Weight: 1.675 kg/3.69 lb</li> </ul>
<b>Power consumption</b>	<ul style="list-style-type: none"> <li>• DCM-MFP-S: 75W maximum</li> <li>• DCM-MFP: 150W maximum</li> </ul>
<b>Environmental Specifications</b>	
<b>Operating temperature</b>	32 - 122°F (0 to 50°C)
<b>Storage temperature</b>	-40 - 158°F (-40 to 70°C)
<b>Relative operating humidity</b>	5 to 90% <b>Note:</b> Not to exceed 0.024 kg water or dry air
<b>Relative storage humidity</b>	5 to 95% <b>Note:</b> Not to exceed 0.024 kg water or dry air
<b>Operating altitude</b>	-61 to 3048m (up to 2000m conforms to IEC/EN/UL/CSA 60950 requirements)
<b>Compliance</b>	
<b>Network Equipment Building Standards (NEBS)</b>	<ul style="list-style-type: none"> <li>• Designed for SR-3580: NEBS Criteria Levels (Level 3)</li> <li>• GR-1089-CORE: NEBS EMC and Safety</li> <li>• GR-63-CORE: NEBS Physical Protection</li> </ul>
<b>ETSI Standards</b>	<ul style="list-style-type: none"> <li>• EN300 386: Telecommunications Network Equipment (EMC)</li> </ul>
<b>EMC Standards</b>	<ul style="list-style-type: none"> <li>• FCC 47 CFR Part 15 Class A</li> <li>• ICES- 003 Class A</li> <li>• AS/NZS 3548 Class A</li> <li>• CISPR 22 /EN55022 Class A</li> <li>• CISPR 24/EN55024</li> <li>• VCCI Class A</li> <li>• KN 22</li> <li>• IEC/EN 61000-3-2: Power Line Harmonics</li> </ul>
<b>Immunity</b>	<ul style="list-style-type: none"> <li>• IEC/EN-61000-4-2: Electrostatic Discharge Immunity</li> <li>• IEC/EN-61000-4-3: Radiated Immunity</li> <li>• IEC/EN-61000-4-4: Electrical Fast Transient Immunity</li> <li>• IEC/EN-61000-4-5: Surge</li> <li>• IEC/EN-61000-4-11: Voltage DIPS, Short Interruptions, and Voltage Variations</li> </ul>
<b>Safety</b>	<ul style="list-style-type: none"> <li>• UL/CSA/IEC/EN 60950-1 2<sup>nd</sup> edition</li> <li>• IEC/EN 60825 Laser Safety</li> <li>• ACA TS001</li> <li>• AS/NZS 60950</li> <li>• FDA: Code of Federal Regulations Laser Safety</li> </ul>

Feature	Description
<b>Video Decoding</b>	
<b>HD bit rates</b>	<ul style="list-style-type: none"> <li>• MPEG-2: MP@HL up to 30 Mbps</li> <li>• H.264: HP@ L4.0-L4.1 up to 25 Mbps</li> </ul>
<b>HD resolutions</b>	<ul style="list-style-type: none"> <li>• 1080i x 1920/1280 @ 25 fps</li> <li>• 1080i x 1920/1280 @ 29.97 fps</li> <li>• 720p x 1280/960 @ 50 fps</li> <li>• 720p x 1280/960 @ 59.94 fps</li> </ul>
<b>SD bit rates</b>	<ul style="list-style-type: none"> <li>• MPEG-2: MP @ML up to 15 Mbps</li> <li>• H.264: MP@L3-L4.1 up to 12 Mbps</li> </ul>
<b>SD resolutions</b>	<ul style="list-style-type: none"> <li>• PAL: 576i x 720/ 704/ 640/ 544/ 528/ 480/ 352 @25 fps</li> <li>• NTSC: 480i x 720/ 704/ 640/ 544/ 528/ 480/ 352 @29.97 fps</li> </ul>
<b>Video Encoding</b>	
<b>HD bit rates</b>	<ul style="list-style-type: none"> <li>• MPEG-2: HP@ HL 0.5 to 30 Mbps</li> <li>• H.264: MP@ L4.0 1 to 20 Mbps</li> <li>• H.264: HP@ L4.0 1 to 25 Mbps</li> <li>• H.264: MP@ L4.1 1 to 30 Mbps</li> </ul>
<b>HD resolutions</b>	<ul style="list-style-type: none"> <li>• 1080i x 1920/1280 @ 25 fps</li> <li>• 1080i x 1920/1280 @ 29.97 fps</li> <li>• 720p x 1280/960 @ 50 fps</li> <li>• 720p x 1280/960 @ 59.94 fps</li> <li>• ABR: between 128 x 160 and 1920 x 1080p @ 25/30 fps Flexible support for any resolution that is multiple of 2 px</li> </ul>
<b>SD bit rates</b>	<ul style="list-style-type: none"> <li>• MPEG-2: MP@ ML 0.5 to 10 Mbps</li> <li>• H.264: MP@ L3.0 0.5 to 10 Mbps</li> <li>• H.264: HP@ L3.0 0.5 to 12.5 Mbps</li> </ul>
<b>SD resolutions</b>	<ul style="list-style-type: none"> <li>• PAL: 576i x 720/ 704/ 640/ 544/ 528/ 480/ 352 @ 25 fps</li> <li>• NTSC: 480i x 720/ 704/ 640/ 544/ 528/ 480/ 352 @ 29.97 fps</li> <li>• ABR: between 128 x 160 and 1920 x 1080p @ 25 or 30 fps Flexible support for any resolution that is multiple of 2 px</li> </ul>
<b>Inverse telecine</b>	<ul style="list-style-type: none"> <li>• 3:2 pulldown inversion</li> </ul>
<b>Video Processing</b>	
<b>Number of services</b>	<p>DCM-MFP-S</p> <ul style="list-style-type: none"> <li>• SD: up to 24 services per card</li> <li>• HD: up to 8 services per card</li> <li>• HD to SD downconversion: up to 8 services per card</li> <li>• ABR: up to 8 services per card</li> <li>• Smooth ad insertion: up to 16 services per card</li> </ul> <p>DCM-MFP</p> <ul style="list-style-type: none"> <li>• SD: up to 48 services per card</li> <li>• HD: up to 16 services per card</li> <li>• HD to SD downconversion: up to 16 services per card</li> <li>• ABR: up to 16 services per card</li> <li>• Smooth ad insertion: up to 32 services per card</li> </ul>
<b>Statistical multiplexing</b>	<ul style="list-style-type: none"> <li>• Mixed AVC, MPEG-2 HD and SD</li> <li>• 64 services per statistical multiplexing group</li> </ul>
<b>GOP control</b>	<ul style="list-style-type: none"> <li>• Static, Hierarchical and dynamic GOP</li> </ul>
<b>Encoder Boundary Point (EPB) insertion</b>	<ul style="list-style-type: none"> <li>• EPB according OpenCable™ OC-SP-EBP-I01-130118</li> </ul>
<b>Ad Insertion</b>	<ul style="list-style-type: none"> <li>• Smooth ad insertion using SCTE-35 cueing message and SCTE-30 interface with ad servers</li> <li>• Ad marker insertion in adaptive bit rate services for targeted advertising</li> </ul>

Feature	Description
<b>Audio Decoding</b>	
<b>MPEG-1 and MPEG-2 Layer II audio</b>	<ul style="list-style-type: none"> <li>• Mono, stereo, and multichannel</li> <li>• Bit rate: 32 to 384 kbps</li> </ul>
<b>AAC</b>	<ul style="list-style-type: none"> <li>• Low complexity, high efficiency</li> <li>• Mono, stereo, and multichannel</li> <li>• Bit rate: 32 to 640 kbps, depending on the encoding mode</li> <li>• ADTS, LATM, and LOAS</li> </ul>
<b>Dolby Digital (AC-3) Dolby Digital Plus (E-AC-3)</b>	<ul style="list-style-type: none"> <li>• Mono, stereo, and multichannel</li> <li>• Bit rate: 56 to 640 kbps</li> </ul>
<b>Audio Encoding</b>	
<b>MPEG-1 and MPEG-2 Layer II audio</b>	<ul style="list-style-type: none"> <li>• Mono, stereo, and multichannel</li> <li>• Bit rate: 32 to 384 kbps</li> </ul>
<b>AAC</b>	<ul style="list-style-type: none"> <li>• Low complexity, high efficiency</li> <li>• Mono, stereo, and multichannel</li> <li>• Bit rate: 32 to 640 kbps, depending on the encoding mode</li> <li>• ADTS, LATM and LOAS</li> </ul>
<b>Dolby Digital (AC-3) Dolby Digital Plus (E-AC-3)</b>	<ul style="list-style-type: none"> <li>• Mono, stereo, and multichannel</li> <li>• Bit rate: 56 to 640 kbps</li> </ul>
<b>Number of audio services</b>	<ul style="list-style-type: none"> <li>• DCM-MFP-S: Up to 128 stereo pairs per card</li> <li>• DCM-MFP: Up to 256 stereo per card</li> </ul>
<b>Audio Processing</b>	
<b>Automatic Audio Leveling</b>	<ul style="list-style-type: none"> <li>• Loudness measurement according ITU-R BS.1770-2</li> <li>• Automatic leveling to comply with Commercial Advertisement Loudness Mitigation (CALM) act.</li> </ul>
<b>VBI and Ancillary Data</b>	
<b>Closed captions</b>	<ul style="list-style-type: none"> <li>• CEA-608 and CEA-708 conversion</li> </ul>
<b>VBI formats</b>	<ul style="list-style-type: none"> <li>• WST, DVB-WST, Inverted WST, WSS, VPS, transparent lines, VII, and OP-47</li> </ul>

## Ordering Information

To place an order, visit the [Cisco Ordering homepage](#). Table 2 provides ordering information for the Cisco DCM Series MFP Card.

**Table 2.** Ordering Information

Description	Part Number
<b>Hardware</b>	
D9900/01/02 DCM Multi Format Processor Board, Single Layer (req. SW, DCM, V10.00.05 or later)	DCM-MFP-S
D9900/01/02 DCM Multi Format Processor Board, Single Layer, Spare (req. SW, DCM, V10.00.05 or later)	DCM-MFP-S=
D9902 DCM Multi Format Processor Board, Double Layer (req. SW, DCM, V10.00.05 or later)	DCM-MFP
D9902 DCM Multi Format Processor Board, Double Layer, Spare (req. SW, DCM, V10.00.05 or later)	DCM-MFP=
<b>Licenses</b>	
Software licenses (Add licenses in the Cisco Commerce Workspace)	DCM-LIC-UPGR
<b>Main DCM Device Licenses</b>	
D9900/01/02 MPEG-2 SD Transcoding Lic (1/prg; req MFP)	LDCM-MP2SDTC
D9900/01/02 MPEG-2 HD Transcoding Lic (1/prg; req MFP)	LDCM-MP2HDTC
D9900/01/02 AVC SD Transcoding Lic (1/prg; req MFP)	LDCM-AVCSBTC
D9900/01/02 AVC HD Transcoding Lic (1/prg; req MFP)	LDCM-AVCHBTC

Description	Part Number
D9900/01/02 MFP Statmux (1/prg; req. MFP)	LDCM-SMX
D9902 MPEG-2 SD Premium PQ Transcoding Lic (1/prg; req MFP)	LDCM-MP2SDTC-PQ
D9902 MPEG-2 HD Premium PQ Transcoding Lic (1/prg; req MFP)	LDCM-MP2HDTC-PQ
D9902 AVC SD Premium PQ Transcoding Lic (1/prg; req MFP)	LDCM-AVCSBTC-PQ
D9902 AVC HD Premium PQ Transcoding Lic (1/prg; req MFP)	LDCM-AVCHBTC-PQ
D9902 MFP Premium PQ Statmux (1/prg; req. MFP)	LDCM-SMX-PQ
D9900/01/02 ABR Transcoding Lic 16 credits (req MFP)	LDCM-ABRTC
D9900/01/02 ABR Profile Lic 1080p25/30 (8 credits; req MFP)	LDCM-ABR-1080PTC
D9900/01/02 ABR Profile Lic 720p25/30 (4 credits; req MFP)	LDCM-ABR-720PTC
D9900/01/02 ABR Profile Lic 576p/480p (2 credits; req MFP)	LDCM-ABR-SDTC
D9900/01/02 ABR Profile Lic 352x576p/480p (1 credit; req MFP)	LDCM-ABR-HALFSDTC
D9900/01/02 MPEG-1 LII Transcode Lic (1/stereo; req MFP)	LDCM-MP1LII-TC
D9900/01/02 Dolby AC-3 Transcoding Lic (1/stereo; req MFP)	LDCM-DLBYAC3-TC
D9900/01/02 Dolby Digital Plus Transcode Lic (1/stereo; req MFP)	LDCM-DDP-TC
D9900/01/02 AAC Audio Transcode Lic (1/stereo; req MFP)	LDCM-AAC-TC
D9900/01/02 Automatic Loudness Control (1/stereo, requires MFP and audio transcode license)	LDCM-LOUDCTRL
D9900/01/02 MFP SD DPI Upgr Lic (1/prg; req MFP)	LDCM-SDDPIU
D9900/01/02 MFP HD DPI Upgr Lic (1/prg; req MFP)	LDCM-HDDPIU
D9900/01/02 Static Logo Lic (1/prg; req MFP or Transcoder Card)	LDCM-LOGO-STATIC
D9900/01/02 Text Crawl Lic (1/prg; req MFP or Transcoder Card)	LDCM-TEXT-CRAWL
<b>Backup DCM Device Licenses</b>	
D9900/01/02 BU MPEG-2 SD Transcoding Lic (1/prg; req MFP)	BDCM-MP2SDTC
D9900/01/02 BU MPEG-2 HD Transcoding Lic (1/prg; req MFP)	BDCM-MP2HDTC
D9900/01/02 BU AVC SD Transcoding Lic (1/prg; req MFP)	BDCM-AVCSBTC
D9900/01/02 BU AVC HD Transcoding Lic (1/prg; req MFP)	BDCM-AVCHBTC
D9900/01/02 BU MFP Statmux (1/prg; req. MFP)	BDCM-SMX
D9902 BU MPEG-2 SD Premium PQ Transcoding Lic (1/prg; req MFP)	BDCM-MP2SDTC-PQ
D9902 BU MPEG-2 HD Premium PQ Transcoding Lic (1/prg; req MFP)	BDCM-MP2HDTC-PQ
D9902 BU AVC SD Premium PQ Transcoding Lic (1/prg; req MFP)	BDCM-AVCSBTC-PQ
D9902 BU AVC HD Premium PQ Transcoding Lic (1/prg; req MFP)	BDCM-AVCHBTC-PQ
D9902 BU MFP Premium PQ Statmux (1/prg; req. MFP)	BDCM-SMX-PQ
D9900/01/02 BU ABR Transcoding Lic 16 credits (req MFP)	BDCM-ABRTC
D9900/01/02 BU ABR Profile Lic 1080p25/30 (8 credits; req MFP)	BDCM-ABR-1080PTC
D9900/01/02 BU ABR Profile Lic 720p25/30 (4 credits; req MFP)	BDCM-ABR-720PTC
D9900/01/02 BU ABR Profile Lic 576p/480p (2 credits; req MFP)	BDCM-ABR-SDTC
D9900/01/02 BU ABR Profile Lic 352x576p/480p (1 credit; req MFP)	BDCM-ABR-HALFSDTC
D9900/01/02 BU MFP Statmux (1/prg; req. MFP)	BDCM-SMX
D9900/01/02 BU MPEG-1 LII Transcode Lic (1/stereo; req MFP)	BDCM-MP1LII-TC
D9900/01/02 BU Dolby AC-3 Transcode Lic (1/stereo; req MFP)	BDCM-DLBYAC3-TC
D9900/01/02 BU Dolby Digital Plus Transcode Lic (1/stereo; req MFP)	BDCM-DDP-TC
D9900/01/02 BU AAC Audio Transcode Lic (1/stereo; req MFP)	BDCM-AAC-TC

Description	Part Number
D9900/01/02 BU Automatic Loudness Control (1/stereo, requires MFP and audio transcode license)	BDCM-LOUDCTRL
D9900/01/02 BU MFP SD DPI Upgr Lic (1/prg; req MFP)	BDCM-SDDPIU
D9900/01/02 BU MFP HD DPI Upgr Lic (1/prg; req MFP)	BDCM-HDDPIU
D9900/01/02 BU Static Logo Lic (1/prg; req MFP or Transcoder Card)	BDCM-LOGO-STATIC
D9900/01/02 BU Text Crawl Lic (1/prg; req MFP or Transcoder Card)	BDCM-TEXT-CRAWL
<b>Software</b>	
SW, DCM, V14.10.02	DCM-SW-141002-K9

## Service and Support

Using the Cisco Lifecycle Services approach, Cisco and our partners provide a broad portfolio of end-to-end services and support that can help increase your network's business value and return on investment. This approach defines the minimum set of activities needed by technology and by network complexity to help you successfully deploy and operate Cisco technologies and optimize their performance throughout the lifecycle of your network.

## For More Information

To learn more about this product, contact your local account representative.

To subscribe to receive end-of-life and end-of-sale information, go to

<http://www.cisco.com/cisco/support/notifications.html>.

Manage your network with ROSA<sup>®</sup> service and element management. Get faster mean time to repair, increased uptime, and management that evolves as you provision your networks. US toll-free 1-800-722-2009. EMEA +32 56 445 445. <http://www.cisco.com/go/rosa>.

## AVC Video License

THIS PRODUCT IS LICENSED UNDER THE AVC PATENT PORTFOLIO LICENSE FOR THE PERSONAL USE OF A CONSUMER OR OTHER USES IN WHICH IT DOES NOT RECEIVE REMUNERATION TO (i) ENCODE VIDEO IN COMPLIANCE WITH THE AVC STANDARD ("AVC VIDEO") AND/OR (ii) DECODE AVC VIDEO THAT WAS ENCODED BY A CONSUMER ENGAGED IN A PERSONAL ACTIVITY AND/OR WAS OBTAINED FROM A VIDEO PROVIDER LICENSED TO PROVIDE AVC VIDEO. NO LICENSE IS GRANTED OR SHALL BE IMPLIED FOR ANY OTHER USE. ADDITIONAL INFORMATION MAY BE OBTAINED FROM MPEG LA, L.L.C. SEE [HTTP://WWW.MPEGLA.COM](http://www.mpegla.com).

Accordingly, please be advised that service providers, content providers, and broadcasters may be required to obtain a separate use license from MPEG LA prior to any use of AVC/H.264 encoders and/or decoders.




---

**Americas Headquarters**  
Cisco Systems, Inc.  
San Jose, CA

**Asia Pacific Headquarters**  
Cisco Systems (USA) Pte. Ltd.  
Singapore

**Europe Headquarters**  
Cisco Systems International BV Amsterdam,  
The Netherlands

Cisco has more than 200 offices worldwide. Addresses, phone numbers, and fax numbers are listed on the Cisco Website at [www.cisco.com/go/offices](http://www.cisco.com/go/offices).

 Cisco and the Cisco logo are trademarks or registered trademarks of Cisco and/or its affiliates in the U.S. and other countries. To view a list of Cisco trademarks, go to this URL: [www.cisco.com/go/trademarks](http://www.cisco.com/go/trademarks). Third party trademarks mentioned are the property of their respective owners. The use of the word partner does not imply a partnership relationship between Cisco and any other company. (1110R)