



# **Administration Guide for Cisco Unified Contact Center Management Portal, Release 15.0(1)**

**For Unified Contact Center Enterprise**

First Published: April, 2025

## **Americas Headquarters**

Cisco Systems, Inc.  
170 West Tasman Drive  
San Jose, CA 95134-1706  
USA  
<http://www.cisco.com>  
Tel: 408 526-4000  
800 553-NETS (6387)  
Fax: 408 527-0883

THE SPECIFICATIONS AND INFORMATION REGARDING THE PRODUCTS IN THIS MANUAL ARE SUBJECT TO CHANGE WITHOUT NOTICE. ALL STATEMENTS, INFORMATION, AND RECOMMENDATIONS IN THIS MANUAL ARE BELIEVED TO BE ACCURATE BUT ARE PRESENTED WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED. USERS MUST TAKE FULL RESPONSIBILITY FOR THEIR APPLICATION OF ANY PRODUCTS.

THE SOFTWARE LICENSE AND LIMITED WARRANTY FOR THE ACCOMPANYING PRODUCT ARE SET FORTH IN THE INFORMATION PACKET THAT SHIPPED WITH THE PRODUCT AND ARE INCORPORATED HEREIN BY THIS REFERENCE. IF YOU ARE UNABLE TO LOCATE THE SOFTWARE LICENSE OR LIMITED WARRANTY, CONTACT YOUR CISCO REPRESENTATIVE FOR A COPY.

The Cisco implementation of TCP header compression is an adaptation of a program developed by the University of California, Berkeley (UCB) as part of UCB's public domain version of the UNIX operating system. All rights reserved. Copyright © 1981, Regents of the University of California.

NOTWITHSTANDING ANY OTHER WARRANTY HEREIN, ALL DOCUMENT FILES AND SOFTWARE OF THESE SUPPLIERS ARE PROVIDED "AS IS" WITH ALL FAULTS. CISCO AND THE ABOVE-NAMED SUPPLIERS DISCLAIM ALL WARRANTIES, EXPRESSED OR IMPLIED, INCLUDING, WITHOUT LIMITATION, THOSE OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT OR ARISING FROM A COURSE OF DEALING, USAGE, OR TRADE PRACTICE.

IN NO EVENT SHALL CISCO OR ITS SUPPLIERS BE LIABLE FOR ANY INDIRECT, SPECIAL, CONSEQUENTIAL, OR INCIDENTAL DAMAGES, INCLUDING, WITHOUT LIMITATION, LOST PROFITS OR LOSS OR DAMAGE TO DATA ARISING OUT OF THE USE OR INABILITY TO USE THIS MANUAL, EVEN IF CISCO OR ITS SUPPLIERS HAVE BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGES.

Any Internet Protocol (IP) addresses and phone numbers used in this document are not intended to be actual addresses and phone numbers. Any examples, command display output, network topology diagrams, and other figures included in the document are shown for illustrative purposes only. Any use of actual IP addresses or phone numbers in illustrative content is unintentional and coincidental.

Cisco and the Cisco logo are trademarks or registered trademarks of Cisco and/or its affiliates in the U.S. and other countries. To view a list of Cisco trademarks, go to <http://www.cisco.com/go/trademarks>. Third-party trademarks mentioned are the property of their respective owners. The use of the word partner does not imply a partnership relationship between Cisco and any other company. (1110R)

*Administration Guide for Cisco Unified Contact Center Management Portal: For Unified Contact Center Enterprise. April 29, 2025*

© 2012-2025 Cisco Systems, Inc. All rights reserved.

# Contents

- Preface .....7**
  - About This Guide ..... 8
  - Product Naming Conventions ..... 8
  - Document Conventions ..... 9
  - Related Documentation ..... 9
  - Obtaining Documentation and Submitting a Service Request ..... 10
  - Documentation Feedback ..... 10
  - Field Alerts and Field Notices ..... 10
  
- Chapter 1: Unified CCMP Overview .....11**
  - Operational Overview ..... 12
  
- Chapter 2: Basic Administration Tasks .....13**
  - Configuration of Unified CCMP Security ..... 14
  - First Steps for Host Administrators ..... 15
  - Configuring Imported Resource Data ..... 15
    - Equipment Mapping ..... 15
    - Automatic Resource Movement ..... 15
    - Shared Remote Resources ..... 16
  - Creating a Tenant Administrator ..... 16
    - Assigning Administrator Privileges ..... 17
  - Using the Agent Password Reset Utility ..... 17
    - Password Complexity Rules ..... 18
    - Unified CCE Password Compliancy ..... 18
  
- Chapter 3: System Architecture .....19**
  - Web Application ..... 20
  - Application Server ..... 20
  - Identity Server ..... 21

Data Import Server . . . . .	21
Provisioning Server. . . . .	21
High Availability. . . . .	22
Application Server to Database Connections . . . . .	22
Database Server Component Failover. . . . .	22

**Chapter 4: Remote Resource Provisioning .....24**

System Management . . . . .	26
Remote Resource States . . . . .	26
State Descriptions . . . . .	27
Pending Active . . . . .	27
Ready. . . . .	28
Error . . . . .	28
Delete Pending . . . . .	28
Deleted . . . . .	28
User Interface . . . . .	29
Database Codes. . . . .	29
Memberships . . . . .	30
State Machine Scenarios . . . . .	30
Provisioning Non-CCE Peripheral Types. . . . .	31
Unified CCE Purge Logic. . . . .	32
Mobile Agent Support. . . . .	32
Configuring Mobile Agent Support in Unified CCE . . . . .	33
Configuring Mobile Agents . . . . .	33
Configuring the Agent Desk Settings for Mobile Agents . . . . .	33
Configuring CTI Ports and Device Targets for Mobile Agents . . . . .	33
Partitioned Internet Script Editor . . . . .	34
Configuring ISE Integration with Unified CCMP . . . . .	34
Configuring Internet Script Editor to use Security Partitioning. . . . .	34
Creating a Linked Unified CCE and Unified CCMP User . . . . .	35
Creating a Linked User in Unified CCMP . . . . .	35
Configuring an Imported Unified CCE User for ISE Integration . . . . .	36
Supported Objects. . . . .	37

<b>Chapter 5: Auditing and Monitoring</b> .....	<b>39</b>
Audit Histories .....	40
Resource Audit History .....	40
Activity Monitor .....	40
Logging .....	40
Logging Levels .....	40
Log File Locations .....	41
Performance Counters .....	42
Unified CCMP Data Pipeline Object .....	43
Unified CCMP Application Server Object .....	43
Unified CCMP Provisioning Object .....	44
Unified CCMP <Service Type> Connection Health Object .....	44
Unified CCMP <Service Type> Connection Requests .....	44
Configuring SNMP Traps .....	45
Enable the Windows SNMP Feature .....	45
Configure the SNMP Service for Trap Forwarding .....	45
Configure Windows Events to Forward to SNMP .....	46
<b>Chapter 6: Standard Administrative Operations</b> .....	<b>47</b>
Service Restart Configuration .....	48
Resetting Default Database Connections .....	48
Connection Updater Features .....	49
Connection Updater Usage .....	50
Testing Connections .....	50
Restart Services .....	51
Actions After Upgrading Unified CCE .....	51
<b>Chapter 7: Advanced Administrative Operations</b> .....	<b>52</b>
Enabling and Disabling Cluster Configuration Components .....	53
Database Backup and Recovery .....	54
<b>Chapter 8: Troubleshooting</b> .....	<b>55</b>
DBCcheck .....	56
Architectural Background .....	56
Installation .....	57

Configuration . . . . .	57
Running DBCheck . . . . .	58
Logging and Error Reporting . . . . .	60
Reviewing Logs. . . . .	60
Troubleshooting DBCheck . . . . .	60
Troubleshooting ISE Integration with Unified CCMP . . . . .	61
Error Reporting . . . . .	61
Error when starting ISE. . . . .	61
Problem . . . . .	61
Sample Log File Entry. . . . .	61
Causes and Solutions . . . . .	61
Failed to connect to Authorization Server. . . . .	61
Problem . . . . .	61
Sample Log File Entry 1 . . . . .	62
Sample Log File Entry 2 . . . . .	62
Sample Log File Entry 3 . . . . .	62
Causes and Solutions . . . . .	63
Unable to see required resources. . . . .	64
Problem . . . . .	64
Sample Log File Entry. . . . .	64
Causes and Solutions . . . . .	65
Unified System CLI . . . . .	65
Installing Unified System CLI . . . . .	65
Starting Unified System CLI. . . . .	65
Getting Help . . . . .	66
General Troubleshooting. . . . .	68
Delays in Importing Agent Changes . . . . .	68
Web Portal Timing Dialogs. . . . .	68
Installing the UCCE Config Web Service Certificate. . . . .	68
Renewing SSL Certificate. . . . .	69
Installing the Security Certificate in the User Certificate Store . . . . .	69
Installing the Security Certificate in the Computer Certificate Store . . . . .	70
Installing the Security Certificate for ICE Users . . . . .	71
Unable to Associate Domain User Account with a Supervisor . . . . .	71

# Preface

- ▶ [About This Guide](#)
- ▶ [Product Naming Conventions](#)
- ▶ [Document Conventions](#)
- ▶ [Related Documentation](#)
- ▶ [Obtaining Documentation and Submitting a Service Request](#)
- ▶ [Documentation Feedback](#)
- ▶ [Field Alerts and Field Notices](#)

## About This Guide

---

*Administration Guide for Cisco Unified Contact Center Management Portal* explains how to administer and provision the Unified Contact Center Management Portal (Unified CCMP) platform.

### Who Should Read This Document

This document is intended for all users of Unified CCMP, from high-level administrators to team supervisors. The reader needs no technical understanding beyond a basic knowledge of how to use computers.

## Product Naming Conventions

---

In this release, the product names defined in the table below have changed. The New Name (long version) is reserved for the first instance of that product name and in all headings. The New Name (short version) is used for subsequent instances of the product name.

Note: This document uses the naming conventions provided in each GUI, which means that in some cases the old product name is in use.

Old Product Name	New Name (long version)	New Name (short version)
Cisco IPCC Enterprise Edition	Cisco Unified Contact Center Enterprise	Unified CCE
Cisco IPCC Hosted Edition	Cisco Unified Contact Center Hosted	Unified CCH
Cisco Intelligent Contact Management (ICM) Enterprise Edition	Cisco Unified Intelligent Contact Management (ICM) Enterprise	Unified ICM
Cisco Intelligent Contact Management (ICM) Hosted Edition	Cisco Unified Intelligent Contact Management (ICM) Hosted	
Cisco CallManager/Cisco Unified CallManager	Cisco Unified Communications Manager	Unified CM

# Document Conventions

---

This guide uses the following typographical conventions.

Convention	Indicates
<i>Italic</i>	Emphasis, or the title of a published document.
<b>Bold</b>	An item in the user interface, such as a window, button, or tab.
Monospace	A file name or command.
<i>script</i>	A variable, which is a placeholder for user-specific text provided by the user. Or, text that must be typed by the user.

*Document conventions*

## Related Documentation

---

Documentation for Cisco Unified ICM/Contact Center Enterprise & Hosted, as well as related documentation, is accessible from Cisco.com at: <http://www.cisco.com/cisco/web/psa/default.html>.

Related documentation includes the documentation sets for:

- ▶ Cisco CTI Object Server (CTIOS), Cisco Agent Desktop (CAD)
- ▶ Cisco Agent Desktop - Browser Edition (CAD-BE)
- ▶ Cisco Unified Contact Center Domain Manager
- ▶ Cisco Unified Customer Voice Portal (CVP)
- ▶ Cisco Unified IP IVR, Cisco Unified Intelligence Center
- ▶ Cisco Support Tools

Documentation for these Cisco Unified Contact Center products is accessible from:

- ▶ <http://www.cisco.com/cisco/web/psa/default.html>.

Troubleshooting tips for these Cisco Unified Contact Center products is accessible from:

- ▶ <http://docwiki.cisco.com/wiki/Category:Troubleshooting>.

Documentation for Cisco Unified Communications Manager is accessible from:

- ▶ <http://www.cisco.com/cisco/web/psa/default.html>.

Technical Support documentation and tools are accessible from:

- ▶ <http://www.cisco.com/en/US/support/index.html>.

The Product Alert tool is accessible from (sign in required):

- ▶ <http://www.cisco.com/cgi-bin/Support/FieldNoticeTool/field-notice>.

For information on the Cisco software support methodology, refer to *Software Release and Support Methodology: ICM/IPCC*, available from (sign in required):

- ▶ [http://www.cisco.com/en/US/partner/products/sw/custcosw/ps1844/prod\\_bulletins\\_list.html](http://www.cisco.com/en/US/partner/products/sw/custcosw/ps1844/prod_bulletins_list.html).

For a detailed list of language localizations, refer to the *Cisco Unified ICM/Contact Center Product and System Localization Matrix*, available from:

- ▶ [http://www.cisco.com/en/US/products/sw/custcosw/ps1001/prod\\_technical\\_reference\\_list.html](http://www.cisco.com/en/US/products/sw/custcosw/ps1001/prod_technical_reference_list.html).

## Obtaining Documentation and Submitting a Service Request

---

For information on obtaining documentation, using the Cisco Bug Search Tool (BST), submitting a service request, and gathering additional information, see What's New in Cisco Product Documentation, at:

<https://www.cisco.com/c/en/us/td/docs/general/whatsnew/whatsnew.html>.

Subscribe to What's New in Cisco Product Documentation, which lists all new and revised Cisco technical documentation as an RSS feed and delivers content directly to your desktop using a reader application. The RSS feeds are a free service.

## Documentation Feedback

---

To provide comments about this document, send an email message to the following address:  
[contactcenterproducts\\_docfeedback@cisco.com](mailto:contactcenterproducts_docfeedback@cisco.com)

We appreciate your comments.

## Field Alerts and Field Notices

---

Cisco products may be modified or key processes may be determined to be important. These are announced through use of the Cisco Field Alerts and Cisco Field Notices. You can register to receive Field Alerts and Field Notices through the Product Alert Tool on Cisco.com. This tool enables you to create a profile to receive announcements by selecting all products of interest.

Log into [www.cisco.com](http://www.cisco.com) and then access the tool at <http://www.cisco.com/cisco/support/notifications.html>

# 1 Unified CCMP Overview

- ▶ [Operational Overview](#)

# Operational Overview

---

The Unified Contact Center Management Portal (Unified CCMP) is a suite of server components that simplify the operations and procedures for performing basic administrative functions, such as managing agents and equipment.

Unified CCMP consists of the following components:

- ▶ The **Database Server** component holds information about all the resources (such as agents and dialed numbers) and actions (such as phone calls and agent state changes) within the system.
- ▶ The **Application Server** component manages security and resilience, enabling one side of a dual-sided Unified CCMP to use the other side's servers if one of the servers or connections fails.
- ▶ The **Identity Server** component provides a lightweight authentication service that includes Local, Windows, and ADFS authentication.
- ▶ The **Web Server** component provides the user interface that enables users to perform resource management and administrative tasks.
- ▶ The **Data Import Server** component imports resources (such as Agents or Skill Groups) into the Unified CCMP Database and synchronizes changes made to those resources outside of the Unified CCMP environment.
- ▶ The **Provisioning Server** component provides the mechanism to commit resource changes made by Unified CCMP users to back-end contact center systems, such as the Cisco Unified Contact Center Platform.

These components are normally installed on more than one machine.

# 2 Basic Administration Tasks

- ▶ [Configuration of Unified CCMP Security](#)
- ▶ [First Steps for Host Administrators](#)
- ▶ [Configuring Imported Resource Data](#)
- ▶ [Creating a Tenant Administrator](#)
- ▶ [Using the Agent Password Reset Utility](#)

Unified CCMP is a browser-based management application designed for use by contact center administrators, system administrators, business users, and supervisors. The host administrator user is created when the application is installed. This user does not manage the Unified CCMP application on a day-to-day basis, but can set up tenant administrator users to do so for each configured tenant in the system.

## Configuration of Unified CCMP Security

The Unified CCMP web application has the following user types:

- ▶ **Host Administrator:** Responsible for the whole platform and therefore has a view across all the equipment and resources.
- ▶ **Tenant Administrator:** Responsible for the section of the system assigned to the tenant by the host administrator.
- ▶ **Tenant User:** Has access only to the resources and tools assigned by the tenant administrator. Several subclasses of tenant user may be created by the tenant administrator using user groups and roles to achieve their business requirements.
- ▶ **Supervisor User:** Has access to one or more agent teams that they supervise in the contact center. They have permissions to create agents and assign them to teams and skill groups. To browse through other supervisors or users, the supervisor must have Browse Domain Accounts checked in the global role.

On a new system, the host administrators and tenant administrators perform their respective tasks before the tenant users and supervisor users are given access to the system.

A host administrator is responsible for global platform security management, whereas a tenant administrator is responsible for security management of only the resources in their domain. Security management is the process of determining which users can perform which actions in which folders.

This involves creating and managing the following entities:

- ▶ **Folders:** The security system used by Unified CCMP is based on a hierarchical folder structure where child folders may inherit permissions from their parent. This means that the folder hierarchy should be designed with security requirements in mind.
- ▶ **Users and Groups:** Users can be assigned to groups of users with the same security permissions. A number of predefined groups with commonly required permissions are provided.
- ▶ **Roles and Tasks:** Control the actions that can be performed within a folder. Each task is an individual kind of action, such as browsing resources or managing information notices. These tasks are collected together into roles. For example, you could create an Auditor role that includes the ability to manage audit reports, browse audit reports, browse resources, and then assign certain groups or even individual users the permission to perform that role within certain folders.



**Important:** For each role a user or group is assigned, the user or group must also be assigned an equivalent global role. Removing a global role removes that user's ability to perform the corresponding non-global roles anywhere within the system, meaning it is possible to remove permissions in a single click where necessary. The default groups have the correct global permissions pre-assigned.

---

Security is explained in more detail in the Security Management chapter of the *User Guide for Cisco Unified Contact Center Management Portal*.

## First Steps for Host Administrators

---

The host administrator is responsible for:

- ▶ Ensuring that the remote resources (such as Skill Groups, Agents, and Call Types) are correctly located in the tenant folder.
- ▶ Creating a tenant administrator user for each tenant.
- ▶ Adding them to the administrators group for the tenant and assigning any specific roles.

## Configuring Imported Resource Data

---

After the initial data import, remote resources imported from Unified CCE and Unified CM are associated with their respective tenants and are automatically stored in their associated folders.

## Equipment Mapping

After installation the host administrator should configure the remote equipment mappings for the system so that resources are placed in the appropriate segregated tenant folders.

An equipment mapping provides a link between a folder in Unified CCMP and the remote equipment, telling the Unified CCMP importer where resources should be placed. To define an equipment mapping, use the Integrated Configuration Environment (ICE) Cluster Configuration tool, Equipment Mapping tab.

For more information see *Integrated Configuration Environment (ICE) for Cisco Unified Contact Center Management Portal*.

## Automatic Resource Movement

Prefixes may be used to manage the automatic movement of remote resources to associated folder locations.



**Important:** To map a prefix to a tenant for the importing of Unified CCE or Unified CM data, the user must have host administrator privileges.

---

You can only map a prefix to a tenant folder. Any individual item moved to a folder is then excluded from the prefix management import job to prevent it from being automatically moved by the system.

Additional information on creating Prefixes is available in the *User Guide for Cisco Unified Contact Center Management Portal*.

## Shared Remote Resources

If multiple tenants share a Unified CCE or Unified CM, resources are placed in the system unallocated folder. An administrator must then place these remote resources into the appropriate tenant folder through either the Unified CCMP user interface or through the use of Unified CCMP Prefix mappings. Related resource items, such as IP Phones and their Directory Numbers or Agents and their associated Person should be moved to the same folder.

Resources associated with more than one tenant, such as peripherals, media routing domains, and phone types should be placed in a folder that should be readable by users from those tenants. More information on how to manage security in Unified CCMP can be found in the *User Guide for Cisco Unified Contact Center Management Portal*.

## Creating a Tenant Administrator

---

### To create a tenant administrator:

1. Click the **Hamburger** icon at the top left of web page.
2. In Security section, click **Users**.
3. Select the Tenant folder and click **New**.
4. Fill in the following fields:
  - **Login Name:** Enter the name as it appears in the system for the new user
  - **Password:** Enter the password for the new user
  - **Confirm Password:** Re-enter the selected password
  - **First Name and Last Name:** Enter the user's details
  - **Email:** Enter the email address of the new user
  - **Description:** Enter any explanatory text, if required
5. Select the **Advanced Mode** check box and any of the following check boxes if applicable:
  - **Account Enabled:** Ensure that the user is live in the system. If unchecked the new user exists in the system, and so can be granted security permissions, but cannot log in.
  - **Create a new folder for this user:** To create a new folder for the user below the user home folder. The name of the new folder is the user's login name followed by the default folder suffix specified in **Settings > Security Settings > *User Folder Suffix***.
  - **Local Login Enabled:** Allow the user to sign into the system using local login.
  - **Internet Script Editor Enabled:** This user is ISE-enabled. This also creates a linked Unified CCE user that can access Cisco's Internet Script Editor using the application's security partitioning.
  - **User must change password at next Logon:** Prompt the new user to change their password after their first login.
  - **Password Never Expires:** Assign the password to the new user indefinitely.

- **User cannot change password:** Prevent the new user from being able to change their password.



**Important:** Only the Login Name, Password and Confirm Password fields are required.

---

6. Click **OK**.

## Assigning Administrator Privileges

You must give the tenant administrator the permissions necessary to manage the system. This is done by assigning the new user to the administration group that was automatically created when you created the tenant.

### To assign administrator privileges:

1. In the User Manager, click **Administrator User** to display the Edit User page.
2. Click **Groups** tab. All users created are automatically assigned to the **Everyone** group.
3. Select **Advanced Users**. The user's permissions are automatically updated so that they can manage users, folders, information notices and folder security within the tenant folder.



**Important:** It is possible to create your own groups with custom permissions, or to grant specific permissions to individual users. See the *User Guide for Cisco Unified Contact Center Management Portal* for details.

---

## Using the Agent Password Reset Utility

Cisco Unified CCMP provides a **Change Your Agent Password** utility from which agents can change their own passwords.

This page is reached by navigating to the URL:

[https://CCMP\\_Server/Portal/agent\\_manage\\_password.aspx](https://CCMP_Server/Portal/agent_manage_password.aspx). You do not need to have a Portal user account to use the Change Your Agent Password page.

### To change a password:

1. Enter the **Agent Username**. This is the login name that you use to log into the peripheral.
2. Enter the agent's current password.
3. Enter your new password for the agent and confirm.

You cannot change a password for an agent using SSO.



**Important:** Password changes are subject to a small time delay while they are committed to Cisco Unified CCE.

---

## Password Complexity Rules

Passwords for agents must conform to the password complexity rules defined in the Cisco Unified CCMP.

The following settings can be configured:

- ▶ Password Format
- ▶ Minimum Password Length
- ▶ Maximum Password Length

For more information about changing the password complexity rules in Cisco Unified CCMP, please refer to the *User Guide for Cisco Unified Contact Center Management Portal*.

## Unified CCE Password Compliancy

When using the resource management functionality of Unified CCMP to configure agent and person entries, Unified CCMP prompts the end user for the entry of login credentials that agents use to sign into their equipment.


Minimum length rules applied in Unified CCE are honored through the Unified CCMP Web User Interface to ensure that agents created or edited within Unified CCMP may sign into their equipment with no further change.

Unified CCE provides the ability to set the minimum password length by accessing the **System Information** section of **Configuration Manager** on the AW.

# System Architecture

- ▶ [Web Application](#)
- ▶ [Application Server](#)
- ▶ [Identity Server](#)
- ▶ [Data Import Server](#)
- ▶ [Provisioning Server](#)
- ▶ [High Availability](#)

The Unified CCMP system architecture is shown below. The top half of the diagram is a traditional three-tier application. This includes a presentation layer (an ASP.NET web application), a business logic application server, and a SQL Server database. The lower half of the system architecture is a process orchestration and systems integration layer called the Data Import Server and the Provisioning Server, provisioning a connection to Unified Communications Manager (Unified CM) and Unified CCE.

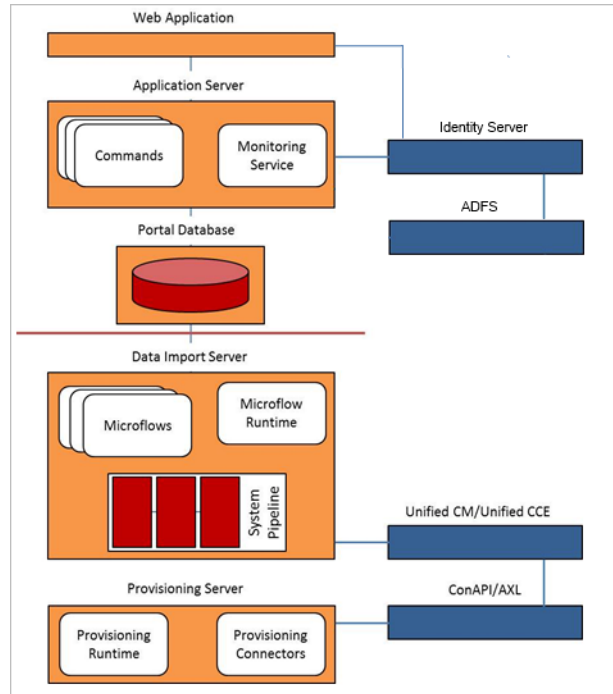

*Server architecture*

## Web Application

The user interface to Unified CCMP is by a web application that is accessed by a web browser. Access is gained through a secure login screen. Every user has a unique user name. This user name is assigned privileges by the system administrator, which defines the system functions the user can access and perform.

The web application is hosted on the server by Microsoft Internet Information Services (IIS).

## Application Server

The Unified CCMP Application Server component provides a secure layer in which all business logic is implemented. The Application Server component runs in a separate service and is always hosted with the web server component. The Application Server component also includes caching to improve performance and audits all actions taken by logged in users.

## Identity Server

---

The Unified CCMP Identity Server component provides a two factor identification system that allows implementation of single sign-on, and access control. The lightweight authentication service includes Local, Windows, and ADFS authentication. Users can have mixed authentication modes, which define how a user can access the system.

## Data Import Server

---

The Data Import Server component is an Extract, Transform, and Load application for Unified CCMP. The Data Import Server component imports the data used in Unified CCMP.

The Microflow Runtime is the heart of the Data Import Server component. It orchestrates systems without resorting to low level programming languages. The Microflow Runtime is a general purpose scripting environment and can be applied to a wide range of problems. The term “microflow” describes any modular, reusable and independent unit of business logic. An example microflow might update an agent on the Cisco Unified CCE platform when changes are made through Unified CCMP web server component.

## Provisioning Server

---

The Provisioning Server component is also responsible for monitoring changes in the Unified CCMP system and ensuring that those changes are updated onto Unified CCE. The Provisioning Server component orchestrates the creation, deletion, and update of resources to Unified CCE and Unified CM.

The Unified CCMP Provisioning Service utilizes the Unified CCE ConAPI interface to commit changes to the Unified CCE.

Provisioning changes are managed via periodic cycles performed by the provisioning server. After a change has been committed by the ConAPI interface, the Provisioning Server waits a period of time (5 seconds by default), before moving onto the next operation. This configurable throttle reduces the possibility of overloading Unified CCE during busy times.

The provisioning characteristics of this service are as follows:

- ▶ For **Agent > Skill Group** relationships, the provisioning server batches together up to 100 requested operations into one request executed every provisioning cycle.
- ▶ For all other items (agents, agent teams, and so on), all items and relationships are treated as separate provisioning operations. These are executed one by one honoring the configured provisioning throttle between operation executions.
- ▶ By default, this would mean that the creation of an agent that is linked to one agent team and two skill groups would create the following provisioning operations:
  - Agent Creations
  - Agent to Agent Team relationship
  - Bulk Agent to Skill Group relationship

# High Availability

---

The Unified CCMP software provides a high-availability deployment option to ensure that, in the event of failure, the system remains operational and able to support end user requests.

The high availability model is implemented across all components in the system. Some components provide an automated failover and others require manual intervention to restore operation.

The Unified CCMP High Availability model is an Active – Active model, where all Unified CCMP and dependent services should be active and running under standard operation.

## Application Server to Database Connections

In a high availability deployment, there are two database servers. These database servers have their information replicated using SQL Server Transactional Replication. If a failure occurs on one side of the system then all data up to the point of failure is replicated on the other database server.

The Application Servers test the databases periodically to identify health. If both databases are healthy, the Application Server connects to the local Database Server. If one of the database health checks fails, the Application Server automatically switches the connection to the other Database Server. There may be a minor loss of service while the monitoring test and connection switch occurs, but the Application Server restores service to end users automatically once the next test is performed.

## Database Server Component Failover

The Database Server contains the Data Import Server and Provisioning Server components of Unified CCMP. These components are essential to the standard operation of Unified CCMP.

- ▶ The Data Import Server imports resources from the AW into the Unified CCMP database.
- ▶ The Provisioning Server sends changes made in Unified CCMP (via the Web Service APIs, or the web application) to Unified CCE.

Both the Data Import Server and the Provisioning Server monitor the connection to the Unified CCE AW (or AWs) to which they are configured to provision. If one of these tests fail, both services automatically switch to importing and provisioning activity from the other side of Unified CCE.



**Important:** Provisioning and import activity must always be performed on the same server. This is to avoid race conditions during high volume provisioning operations.

---

Under normal operation, the Data Import Server and Provisioning Server are running on both sides of the Unified CCMP system. Both maintain the required connections to the AW which they use for importing and provisioning. One side of the Unified CCMP system is marked as active, and one side is disabled. This means that all provisioning and importing activity is performed on only one of the database servers.

To move provisioning and importing activity to the other database server in a Unified CCMP installation, use the Integrated Configuration Environment (ICE) Failover Manager. For more information, see *Integrated Configuration Environment (ICE) for Cisco Unified Contact Center Management Portal*.



**Important:** Only use the Unified CCMP Failover Manager to perform a planned manual failover, for example to perform maintenance on one of the servers. The service to be switched must be running and fully operational on both servers, and the data must have previously been synchronized between the servers. Do not use the Failover Manager to switch between servers in a disaster recovery scenario, for example, in an instance in which one of the servers has failed or has corrupt data.

---



# Remote Resource Provisioning

- ▶ [System Management](#)
- ▶ [Remote Resource States](#)
- ▶ [State Descriptions](#)
- ▶ [User Interface](#)
- ▶ [Database Codes](#)
- ▶ [Memberships](#)
- ▶ [State Machine Scenarios](#)
- ▶ [Provisioning Non-CCE Peripheral Types](#)
- ▶ [Unified CCE Purge Logic](#)
- ▶ [Mobile Agent Support](#)
- ▶ [Partitioned Internet Script Editor](#)
- ▶ [Configuring ISE Integration with Unified CCMP](#)

▶ Supported Objects

All system and security management for Unified CCMP is performed through the Unified CCMP web application. Most system and security management after the initial setup is performed by individual tenant administrators.

## System Management

---

The Resource Manager tool allows the user to create and manage resources and resource folders within a hierarchical folder structure. Users with sufficient security privileges can access and manage the entire contents of the system via the Resource Manager interface. This lets you remotely configure and administer key aspects of your Unified CC system.


How to manage resources is explained in more detail in the System Management chapter of the *User Guide for Cisco Unified Contact Center Management Portal*.

## Remote Resource States

---

A remote resource is any kind of entity on Unified CCE or Unified CM, for example: agents, teams, skill groups, and phones. All the remote resources in Unified CCMP participate in a state machine. A state machine is a

collection of states which a resource progress through during its lifetime. It is important to understand the state machine when troubleshooting problems in Unified CCMP.

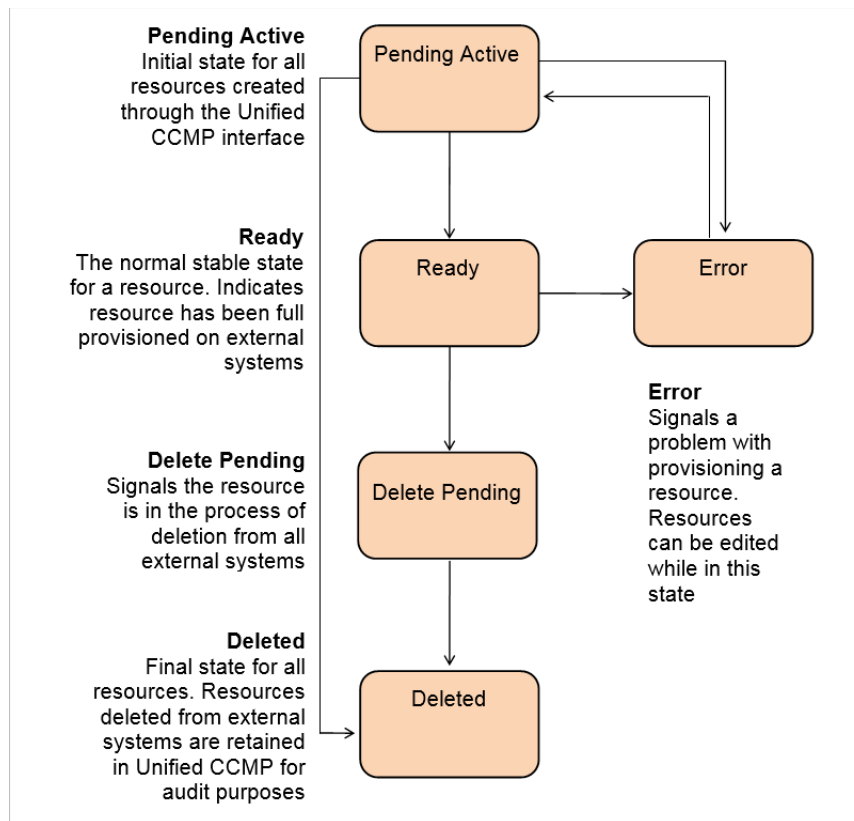

*Resource State and Transitions*

Provisioning changes are managed via periodic cycles performed by the Unified CCMP Provisioning Server. After a change has been committed, the Provisioning Server waits a configurable period of time (five seconds by default), before moving onto the next operation. This configurable throttle reduces the possibility of overloading the remote equipment during busy times.

## State Descriptions

### Pending Active

Pending Active is the initial state for all resource items created through Unified CCMP. Pending Active tells us that the resource exists in Unified CCMP, but has not yet been created on the remote equipment. This may be a result of the remote item being configured with affected “from” data or simply mean that the change has not yet been made.

When a resource item is in the Pending Active state, no updates are accepted from importer microflows or the user interface, with the exception that the item may be changed to the Delete Pending state. This business logic ensures that the Unified CCMP database acts as conflict master.

## Ready

Ready is the normal state of a resource item in the Unified CCMP database. It indicates that the resource item has been fully provisioned on all the remote equipment controlled by Unified CCMP.

If the user interface edits a resource item then it is changed to the Pending Active state. If an importer microflow updates a resource item, then it changes to the respective state depending on the change.

## Error

The Error state signals that an error has occurred while provisioning a resource item. It means that the current status of the item in Unified CCMP is not reflected on the remote equipment.

Using the Resource Manager user interface, additional information about the error may be source by viewing the history tab of the remote resource. This information helps the user identify why the remote resource could not be provisioned allowing them to update the configuration and re-save the remote resource.

The user may choose to remove the remote resource using the Unified CCMP Resource Manager or the Unified CCE / Unified CM tools which then results in it progressing to deleted status.

When an item enters Error state then a **Purge** button is displayed in the status tab allowing the resource to be marked as purged in the Unified CCMP database. This allows changes in Unified CCMP to be cleared, forcing the importer to re-create the item on the next cycle. This also separates the historical data for the item at the point in time the purge is performed, linking all new historical data to the new resource that is created by the importer.

## Delete Pending

This state signals that the resource item is to be deleted from all external systems.

The `DELETED` flag and `EFFECTIVE_T0` fields on the resource item rows in the corresponding dimension pkey map table are set in the transition to this state. For the agent dimension, for example, the corresponding table is `TB_DIM_AGENT_PKEY_MAP`.

User interface operations are not allowed on a resource item which is Delete Pending, specially editing. Once it has been changed to Delete Confirmed then the resource item can be reactivated.

The underlying delete business functions in the Unified CCMP Unified CCE and Unified CM connectors always check to see if the resource item is valid before starting a delete operation.


## Deleted

A resource item changes to the Deleted state once it has been deleted from all externally controlled systems. The Delete Pending microflow runtime ensures all externally controlled systems are updated before the transition occurs. The workflow must also ensure any memberships are reset, for example the deletion of an agent may first require it to be removed from any agent teams.

# User Interface

The user interface can only edit resource items which are in the Error and Ready states. Resource items in the Pending Active and Delete Pending states cannot be edited until the provisioning system has processed the resource item. There are a number of exceptions to this rule where effective dates can still be changed in the Pending Active state.

The Error state is particularly important as it catches all the resource items that could not be provisioned. The normal use of the Error state is to hold resources that need to be edited before being provisioned again (by changing them to the Pending Active state).

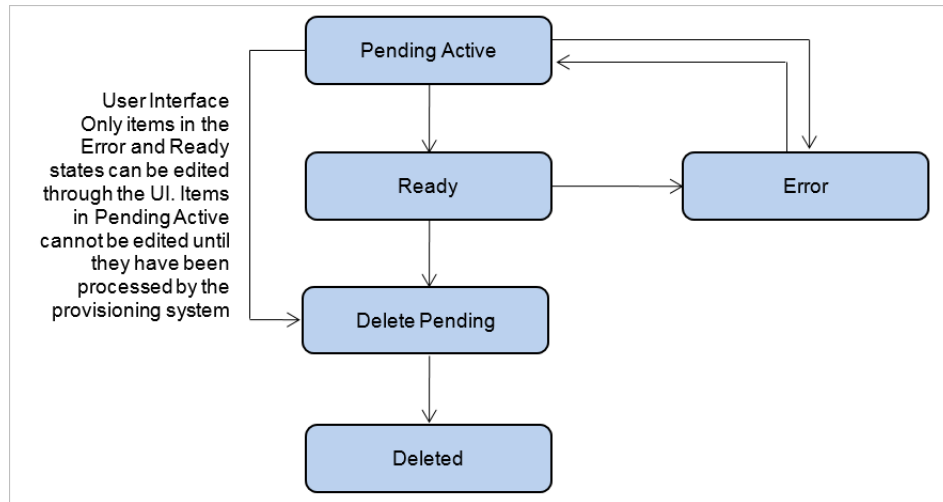

*Editable resource states*

# Database Codes

The resource state field in the corresponding dimension pkey map table uses these codes. For the agent dimension, for example, the corresponding table is TB\_DIM\_AGENT\_PKEY\_MAP.

Code	State	Description
R	Ready	Ready is the normal state of a resource item in the Unified CCMP database. It indicates that the resource item has been fully provisioned on all externally controlled systems.
S	Pending Active	Pending Active is the initial state for all resource items created/edited through Unified CCMP.
P	Delete Pending	The Delete Pending state signals the resource item is to be deleted from all externally controlled systems. The EFFECTIVE_TO and DELETED fields are also set in the corresponding dimension pkey map table.

Code	State	Description
D	Delete Confirmed	A resource item transitions to the Delete Confirmed state once it has been deleted from all externally controlled systems.
E	Error	The Error state signals an error occurred provisioning a resource item.

## Memberships

Memberships in the Unified CCMP database also have effective dating and a status. The Pending Active workflows ensure that changes to memberships are reflected on any externally controlled system. The state of a resource item shows whether it has been provisioned on all external systems (for example, whether an agent has been added to Unified CCE). The state also reflects whether all its memberships are up to date and fully provisioned. This approach makes it easy in the user interface to show an item's state.

## State Machine Scenarios

The following table explores the state machine through some user case scenarios.

Scenario	Expected Result
Dimension item is created and provisioned (transitioning it to the Ready state). It is then deleted from one of the externally controlled systems.	Dimension item is transitioned to the Delete Confirmed state.
Dimension item in the Delete Pending state is deleted from a different external system.	Dimension item is transitioned to the Delete Confirmed state.
Dimension item in the Delete Pending state is reactivated on an externally controlled system.	Dimension item is left in the Delete Pending state and is deleted on all externally controlled systems.
Dimension item in the Delete Confirmed state is reactivated on an external system.	Dimension item is transitioned to the Ready state.
Dimension item fails to provision correctly; perhaps there is a network connectivity issue between Unified CCMP and the Unified CM.	Dimension item is transitioned to the Error state. Any systems it was correctly provisioned on are reflected in the Unified CCMP database. Details of the provisioning problem are available in the audit tables.
Dimension item fails to provision correctly and is then deleted in the Unified CCMP system.	Dimension item is transitioned to the Delete Pending state.
Dimension item partially fails to provision correctly and is then deleted in an externally controlled system.	Dimension item is transitioned to the Delete Confirmed state.

Scenario	Expected Result
Dimension item in the Error state is deleted from an externally controlled system.	Dimension item is transitioned to the Delete Confirmed state.
The Unified CCMP server suffers a total database crash and has to be restored from backup.	Support technician uses the Recovery Console to change the state of all non-deleted dimension items to Ready. The import synchronization may take some time to run but ensures all externally controlled systems are in line with the Unified CCMP database.
Just prior to a server crash, a dimension item was created on an externally controlled system but was not updated in the Unified CCMP database.	The next time the <b>Synchronize</b> microflow runs, it brings back the existing primary key for the dimension item on the externally controlled system and updates its identity in the corresponding dimension pkey map table. For the agent dimension, for example, the corresponding table is TB_DIM_AGENT_PKEY_MAP.

## Provisioning Non-CCE Peripheral Types

By default items may only be provisioned through Unified CCMP on peripherals of client type Enterprise Agent, System PG and IPCC Enterprise Gateway. These are the supported peripheral types that Unified CCMP has been configured and tested with. It is however possible to configure Unified CCMP to provision items to peripherals that are not constrained to the types listed above.

### To configure Unified CCMP to support another peripheral client type:

1. On the primary database server, launch Integrated Configuration Environment (installed as part of Unified CCMP).
2. Select the **System Properties** tool from the dropdown list.
3. Locate the **Supported Peripheral Types** option in the **Miscellaneous** section of Global Properties and from the drop-down list, select the checkbox beside the Peripheral Types you want to be supported.
4. Click **Save** and close ICE.



**When performing an update to the supported peripheral client types ensure that the existing types are not removed from the comma separated list as this changes standard product behavior. The standard supported types are 30,50,51.**



**Note:** Unifiedconfig API support is removed for Skill Groups for System Peripheral Gateway. For more details, see *Cisco Unified Contact Center Enterprise Developer Guide*.

5. Restart all Unified CCMP Application Server Services on all of the servers hosting the Application Service.
6. On each Unified CCMP Web Server, in the **Run** command dialog box, enter **IISReset**.

## Unified CCE Purge Logic

---

When remote equipment resources are deleted in Unified CCMP then they are set to the Delete Pending state in the Unified CCMP database. This forces the Provisioning Server to remove the associated resource(s) on the related equipment.

Some resource types in Unified CCE implement purge logic, causing items to be propagated to a resource pool (similar to a recycle bin in Windows). This stops any properties that are associated with these items from being reused for new resources configured on that Unified CCE instance. For example, a person in Unified CCE is allocated a Login Name which is a unique identity used to log the agent onto Unified CCE. If a person is deleted in Unified CCE, then it is moved to the Deleted Objects section of the Unified CCE Configuration Manager tool. The Login Name associated with that person cannot be re-used until the person has been manually removed from the Deleted Objects section.

When Unified CCMP's Unified CCE provisioning capability is configured, the user can select whether the associated CCE instance supports **purge on delete** logic. If purge on delete is enabled, then resources deleted through Unified CCMP are automatically removed from the Unified CCE Deleted Objects section. This enables their associated properties to be re-used immediately.

If purge on delete is not enabled then Unified CCMP reports an error if you try to reuse a property that is associated with a resource in the Unified CCE Deleted Objects section of Configuration Manager. A typical error message for this scenario is: `Login Name duplicate detected - the login name you are trying to use is currently assigned to another resource.`

## Mobile Agent Support

---

Unified CCE offers a feature called Unified Mobile Agent, which allows any agent with a PSTN phone and a broadband VPN connection to access contact center calls as if they were in the contact center.

This means that:

- ▶ Agents have the added flexibility of working remotely.
- ▶ Temporary staff can be added to deal with high call volumes at peak times.
- ▶ Geographically dispersed agents with the required skillsets can operate as a team within the contact center environment.

A mobile agent can operate in one of two modes:

- ▶ **Call by Call:** The agent is called individually for each connected call and disconnected at the end of the call.
- ▶ **Nailed Connection:** The agent is called at logon and their connection with the contact center remains until they logoff.

For more information about Unified Mobile Agent, please refer to *Mobile Agent Guide for Cisco Unified Contact Center Enterprise & Hosted*.

## Configuring Mobile Agent Support in Unified CCE

There are several steps required to configure the system to support mobile agents. These steps must be performed in Unified CCE before mobile agents can be created. For detailed instructions see *Mobile Agent Guide for Cisco Unified Contact Center Enterprise & Hosted*.

## Configuring Mobile Agents

When you have configured the system to support mobile agents, you can configure individual agents as mobile agents. To do this, you need to:

- ▶ Configure the agent desk settings (Agent Desktops in Unified CCMP) to support mobile agents.
- ▶ Configure two CTI ports (IP Phones in Unified CCMP) for each mobile agent: you need a remote CTI port to initiate the call, and a local CTI port to be the mobile agent's virtual extension.
- ▶ Configure a device target for the local CTI port (in Unified CCMP, this is automatically done via the Directory Number resource).

The agent desk settings can be configured from the Unified CCMP Web Application. If Unified CM provisioning is enabled, the CTI ports and device target can also be configured from the Unified CCMP Web Application or the Resource Management Web Service APIs. The instructions for performing these steps in the Unified CCMP Web Application are below.

If Unified CM provisioning is not enabled, you need to configure the CTI ports and device targets using Unified CM or the domain manager for that equipment. For more information, see *Mobile Agent Guide for Cisco Unified Contact Center Enterprise & Hosted*.

## Configuring the Agent Desk Settings for Mobile Agents

**To configure the agent desk settings for mobile agents:**

1. In the Unified CCMP Web Application, create an Agent Desktop.
2. On the **Details** tab for the Agent Desktop, set the **Remote Agent Type** field to one of the following: **Local Only**, **Call by Call Routing**, **Nailed Connection Routing**, or **Agent Chooses at Login**, depending on your requirements.
3. Assign this Agent Desktop to the Agents that are to be mobile agents.

## Configuring CTI Ports and Device Targets for Mobile Agents

Unified CM provisioning must be enabled to follow these steps. For more information, see *Mobile Agent Guide for Cisco Unified Contact Center Enterprise & Hosted*.

**To configure the CTI ports and device targets for a mobile agent:**

1. In the Unified CCMP Web Application, create an IP Phone for the local CTI port. The name used for the IP Phone must begin with the characters **LCP**. This allows Unified CCE to identify this as a local CTI port.
2. Create an IP Phone for the remote CTI port. The name used for the IP Phone must begin with the characters **RCP**. This allows Unified CCE to identify this as a remote CTI port.

3. Create a Directory Number and associate it with the IP Phone that corresponds to the local CTI port.
4. On the **Details** tab for the Directory Number associated with the local IP phone, select **Contact Center Enabled**. This automatically configures the device target for the local CTI port.

## Partitioned Internet Script Editor

Cisco's Internet Script Editor (ISE) can be integrated with Unified CCMP. This allows routing scripts and the resources within those routing scripts to be partitioned using Unified CCMP security. ISE users see only the scripts and the resources within those scripts that they are authorized to access, according to the Unified CCMP security model. For example, when creating a routing script element to route to a dialed number, the ISE user only sees the dialed numbers that the corresponding Unified CCMP user is authorized to access. Similarly, when viewing the available routing scripts, the ISE user only sees the scripts available to the corresponding Unified CCMP user.

ISE integration with Unified CCMP uses the Unified CCMP Analytical Data Web Service to implement the secure partitioning, and requires specific configuration settings in both Unified CCE and Unified CCMP in order to work properly.



**Important:** Secure partitioning using Unified CCMP is currently only supported for the Cisco Internet Script Editor (ISE). Users of the standard Script Editor on the Unified CCE AW still see all resources on their associated Unified CCE instance.

---

## Configuring ISE Integration with Unified CCMP

### To configure ISE integration with Unified CCMP:

1. Configure Unified CCE to use Unified CCMP security partitioning.
2. Create one or more linked Unified CCE and Unified CCMP users with appropriate permissions. The Unified CCE user and the Unified CCMP user are both linked to the same Windows active directory user, which must already exist on the domain on which Unified CCE and the Unified CCMP servers are located. The Unified CCMP user must be a local account, and must match the unique principal name of the Active Directory user. For example, user@domain.local. The password of the Unified CCMP user account must match the password of the corresponding Active Directory user.

## Configuring Internet Script Editor to use Security Partitioning



**Important:** The ICR Instance on the ICM must match the distributor name (that is created during the installation of ICM). While changing the ICR Instance name (to anything other than the distributor name) does not impact the normal functioning of ICM, it however affects the functioning of Unified CCMP.

---

## To configure the Internet Script Editor to use security partitioning:

1. Log in to the Unified CCE Admin Workstation.
2. In the Unified CCE Web Setup, navigate to Component Management - Administration and Data Servers section. Check the Administration and Data server check box and click **Edit**.
3. Click **Next** until you see Database and Options tab, then select the following options:
  - Select **Internet Script Editor (ISE) server**.
  - Select **Authorization Server**.
  - In the **Authorization Server Name** field, enter the name of the Authorization Server. This is the Unified CCMP App/Web Server that is used to apply Unified CCMP security to partition the resource data.
  - In the **Authorization Server Port** field, enter the port on which the Unified CCMP Analytical Data Services Web Service has been hosted. By default, this is port 8087, but if this has been changed for your installation, enter the value that your installation uses.
  - Fill out the Central Controller Connection details tab as appropriate. Check the **Summary**, and click **Finish**.
4. Ensure that the firewall on the server running the Unified CCE AW has been configured to allow inbound traffic from ISE on the appropriate port. For more information, consult the relevant Unified CCE documentation.
5. Ensure that the specified Authorization Server port on the Unified CCMP Authorization Server has been configured in the firewall to allow inbound HTTPS traffic.



**Important:** When you have completed these configuration steps, when you run ISE, you must specify a Unified CCE user that corresponds to a linked Unified CCMP user. You cannot log in otherwise. When you have logged in, you can only see the script items that the linked Unified CCMP user is able to see.

---

## Creating a Linked Unified CCE and Unified CCMP User

There are two ways to create a linked Unified CCE and Unified CCMP user so that Unified CCMP security can be applied to ISE scripts and resources:

- ▶ You can create the user in Unified CCMP, specify that it is ISE-enabled and Unified CCMP automatically creates the linked Unified CCE user.
- ▶ If a user, who is not a supervisor, already exists in Unified CCE, Unified CCMP automatically imports it. You then can configure the user as ISE-enabled in Unified CCMP.

## Creating a Linked User in Unified CCMP



**Important:** Unified CCMP imports all users who are not supervisors.

---

A linked Unified CCMP user can be used to apply Unified CCMP security to ISE scripts and resources.

### To create a Unified CCMP user:

1. In Unified CCMP, select **Security > Users** and create a Unified CCMP user with the same name as the corresponding Windows active directory user which is to be associated with the linked Unified CCMP and Unified CCE users. The Unified CCMP user name must be specified as `<username>@<domainname>`, where `<username>` is the Windows user name and `<domainname>` is the fully qualified Windows domain name. For example: `iseuser1@testdomain.local`.



**Important:** The user must be created under a tenant.

---

2. Select **Account Enabled**, and **Internet Script Editor Enabled**.
3. On the **Password** tab, select **Reset Password** to reset the password. The **User must change password at next logon** check box is selected automatically. The user must set the password to match the Active Directory password on login.
4. Enter a temporary password into the **Password** and **Confirm Password** fields.
5. Click **Save**.
6. Give this user Browse Dimensions permission to the Unified CCE folders and resources to which they require permissions. You can do this in one of the following ways:
  - Select the **Groups** tab and add the user to a group that already has the required permissions.OR
  - a. After you have finished the remaining steps in this section, select the “hamburger” icon in the menu bar, to show the tools menu. Select **Security**.
  - b. On the **Users** tab, select the check box beside the user you have just created.
  - c. Click **Change Permissions**.
  - d. Identify a suitable folder role that includes the Browse Dimensions permission, and assign it to this user for each of the folders containing the scripts and resources you want this linked user to be able to access.
7. Click **Save** to create the Unified CCMP user and a linked Unified CCE user. The Unified CCE user is created on the Unified CCE instance that is associated with the folder where the Unified CCMP user has been created.

## Configuring an Imported Unified CCE User for ISE Integration

An imported Unified CCE can apply Unified CCMP security to ISE scripts and resources.

### To configure an imported Unified CCE user:

1. In Unified CCMP, locate the imported Unified CCE user. The Unified CCMP user name is formatted as `<username>@<domainname>`, where `<username>` is the Windows user name and `<domainname>` is the fully qualified Windows domain name. For example: `iseuser1@testdomain.local`. The imported user is in your default import location unless you have moved the user after the import.
2. Click the user to view the details.
3. Select **Account Enabled**, and **Internet Script Editor Enabled**.

4. On the Password tab, select Reset Password to reset the password. The User must change password at next logon check box will be selected automatically. The user must set the password to match the Active Directory password on login.
5. Enter a temporary password into the Password and Confirm Password fields.
6. Give this user Browse Dimensions permission to the Unified CCE folders and resources to which they require permissions. You can do this in one of the following ways:
  - Select the **Groups** tab and add the user to a group that already has the required permissions.

OR

  - a. After you have finished the remaining steps in this section, select the “hamburger” icon in the menu bar, to show the tools menu. Select **Security**.
  - b. On the **Users** tab, select the check box beside the user you have just created.
  - c. Click **Change Permissions**.
  - d. Identify a suitable folder role that includes the Browse Dimensions permission, and assign it to this user for each of the folders containing the scripts and resources you want this linked user to be able to access.
7. Click **Save** to update the user details for the linked Unified CCMP user.
8. If your Unified CCMP installation does not use single sign on, then before this user can be used to access ISE, you must log in to Unified CCMP as this user and supply a password when prompted. This password must be the same as the password for the corresponding Windows active directory user. If your Unified CCMP installation uses single sign-on, this step is not required.

## Supported Objects

The Script Editor can partition the following resources in a routing or administration script.

Resources that are not supported for Unified CCMP partitioning in this release of the Script Editor are shown in the table below in italics. In this release, all resources of these types are available to the ISE user, regardless of the Unified CCMP partitioning.

Resource	Related Resources	Script Node(s)	Comments
Agent	Route	Agent Node	
	Peripheral (for Peripheral Number)	Agent to Agent Node	Select by <ul style="list-style-type: none"> <li>▶ Peripheral/Peripheral Number</li> <li>▶ Enterprise Name</li> <li>▶ Skill Target ID</li> </ul>
	Peripheral, Enterprise Skill Group, Enterprise Route, Roue	Queue to Agent Node	
	Agent Route	Route Select Node	Using Agent(s) as selector

Resource	Related Resources	Script Node(s)	Comments
Call Type	N/A	Call Type Node	Two modes: <ul style="list-style-type: none"> <li>▶ Static</li> <li>▶ Dynamic by Name or ID</li> </ul>
	N/A	Requalify Call Node	
Dialed Number	N/A	Dialed Number Node	
Enterprise Service	Service, Route	Enterprise Service Node	
	Service, Route	Route Select Node	Using Enterprise Service as selector
Enterprise Skill Group	Skill Group, Route		
	Skill Group, Route	Route Select Node	Using Enterprise Skill Group as selector
Label	Routing Client	Label Node	Labels defined by Routing Client
Media Routing Domain	N/A	Media Routing Domain Node	By default: Cisco_Voice, Email and Multisession
Precision Queue	N/A	Precision Queue	Dynamic not supported for this release
Service	Route	Service Node	
	Route	Route Select Node	Using Service(s) as selector
Skill Group	Route	Skill Group Node	
	Route	Queue to Skill Group Node	
	Route	Route Select Node	Using Skill Group(s) as selector
VRU Script	N/A	Run External Script Node	



# Auditing and Monitoring

- ▶ [Audit Histories](#)
- ▶ [Logging](#)
- ▶ [Performance Counters](#)
- ▶ [Configuring SNMP Traps](#)

Unified CCMP enables provisioning users to view the audit histories of individual items.

These audit trails display events that relate to operations that have been performed within the platform, such as move agent, delete skill group, and so forth.

In addition to the standard platform audit information, administrators can use system logs and performance counters to further aid problem diagnosis or establish system status.

## Audit Histories

---

### Resource Audit History

Each individual resource has its own audit history, showing all the events that have occurred on that resource. This can be accessed from the History tab when examining the resource in the Unified CCMP Resource Manager (see the *User Guide for Cisco Unified Contact Center Management Portal*). This information can be used for problem diagnosis relating to a particular remote resource or to identify when a particular change is made and by whom.

Using the Edit Filter link available on the History tab allows you to view only events which were successful, events which failed, or to view events that took place between certain dates. You can click some of these events to see more details.

### Activity Monitor

The Unified CCMP Resource Manager includes an Activity Monitor tool which enables you to:

- View the items currently in the provisioning queue
- View audit details for resources, filtered by any or all of the resource type, location, date range, and the provisioning outcome (success or failure).

You can click on an item to see more information about the event. See the *User Guide for Cisco Unified Contact Center Management Portal* for more information.

## Logging

---

### Logging Levels

Unified CCMP provides an extensive logging framework for each of the components of the system to aid troubleshooting in the event of a problem.

Logging trace levels are stored in the registry for each separate component and may be set to one of the four following values:

Logging	Name	Description
0	ERROR	This is the lowest level of logging. It only logs information relating to exceptions that occurred in the application.
1	WARN	Warn provides ERROR level logging plus warnings raised for potential system issues.
2	INFO	Info is the default logging level. It provides ERROR and WARN as well as standard diagnostic information.
3	TRACE	Generates TRACE logs. It provides information of every operation that is performed without having the adverse effect on performance that DEBUG does.
4	DEBUG	DEBUG is the highest level of logging. It provides detailed information of every operation that is performed. Debug logging has an adverse effect on performance, its usage should be kept to a minimum.

Logging levels are defined on a per component basis and may be configured at the following registry locations:

Component	Registry Key
Web Application	HKEY_LOCAL_MACHINE\SOFTWARE\Exony\Components\Web\TraceLevel
Application Server	HKEY_LOCAL_MACHINE\SOFTWARE\Exony\Components\Application Server\TraceLevel
Partitioning Service	HKEY_LOCAL_MACHINE\SOFTWARE\Exony\Components\Partitioning\TraceLevel
Provisioning Service	HKEY_LOCAL_MACHINE\SOFTWARE\Exony\Components\Provisioning\TraceLevel
Data Import Server	HKEY_LOCAL_MACHINE\SOFTWARE\Exony\Components\Data Pipeline\TraceLevel
OLAP	HKEY_LOCAL_MACHINE\SOFTWARE\Exony\Components\OLAP\TraceLevel



**Important:** Updating the logging level in the registry requires the associated process to be restarted before the change takes effect.

## Log File Locations

The following provides the location of the Unified CCMP log files. In the table, <install-folder> is the folder where Unified CCMP was installed on that server. If the default location was selected when Unified CCMP was installed, <install-folder> is C:\Program Files\DomainManager\.

Log File	Server	Location
Application server logs	App/Web Server	<install-folder>\Application Server\LOGS
Web application logs	App/Web Server	<install-folder>\WebLOGS
Identity server logs	App/Web Server	<install-folder>\Identity Server\LOGS
Data import server logs	Database Server	<install-folder>\Data Import Server\LOGS
Provisioning server logs	Database Server	<install-folder>\Provisioning\LOGS
Partitioning logs	Database Server	<install-folder>\Partitioning\LOGS
Database logs	Database Server	<install-folder>\Database\LOGS
ICE logs	Database Server	<install-folder>\ICE\LOGS
Installer and uninstaller logs	All servers	C:\InstallLogs (Windows Installer logs). <install-folder>\InstallLogs (Windows Installer custom action logs). These allow diagnosis of custom exceptions (often reported by Windows Installer as Error 1001).
IIS logs	App/Web Server	C:\inetpub\logs\LogFiles\W3SVC1\u_ex<YYMMDD>.log. These contain details of all web server transactions. They contain standard HTTP status codes. See <a href="http://www.w3.org/Protocols/rfc2616/rfc2616-sec10.html">http://www.w3.org/Protocols/rfc2616/rfc2616-sec10.html</a> for a full list of HTTP status codes. Some common codes are: <ul style="list-style-type: none"> <li>▶ 200: OK</li> <li>▶ 401: Failed Authorization</li> <li>▶ 404: Page Not Found</li> <li>▶ 500: Internal Server Error</li> </ul>

## Performance Counters

Unified CCMP integrates with Windows performance counters (accessed by running the perfmon command) to provide real time activity monitoring. Unified CCMP appears across several objects in perfmon, each with a number of associated performance counters.

The perfmon graph can combine many different performance counters. Furthermore, perfmon can be configured to trace specific counters at scheduled times of the day. These performance logs can then be exported to Excel for further analysis. Perfmon can also connect to remote computers, if necessary.

For information on how to use and configure perfmon, see the Microsoft documentation on Performance Logs and Alerts.

## Unified CCMP Data Pipeline Object

Counter	Monitors
Total Cache Reloads	Number of times a cache has been reloaded
Total Database Downloads	Total number of database downloads
Total Database Requests	Total number of database requests
Total Database Statements	Total number of TSQL statements
Total Database Transactions	Total number of database transactions
Total Directory Rollbacks	Total number of import directories rolled back
Total Microflow Validation Errors	Total number of microflows that have failed validation testing
Total Microflows Run	Total number of microflows run
Total Number Imports	Total number of imports started
Total Replication Imports	Total number of directories imported on the Subscriber
Total Replication Publisher Requests	Total number of directories sent for replication
Total Rows Imported	Total number of rows imported

## Unified CCMP Application Server Object

Counter	Monitors
Application Requests/Second	Application requests processed per second
Application Requests/Total	Total application requests processed
Available I/O Threads	The difference between the maximum number of thread pool IO threads and the number currently active.
Available Worker Threads	The difference between the maximum number of thread pool worker threads and the number currently active.
Max IO Threads	The number of requests to the thread pool that can be active at the same time. All requests above that number remain queued until thread pool IO threads become active.
Max Worker Threads	The number of requests to the thread pool that can be active at the same time. All requests above that number remain queued until thread pool worker threads become active.
Min IO Threads	The minimum number of idle asynchronous IO threads currently maintained by the thread pool.
Min Worker Threads	The minimum number of idle worker threads currently maintained by the thread pool.

Counter	Monitors
Total Failed Logons	Total number of failed logons
Total Failed Logons/Second	Total number of failed logons per second
Total Logon Attempts	Total number of logon attempts
Total Logon Attempts/Second	Total number of logon attempts per second
Total Successful Logons	Total number of successful logons
Total Successful Logons/Second	Total number of successful logons per second

## Unified CCMP Provisioning Object

Counter	Monitors
Total ConAPI Add Requests	Total number of add requests sent on each ConAPI connection since the service last started
Total ConAPI Get (Alternate) Requests	Total number of get (alternate) requests sent on each ConAPI connection since the service last started
Total ConAPI Get (Primary) Requests	Total number of get (primary) requests sent on each ConAPI connection since the service last started
Total ConAPI Remove Requests	Total number of remove requests sent on each ConAPI connection since the service last started
Total ConAPI Update Requests	Total number of update requests sent on each ConAPI connection since the service last started

## Unified CCMP <Service Type> Connection Health Object

Counter	Monitors
Health	The health of the connections from this service to each of the listed servers.

## Unified CCMP <Service Type> Connection Requests

Counter	Monitors
Connection Requests/Second	Connection requests that this service has processed per second
Connection Requests/Total	Total connection requests that this service has processed

# Configuring SNMP Traps

---

Simple Network Management Protocol (SNMP) traps may be raised from Unified CCMP by configuring Windows to send selected events to an SNMP monitor. This is achieved using a Windows utility called `evntwin.exe`. This utility converts events written to the Windows Event log into SNMP traps that are raised and forwarded by the Windows SNMP service to an SNMP management tool.

## Enable the Windows SNMP Feature

To configure Windows event forwarding to SNMP, the SNMP feature in Windows must be enabled. To do this, on the Unified CCMP server containing the component for which traps are required.

### To enable the Windows SNMP feature:

1. Launch the Server Manager application.
2. In the Server Manager left-hand pane, right-click the **Features** option and select **Add Features**.
3. In the Add Features Wizard window, select **SNMP Services** and expand it to ensure that both **SNMP Service** and **SNMP WMI Provider** are also selected.
4. Click **Next** and click **Install** to complete the deployment of SNMP. Close the Server Manager.
5. Launch the Services application. Right-click the **SNMP Service** and select **Properties**.
6. In the **Security** tab ensure Send authentication trap is selected and, in the Accepted community names section, click **Add**.
7. Select READ ONLY for community rights and enter a custom Community Name to restrict access through SNMP.
8. Click **OK** to complete the configuration of the SNMP Service. Close the Services window.

## Configure the SNMP Service for Trap Forwarding

Next, the SNMP Service must be configured to forward traps to the management tool that is being used for reporting and alerting.

### To configure the SNMP service for trap forwarding:

1. Launch the Services application.
2. In the list of services, locate the SNMP Service, right-click, and select **Properties**.
3. On the Traps tab, in the Community name field, enter **public**.
4. Click **Add to List**.
5. Below the Trap destinations field, click **Add**.
6. In the SNMP Service Configuration dialog box, enter the host name or IP address of the system that is receiving the trap information (that is, the server hosting the management agents or reporting and alerting tools).
7. Click **Add** to add the trap destination.

8. If there is more than one system that needs to receive the trap information, repeat steps 5-7 for each of the other servers.
9. Click **OK** and close the Services window.

## Configure Windows Events to Forward to SNMP

Use the `evntwin.exe` tool to configure the Windows events to be forwarded as SNMP traps. Any event that is raised in the Windows Event Log may be configured to generate an SNMP trap.

### To configure Windows events to forward to SNMP:

1. In the Run command dialog box, enter `evntwin.exe`.
2. Select **Custom** and click **Edit**.
3. In the Event Sources list, expand the Application source to see the available Unified CCMP events. The Unified CCMP events and their meanings are given in the table below.

Event Source	Description
Unified CCMP Application Server Monitoring	The core monitoring service for the application server. This posts connection change events to the event log.
Unified CCMP Data Import Server Monitoring	The data import service used for importing data from CCE etc.
Unified CCMP Partition Table Manager Monitoring	Connection monitoring for the partition manager service (which creates partitioning tables in the database).
Unified CCMP Provisioning Server Monitoring	Service used for provisioning changes on remote equipment, for example, CCE etc.
Unified CCMP: Partition Table Manager	Core application service for creating partitioning tables in the database.
X_ANALYTICALDATA, X_HIERARCHY, X_IMPORTER etc.	These are the individual services configured in Windows for Unified CCMP. These applications can be used for subscribing to standard service events, for example, start/stop events etc.

4. To configure an event source to generate SNMP traps, select the event source, wait a few moments, then click Add once it is enabled. In the Properties dialog, specify the trap properties required, then click **OK**.
5. When you have finished setting the SNMP traps you require, click **Apply**.



# Standard Administrative Operations

- ▶ [Service Restart Configuration](#)
- ▶ [Resetting Default Database Connections](#)
- ▶ [Actions After Upgrading Unified CCE](#)

This section provides basic information on performing every-day administrative procedures that are required for the system to operate correctly. This includes such activities as the resetting of system account passwords should a domain policy be enforced that requires passwords to be reset within a given time range.

## Service Restart Configuration

---

All Unified CCMP services are configured to start automatically, and restart automatically on failure. However, three consecutive failures of a service causes a system restart.

### To configure service restart behavior:

1. Launch the Services application.
2. Double-click to open each Unified CCMP service in turn.
3. Select the **Recovery** tab.
4. Set the response to all the failures to be **Restart the Service** (changing the Subsequent Failures entry).
5. Click **OK**.

## Resetting Default Database Connections

---

Unified CCMP provides a Windows client utility allowing for default database connections to be updated for the various components of the system. When Unified CCMP is installed configured connection strings are encrypted and stored in the configuration files specific to each component. In some scenarios it is necessary to update these encrypted connection strings so that the component is able to establish a connection to the database. Common scenarios where this is required are as follows:

- ▶ Moving the Unified CCMP Database to a new server
- ▶ Expiry of a SQL Server account used at install time


This section outlines the usage of the Connection Updater Tool. This tool is for resetting the connection settings for the relational database used by various Unified CCMP components.

The Connection Updater tool is installed on the system alongside each of separate Unified CCMP component. The tool can be found in the installation directory of an installed Unified CCMP component. This tool is intended to be used when the connection settings to the Unified CCMP relational database defined at install time, have been setup incorrectly. This tool can also be used to change the settings for any other reason like, switching between Windows Authentication and SQL Server Authentication.

## Connection Updater Features

The Connection Updater tool can be launched using the `ConnectionUpdater.exe` file contained in the installation folder for each component.


To find the tool navigate to installation directory of the Unified CCMP component using Windows Explorer. Typically, this path would be `C:\Program Files\Management Portal\Application Server` for the Application Server component. Double-click the executable `ConnectionUpdater.exe`.

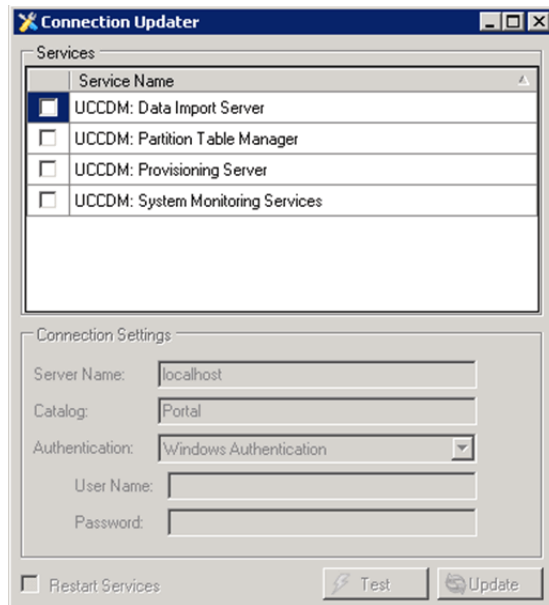

*The Connection Updater tool*

When the tool loads, it checks all the installed Unified CCMP components on this server and list the Unified CCMP Services that support resetting of the default database connection settings.

The Connection Updater tool allows you to change the connection settings for an individual component one by one or all the components together.

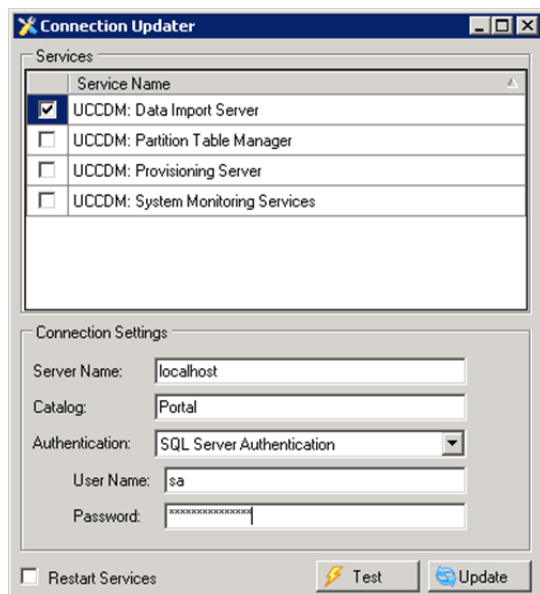

*Connection settings for Unified CCMP data import server*

You can switch to view the connection settings for other Unified CCMP component services by clearing the Data Import Server check box and selecting the check box for any other component.



**Important:** If you select more than one Unified CCMP service, the tool shows the default Connection Settings and not the active configuration of any specific services.

## Connection Updater Usage

The Connection Updater tool allows you to change the following details for the relational database connection settings:

- ▶ **Server Name:** This is the database server name when the Unified CCMP database is installed. Default is `localhost`.
- ▶ **Catalog:** The Unified CCMP database name. Default is `Portal`.
- ▶ **Authentication:** The authentication method for the database connection. The default is Windows Authentication. You may change this to use SQL Server Authentication. If SQL Server Authentication is used then you need to provide details for the SQL Server User Name and Password.

Select one or more Unified CCMP Services in the Services list by checking the checkboxes provided. Change the connection credentials in the **Connection Settings** section and click the **Update** button to apply the changes.

## Testing Connections

You can use the **Test** button to test the connection details provided.

This test is a valid if you have chosen SQL Server Authentication to connect to the database. If you have chosen to authenticate using Windows Authentication, then the test uses the credentials of the user running the Connection Updater tool. This may not be the user configured to run the respective services (typically NETWORK SERVICE).

## Restart Services

Any changes to the connection settings made through the Connection Updater tool requires the related services to be restarted before they take effect. Checking the **Restart Services** checkbox automates the restart of the associated services when the **Update** button is pressed.

## Actions After Upgrading Unified CCE

When Unified CCE is upgraded to a newer version, the ICE cluster configuration must be updated to ensure that Unified CCMP can communicate with the new version of Unified CCE.

### To ensure the application can communicate with Unified CCE:

1. On the primary database server, launch Integrated Configuration Environment (installed as part of Unified CCMP). The Database Connection dialog box is displayed.
2. Enter the credentials for your database. If you see a dialog box showing errors and warnings, click **OK**.
3. In the ICE Cluster Configuration tool, select the **Setup** tab and click **Configure Cisco Unified CCE Servers** to start the wizard.
4. On the **Select Task** page, select **Modify an existing instance**. Select the Unified CCE instance that has been updated, and click **Next**.
5. Click **Next** to go through the remaining pages in turn, without changing anything.
6. When you see the confirmation message indicating that the wizard has completed successfully, click **Exit** to close the wizard.
7. To save and action your changes, either click the **Save** icon in the tool bar or select **File > Save** from the menu.
8. On each of the database servers, restart the Unified CCMP Data Import service and the Unified CCMP Provisioning service.

To convert old users and keep their settings, you must run the User Migration Tools on the Application Server. For more information, see the *Installation and Configuration Guide for Cisco Unified Contact Center Management Portal*.

# 7 Advanced Administrative Operations

- ▶ [Enabling and Disabling Cluster Configuration Components](#)
- ▶ [Database Backup and Recovery](#)

This section provides information on advanced administrative operations. This includes the configuration and management of cluster resources in the event of a failure and advanced procedures to be performed to restore a failed system.

## Enabling and Disabling Cluster Configuration Components

This section describes the effects of enabling and disabling the various components in the Unified CCMP cluster configuration model. Each of these components has an Enabled property, which can be true or false. To set the Enabled property for a component, use the Integrated Configuration Environment (ICE) Cluster Configuration tool, Servers tab. For more information, see *Integrated Configuration Environment (ICE) for Cisco Unified Contact Center Management Portal*.

When you disable a connection in the cluster configuration model, the connection is no longer available for use. In a single-sided system that functionality is unavailable until the connection is re-enabled. A dual-sided system reconfigures itself to use an alternate connection if possible. In this case, the system chooses to use the connection that has the lowest cost from those that are available and enabled. If a connection with a lower cost subsequently becomes available and enabled, the system automatically reconfigures itself to use that connection.

The following table lists the components in the cluster configuration model and the effects of changing the Enabled property for each of these components. For more information about these components see *Integrated Configuration Environment (ICE) for Cisco Unified Contact Center Management Portal*.

Component	Description
Server	Indicates if this server is enabled. This is a calculated field, and indicates whether all physical resource components on this server are enabled. Changing this value updates the enabled property of all physical resource components on this server.
Physical Resource Component	Indicates if this physical resource component is enabled. Changing this value also changes the enabled state of the connections to and from the component.
Physical Resource	Indicates if this physical resource is enabled. This is a calculated field and indicates whether all physical resource components in this physical resource are enabled. Changing this value updates the enabled flag of all physical resource components in this physical resource.
Logical Resource	Indicates if this logical resource is enabled. This is a calculated field and indicates whether all physical resources in this logical resource are enabled. Changing this value updates the enabled flag of all physical resources in this logical resource.
Physical Connection	Allows or prevents monitoring from using the connection.

Using the ICE Cluster Configuration tool to enable or disable items in the cluster (as described in this section) is a different and distinct activity from using the ICE Failover Manager to switch from a healthy active service to a

healthy but inactive service in a dual-sided system. A disabled item is not considered for use until the item is re-enabled. An inactive item may still be used if it supports the connection with the lowest cost.



**Important:** A disabled item is not be considered for use until the item is re-enabled. An inactive item may still be used if it supports the connection with the lowest cost.

---

## Database Backup and Recovery

The Data Import Server component has a configuration attribute to stop it processing microflows at a specified time of the day. This allows the Data Import Server component service to be left running even though microflows are not being processed. The advantage of this approach is that health monitoring applications does not raise alerts, such as SNMP traps, because the service is up and running.

Disabling the Data Import Server can be used to stop importing when SQL Server backups are taken. Do not allow backups at the same time as data is being imported because the database does not have a consistent state. Database backups are typically automated and run at a predefined time of the day.

The Data Import Server is enabled through the **EnabledTime** attribute in the Data Import Server service configuration file (`DataPipelineService.exe.config`). In the example below, the Data Import Server processes microflows from 3:00 through to 2:00 (24 hour clock). This effectively disables the Data Import Server for an hour at 2 AM. Note that an import cycle could start just before 2:00 and so may still be running after 2:00.

```
<add key="EnabledTime" value="03:00-02:00" />
```

# 8 Troubleshooting

- ▶ [DBCheck](#)
- ▶ [Troubleshooting ISE Integration with Unified CCMP](#)
- ▶ [Unified System CLI](#)
- ▶ [General Troubleshooting](#)

This section provides information on commonly observed issues and the steps to be performed to identify and resolve Unified CCMP related issues. It also includes information on support tools provided with Unified CCMP.

## DBCheck

---

The DBCheck utility automates the execution of health check queries and repairs for the Unified CCMP database. DBCheck provides an automated summary of potential data integrity issues that may affect system stability.

The Unified CCMP database holds the core resources and state machine states that drive the closed loop provisioning operations of the Unified CCMP product. The DBCheck tool is a Support utility that allows the health of the Unified CCMP database catalog to be checked and repaired. Before attempting to use DBCheck, consider the following:

- ▶ To run DBCheck, you need SQL admin permissions on the Portal database catalog.
- ▶ Ensure that you have a current back up of the Portal database before executing any repair operations with DBCheck.
- ▶ The DBCheck tool must be used with caution. Although DBCheck is designed for detecting and repairing potential data integrity issues, do not run this tool repeatedly, since the repair process impacts database performance and may appear to make minor problems worse. If you have frequent issues with data integrity, contact Cisco support for help with addressing the underlying issues.

DBCheck is a console tool that is installed with the Database component of Unified CCMP. It uses a set of rules located in XML files to perform a range of check operations on the database, if errors are found the user can choose to repair them.

During the check process if errors are found then the tool can save the error records plus the relevant product logs so that detailed off-line analysis may be performed.

Rules files can be updated independently of the DBCheck tool itself. Only Unified CCMP supplied rules files can be used with the DBCheck tool. Rules files are signed, so if a rules file is edited DBCheck no longer accepts the file.

## Architectural Background

The Unified CCMP database is a Microsoft SQL Server database that holds the configuration, security, and provisioning and audit data for the product. The product may be operated in a high availability mode using a pair of Side A and Side B database servers synchronized with standard SQL Server transactional replication.

The Unified CCMP database catalog is written to by the following services:

- ▶ **Web/Application Server:** User requests are received via the product web pages and persisted into the catalog. The usual operation here is users peruse their data and make the occasional provisioning request. Some sites use bulk provisioning to make large number of provisioning requests. These are all validated and queued into the Unified CCMP database catalog.

- ▶ **Provisioning Server:** This service reads the provisioning requests and uses the appropriate workflows to apply them to the related Unified CCE(s) and Unified CM(s) using the Cisco ConAPI and AXL APIs. This is a regulated activity that protects the back-end equipment when very large bursts of activities occur. The results of the provisioning operations are written back to the Unified CCMP database catalog as either successful (items are ready/deleted) or failed (error state).
- ▶ **Data Import Server:** This service operates in the reverse direction of the Provisioning Server and reads the configuration data from the Unified CCE(s) and Unified CM(s). It applies read data to the data model held in the Unified CCMP database. By default, this operation occurs every 15 minutes.
- ▶ **Transactional Replication:** Write operations committed into the partner Unified CCMP database catalog are replicated across the network and written to the local database catalog. For information on this standard technology please see <http://technet.microsoft.com/en-us/sqlserver/cc511480.aspx>

## Installation

DBCheck is installed with the Unified CCMP component. The DBCheck tool is located in `C:\Program Files\Management Portal\Database\DbCheck` if the default installation options are selected.

## Configuration

The `DbCheck.exe.config` file contains the configuration information which may need editing to match a specific installation.

Key	Description	Default
ProvLogLocation	The directory path to the Provisioning Server logs that are collected as part of the Save command or when run in batch mode.	C:\Program Files\Management Portal\Provisioning Server\LOGS
ImportLogLocation	The directory path to the Data Import Server logs that are collected as part of the Save command or when run in batch mode.	C:\Program Files\Management Portal\Data Import Server\LOGS
RuleLocation	The directory path to the location of the Rules files.	.\Rules\
OutputLocation	The directory path to the location where the summary and logs files are saved as part of the Save command or summary rules.	.\Output\

Key	Description	Default
PrimaryConnectionString	The connection string to the Unified CCMP SQL Server database which is the primary database in case of a dual sided Unified CCMP setup.	Integrated Security=SSPI; Persist Security Info=False; Initial Catalog=Portal; Data Source=(local)
SecondaryConnectionString	The connection string to the secondary Unified CCMP SQL Server database in case of a dual sided setup.	
SqlCmdTimeOut	The command timeout in seconds used when reading and writing to the SQL Server Portal database.	600
ErrorTextColor	The console color used in interactive mode to highlight the rules that have errors after a Check command is executed.	Red
InfoTextColor	The console color used in interactive mode to show the error row's details when using the Results <rule id> command.	Yellow
MonitoredServiceNames	The service name fragments that a Repair operation shuts down before beginning the repair operation. <b>Note: this setting should not be changed.</b>	" IMPORTER; _PROVISIONING

Ensure the configuration matches the system configuration before executing the DBCheck tool.

## Running DBCheck

DBCheck can be executed from the command line by running the DBCheck.exe file from the installation location (typically C:\Program Files\Management Portal\Database\DbCheck).



**Important:** In a dual sided Unified CCMP Database setup, DBCheck must be executed against the database server that acts as the Primary (Publisher) Unified CCMP Database. The tool does the relevant checks using the Primary Connection to the Unified CCMP database. The tool exits immediately if it being run against the Secondary Unified CCMP database.

Once initiated the following commands may be executed to monitor system data integrity and repair data in the event of a reported issue.

Command	Description	Example
help	Displays a brief description of all the interactive commands.	help
list	Displays the titles of all the rules that have been read from the Rules directory.	list

Command	Description	Example
list <rule id>	Displays detailed information for the specified rules.	list R01 R02 R05
check	Runs the check functionality of all the rules and displays the summary details to the screen. <b>Note:</b> The results are not logged to the output directory. Use the save command immediately after the check command to save the results to the output directory.	check
check <rule ids>	Runs the check functionality of just the specified rule(s) and displays the summary details to the screen. <b>Note:</b> The results are not logged to the output directory. Use the save command immediately after the check <rule ids> command to save the results to the output directory.	check R01 R02 R05
repair	Runs the check functionality of all the rules and, if there is an error, runs the corresponding repair actions. Note the results are only shown to the screen and are not logged to the output directory. If required, the "save" command should be used after the repair operation to write the results to the output directory. <b>Note:</b> The results are not logged to the output directory. Use the save command immediately after the repair command to save the results to the output directory. <b>Note:</b> Before executing a repair operation, DBCheck stops the Data Import and Provisioning services. After the repair, DBCheck restarts the services. It is important to check that the services have restarted correctly.	repair
repair <rule ids>	Runs the check functionality for the specified rule(s) and, if there is an error, runs the corresponding repair actions. Note the results are only shown to the screen and are not logged to the output directory. If required, the "save" command should be used after the repair operation to write the results to the output directory. <b>Note:</b> Before executing a repair operation, DBCheck stops the Data Import and Provisioning services. After the repair, DBCheck restarts the services. It is important to check that the services have restarted correctly.	repair R01 R02 R05
results	Shows the summary details of the last run check that was run.	results
results <rule ids>	Shows the detailed rows of the specified rules.	results R01 R02 R05
save	Saves the results of last check or repair operation to the output directory. If there were no errors detected then a simple summary is saved, otherwise the detailed error rows plus the Data Importer and Provisioning Server logs are saved.	save

Command	Description	Example
clean	Deletes all the saved sessions from the output directory. The user is first prompted to confirm before the deletion takes place.	clean
cls	Clears the screen contents	cls
exit	Exits interactive mode and restarts the Data Import and Provisioning Service.	exit

## Logging and Error Reporting

By default, DBCheck writes all of its console output to a text file in the installation directory called DbCheck.log. This log file can be used to troubleshoot potential issues for example, database connectivity errors, when the tool is used.

If a save command or a batch operation is performed then the tool executes the check queries, records the results, copies the essential log files for the last 24 hours and generates a high level summary of results. A new folder is created in the Output folder with a name derived from the date-time in the following format:

```
yyyy_MM_dd_hh_mm_ss_<F Lag>
```

where F Lag = E for errors found or S for success (no errors)

This folder contains the following items:

- ▶ Dbcheck Check Summary.html.
- ▶ Dump files containing query results for any check queries that returned results.
- ▶ ProvisioningServerLogs folder containing log files for the Provisioning Server for the last 24 hours.
- ▶ IMPORTERLogs folder containing log files for the Data Import Server for the last 24 hours.

## Reviewing Logs

When check rules return errors then the saved logs should be analyzed before a repair is performed. Some rules such as “In Error Items” return items that have been in the Error status for longer than 24 hours.

It may be perfectly valid that items are in error state, for example the creation of an agent may have failed because Unified CM has reached a license limit. In this scenario, running a repair would remove the agent in error status from the Unified CCMP database and they would not be provisioned on the Unified CM.

The correct process for this scenario would be to identify the licensing exception from the logs, add additional licenses to Unified CM and then re-save the agent through the Unified CCMP Resource Manager.

## Troubleshooting DBCheck

If a DBCheck repair returns an error, review the execution log. If a database timeout occurred, then change the timeout configuration, reload the tool and execute the command again.

# Troubleshooting ISE Integration with Unified CCMP

## Error Reporting

If there are problems with the ISE integration with Unified CCMP, ISE may report an error. Some error scenarios may also result in an entry in the log file on the Unified CCMP Application Server that was specified as the Authorization Server.

## Error when starting ISE

### Problem

ISE takes a long time to open, then reports the following errors:

- ▶ Web server access forbidden.
- ▶ Cannot connect to distributor. Script Editor now exits.

### Sample Log File Entry

None.

### Causes and Solutions

Cause	Solution
The AW Distributor service is not running	Start the Distributor service on the AW.
The AW Distributor service is running but ISE cannot connect to it.	Ensure that the firewall on the server running the Unified CCE AW has been configured to allow inbound traffic from ISE on the appropriate port. For more information, consult the relevant Unified CCE documentation.

## Failed to connect to Authorization Server

### Problem

When logging into ISE, the following error is reported:

- ▶ Failed to connect to the Authorization Server.

## Sample Log File Entry 1

```
2013-01-14 10:58:37,421 ERROR [2736]
ErrorHandling.ErrorHandlerBehaviorAttribute WS Exception: Unauthorized (Unknown
Username or Incorrect Password) [Authentication] [401] [Sender/Unauthorized]
```

## Sample Log File Entry 2

```
2013-01-14 10:52:12,876 ERROR [2448]
ErrorHandling.ErrorHandlerBehaviorAttribute WS Exception: Unauthorized
(Service [Search Service] is not ready: Indexing Is Not Complete)
[Authentication] [503] [Sender/Unauthorized]
```

## Sample Log File Entry 3

```
2013-01-14 11:29:13,580 ERROR [644 ]
ErrorHandling.ErrorHandlerBehaviorAttribute WS Exception:
System.ApplicationException

Message: No machine instance found matching name hcs01 and key1

Source: Exony.Reporting.Application.AnalyticData

at Exony.Reporting.Application.DataCommand.Execute() in
t:\Dev\Source\Reporting\9_3_M\App\Exony.Reporting.Application\DataCommand.cs:li
ne 726

at
Exony.Reporting.Application.AnalyticData.AnalyticDataFacade.EquipmentClusters(S
earchEquipmentClustersParameters searchEquipmentClustersParameters)

at SyncInvokeEquipmentClusters(Object , Object[] , Object[] )

at System.ServiceModel.Dispatcher.SyncMethodInvoker.Invoke(Object instance,
Object[] inputs, Object[]& outputs)

at
System.ServiceModel.Dispatcher.DispatchOperationRuntime.InvokeBegin(MessageRpc&
rpc)



at
System.ServiceModel.Dispatcher.ImmutableDispatchRuntime.ProcessMessage5(Message
Rpc& rpc)

at
System.ServiceModel.Dispatcher.ImmutableDispatchRuntime.ProcessMessage31(Messag
eRpc& rpc)

at System.ServiceModel.Dispatcher.MessageRpc.Process(Boolean
isOperationContextSet)
```

## Causes and Solutions

Cause	Solution
With no corresponding Unified CCMP Application Server log file entry	
The AW cannot connect to the Unified CCMP Authorization Server	Ensure that the specified Authorization Server port on the Unified CCMP Authorization Server has been configured in the firewall to allow inbound HTTPS traffic.
<b>With an entry in the Unified CCMP Application Server log file similar to sample log file entry 1</b>	
There is no corresponding linked Unified CCMP user.	Create a Unified CCMP user with a login name in the correct format, for example, iseuser1@testdom.local.
The corresponding linked Unified CCMP user has not been enabled.	In the Unified CCMP Web Application, select <b>Tools &gt; Users</b> , select the Unified CCMP user and tick the <b>Account Enabled</b> option.
The corresponding linked Unified CCMP user account has been locked due to multiple unsuccessful login attempts.	In the Unified CCMP Web Application, select <b>Security Manager &gt; Users</b> , navigate to the Unified CCMP user and check that <b>User Exceeded Maximum Login Attempts</b> is not selected. If it is, clear it to reset the user account.
The corresponding linked Unified CCMP user does not have the same password as the Windows active directory user that is being used to log into ISE (only for installations that do not use single sign on).	In the Unified CCMP Web Application, modify the password for the corresponding linked Unified CCMP user to match the password of the domain user.  If the linked Unified CCMP user was created by importing from Unified CCE, and the linked Unified CCMP user has never logged in to Unified CCMP, then the Unified CCMP password may never have been set. In this case, log into Unified CCMP using the linked Unified CCMP user and set the password when prompted.
<b>With an entry in the Unified CCMP Application Server log file similar to sample log file entry 2</b>	
The Unified CCMP Application has not yet had time to build the internal cache.	Wait until for a message similar to <pre>2013-01-14 10:53:44,579 INFO [read] Diagnostics.EventDurationLogger          Cache Load [Completed: 14/01/2013 10:53:44]</pre> in the Unified CCMP application log before retrying.
<b>With an entry in the Unified CCMP Application Server log file similar to sample log file entry 3</b>	
The corresponding Unified CCMP user does not have permission to see the ICM.	In the Unified CCMP Web Application, select <b>Security Manager &gt; Users</b> , and ensure that this Unified CCMP user has a folder role that includes the Browse Dimensions task on the ICM folder, or is in a group that has such a folder role.

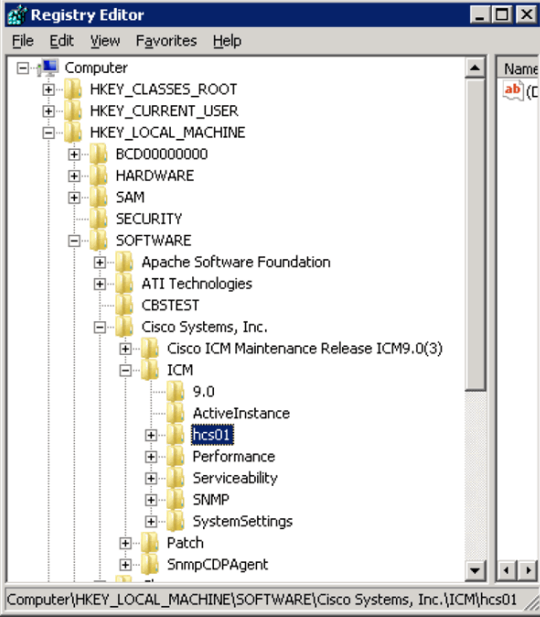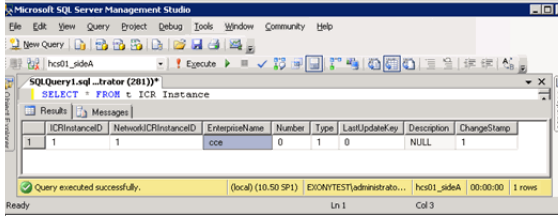Cause	Solution
<p>There is a mismatch between some or all of:</p> <ul style="list-style-type: none"> <li>▶ The ICM name in the registry on the AW</li> <li>▶ The ICM name in the CCE AW</li> <li>▶ The ICM name in Unified CCMP</li> <li>▶ The ICM name supplied to ISE</li> </ul>	<p>Check the various ICM names as below (called ICR in some places), and ensure that the last three match the ICM name in the registry on the AW.</p> <p>The ICM name in the registry on the AW:</p> 
	<p>The ICM Instance Name in the AW:</p> 

## Unable to see required resources

### Problem

ISE starts but the logged in user cannot see the required scripts or resources.

### Sample Log File Entry

None.

## Causes and Solutions

Cause	Solution
The Unified CCMP user does not have a folder role that includes Browse Dimensions on the folder containing the required scripts or resources.	In the Unified CCMP web application, select <b>Tools &gt; Security</b> . On the Users tab, select the check box beside the user, then click <b>Change Permissions</b> . Assign a suitable folder role that includes Browse Dimensions to the folders containing the scripts and resources you want this linked user to be able to access.

## Unified System CLI

Cisco Unified System CLI is a command line support tool for Cisco support engineers. It provides a common interface to control logging and diagnostics. Cisco Unified System CLI can be run from Unified CCMP to configure and collect diagnostic information from Unified CCMP.

The Unified CCMP implementation of Unified System CLI supports a subset of the Unified System CLI command set. For more information about Unified System CLI, see [http://docwiki.cisco.com/wiki/Unified\\_System\\_CLI\\_Quick-Reference\\_Guide](http://docwiki.cisco.com/wiki/Unified_System_CLI_Quick-Reference_Guide) (link checked January 2014).

## Installing Unified System CLI

Unified System CLI is installed with the Diagnostic Framework (see *Installation and Configuration Guide for Cisco Unified Contact Center Management Portal* for more information).

## Starting Unified System CLI

### To start Unified System CLI:

1. In a command window launch Unified System CLI (installed as part of Unified CCMP). A command window opens.
2. At the **Enter username:** prompt, enter `wsmadmin`.
3. At the **Enter password:** prompt, enter the password that was specified for the `wsmadmin` user when the Diagnostic Framework was installed.
4. At the **Enter Instance[(Optional):** prompt, press **Enter**. Do not change the instance you specified on the command line using the `devicetype` keyword as the Unified CCMP implementation of Unified System CLI does not support this.

See section “[Getting Help](#)” on page 66 to see more complete help for a command, including a description of the command and the options available, enter: `help <command>`

where `<command>` is one of the commands in the table below. Unified System CLI Command Reference for a list of commands available.

- To exit Unified System CLI, type exit.

## Getting Help

### To get help about Unified System CLI syntax:

- ▶ In the Unified System CLI command window, enter: `help`

### To see the list of available commands:

- ▶ In the Unified System CLI command window, enter: `?`

### To see the options for a command:

- ▶ In the Unified System CLI command window, enter: `<command>?`

You can add one or more optional parameters to `<command> ?` to show the next level of options available. For example:

- `show ?` lists the various items you can view using the show command.
- `show log ?` lists the options for controlling the log information.
- `show log redirect ?` lists the options for redirecting the location that the log output is sent to.
- `show log redirect file ?` lists the valid syntax options for specifying the filename if you have chosen to send the log output to a file.

To see more complete help for a command, including a description of the command and the options available, enter “`help <command>`”, where `<command>` is one of the commands in the table below.

Command	Description
capture start	Not supported
capture stats	Not supported
capture stop	Not supported
debug level	<p>Sets the logging level for the Unified CCMP components installed on the system.</p> <p>Valid values are:</p> <ul style="list-style-type: none"> <li>▶ 0 Error</li> <li>▶ 1 Warn</li> <li>▶ 2 Info</li> <li>▶ 3 Trace</li> <li>▶ 4 Debug</li> <li>▶ 5 Not supported</li> <li>▶ 99 Not supported</li> </ul>

Command	Description
show all	Returns a combined set of results from the various show commands in single zip file (by default, covering the last 24 hours).  Filter results using <b>component</b> , <b>realtime</b> , and <b>absdatetime</b> . Specify the output location using <b>redirect file</b> to send the output to a text file, or <b>redirect dir</b> to send the output to a zip file in a folder.
show component	Returns a list of components installed on the system. You can specify a component on the command line to return only the results for that component. If the component name includes spaces, enclose the name in double quotes (""). For example:  show component "CCMP:Application Server"
show config	Extracts the registry content for Unified CCMP components to the specified file.  Note. This command has limited use for Unified CCMP since it is not possible to apply the extracted registry configuration to other machines.
show debug	Prints the current trace level for the installed components. If passed a component name then only the trace level for that component is returned.
show devices	Shows the name of the installed product.
show license	Not supported
show log	Obtains log files for the specified date/time range and components, and store them at the specified location.  Filter results using <b>component</b> , <b>realtime</b> , and <b>absdatetime</b> . Specify the output location using <b>redirect file</b> to send the output to a text file, or <b>redirect dir</b> to send the output to a zip file in a folder.
show perf	Not supported
show platform	Returns system related information about the machine on which Unified System CLI is running.
show processes	Not supported
show sessions	Not supported
show tech-support	Equivalent to <b>show all</b>
show trace	Obtains log files for the specified date/time range and components, and store them at the specified location.  Filter results using <b>component</b> , <b>realtime</b> , and <b>absdatetime</b> . Specify the output location using <b>redirect file</b> to send the output to a text file, or <b>redirect dir</b> to send the output to a zip file in a folder.

Command	Description
show version	Shows the installed version of software. Note that the build number is not supported.
system	Enter system mode. The prompt changes from <b>admin:</b> to <b>admin(system)</b> . System mode gives you access to additional options for some commands.  To exit system mode, type <b>exit</b> .

## General Troubleshooting

### Delays in Importing Agent Changes

If you make a change to an Agent in Unified CCE, most changes are imported into Unified CCMP promptly. But if you change the domain account for a Supervisor Agent in Unified CCE, then there may be a delay of up to 24 hours before the change is reflected in Unified CCMP. This is the expected behavior.

### Web Portal Timing Dialogs

If you run the Unified CCMP web application from a browser session on the web/app server itself, you can see some diagnostic timing information about the web page display times in the top right of the browser window. You can select:

- ▶ An individual time to see more details about the actions taken.
- ▶ C at the bottom right of the list to clear the current list.
- ▶ M at the bottom left of the list to minimize the list.

If you run the Unified CCMP web application from anywhere else, the diagnostic timing information is not displayed.

### Installing the UCCE Config Web Service Certificate

By default, Unified CCMP ignores untrusted certificate warnings about the Unified CCE ConfigWebService certificate (the **Ignore Certificate Warnings** property for the Unified CCE config web service is **True** by default). But if the **Ignore Certificate Warnings** property for the Unified CCE config web service has been set to False in the ICE tool, then you need to install the Unified CCE ConfigWebService security certificate before Unified CCMP works properly.

If you do not do this, Unified CCMP does not operate correctly and the error "`Could not establish trust relationship for the SSL/TLS secure channel with authority`" is displayed in the system log. The ICE tool also reports this error if you try to test the connection to the Unified CCE instance.

To fix this error you need to:

- ▶ Install the certificate in the user certificate store of each Unified CCMP database server

- ▶ Install the certificate in the computer certificate store of each Unified CCMP database server
- ▶ Install the Unified CCE ConfigWebService security certificate in the user certificate store of each user who wants to run ICE and test connections, on each machine they want to be able to run ICE from. (optional)

## Renewing SSL Certificate

If the security certificate for CCMP has expired or been replaced without running the SSL configuration steps, perform the following:

1. Select the Run as Administrator option when opening a browser.
2. Access `http://webserverFQDN/sslconfig`.
3. Provide the necessary credentials to access the Web server.
4. Click **Choose File** and select the valid certificate.
5. Provide the certificate password.
6. Click the **Upload** button.
7. Verify that log on the browser has no error.
8. Open Command Prompt on the Web server.
9. Run the `IISRESET` command.

## Installing the Security Certificate in the User Certificate Store

To install the Unified CCE ConfigWebService security certificate in the user certificate store, you need to locate the certificate and import it into your certificate store.

On each Unified CCMP database server:

1. On the primary database server, launch Integrated Configuration Environment (installed as part of Unified CCMP). The Database Connection dialog box is displayed.
2. Enter the credentials for your database. If you see a dialog box showing the errors and warnings, click **OK**.
3. In the ICE Cluster Configuration tool, select the **Resources** tab and navigate to the Unified CCE instance. Select the **Components** tab. Select the Inbound connections and expand by clicking on the "...". Select the last node in the **Provisioning Server** branch. When using the URL replace the `%SINK_SERVER%` with the server name or address.
4. In Internet Explorer, navigate to the URL you found above. If the certificate has not been installed on this server, you can see a certificate error.
5. Click **Certificate Error** in the top right hand corner of the window.
6. In the Untrusted Certificate dialog box, select **View Certificates**.
7. In the Certificate dialog, note the "Issued to:" name (you need this name to locate the certificate again below) and click **Install Certificate**.
8. In the Certificate Import Wizard, click **Next**.

9. In the Certificate Store dialog box, select **Place all certificates in the following store**, and click **Browse**. Choose **Trusted Root Certificate Authorities** and click **OK** to return to the Certificate Store dialog box.
10. In the Certificate Store dialog box, click **Next**. Review the settings and click **Finish** to complete the certificate import wizard.
11. If you see a security warning, click **Yes**, to import the certificate. When the import completes, click **OK**.

## Installing the Security Certificate in the Computer Certificate Store

To install the Unified CCE ConfigWebService Security Certificate in the computer's certificate store, you need to export the security certificate from the user certificate store where you saved it above and import it into the computer certificate store.

### To export the certificate on each Unified CCMP database server:

1. In the Run command dialog box, enter mmc to open Microsoft Management Console (MMC).
2. Click **File > Add/Remove Snap-in**.
3. Click **Certificates**.
4. Click **Add**.
5. In the Certificates Snap-in dialog box, select **My user account** and click **Finish** to add the Certificates snap-in to MMC. Click **OK**.
6. In MMC, expand the Certificates – Current User node, Trusted Root Certificate Authorities node, then click **Certificates** to see the available certificates.
7. Locate the certificate you imported in the section above, right-click on it, and select **All Tasks > Export**.
8. In the Certificate Export Wizard, select **Next**.
9. In the Export File Format dialog box, accept the default format and click **Next**.
10. In the File to Export dialog box, specify a file name and click **Next**.
11. Review the settings and click **Finish** to complete the certificate export wizard.

### To import the certificate on each Unified CCMP database server:

1. In the Run command dialog box, enter mmc to open MMC.
2. Click **File > Add/Remove Snap-in**.
3. Click **Certificates**.
4. Click **Add**.
5. In the Certificates Snap-in dialog box, select Computer account and click **Next**.
6. In the Select Computer dialog box, select **Local computer**.
7. Click **Finish** to add the Certificates snap-in to MMC.
8. Click **OK**.
9. In MMC, expand the Certificates (Local Computer) node Trusted Root Certificate Authorities node, then right-click **Certificates** and select **All Tasks > Import**.

10. In the Certificate Import Wizard, click **Next**.
11. In the File to Import dialog box, browse to the certificate file you exported above, click **Open**.
12. Click **Next**.
13. In the Certificate Store dialog box, select the **Place all certificates in the following store** option.
14. Click **Browse** and locate the Trusted Root Certificate Authorities store and click **OK** to return to the Certificate Store dialog box.
15. In the Certificate Store dialog box, click **Next**.
16. Review the settings and click **Finish** to complete the certificate import wizard.

## Installing the Security Certificate for ICE Users

### To install the certificate in a user's certificate store:

- ▶ Each ICE user must repeat the steps in [“Installing the Security Certificate in the User Certificate Store”](#) on [page 69](#) on the servers on which they want to be able to run ICE.




**Important:** This step is only required if an ICE user wants to be able to test Unified CCE connections using the ICE tool.

---

## Unable to Associate Domain User Account with a Supervisor

When you create or edit a supervisor agent in the web application, you can optionally select a domain user account to associate with the supervisor agent. The available domain user accounts are identified from the Active Directory Organizational Unit that was selected when the equipment was configured in ICE.

If you do not see the domain account you want to use in the list of available accounts, then ensure that, on the Domain Controller, the User logon name has been set for that domain user (see the example here).

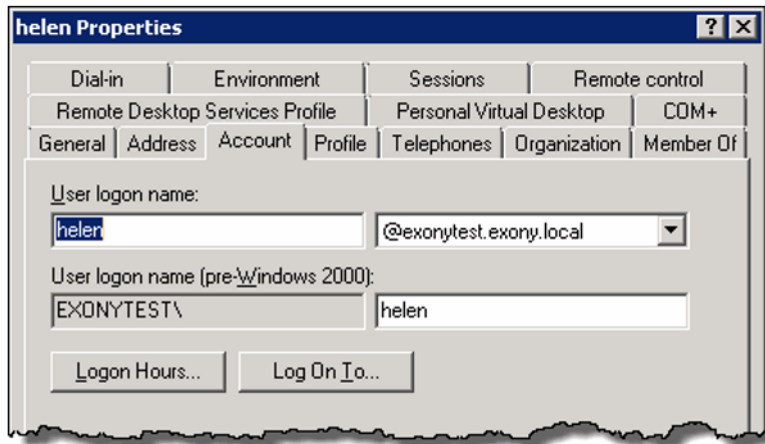

*Domain account properties*