

Cisco Integrated V.92 Modem WAN Interface Cards

One- and two-port analog modem WAN interface cards (WICs; part numbers WIC-1AM-V2 and WIC-2AM-V2) are now available for the award-winning Cisco® 1800, 2600XM, 2691, 2800, 3700, and 3800 Series modular router platforms. The new version of these cards expands the already extensive range of WICs currently available for these routers (Figure 1). The interface cards provide cost-effective basic telephone service connectivity to allow remote router management, asynchronous dial-on-demand routing (DDR) and dial backup, dial- and fax-out modem access, and low-density remote-access-server (RAS) services. Combined with the differentiated services delivered through Cisco IOS® Software, the Cisco 1800, 2600XM, 2691, 2800, 3700, and 3800 Series routers offer customers best-of-breed scalability, flexibility, and investment protection—all in cost-effective, multifunctional platforms.

Figure 1. One- and Two-Port Analog Modem WICs for Cisco 1800, 2600XM, 2691, 2800, 3700, and 3800 Series Platforms



Both cards feature dual RJ-11 connectors, which are used for basic telephone service connection. The 2-port card uses one port for connection to a standard telephone line and the other port for connection to a basic analog telephone for use when the modem is idle.

KEY BENEFITS

Combined with the Cisco 1800, 2600XM, 2691, 2800, 3700, and 3800, the cards provide:

- An integrated solution for ease of deployment and management
- Enhanced remote management capabilities
- A cost-effective alternative to leased lines or ISDN
- On-demand dial backup for critical WAN links

KEY FEATURES


Equipped with the new integrated analog modem WICs, the Cisco 1800, 2600XM, 2691, 2800, 3700, and 3800 offer the most flexible, scalable, and manageable telephone dial access solution available on the market today.

- Internal analog modem dialup capability—Internal modems allow simple setup of a remote router. There is no separate external power and no cables, and everything is in one chassis.
- Support for speeds up to 56K (V.92 specification)—When dialing out to a digital endpoint, this feature allows users to achieve maximum data transfer rates, equating to faster file transfers, speedier Web access, and faster e-mail downloads.
- Cisco IOS Dial Access Software—Cisco IOS Software provides a broad range of features for remote router management and dial backup, including:
 - Reverse Telnet support for LAN-based dial- and fax-out
 - Point-to-Point Protocol (PPP), Multilink PPP (MLPPP), and Serial Line Internet Protocol (SLIP)
 - TACACS+, RADIUS, and PPP password security
 - Autosensing Internetwork Packet Exchange (IPX), Transmission Control Protocol/IP (TCP/IP), AppleTalk Remote Access (ARA), and AppleTalk Control Protocol (ATCP)

APPLICATIONS

Remote Router Management


Figure 2. Remote Router Management

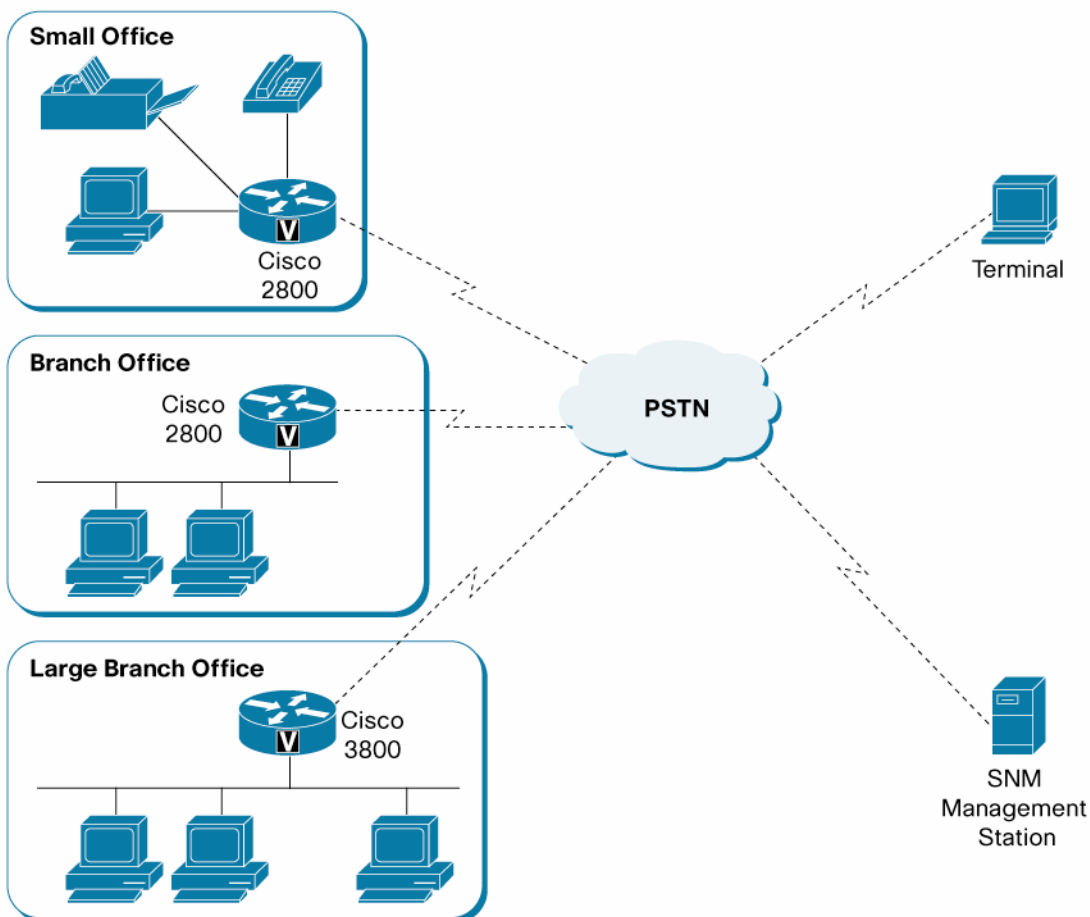

The cards are ideal for dialup access for remote router configuration and management (Figure 2). Similar to connecting a modem to the router auxiliary port, the modem WICs allow out-of-band management through an internal device. Both WICs can receive calls at speeds as fast as 33.6 kbps, depending upon line conditions.

Dial Backup and Asynchronous DDR

Figure 3. Dial Backup and Asynchronous

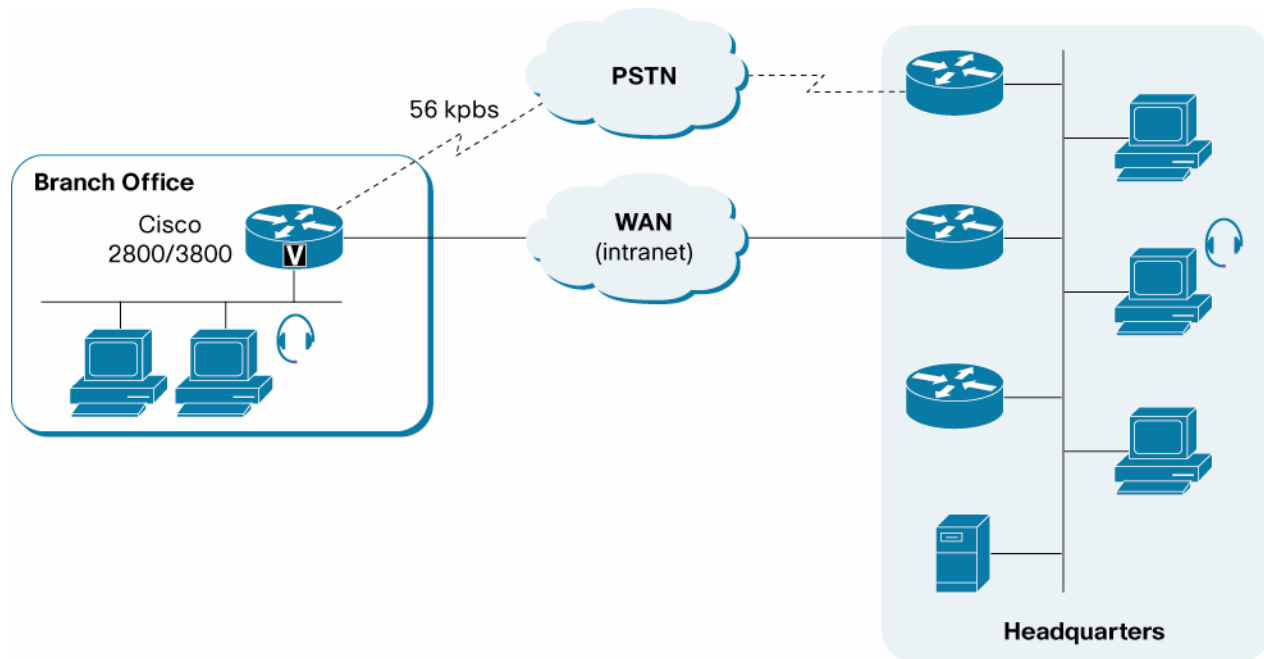


Constant WAN access is often a requirement for branch offices connecting to a corporate site or the Internet. Although DSL, Frame Relay, ISDN, and leased line are common choices for a primary WAN link, an alternate data path is sometimes needed. The WICs combined with the Cisco 1800, 2600XM, 2691, 2800, 3700, and 3800 offer the ability to automatically dial a backup connection when the primary WAN link is unavailable. In addition, the modem WICs can also be used to provide supplemental bandwidth when the primary WAN link is overused. Multiple modem calls can be aggregated using MLPPP when one 56K connection is insufficient.

For some customers, dialup telephone service connectivity may be the only available choice for WAN access to the Internet or to a corporate home office. For those situations and for those installations that require only a dialup connection, the Cisco routers with the integrated modem WIC offer WAN connectivity through asynchronous DDR. As in the case of dial backup, MLPPP can be used to aggregate multiple dialup connections into one data stream, providing higher throughput.

Dial- and Fax-Out Modem Access

Figure 4. Dial- and Fax-Out Modem Access

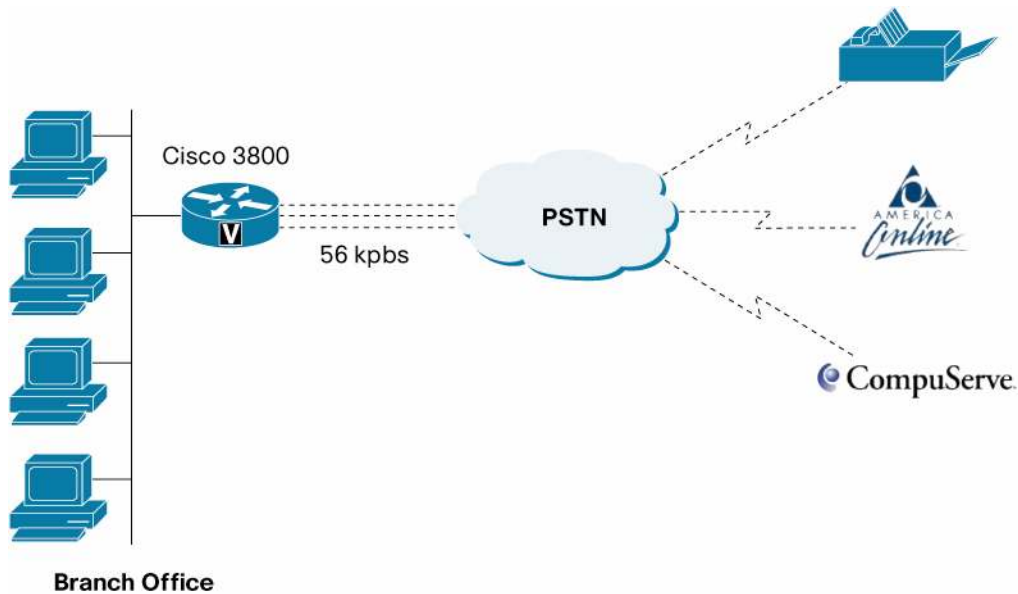


The modem WICs comply with RFC 2217 and provide dial- and fax-out modem functions to LAN-connected devices (Figure 4). Using the recommended “Advanced COM Port Redirection” software (available from <http://www.tacticalsoftware.com>), customers can take advantage of the modem WICs as if they were connected directly to their PC communications port, allowing convenient access to services such as America Online, CompuServe, and remote fax machines without requiring dedicated phone lines and modems at each PC.

Note: The WICs do not have the ability to receive faxes; only fax-out is supported.

Low-Density Analog RAS Access

Figure 5. Low-Density Analog RAS Access

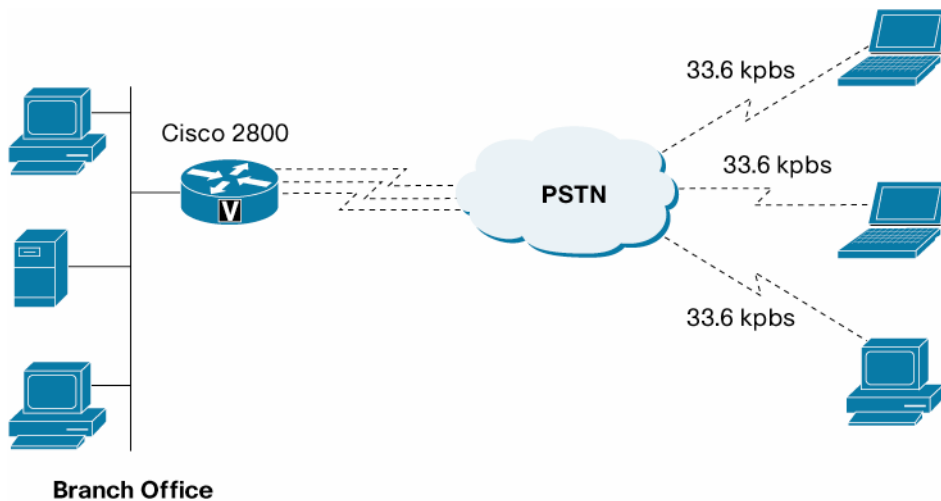

Dial-in users can take advantage of the ability of the router to function as a small RAS, thus allowing dialup access to the LAN (Figure 5). Typically, a 2-port modem WIC would be used here for maximum port density, but the 1-port WIC is also acceptable. Scalability to multiple modem WICs per chassis (up to 12 in a Cisco 3845—refer to Table 3) is also possible. Dial-in speeds of up to 33.6 kbps (V.34bis) are possible. MLPPP is available to bond two or more calls together, thereby allowing higher-speed RAS support.

FEATURE SUMMARY

A summary of the features and benefits of the integrated modem WICs is provided in Table 1.

Table 1. Integrated V.92 and V.44 Modem WICs Features and Benefits Summary

Feature	Benefit
Auxiliary port compatibility	<ul style="list-style-type: none"> Eases deployment and saves space because of its integrated solution Provides convenience by replicating all functions of an external modem connected to an auxiliary port
V.92 (up to 56K) and V.44 modem specification support when dialing out to a digital endpoint	Achieves maximum data transfer rates though V.92 or V.44, equating to faster file transfers, speedier Web access, and faster e-mail downloads
Fax-out capability at speeds up to 14.4 kbps	Allows customers to access fax machines and servers from their LAN-connected PCs
MLPPP	Increases connection speeds across modems in the same WIC and across other modem WICs in the same chassis
Full platform support	Modem WIC supported on Cisco 1800, 2600XM, 2691, 2800, 3700, and 3800 routers
Retrofits into existing chassis	Fits into a WIC slot on a Cisco 2600XM, 2691, or 3700 chassis or any compatible network module on a Cisco 2600XM, 2691, or 3700 router (refer to Table 3 for details)
Cisco IOS Software support	Does not require additional memory to support the modem WICs
Up to 24 modems per chassis	No restriction on number of modems available (other than slot availability; refer to Table 3 for details)
Major modem vendor compatibility	Works with AT&T, Hayes, Motorola, Microcom, Multitech, and USR modems (compatibility with other modem vendors is expected, but not confirmed)
Fax vendor compatibility	Works with Panasonic fax machines (compatibility with other fax vendors is expected, but not confirmed)
Current analog and digital modem network module compatibility	Integrates transparently with current analog (NM-8AM-V2 and NM-16AM-V2) and digital modems (NM-xDM)
Worldwide support for country-specific standards	Supports various regulatory requirements; for the latest per-country approval information for the modem WICs, contact your local Cisco Systems® representative
Leased-line mode	Does not support leased-line mode
Modem firmware upgrade capability	Support modem firmware upgrades

NETWORK MANAGEMENT SUPPORT

One- and two-port analog modem WICs work with the following configuration and network management methods:

- CiscoWorks
- Telnet and console port command-line interface (CLI) configuration

MEMORY AND SOFTWARE REQUIREMENTS

Table 2. Memory and Software Requirements

Minimum Cisco IOS Software Support	Cisco 1800 Series Integrated Services Routers	Cisco 2600XM Multiservice Router	Cisco 2691 Multiservice Platform	Cisco 2800 Series Integrated Services Routers	Cisco 3700 Series Multiservice Access Routers	Cisco 3800 Series Integrated Services Routers
WIC-1AM-V2, WIC-2AM-V2	12.4(3), 12.4(4)T	12.3.(16), 12.3(14)T, 12.4(3), 12.4(4)T	12.3(16), 12.3(14)T, 12.4(3), 12.4(4)T	12.4(3), 12.4(4)T	12.3(16), 12.3(14)T, 12.4(3), 12.4(4)T	12.4(3), 12.4(4)T

Note: No additional memory is required to support the modem WICs (refer to the Cisco IOS Software release notes for platform memory requirements per feature set).

MAXIMUM MODEM WAN INTERFACE CARDS PER CHASSIS

Table 3. Maximum Modem WICs per Chassis without Network Module

Platform	Maximum Modem WICs per Chassis
Cisco 1800	2
Cisco 2600XM	4
Cisco 2691	5
Cisco 2800	4 (Cisco 2801: only 3)
Cisco 3725	7
Cisco 3745	11
Cisco 3825	8
Cisco 3845	12

Note: Refer to the platform documents for more details about other hardware restrictions. The Cisco 2600XM, 2600, 2800, 3700, and 3800 also support higher-density modem solutions in a network module form factor. Visit the following URLs for additional information about the 1- and 2-port WICs and the digital modem:

- For the WICs (NM-8AM-V2 and NM-16AM-V2) (Cisco 2600XM, 2600, 2800, 3700, and 3800 Analog Modem Network Modules): http://www.cisco.com/warp/public/cc/pd/rt/2600/prodlit/brisc_ds.pdf
- For digital modem (NM-xDM) (Cisco 3700 and 3800 Series Digital Modem Network Modules): http://www.cisco.com/en/US/prod/collateral/routers/ps274/product_data_sheet09186a0080091b98.html

MODEM SPECIFICATIONS

Carrier Protocols

- ITU V.92
- ITU V.90
- K56Flex
- ITU V.23
- Bell 103
- ITU V.21
- ITU V.22
- Bell 212A
- ITU V.22bis
- ITU V.32
- ITU V.32bis
- V.34

Error-Correcting Link Access Protocols

V.42 Link Access Procedure for Modems (LAPM), MNP 2-4

Compression Protocols

V.44 and V.42bis (includes MNP-5)

Fax Protocols

- ITU-T V.27ter
- ITU-T V.29
- ITU-T V.17
- Point-of-sale (POS) configuration support
- FAX Class 2
- TIA/EIA-592 Class 2.0 and TIA/EIA-592 draft SP- 2388 Class 2 Group III fax transmission, at ITU-T V.33, V.17, V.29, V.27ter, and V.21 modulations

HARDWARE SPECIFICATIONS

Hardware specifications of the integrated modem WICs are described in Table 4.

Table 4. Specifications for the WICs

Specification	Data
Hardware and platform compatibility	Cisco 1800, 2600XM, 2691, 2800, 3700, and 3800 models
Dimensions (H x W x D)	75 x 3.08 x 4.38 in. (1.91 x 6.93 x 9.86 cm)
Weight	2.4 oz (68 gram)
Network module support	<ul style="list-style-type: none">• Cisco 2600XM: Through NM-2W• Cisco 2691: Through mixed modules (NM-2W, NM-1FE2W-V2, and NM-2FE2W-V2)• Cisco 3700: Through combo modules (NM-2W, NM-1FE2W-V2, and NM-2FE2W-V2)• Cisco 3800: Through combo modules (NM-2W, NM-1FE2W-V2, and NM-2FE2W-V2)
Throughput	Up to 56 kbps downstream and up to 33.6 kbps upstream, subject to line conditions
Ports	Two RJ-11 ports (second port on WIC [WIC-1AM] can be used to connect an analog telephone for use when the modem is idle)
Cabling	One or two RJ-11 connectors
LEDs (per modem)	SP (high-speed connectivity for V.92, V90, or K56Flex), CN (carrier detect), and OH (off-hook) status indicators
Network Equipment Building Standards (NEBS) compliance	Level 3, Types II and IV

Refer to the Cisco 1800, 2600, 2800, 3700, and 3800 data sheets for additional information about mechanical, environmental, and agency certifications. Also visit the following URLs:

- Cisco 1800: http://www.cisco.com/en/US/products/ps5853/products_data_sheets_list.html
- Cisco 2600: http://www.cisco.com/en/US/prod/collateral/routers/ps259/product_data_sheet0900aec800fa5be.html
- Cisco 2800: http://www.cisco.com/en/US/prod/collateral/routers/ps5854/ps5882/product_data_sheet0900aec8016fa68.html
- Cisco 3700: http://www.cisco.com/en/US/prod/collateral/routers/ps282/product_data_sheet09186a008009203f.html
- Cisco 3800: http://www.cisco.com/en/US/prod/collateral/routers/ps5855/product_data_sheet0900aec8016a8e8.html

COUNTRY AVAILABILITY

For the latest information regarding per-country approval for the WICs, contact your local Cisco representative.

ORDERING INFORMATION

Table 5. Part Numbers

Part Number	Description
WIC-1AM-V2	1-port analog modem WIC
WIC-1AM-V2=	1-port analog modem WIC
WIC-2AM-V2	2-port analog modem WIC
WIC-2AM-V2=	2-port analog modem WIC

ENVIRONMENTAL OPERATING RANGES

- Operating temperature: 32 to 104°F (0 to 40°C)
- Nonoperating temperature: -4 to 149°F (-20 to 65°C)
- Relative humidity: 10 to 85 percent noncondensing, operating; 5 to 95 percent noncondensing, nonoperating safety



CISCO 1800, 2600, 2800, 3700, AND 3800 POWER

- AC input voltage: 100 to 240 VAC
- DC voltages (Cisco 2600, 3600, and 3700)
- Frequency: 47 to 64 Hz



Corporate Headquarters
Cisco Systems, Inc.
170 West Tasman Drive
San Jose, CA 95134-1706
USA
www.cisco.com
Tel: 408 526-4000
800 553-NETS (6387)
Fax: 408 526-4100

European Headquarters
Cisco Systems International BV
Haarlerbergpark
Haarlerbergweg 13-19
1101 CH Amsterdam
The Netherlands
www-europe.cisco.com
Tel: 31 0 20 357 1000
Fax: 31 0 20 357 1100

Americas Headquarters
Cisco Systems, Inc.
170 West Tasman Drive
San Jose, CA 95134-1706
USA
www.cisco.com
Tel: 408 526-7660
Fax: 408 527-0883

Asia Pacific Headquarters
Cisco Systems, Inc.
168 Robinson Road
#28-01 Capital Tower
Singapore 068912
www.cisco.com
Tel: +65 6317 7777
Fax: +65 6317 7799

Cisco Systems has more than 200 offices in the following countries and regions. Addresses, phone numbers, and fax numbers are listed on the **Cisco.com Website at www.cisco.com/go/offices.**

Argentina • Australia • Austria • Belgium • Brazil • Bulgaria • Canada • Chile • China PRC • Colombia • Costa Rica • Croatia • Cyprus • Czech Republic
Denmark • Dubai, UAE • Finland • France • Germany • Greece • Hong Kong SAR • Hungary • India • Indonesia • Ireland • Israel • Italy
Japan • Korea • Luxembourg • Malaysia • Mexico • The Netherlands • New Zealand • Norway • Peru • Philippines • Poland • Portugal
Puerto Rico • Romania • Russia • Saudi Arabia • Scotland • Singapore • Slovakia • Slovenia • South Africa • Spain • Sweden
Switzerland • Taiwan • Thailand • Turkey • Ukraine • United Kingdom • United States • Venezuela • Vietnam • Zimbabwe

Copyright © 2006 Cisco Systems, Inc. All rights reserved. CCSP, CCVP, the Cisco Square Bridge logo, Follow Me Browsing, and StackWise are trademarks of Cisco Systems, Inc.; Changing the Way We Work, Live, Play, and Learn, and iQuick Study are service marks of Cisco Systems, Inc.; and Access Registrar, Aironet, BPX, Catalyst, CCDA, CCDP, CCIE, CCIP, CCNA, CCNP, Cisco, the Cisco Certified Internetwork Expert logo, Cisco IOS, Cisco Press, Cisco Systems, Cisco Systems Capital, the Cisco Systems logo, Cisco Unity, Enterprise/Solver, EtherChannel, EtherFast, EtherSwitch, Fast Step, FormShare, GigaDrive, GigaStack, HomeLink, Internet Quotient, IOS, IP/TV, iQ Expertise, the iQ logo, iQ Net Readiness Scorecard, LightStream, Linksys, MeetingPlace, MGX, the Networkers logo, Networking Academy, Network Registrar, Packet, PIX, Post-Routing, Pre-Routing, ProConnect, RateMUX, ScriptShare, ScriptShare, SlideCast, SMARTnet, The Fastest Way to Increase Your Internet Quotient, and TransPath are registered trademarks of Cisco Systems, Inc. and/or its affiliates in the United States and certain other countries.

All other trademarks mentioned in this document or Website are the property of their respective owners. The use of the word partner does not imply a partnership relationship between Cisco and any other company. (0601R)