

# Cisco D9859 Advanced Receiver Transcoder

Deliver MPEG-4 high-definition (HD) services to MPEG-2 cable TV (CATV) headends with the Cisco® D9859 Advanced Receiver Transcoder.

The Cisco D9859 platform (Figures 1 and 2) extends the distribution options for MPEG-4 Advanced Video Coding (AVC) HD from MPEG-4 only environments to existing MPEG-2 networks. Support for up to eight simultaneous high-definition or standard-definition (SD) channels of decryption and transcoding provides the advantage of density for locations requiring more than just a single channel. The Cisco D9859 can provide up to 8 down-converted MPEG-2 standard definition programs or MPEG-2 high-definition transcoded programs along with decrypted passthrough of the incoming programs. Video and two audio outputs are available for analog down-conversion for one of the decrypted incoming MPEG-4 high-definition programs. The base Cisco D9859 comes configured for 1 HD and 1 SD output with dynamic licensing options to upgrade the unit in the field locally or over the air using the Cisco PowerVu® Network Center uplink control system, supporting a pay-as-you-grow model.

**Figure 1.** Cisco D9859 Advanced Receiver Transcoder



## Digital Program Distribution

The Asynchronous Serial Interface (ASI) and MPEG over IP (MPEGoIP) transport outputs are individually configurable and provide the capability of carrying up to eight decrypted transcoded programs for digital tier distribution. This helps the compressed video programs to be efficiently distributed to subscribers equipped with digital set-top boxes. Digital audio passthrough is synchronized to the transcoded program output. Compliant program-specific information and service information (PSI/SI) regeneration provides integration into a digital tier distribution network for eight transcoded programs.

## Digital Program Mapping

Digital Program Mapping allows programmers to transparently substitute programs at the uplink. It maintains predictable and compliant transport output during service replacement, Network Information Table (NIT) retune, and channel changes, including force tunes. This feature remaps the packet identifier (PID) information from the primary service to an alternate service, allowing downstream devices to continue to operate without headend operator intervention. This helps ensure the availability of alternate programming in the digital tier.

## Digital Ad Insertion

Digital Program Insertion (DPI) information is available along with the video and audio PIDs for external ad insertion in compressed digital format on all transcoded programs. In addition, the decoded program DPI can be used to drive cue tones, open collector outputs, and a relay output.

---

## Features and Benefits

- Four L-band inputs
- DVB-S demodulation for QPSK
- DVB-S2 Demodulation for QPSK and 8PSK
- Cisco PowerVu conditional access with Data Encryption Standard (DES) or DVB descrambling
- Support for Basic Interoperable Scrambling System (BISS) conditional access
- Decryption and transcoding of up to eight programs for digital transport output
- Two digital transport outputs available (ASI and MPEGoIP)
- Support for up to eight simultaneous high-definition or standard-definition channels of decryption and transcoding and passthrough of the original channel. Total of 16 regenerated outputs (8 transcode + 8 passthrough)
- Program transcoding to support down-conversion of a MPEG-4 HD program to a MPEG-2 SD program
- PSI/SI regeneration support on all licensed outputs (up to eight programs transcoded + up to 8 original content passthrough)
- 4:2:0 high-definition 1080i and 720p video decoding
- AFD support for down-conversion of a decoded HD program with aspect ratio conversion
- Dolby Digital (AC-3) and Dolby Digital Plus (E-AC-3) audio decoding
- Closed captioning passthrough of EIA-608 and EIA-708 for transcoded programs
- Audio passthrough synchronization for transcoded programs
- Additional ASI outputs for redundancy
- MPEGoIP output for network connectivity
- DVB subtitle passthrough with transcode programs
- Contact closure terminals for simple alarm monitoring
- Simple Network Management Protocol (SNMP) for setup, control, and monitoring
- Field-upgradeable software
- Field-upgradeable additional transcoder channel licenses
- Front panel LCD for control and monitoring
- Web browser interface for easy setup, control, and monitoring
- Uplink addressable decoder output control (vertical blanking interval [VBI], audio routing, DPI, and ASI output)
- Dual-tone multifrequency (DTMF) cue tone and cue trigger outputs for ad insertion
- Digital Program Mapping that provides uplink control for service replacements in blackout areas
- Fingerprint support in transcoded output
- DVB subtitle burn-in support
- On Screen Display support in transcoded output
- Satellite Disaster Recovery support with PNC uplink control (PNC12.5 or higher)

## Product Specifications

Table 1 lists specifications for the Cisco D9859 Advanced Receiver Transcoder.


**Table 1.** Product Specifications

Category	Specification
<b>System</b>	
<b>MPEG-2 and DVB compatible</b> EN 300 421, EN 300 468	
<b>Demodulation</b>	DVB-S QPSK, DVB-S2 QPSK, and 8PSK
<b>Tuner</b>	
<b>Number of RF inputs</b>	4 (one active at a time)
<b>Input level</b>	-25 dBm to -65 dBm per carrier
<b>Frequency range</b>	950 MHz to 2150 MHz
<b>Symbol rate range</b>	DVB-S: 1.0 to 45 MSymbols/s DVB-S2: 10.0 to 30 MSymbols/s 1.0 to 10 MSymbols/s
<b>Carrier capture range</b>	≥ ±0.5 MHz (1-10 Msym) ≥ ±5.0 MHz (10-45 Msym)
<b>Satellites</b>	C-band and Ku-band
<b>Input impedance</b>	75ohms
<b>Analog Outputs</b>	
<b>Analog SD Video Output</b>	
<b>Number of channels</b>	One down-converted source HD program
<b>Video decompression type</b>	MPEG-2 4:2:0 and MPEG-4 4:2:0
<b>Output level</b>	1.0Vpp ± 5%
<b>Output impedance</b>	75 ohms
<b>Analog Audio Output</b>	
<b>Number of channels</b>	Two stereo pairs or four mono channels
<b>Audio decompression</b>	MPEG or Dolby Digital (AC-3)
<b>Transcoder Channel Inputs</b>	
<b>HD Video Input</b>	
<b>Compression format</b>	MPEG-2, MPEG-4 part 10
<b>V resolutions</b>	1080, 720
<b>H resolutions</b>	1080i:1920, 1440 720p:1280, 960
<b>Input bitrate</b>	3Mb/s to 20Mb/s main profile 3Mb/s to 25Mb/s high profile
<b>Audio Input</b>	
<b>Number of channels</b>	Two audio channels
<b>Compression format</b>	MPEG or Dolby Digital and Dolby Digital Plus
<b>VBI Data Input</b>	
<b>Transmission format</b>	EIA-708 and 608

Category	Specification
<b>Transcoder Channel Outputs</b>	
<b>HD Video Output</b>	
Compression format	MPEG-2
V resolutions	Same as input
H resolutions	1080i:1920, 1440 720p:1280, 960
Output bitrate	10Mb/s to 25 Mb/s
<b>Down-Converted SD Video Output</b>	
Compression format	MPEG-2
V resolutions	480, 576
H resolutions	720/704/544/528
Output bitrate	2Mb/s to 15 Mb/s
SD output aspect ratios	4:3, 16:9
Aspect ratio conversions	Auto, auto AFD, 16:9 L/B, 4:3 P/B, 14:9, 4:3 CCO, 16:9 SCALE
<b>Audio Output</b>	
Number of channels	Two stereo pairs
Compression format	Same as input
<b>VBI Data Output</b>	
Closed captioning format	EIA-708 and 608
<b>Inputs/Outputs</b>	
MPEG-2 transport input	EN50083-9, DVB-ASI coaxial, 188/204 byte packets
MPEG-2 transport output	EN50083-9, DVB-ASI coaxial, 188 byte packets
<b>MPEGoIP Output</b>	
Ethernet type	1000 Base-T
Format	UDP or RTP
IP addressing	Multicast or Unicast
Transport stream (TS) streaming	MPTS
<b>Other Outputs</b>	
<b>Cue Trigger Output</b>	
Number of outputs	8
Type	Open collector
<b>Cue Tone Output</b>	
Balanced audio output	-3.0 dBu $\pm$ 3 dB, 600 ohms
Output impedance	< 50 ohms
Programmable relay output	Alarm or configurable to one of the 8 open collector outputs
<b>Environmental and Physical</b>	
Operating temperature	32° to 122°F (0° to 50°C)
Storage temperature	(-4°F to 158°F)(-20° to 70°C)
Physical dimensions	1.75 in. H x 19.0 in. W x 20.5 in. D (4.4 cm H x 48.3 cm W x 52.1 cm D) 1RU high, 19 in. EIA rack mountable
Weight	16 lb (7.2 kg) approximately

Category	Specification
<b>Power</b>	
Voltage range	100 to 240 VAC
Line frequency	50/60 Hz
Power consumption	110W maximum
LNB power on RF1	+13V/+18Vat400 mA maximum

**Figure 2.** Cisco D9859 Advanced Receiver Transcoder

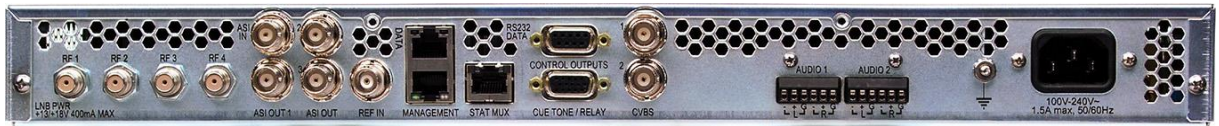

## Ordering Information

Table 2 provides ordering information.

**Table 2.** Ordering Information: Cisco D9859 Advanced Receiver Transcoder

Features	Part Number
D9859 with GEN-ISE 2CH base unit with 1 HD and 1 SD channel	D9859-GEN-1RU
D9859 with ATP-ISE 2CH base unit with 1 HD and 1 SD channel	D9859-ATP-1RU
D9859 AVC to MPEG-2 HD Transcoding additional channel License	LIC-D9859-HD-CH
D9859 AVC to MPEG-2 SD Transcoding additional channel License	LIC-D9859-SD-CH
D9859 AVC to MPEG-2 SD to HD Upgrade Transcoding channel License	LIC-D9859-HD-UP-CH
<b>Power Cords</b>	
North American Power Cord (US, IEC, 10AMP, 2.5m)	CAB-PWR-DMN-US
Japan Power Cord	CAB-PWR-DMN-JPN
China Power Cord (IEC)	CAB-PWR-DMN-CHN
Australia Power Cord	CAB-PWR-DMN-AUS
Italy Power Cord	CAB-PWR-DMN-IT
European Power Cord (EU)	CAB-PWR-DMN-EU
Brazil Power Cord	CAB-PWR-DMN-BRA
India Power Cord	CAB-PWR-DMN-IND
Argentina Power Cord	CAB-PWR-DMN-ARG
UK Power Cord (IEC, 10AMP, 2.5m)	CAB-PWR-DMN-UK

## For More Information

To read more about the Cisco D9859 Advanced Receiver Transcoder, contact your local account representative or go to [Digital Receivers/Decoders](#).

Read more about the [Cisco End-of-Life Policy](#) and [Subscribe](#) to receive end-of-life and end-of-sale information.

---

## AVC VIDEO LICENSE

With respect to each AVC/H.264 product, we are obligated to provide the following notice:

THIS PRODUCT IS LICENSED UNDER THE AVC PATENT PORTFOLIO LICENSE FOR THE PERSONAL AND NON-COMMERCIAL USE OF A CONSUMER TO (i) ENCODE VIDEO IN COMPLIANCE WITH THE AVC STANDARD (“AVC VIDEO”) AND/OR (ii) DECODE AVC VIDEO THAT WAS ENCODED BY A CONSUMER ENGAGED IN A PERSONAL AND NON-COMMERCIAL ACTIVITY AND/OR WAS OBTAINED FROM A VIDEO PROVIDER LICENSED TO PROVIDE AVC VIDEO. NO LICENSE IS GRANTED OR SHALL BE IMPLIED FOR ANY OTHER USE. ADDITIONAL INFORMATION MAY BE OBTAINED FROM MPEG LA, L.L.C. SEE <http://www.mpegla.com>.

Accordingly, please be advised that service providers, content providers, and broadcasters are required to obtain a separate use license from MPEG LA prior to any use of AVC/H.264 encoders and/or decoders.

Part Number OL-30087-01

July 2014



---

Americas Headquarters  
Cisco Systems, Inc.  
San Jose, CA

Asia Pacific Headquarters  
Cisco Systems (USA) Pte. Ltd.  
Singapore

Europe Headquarters  
Cisco Systems International BV Amsterdam,  
The Netherlands

Cisco has more than 200 offices worldwide. Addresses, phone numbers, and fax numbers are listed on the Cisco Website at [www.cisco.com/go/offices](http://www.cisco.com/go/offices).

Cisco and the Cisco logo are trademarks or registered trademarks of Cisco and/or its affiliates in the U.S. and other countries. To view a list of Cisco trademarks, go to this URL: [www.cisco.com/go/trademarks](http://www.cisco.com/go/trademarks). Third party trademarks mentioned are the property of their respective owners. The use of the word partner does not imply a partnership relationship between Cisco and any other company. (1110R)