

Cisco Multimedia Stretch Tap Directional Coupler with Reverse Window

The Cisco® Multimedia Stretch Tap Directional Coupler with Reverse Window (DC/RW) allows a more flexible deployment of reverse services in a hybrid fiber-coaxial transmission system.

It is a byproduct on the extensive reverse path. This 5 to 1000-MHz broadband directional coupler adds cable simulation attenuation to the forward-path tap ports while providing a fixed “reverse window” of attenuation in the reverse path.

Benefits

The Cisco Multimedia Stretch Tap DC/RW (Figure 1) has several key benefits.

- Provide high values of attenuation (and the addition of cable simulated slope) to the forward path
- Prevent excessive signal from reaching the homes connected to the first few taps after the node
- Allow the reverse signals to pass through the tap, yet maintain the higher signal level desired at the node
- Improve the signal-to-noise ratio and decrease the dynamic range variance of the reverse signals at the node, thus simplifying the deployment of new services (The high forward attenuation allows full use of the additional signal available from the high-output nodes).
- Compensate for the inverse cable slope present at the output of the node


Scope of Application

The Cisco Multimedia Stretch Tap DC/RW is designed for use with high-output-level nodes. This product comes in the following 12 attenuation values, as referenced to 1 GHz:

- 17/20 dB, 17/23 dB, 17/26 dB, 17/29 dB, and 17/32 dB
- 20/23 dB, 20/26 dB, 20/29 dB, and 20/32 dB
- 23/26 dB, 23/29 dB, and 23/32 dB

All the forward-attenuation values have a single fixed reverse window of attenuation of 17/20/23 dB at 5 MHz. The loss shape between 5 MHz and 1 GHz follows that of cable slope. These new plug-in devices are fully compatible with all Cisco Multimedia Stretch Tap faceplates.

Figure 1. Cisco Multimedia Stretch Tap Directional Coupler with Reverse Window

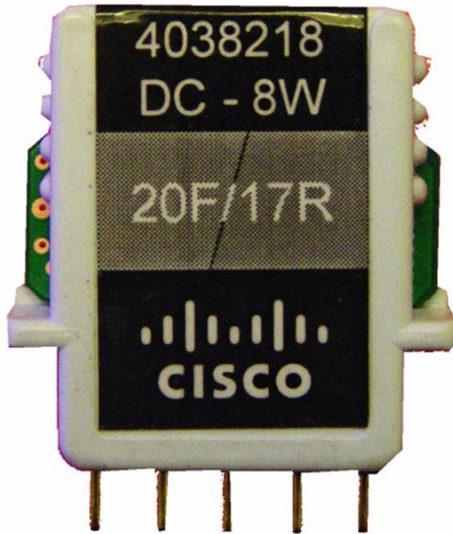

Features

- Available in 12 cable slope values
- Available at 1 GHz frequency band
- Plugs into all Cisco Stretch Tap products
- Unique labeling to distinguish Cisco Multimedia Stretch Tap DC/RW from standard DC and DC/EQ
- Additional labels provided in packaging to mark the tap containing a Cisco Multimedia Stretch Tap DC/RW module

Product Specifications

Tables 1 through 4 provide product specifications for the Cisco Multimedia Stretch Tap DC/RW.

Table 1. Two-Way Insertion Loss with the Cisco Multimedia Stretch Tap DC/RW

Two-Way Insertion Loss with the Cisco Multimedia Stretch Tap DC/RW										
Freq. (MHz)	17/20 dB		17/23 dB		17/26 dB		17/29 dB		17/32 dB	
	Max	Mean	Max	Mean	Max	Mean	Max	Mean	Max	Mean
5	1.2	0.9	1.2	0.9	1.2	0.9	1.2	0.9	1.2	0.9
40	1.1	0.8	1.1	0.8	1.1	0.8	1.1	0.8	1.1	0.8
50	1.0	0.7	1.0	0.7	1.0	0.7	1.0	0.7	1.0	0.7
300	1.5	1.2	1.5	1.2	1.5	1.2	1.5	1.2	1.5	1.2
450	1.8	1.5	1.8	1.5	1.8	1.5	1.8	1.5	1.8	1.5
550	1.9	1.6	1.9	1.6	1.9	1.6	1.9	1.6	1.9	1.6
750	2.1	1.7	2.1	1.7	2.1	1.7	2.1	1.7	2.1	1.7
870	2.3	1.9	2.3	1.9	2.3	1.9	2.3	1.9	2.3	1.9
1000	2.9	2.4	2.9	2.4	2.9	2.4	2.9	2.4	2.9	2.4
Freq. (MHz)	20/23 dB		20/26 dB		20/29 dB		20/32 dB			
	Max	Mean	Max	Mean	Max	Mean	Max	Mean		
5	1.1	0.8	1.1	0.8	1.1	0.8	1.1	0.8		
40	1.0	0.7	1.0	0.7	1.0	0.7	1.0	0.7		
50	0.8	0.5	0.8	0.5	0.8	0.5	0.8	0.5		
300	1.4	1.1	1.4	1.1	1.4	1.1	1.4	1.1		
450	1.6	1.3	1.6	1.3	1.6	1.3	1.6	1.3		
550	1.7	1.4	1.7	1.4	1.7	1.4	1.7	1.4		
750	1.8	1.4	1.8	1.4	1.8	1.4	1.8	1.4		
870	2.0	1.6	2.0	1.6	2.0	1.6	2.0	1.6		
1000	2.6	2.1	2.6	2.1	2.6	2.1	2.6	2.1		
Freq. (MHz)	23/26 dB		23/29 dB		23/32 dB					
	Max	Mean	Max	Mean	Max	Mean				
5	1.3	1.0	1.3	1.0	1.3	1.0				
40	1.0	0.7	1.0	0.7	1.0	0.7				
50	0.8	0.7	0.8	0.7	0.8	0.7				
300	1.4	0.9	1.4	0.9	1.4	0.9				
450	1.6	1.3	1.6	1.3	1.6	1.3				
550	1.7	1.3	1.7	1.3	1.7	1.3				
750	1.9	1.4	1.9	1.4	1.9	1.4				
870	2.1	1.5	2.1	1.6	2.1	1.6				
1000	2.3	1.5	2.3	1.6	2.3	1.6				

Table 2. Four-Way Insertion Loss with the Cisco Multimedia Stretch Tap DC/RW

Four-Way Insertion Loss with the Cisco Multimedia Stretch Tap DC/RW										
Freq. (MHz)	17/20 dB		17/23 dB		17/26 dB		17/29 dB		17/32 dB	
	Max	Mean	Max	Mean	Max	Mean	Max	Mean	Max	Mean
5	1.5	1.2	1.5	1.2	1.5	1.2	1.5	1.2	1.5	1.2
40	1.3	1.0	1.3	1.0	1.3	1.0	1.3	1.0	1.3	1.0
50	1.2	0.9	1.2	0.9	1.2	0.9	1.2	0.9	1.2	0.9
300	1.8	1.5	1.8	1.5	1.8	1.5	1.8	1.5	1.8	1.5
450	2.2	1.9	2.2	1.9	2.2	1.9	2.2	1.9	2.2	1.9
550	2.3	2.0	2.3	2.0	2.3	2.0	2.3	2.0	2.3	2.0
750	2.4	2.0	2.4	2.0	2.4	2.0	2.4	2.0	2.4	2.0
870	2.5	2.1	2.5	2.1	2.5	2.1	2.5	2.1	2.5	2.1
1000	3.2	2.7	3.2	2.7	3.2	2.7	3.2	2.7	3.2	2.7
Freq. (MHz)	20/23 dB		20/26 dB		20/29 dB		20/32 dB			
	Max	Mean	Max	Mean	Max	Mean	Max	Mean		
5	1.2	0.9	1.2	0.9	1.2	0.9	1.2	0.9		
40	1.1	0.8	1.1	0.8	1.1	0.8	1.1	0.8		
50	1.0	0.7	1.0	0.7	1.0	0.7	1.0	0.7		
300	1.5	1.2	1.5	1.2	1.5	1.2	1.5	1.2		
450	1.8	1.5	1.8	1.5	1.8	1.5	1.8	1.5		
550	1.9	1.6	1.9	1.6	1.9	1.6	1.9	1.6		
750	2.1	1.7	2.1	1.7	2.1	1.7	2.1	1.7		
870	2.3	1.9	2.3	1.9	2.3	1.9	2.3	1.9		
1000	2.9	2.4	2.9	2.4	2.9	2.4	2.9	2.4		
Freq. (MHz)	23/26 dB		23/29 dB		23/32 dB					
	Max	Mean	Max	Mean	Max	Mean				
5	1.3	1.0	1.3	1.0	1.3	1.0				
40	1.0	0.7	1.0	0.7	1.0	0.7				
50	0.8	0.7	0.8	0.7	0.8	0.7				
300	1.4	0.9	1.4	0.9	1.4	0.9				
450	1.6	1.3	1.6	1.3	1.6	1.3				
550	1.7	1.4	1.7	1.4	1.7	1.4				
750	1.9	1.4	1.9	1.4	1.9	1.4				
870	2.1	1.6	2.1	1.6	2.1	1.6				
1000	2.3	1.6	2.3	1.6	2.3	1.6				

Table 3. Eight-Way Insertion Loss with the Cisco Multimedia Stretch Tap DC/RW

Eight-Way Insertion Loss with the Cisco Multimedia Stretch Tap DC/RW										
Freq. (MHz)	17/20 dB		17/23 dB		17/26 dB		17/29 dB		17/32 dB	
	Max	Mean	Max	Mean	Max	Mean	Max	Mean	Max	Mean
5	2.2	1.9	2.2	1.9	2.2	1.9	2.2	1.9	2.2	1.9
40	2.0	1.7	2.0	1.7	2.0	1.7	2.0	1.7	2.0	1.7
50	1.8	1.5	1.8	1.5	1.8	1.5	1.8	1.5	1.8	1.5
300	2.7	2.4	2.7	2.4	2.7	2.4	2.7	2.4	2.7	2.4
450	2.9	2.6	2.9	2.6	2.9	2.6	2.9	2.6	2.9	2.6
550	2.9	2.6	2.9	2.6	2.9	2.6	2.9	2.6	2.9	2.6
750	2.9	2.5	2.9	2.5	2.9	2.5	2.9	2.5	2.9	2.5
870	3.2	2.8	3.2	2.8	3.2	2.8	3.2	2.8	3.2	2.8
1000	3.8	3.3	3.8	3.3	3.8	3.3	3.8	3.3	3.8	3.3
Freq. (MHz)	20/23 dB		20/26 dB		20/29 dB		20/32 dB			
	Max	Mean	Max	Mean	Max	Mean	Max	Mean		
5	1.5	1.2	1.5	1.2	1.5	1.2	1.5	1.2		
40	1.3	1.0	1.3	1.0	1.3	1.0	1.3	1.0		
50	1.2	0.9	1.2	0.9	1.2	0.9	1.2	0.9		
300	1.8	1.5	1.8	1.5	1.8	1.5	1.8	1.5		
450	2.2	1.9	2.2	1.9	2.2	1.9	2.2	1.9		
550	2.3	2.0	2.3	2.0	2.3	2.0	2.3	2.0		
750	2.4	2.0	2.4	2.0	2.4	2.0	2.4	2.0		
870	2.5	2.1	2.5	2.1	2.5	2.1	2.5	2.1		
1000	3.2	2.7	3.2	2.7	3.2	2.7	3.2	2.7		
Freq. (MHz)	23/26 dB		23/29 dB		23/32 dB					
	Max	Mean	Max	Mean	Max	Mean				
5	1.4	1.1	1.4	1.1	1.4	1.1				
40	1.1	0.8	1.1	0.8	1.1	0.8				
50	1.1	0.8	1.1	0.8	1.1	0.8				
300	1.5	1.1	1.5	1.1	1.5	1.1				
450	1.8	1.5	1.8	1.5	1.8	1.5				
550	2.1	1.6	2.1	1.6	2.1	1.6				
750	2.3	1.7	2.3	1.7	2.3	1.7				
870	2.4	1.9	2.4	1.9	2.4	1.9				
1000	2.6	2.1	2.6	2.1	2.6	2.1				

Table 4. Stretch Tap Loss with the Cisco Multimedia Stretch Tap DC/RW

Stretch Tap Loss with the Cisco Multimedia Stretch Tap DC/RW				
Equalizer 3 dB Tap Loss (dB) (maximum tolerance ±1 dB)	Freq. (MHz)	17/20 dB	20/23 dB	23/26 dB
	5	17.0	20.0	23.0
	40	17.5	20.5	23.6
	50	17.6	20.6	23.9
	300	18.5	21.5	24.8
	450	18.8	21.8	25.1
	550	19.1	22.1	25.3
	750	19.5	22.5	25.5
	870	19.7	22.7	25.7
1000	20.0	23.0	26.0	
Equalizer 6 dB Tap Loss (dB) (maximum tolerance ±1 dB)	Freq. (MHz)	17/23 dB	20/26 dB	23/29 dB
	5	17.0	20.0	23.0
	40	18.0	21.0	24.1
	50	18.1	21.1	24.6
	300	20.0	23.0	26.6
	450	20.8	23.8	27.0
	550	21.2	24.2	27.5
	750	22.1	25.1	28.1
	870	22.5	25.5	28.5
1000	23.0	26.0	29.0	
Equalizer 9 dB Tap Loss (dB) (maximum tolerance ±1 dB)	Freq. (MHz)	17/26 dB	20/29 dB	23/32 dB
	5	17.0	20.0	23.0
	40	18.4	21.4	24.5
	50	18.5	21.5	25.1
	300	21.3	24.3	28.1
	450	22.4	25.4	28.8
	550	23.2	26.2	29.5
	750	24.5	27.5	30.5
	870	25.2	28.2	31.2
1000	26.0	29.0	32.0	
Equalizer 12 dB Tap Loss (dB) (maximum tolerance ±1 dB)	Freq. (MHz)	17/29 dB	20/32 dB	-
	5	17.1	20.1	-
	40	18.5	21.5	-
	50	18.8	21.8	-
	300	22.8	25.8	-
	450	24.4	27.4	-
	550	25.4	28.4	-
	750	27.1	30.1	-
	870	28.1	31.1	-
1000	29.0	32.0	-	

Stretch Tap Loss with the Cisco Multimedia Stretch Tap DC/RW				
Equalizer 15 dB Tap Loss (dB) (maximum tolerance ±1 dB)	Freq. (MHz)	17/32 dB	-	-
	5	17.1	-	-
	40	18.9	-	-
	50	19.2	-	-
	300	24.2	-	-
	450	26.3	-	-
	550	27.5	-	-
	750	29.6	-	-
	870	30.8	-	-
	1000	32.0	-	-

Note: Unless otherwise noted, specifications are based on measurements made in accordance with NCTA Practices for Measurements on Cable Television Systems using standard frequency assignments and are referenced to 68°F (20°C). All ports are terminated.

Ordering Information

To place an order, visit the [Cisco Ordering Home Page](#) and refer to Table 5, which lists the part numbers for the Cisco Multimedia Stretch Tap Directional Coupler with Reverse Window. The accessories should be ordered in quantities of 10.

Table 5. Ordering Information

EQ Value	Two-Way	Four-Way	Eight-Way	Part Number
3 dB			17/20 dB	4038218
		17/20 dB	20/23 dB	4038203
	17/20 dB	20/23 dB	23/26 dB	734126
	20/23 dB	23/26 dB		734123
	23/26 dB			734120
6 dB			17/23 dB	4038217
		17/23 dB	20/26 dB	4038202
	17/23 dB	20/26 dB	23/29 dB	734127
	20/26 dB	23/29 dB		734124
	23/29 dB			734121
9 dB			17/26 dB	4038216
		17/26 dB	20/29 dB	4038201
	17/26 dB	20/29 dB	23/32 dB	734128
	20/29 dB	23/32 dB		734125
	23/32 dB			734122

EQ Value	Two-Way	Four-Way	Eight-Way	Part Number
12 dB			17/29 dB	4038215
		17/29 dB	20/32 dB	4038200
	17/29 dB	20/32 dB		4038196
	20/32 dB			4038192
15 dB			17/32 dB	4038214
		17/32 dB		4038209
	17/32 dB			4038204

For More Information

Cisco Multimedia Line Equalizer/Reverse Conditioner products include one of the industry's most complete range of high-performance components. For additional information, please go to:

<http://www.cisco.com/en/US/products/ps9091/index.html>.



Americas Headquarters
Cisco Systems, Inc.
San Jose, CA

Asia Pacific Headquarters
Cisco Systems (USA) Pte. Ltd.
Singapore

Europe Headquarters
Cisco Systems International BV Amsterdam,
The Netherlands

Cisco has more than 200 offices worldwide. Addresses, phone numbers, and fax numbers are listed on the Cisco Website at www.cisco.com/go/offices.

Cisco and the Cisco logo are trademarks or registered trademarks of Cisco and/or its affiliates in the U.S. and other countries. To view a list of Cisco trademarks, go to this URL: www.cisco.com/go/trademarks. Third party trademarks mentioned are the property of their respective owners. The use of the word partner does not imply a partnership relationship between Cisco and any other company. (1110R)