

Meeting 4 People

Gather the team together in an everyday workspace and bring in remote participants for extended collaboration.



Product ID

Product

<p>1 CTS-MX200-K9*</p>	<p>Cisco TelePresence MX200 G2</p>
<p>2 Included in CTS-MX200-K9</p>	<p>Cisco MIC20</p>
<p>3 Included in CTS-MX200-K9</p>	<p>Cisco TelePresence Touch 10</p>

*Select MX200 G2 floor stand kit, CTS-MX200-FSK, when ordering the endpoint



Cisco MIC20

This table-top microphone designed by Cisco offers a 360-degree pickup for scenarios where people may be situated around a table or throughout a space.



Cisco TelePresence Touch 10

Cisco TelePresence Touch enables easy control of your meeting, from making a call to sharing content.

Cisco TelePresence MX200 G2

Enjoy telepresence in a small multipurpose meeting room. The 42-inch display and wide-angle camera enable everyone to see and be seen, whether in a video meeting or for in-room presentations.

Best Practice


The distance from the [system](#) to the table is defined by the camera's field of view (83 degrees). At this distance, the camera captures everyone at the table. The system is placed on the wall adjacent to the window to avoid direct sunlight into the camera. The rectangular table should be slightly wider than the system to give four people a good viewing angle.

Acoustic panels are placed behind the system, which is on the wall adjacent to the window, to avoid flutter echo. Curtains on the windowed walls work great as [sound absorption](#), too. Floor carpeting also contributes to the absorption and helps reduce noise from shuffling of chairs.

One Cisco omnidirectional [microphone](#) is placed centrally, but with a slight bias to the far end of the table. The internal microphone covers the participants closest to the system. With this placement, the microphones pick up accurate, natural, and high-quality audio from all four participants, even when they are using the whiteboard.

The [whiteboard](#) is placed on the wall opposite the endpoint. This keeps it within the camera view and facilitates easy use of camera presets to zoom when necessary. The camera captures whiteboard content, and participants (both seated and standing), in high quality. Swiveling chairs make it easy for participants to shift focus from system to whiteboard.

This is a representation of a physical setup built and tested by Cisco R&D. Other setups are possible and might be equally good. Room dimensions should always adhere to local rules and regulations. Further detailing and development will occur with future versions of Project Workspace.

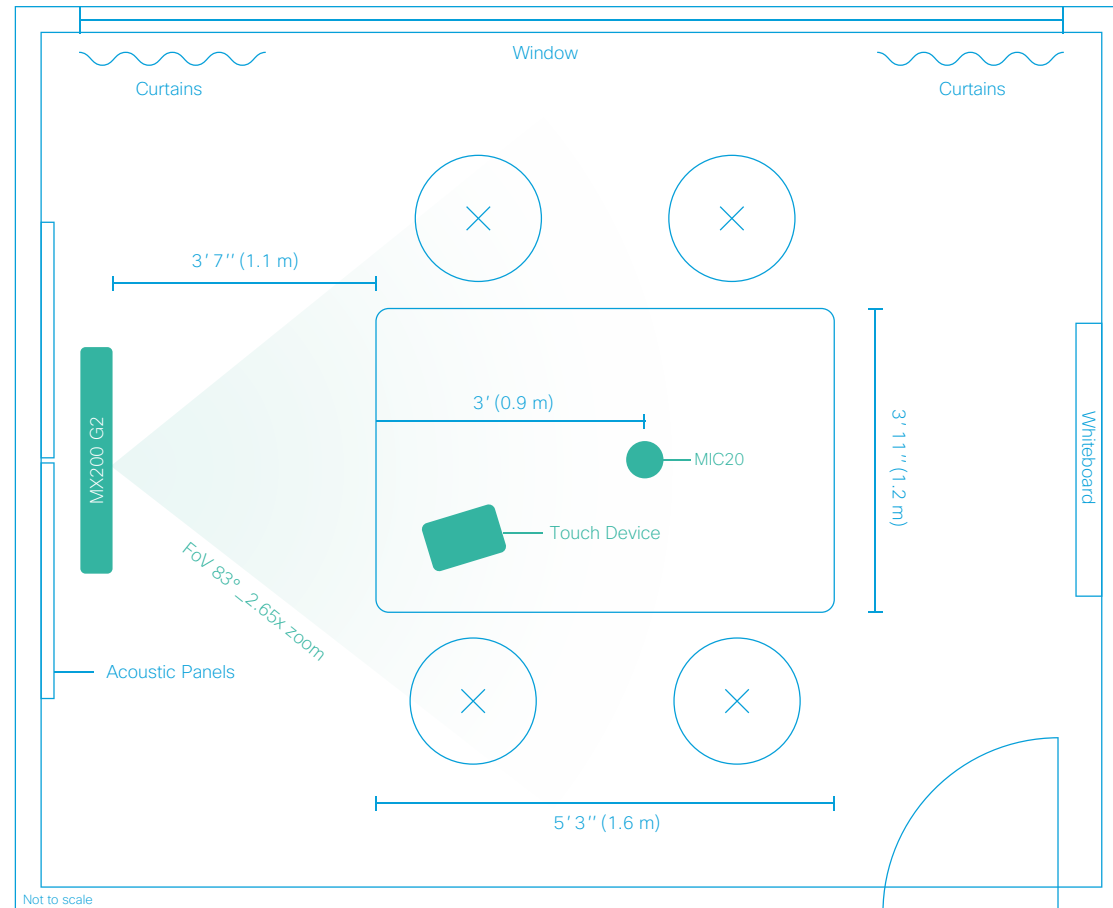

For more information about scenarios and setup, please visit:

www.cisco.com/web/telepresence/projectworkplace.html