

Video Centric 5 People

See every detail when
face-to-face matters most.



Product ID

Product

1 CTS-MX700D-1CAM-K9

Cisco TelePresence MX700 (single camera)

2 Included in CTS-MX700D-1CAM-K9

2 Cisco TelePresence Table Microphone 60

3 Included in CTS-MX700D-1CAM-K9

Cisco TelePresence Touch 10



Cisco TelePresence Table Microphone 60

This high-end tabletop microphone designed by Cisco offers a 360-degree pickup for scenarios where people may be situated around a table or throughout a meeting space.



Cisco TelePresence Touch 10

Cisco TelePresence Touch enables easy control of your meeting, from making a call to sharing content.

Cisco TelePresence MX700

The Cisco TelePresence MX700 is a dual 55-inch-display video system designed to provide medium to large meeting spaces with advanced collaboration capabilities. The most innovative and flexible all-in-one video collaboration device on the market, it can be installed and connected in less than an hour.

Best Practice

A table at least as wide as the [system](#) is preferred to give all five people a good view of the screen. The distance from the system to the table is defined by the camera's field of view (80 degrees). At this distance, the camera captures everyone at the table. The table is placed with the longest side toward the system. Everyone is sitting as equidistant from the screens as possible, which makes the room perfect for face-to-face discussions as well as content collaboration.

The [dual 55-inch screens](#) create an improved meeting experience where there is equal room for content and remote participants. Without content, you get increased presence for more participants. In addition, the wide dual-screen system increases the effects of directional audio and a wider stereo image.


When no [direct sunlight](#) enters a room, place the system in front of the window. The daylight contributes positively to the video quality, and the camera does not film the window.

Curtains on the windowed wall work great as [sound absorption](#). Acoustic panels are placed on the sidewall adjacent to the window to avoid flutter echo.

Two Cisco omnidirectional [microphones](#) capture all five participants in high fidelity.

The microphones can be integrated into the table for better cable management and to keep them from being moved around.

* This is a representation of a physical setup built and tested by Cisco R&D. Other setups are possible and might be equally good. Room dimensions should always adhere to local rules and regulations. Further detailing and development will occur with future versions of Project Workspace.

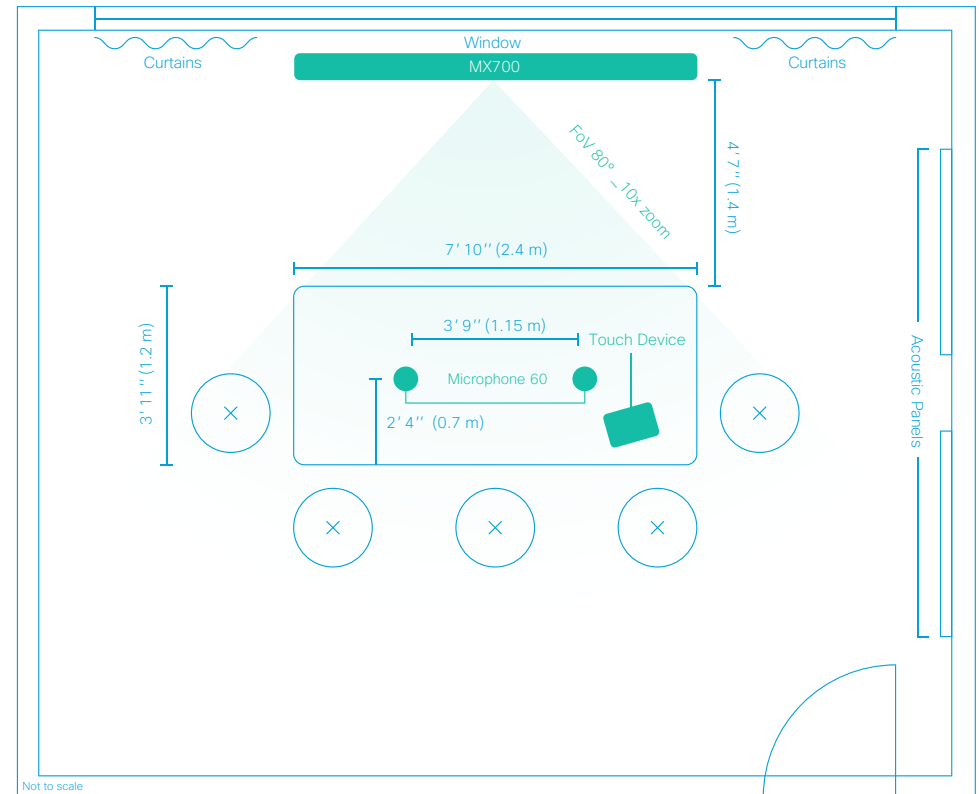

For more information about scenarios and setup, please visit:

www.cisco.com/web/telepresence/projectworkplace.html